

# **5I23 ANYTHING I/O MANUAL**

This page intentionally not blank

—

# Table of Contents

GENERAL .....	1
DESCRIPTION .....	1
HARDWARE CONFIGURATION .....	2
GENERAL .....	2
EEPROM ENABLE .....	2
CONNECTOR POWER .....	2
PULLUP POWER .....	3
BUS SWITCH MODE .....	3
P2 IOVCC .....	4
CONNECTORS .....	4
CONNECTOR LOCATIONS AND DEFAULT JUMPER POSITIONS .....	5
I/O CONNECTOR PIN-OUT .....	6
OPERATION .....	10
FPGA .....	10
FPGA PINOUT .....	10
MEMORY AND I/O REGIONS .....	10
LOCAL BUS .....	10
CONFIGURATION .....	11
SC5I23 .....	11
SC5I23W .....	12
IO5I23/IO5I23W .....	12
CLOCK SIGNALS .....	13
LEDS .....	13
I/O LEVELS .....	13
TERMINATION .....	13
POWER SUPPLY .....	14
SUPPLIED CONFIGURATIONS .....	15
IOPR24 – 24 BIT LONGWORD ACCESSED I/O PORT .....	15
5I23LOOP – LOOPBACK TEST .....	15
HOSTMOT2 .....	15
SOFTDMC .....	16
REFERENCE INFORMATION .....	17
SPECIFICATIONS .....	17

# GENERAL

## DESCRIPTION

The MESA 5I23 is a general purpose programmable I/O card for the PCI bus. The 5I23 uses a 400K gate Xilinx Spartan3 FPGA for all logic, so it is truly an "Anything I/O" card. The FPGA is downloadable from the PCI bus side, allowing creation of almost any kind of specialized I/O function, even including multiple 32 bit processors in the FPGA.

Several pre-made functions are provided, including a 72 bit parallel I/O card with four 24 bit ports, a 12 channel host based servo motor controller, a 8 channel micro-controller based servo motor controller (*SoftDMC*), and a 12 channel, 32 bit timer counter card capable of running at 100 MHz. VHDL source is provided for all examples.

A bus mastering PCI bridge is used to support high bandwidth I/O. 10 LVDS pairs are available on one I/O connector for high speed card-card interfaces.

# HARDWARE CONFIGURATION

## GENERAL

Hardware setup jumper positions assume that the 5I23 card is oriented in an upright position, that is, with the PCI connector facing the user, and the white PCB markings right side up.

## DEFAULT SETUP

**EEPROM ENABLED**

**P2 VCCIO = 3.3V**

**CONNECTOR POWER = 5V (ALL)**

**PULLUP POWER = 3.3V**

**BUS SWITCH MODE = 3.3V**

These default jumper positions are shown in the default jumper position picture on page 5.

## EEPROM ENABLE

The PLX9054 PCI-Local bus bridge chip is configured at power up via a serial EEPROM. If the EEPROM is somehow mis-programmed or corrupted, it can be impossible to re-write the EEPROM from the PCI bus. To avoid this problem, The EEPROM can be temporarily disabled. W11 controls the EEPROM enable function, When W11 is in the up position (default) the EEPROM is enabled. When W11 is in the down position, the EEPROM is disabled. To fix a broken EEPROM setup, you must power up the 5I23 card with the EEPROM disabled, Enable the EEPROM, and re-write the EEPROM.

## CONNECTOR POWER

The power connection on the I/O connectors pin 49 can supply either 3.3V or 5V power. Supplied power should be limited to 400 mA per connector.

When the following jumpers are in the up position, 5V power is supplied to pin 49 of the associated connector. When the jumper is in the down position, 3.3V power is supplied to pin 49 of the associated connector.

W1 selects the voltage supplied to P2. (I/O connector for bits 0..23)

W4 selects the voltage supplied to P3. (I/O connector for bits 24..47)

W7 selects the voltage supplied to P4. (I/O connector for bits 48..71)

# HARDWARE CONFIGURATION

## PULLUP POWER

Pullup resistors are provided for all I/O pins. These pullups can simplify interfacing to open collector devices such as mechanical switches, OPTO isolators and OPTO interrupters. Pullup voltage can be selected to be 5V or 3.3V on a per connector basis. When the pullup voltage jumper is in the 'up' position, 5V pullup voltage is selected, when the jumper is in the 'down' position, 3.3V pullup voltage is selected.

W2 selects the pullup resistor voltage for P2

W5 selects the pullup resistor voltage for P3

W8 selects the pullup resistor voltage for P4

## BUS SWITCH MODE

The 5I23 uses bus switch devices in series with all I/O pins. These devices allow the 5I23 inputs to be 5V tolerant and allow the I/O pins to be pulled up to 5V. The bus switch input protection function works by disconnecting the FPGA from the IO pins when the IO pin voltage rises above a preset threshold. This threshold determines the bus switch operational mode and is selectable on a per connector basis. We refer to the modes as 5V mode and 3.3V mode.

When in 5V mode, the inputs and tri-stated outputs may be pulled up to 5V. This allows driving 5V referred loads such as I/O module racks. The disadvantage of 5V mode is that the output impedance is higher in the high output state (when the FPGA pins are at 3.3V) as the bus switch is off when the FPGA pin is at 3.3V.

When 3.3V mode is selected, the bus switch is always fully on unless input voltages >4V are applied, at which point the bus switch disconnects the FPGA from the I/O pin. 3.3V mode is suggested for general use.

When the bus switch mode jumper is in the 'up' position, 5V mode is selected, when 'down', 3.3V bus switch mode is selected.

W3    Sets bus switch mode for P2, IO 0..23

W6    Sets bus switch mode for P3, IO 24..47

W9    Sets bus switch mode for P4, IO 48..71


# HARDWARE CONFIGURATION

## P2 VCCIO

The IO bank that connects to P2 can have 3.3V or 2.5V power. This is intended to allow LVDS operation on connector P2. Jumper W13 selects the IOVCC for this bank. When W13 is in the up position, 3.3V IOVCC is selected for the bank connected to P2. When W13 is in the down position, 2.5V is selected for the bank connected to P2.

# CONNECTORS

## CONNECTOR LOCATIONS AND DEFAULT JUMPER POSITIONS

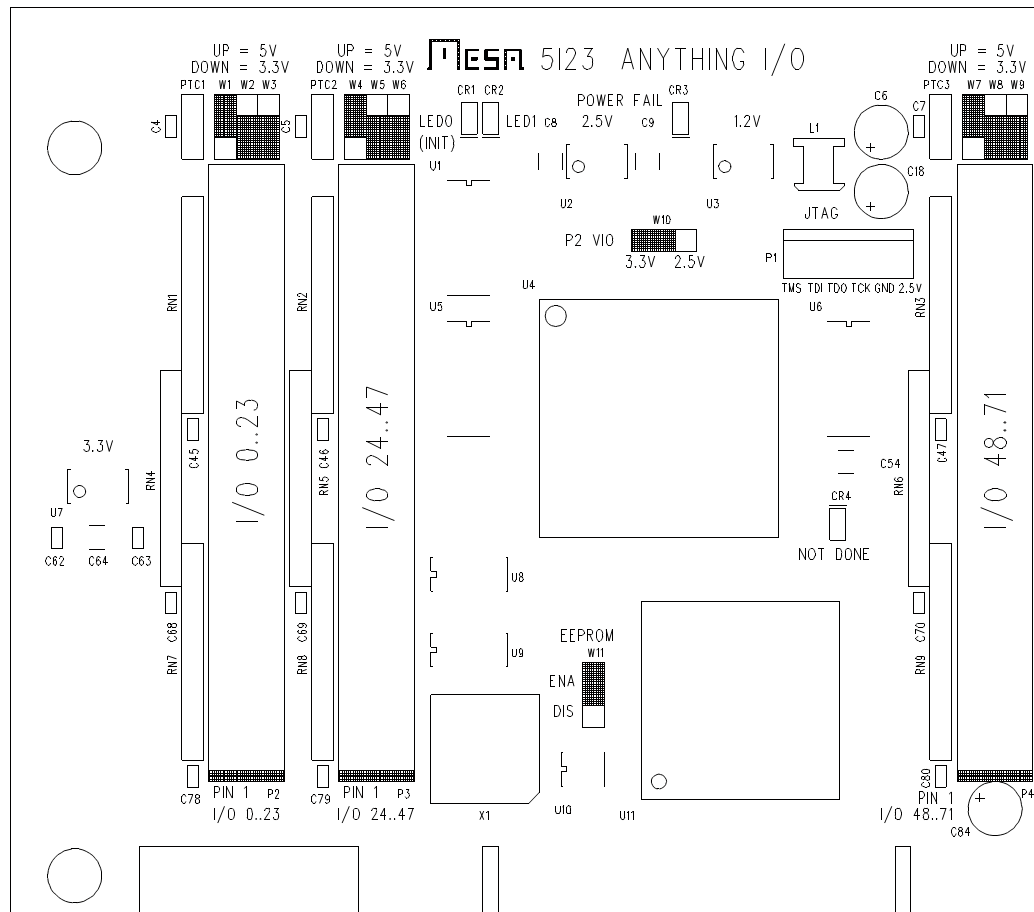



# CONNECTORS

## I/O CONNECTORS

P2, P3, and P4 are the 5I23s I/O connectors. These are 50 pin box headers that mate with standard 50 conductor female IDC connectors. Suggested mating connector is AMP PN 1-1658621-0. For information on which I/O pin connects to which FPGA pin, please see the 5I23IO.PIN file on the 5I23 distribution disk. 5I23 IO connector pinouts are as follows:

### P2 CONNECTOR PINOUT

PIN	FUNC	PIN	FUNC	PIN	FUNC	PIN	FUNC
1	IO0/D0N	2	GND	3	IO1/D0P	4	GND
5	IO2/D1N	6	GND	7	IO3/D1P	8	GND
9	IO4/D2N	10	GND	11	IO5/D2P	12	GND
13	IO6/D3N	14	GND	15	IO7/D3P	16	GND
17	IO8/D4N-C	18	GND	19	IO9/D4P-C	20	GND
21	IO10/D5N-C	22	GND	23	IO11/D5P-C	24	GND
25	IO12/D6N	26	GND	27	IO13/D6P	28	GND
29	IO14/D7N	30	GND	31	IO15/D7P	32	GND
33	IO16/D8N	34	GND	35	IO17/D8P	36	GND
37	IO18/D9N	38	GND	39	IO19/D9P	40	GND
41	IO20	42	GND	43	IO21	44	GND
45	IO22	46	GND	47	IO23	48	GND
49	POWER	50	GND				

### DIFFERENTIAL PAIRS

The 5I23 supports LVDS signaling on 10 pairs of the P2 I/O connector. The pairs are marked DN<sub>x</sub> and DP<sub>x</sub> in the table above. These signals are connected to the FPGA with 100 ohm impedance differential traces on the 5I23 PCB. Note that when LVDS is used, P2's VCCIO must be set to 2.5V. All pairs are length matched so the the PCB delays add less than 50 pS to the pair-pair skew. Pins marked with a -C are GCLK pins.

# CONNECTORS

## I/O CONNECTORS

### P3 CONNECTOR PINOUT

PIN	FUNC	PIN	FUNC	PIN	FUNC	PIN	FUNC
1	IO24	2	GND	3	IO25	4	GND
5	IO26	6	GND	7	IO27	8	GND
9	IO28	10	GND	11	IO29	12	GND
13	IO30	14	GND	15	IO31	16	GND
17	IO32	18	GND	19	IO33	20	GND
21	IO34	22	GND	23	IO35	24	GND
25	IO36	26	GND	27	IO37	28	GND
29	IO38	30	GND	31	IO39	32	GND
33	IO40	34	GND	35	IO41	36	GND
37	IO42	38	GND	39	IO43	40	GND
41	IO44	42	GND	43	IO45	44	GND
45	IO46	46	GND	47	IO47	48	GND
49	POWER	50	GND				

# CONNECTORS

## I/O CONNECTORS

### P4 CONNECTOR PINOUT

PIN	FUNC	PIN	FUNC	PIN	FUNC	PIN	FUNC
1	IO48/CLK3	2	GND	3	IO49	4	GND
5	IO50	6	GND	7	IO51	8	GND
9	IO52	10	GND	11	IO53	12	GND
13	IO54	14	GND	15	IO55	16	GND
17	IO56	18	GND	19	IO57	20	GND
21	IO58	22	GND	23	IO59	24	GND
25	IO60	26	GND	27	IO61	28	GND
29	IO62	30	GND	31	IO63	32	GND
33	IO64	34	GND	35	IO65	36	GND
37	IO66	38	GND	39	IO67	40	GND
41	IO68	42	GND	43	IO69	44	GND
45	IO70	46	GND	47	IO71	48	GND
49	POWER	50	GND				

# OPERATION

## FPGA

The 5I23 use a Xilinx Spartan-III 400K gate FPGA in a 208 lead QFP package: XC3S400-4PQ208C.

## FPGA PINOUT

The local bus and I/O interface FPGA pinouts are described in the 5I23INFC.PIN and 5I23IO.PIN files in CONFIGS directory of the distribution disk. The 5I23IO.PIN file may be used as a template for custom configurations.

## MEMORY AND I/O REGIONS

The PLX9054 PCI bridge local configuration registers can be accessed via I/O or memory. These are used to setup the PCI bridge, and for manipulating the I/O bits when configuring the FPGA.

BAR	MEM - I/O	WIDTH	RANGE
BAR 0	MEMORY	32 BITS	128 BYTES
BAR 1	I/O	32 BITS	128 BYTES

The PLX9054 PCI bridge allows for 2 separate memory and I/O regions to be mapped to the local bus that connects to the FPGA. The default EEPROM configuration sets these up as follows:

BAR	ADDRESS SPACE	MEM - I/O	WIDTH	RANGE
BAR 2	0	I/O	32 BITS	256 BYTES
BAR 3	1	MEMORY	32 BITS	64K BYTES

## LOCAL BUS INTERFACE

The 5I23 uses the multiplexed local bus option of the PLX9054 bridge chip to save FPGA pins. Because of this multiplexed bus, the FPGA interface logic must latch the LAD bus when ADS is active to create an internal address.

# OPERATION

## CONFIGURATION

Before the 5I23 can do anything useful it must have its FPGA configuration data downloaded from the host CPU to the FPGA on the 5I23. This is done by writing a series of bytes from the configuration file to the 5I23 card's configuration data register. Configuration data is written a byte at a time (Right justified) to any of the I/O or memory bus space regions mapped to the 5I23s local bus.

The FPGA configuration control bits must be manipulated before configuration data can be sent to the FPGA. These control bits are controlled via GPIO pins of the PLX9054 PCI bridge. The PLX9054s GPIO pins are connected to the following FPGA configuration pins:

<b>GPIO</b>	<b>DIRECTION</b>	<b>FPGA</b>	<b>ALTERNATE</b>
GPI	IN	DONE	/DACK
GPO	IN	/PROGRAM	/DREQ

Note that the DONE and /PROGRAM bits are multiplexed with DMA control lines. If these DMA control lines are needed (They are required to support demand mode DMA), the DISABLECONF pin on the FPGA needs to be asserted or a /DREQ signal will reset the FPGA.

## SC5I23

A utility program SC5I23.EXE is provided to send configuration files to the 5I23. The Pascal and C source for this program is available on the distribution disk, and can be used as an example for writing a custom version of download software. SC5I23 is invoked with the FPGA configuration file and the 5I23 configuration base address on the command line:

```
SC5I23  FPGAFILE.BIN
```

SC5I23 uses binary FPGA configuration files. These files can be standard Xilinx BIT files or PROM format files. The SC5I23 utility sends PROM files directly to the 5I23. BIT files have their headers stripped and are bit reversed before being sent to the 5I23.

# **OPERATION**

## **CONFIGURATION**

### **SC5I23W**

Another utility SC5I23W is provided for Windows 2000 and Windows XP. This utility requires the PLX9054.SYS driver and PLXAPI.DLL API SHIM to work. The source for SC5I23W can be used as an example of how to access the configured 5I23 cards under Windows 2K or XP.

SC5I23 and SC5I23W use binary FPGA configuration files. These files can be standard Xilinx BIT files or PROM format files. The SC5I23 utility sends PROM files directly to the 5I23. BIT files have their headers stripped and are bit reversed before being sent to the 5I23.

### **IO5I23**

IO5I23 is a DOS demo program that accesses the IOPR24 configuration.

### **IO5I23W**

IO5I23W is a Windows NT/2K/XP demo program that accesses the IOPR24 configuration and can be used as an example of low level card access on Windows systems, that use the PLX9054.SYS driver.

# OPERATION

## CLOCK SIGNALS

The FPGA has one on card clock source and 4 available clock inputs. The on card clock is 48 MHz routed to GCLK3. This clock functions both as the FPGA system clock and the local bus interface clock. IOBITS 8 and 9 and 10 and 11(connector P2) are FPGA GCLK7,GCLK6, GCLK5, GCLK4 respectively. These clocks can also be used as LVDS differential input clocks.

## LEDS

The 5I23 has 8 FPGA driven user LEDs. The user LEDs can be used for any purpose, and can be helpful as a simple debugging feature. A low output signal from the FPGA lights the LED. See the 5I23IO.PIN file for FPGA pin locations of the LED signals.

## IO LEVELS

The FPGA used on the 5I23 is a Spartan3. The Spartan3 supports many I/O standards. The 5I23 does not support use of the I/O standards that require input reference voltages, also VCCIO on the banks that connect to P2, P4 and P5 are fixed at 3.3V so only 5 I/O options can be used on P1 and P2. The available I/O options for P1 and P2 are LVTTTL, LVCMOS\_33, LVDCI\_33, and LVDCI\_33\_DV2 . P3 can use a 2.5V VCCIO which adds the following I/O standards: LVCMOS\_25, LVCMOS\_25\_DCI, LVDS\_25, LVDS\_25\_DCI, LVDSEXT\_25, LVDSEXT\_25\_DCI.

The Spartan3 FPGA chip used on the 5I23 is not 5V tolerant but external bus switch parts are used on the 5I23 to make the I/O pins 5V tolerant. The bus switch parts disconnect the FPGA pins from the I/O pins when the I/O pins are driven to positive voltage levels that would damage the FPGA.

The voltage level that causes disconnect can be selected to be ~4V (3.3V mode) or ~3.3V (5Vmode). For most applications, the 3.3V mode should be used. The 5V mode is useful when driving 5V referred loads.

Note that there is no protection against negative input voltages other than the input clamp diodes in the FPGA and bus switches, so negative input voltages must be limited to -.5V

## TERMINATION

The FPGAs used on the 5I23 support series and parallel termination that can be programmed on a pin-for-pin basis. This feature is called DCI. The 5I23 supports DCI on all I/O pins. The DCI reference resistors are all 100 Ohm 1%.

## **OPERATION**

### **POWER SUPPLY**

The 5I23 uses on card switching regulators to supply the 3.3 VIO and 1.2V CORE core power for the FPGA. A linear low dropout regulator is used to supply the 2.5V VAUX and LVDS power. The core power and 3.3V power supplies are rated at 2.5 Amp. The 2.5V power supply is limited to 500 mA. The 5I23 uses only the 5V power from the PCI bus.



# **SUPPLIED CONFIGURATIONS**

## **IOPR24**

The IOPR24 configuration creates a simple 72 bit parallel I/O port. IOPR24 is 32 bit device, all accesses read or write 16 bit words. IOPR24 creates three 24 bit ports, one port per I/O connector.. Each I/O bit can be individually programmed to be input or output. All I/O bits will be input on startup. For information on the register map of the IOPR24 configuration, see the regmap file in the /configs/IOPR24 directory of the 5I23 distribution disk.

## **5I23LOOP**

The IOPR24 configuration provides a simple way to check that all the I/O pins are OK and that most of the host interface is working. A loopback program (5I23LOOP) is provided for doing this testing. 5I23LOOP depends on an external loopback cable between I/O connectors P2, P3, and P4. 5I23LOOP perform a rotating bit test with one I/O connector programmed as outputs and the other two as inputs. All combinations of inputs and outputs are tested. In addition, a 32 bit register readback test is performed to verify 32 bit local data bus functionality.

## **HOSTMOT2**

The HOSTMOT2 configuration is a up to 12 channel host based servo motor or step motor controller. Host based controllers depend on the host CPU to "close" the servo loop. This has advantages and disadvantages. One advantage is that less hardware is needed, since host based software does all the math and handles all the control bits. Another advantage is that since the host based software is easily examined and modified, it is more amenable to customization and is more useful as a teaching tool. One disadvantage is that host based motor controllers depend on fast interrupt response time, since the control loop is an interrupt driven background task. This means that host based motor controllers don't tend to work well with multitasking operating systems such as Windows or Unix. They will work with real-time operating systems or simple operating systems like DOS.

# SUPPLIED CONFIGURATIONS

## HOSTMOT2

HOSTMOT2 is available in several configurations that vary the number of servo or step generator channels, plus miscellaneous I/O options including 32 bit buffered UARTs, SPI interfaces, SSI interfaces etc.

Demonstration software provided with the 5I23 implements a PID + feedforward control loop, plus a ramp-up, slew, ramp-down, profile generator for position control applications. Demo program (newmove.exe) and sources are located in the /configs/hostmot2/support directory of the 5I23 distribution disk.

## SOFTDMC

The *SoftDMC* configuration creates a 4 or 8 axis processor based servo motor controller, with the processor embedded in the FPGA. The *SoftDMC* configuration has the advantage that the embedded processor takes care of all time critical functions, so it can control motor position and motions without host intervention.

The *SoftDMC* configuration has programmable sample and PWM rates, and can operate 4 axis at up to 50 KHz sample rate and 8 axis at up to 25 KHz sample rate.

The control loop is a PID+F loop (F=feedforward) with 16 bit tuning parameters. Position and Velocity use 32 bit parameters for wide range.

The profile generator supports position, velocity, and homing modes. Position mode includes ramp-up, slew, ramp-down motions. Velocity mode supports breakpoints and a linked list parameter loading system for accurate profiling. Profile generator uses 48 bit accumulator to allow velocities from 2 turns per day (500 line - 2000 count encoder, 4 KHz sample rate) to 60,000 RPM.

There is a separate manual available for the *SoftDMC* motion controller.

Demo programs, and tuning program (dmctune.exe) and sources are located in the /configs/softdmc/support directory of the 5I23 distribution disk.

## REFERENCE

### SPECIFICATIONS

POWER	MIN	MAX	NOTES:
POWER SUPPLY	4.5V	5.5V	
POWER CONSUMPTION:	----	2A	Depends on FPGA Configuration and external load
MAX 5V CURRENT TO I/O CONNS	---	400 mA	Per Connector
MAX 3.3V CURRENT TO I/O CONNS	---	400 mA	Per Connector
ABSOLUTE MAX I/O PIN VOLTAGE	-.5V	7V	
TEMPERATURE RANGE -C version	0 °C	+70 °C	
TEMPERATURE RANGE -I version	-40 °C	+85 °C	