Control Systems

G V V Sharma*

Contents

1 **Signal Flow Graph** 1
- 1.1 Mason's Gain Formula . . . 1
- 1.2 Matrix Formula 1
- 1.3 Example 1

2 **Bode Plot** 1
- 2.1 Introduction 1
- 2.2 Example 1
- 2.3 Phase 3

3 **Second order System** 3
- 3.1 Damping 3
- 3.2 Example 3
- 3.3 Settling Time 3

4 **Routh Hurwitz Criterion** 3
- 4.1 Routh Array 3
- 4.2 Marginal Stability 3
- 4.3 Stability 3
- 4.4 Example 3
- 4.5 Example 3

5 **State-Space Model** 3
- 5.1 Controllability and Observability 3
- 5.2 Second Order System 3
- 5.3 Example 3
- 5.4 Example 3
- 5.5 Example 3
- 5.6 Example 3
- 5.7 Example 3

6 **Nyquist Plot** 3
- 6.1 Introduction 3
- 6.2 Example 3

7 **Compensators** 3
- 7.1 Phase Lead 3
- 7.2 Lag Lead 3
- 7.3 Example 3

8 **Gain Margin** 3
- 8.1 Introduction 3
- 8.2 Example 3
- 8.3 Example 3

9 **Phase Margin** 3
- 9.1 Intoduction 3
- 9.2 Example 3

10 **Oscillator** 3
- 10.1 Introduction 3
- 10.2 Example 3

11 **Root Locus** 3
- 11.1 Introduction 3

***Abstract*—This manual is an introduction to control systems based on GATE problems.Links to sample Python codes are available in the text.**

Download python codes using

```
svn co https://github.com/gadepall/school/trunk/
    control/codes
```

1 Signal Flow Graph

1.1 Mason's Gain Formula

1.2 Matrix Formula

1.3 Example

2 Bode Plot

2.1 Introduction

2.2 Example

2.1. For an LTI system, the Bode plot for its gain defined as

$$G(s) = 20 \log |H(s)| \tag{2.1.1}$$

is as illustrated in the Fig. 2.1. Find the corner frequencies ω_{01} and ω_{02} from the plot.

*The author is with the Department of Electrical Engineering, Indian Institute of Technology, Hyderabad 502285 India e-mail: gadepall@iith.ac.in.

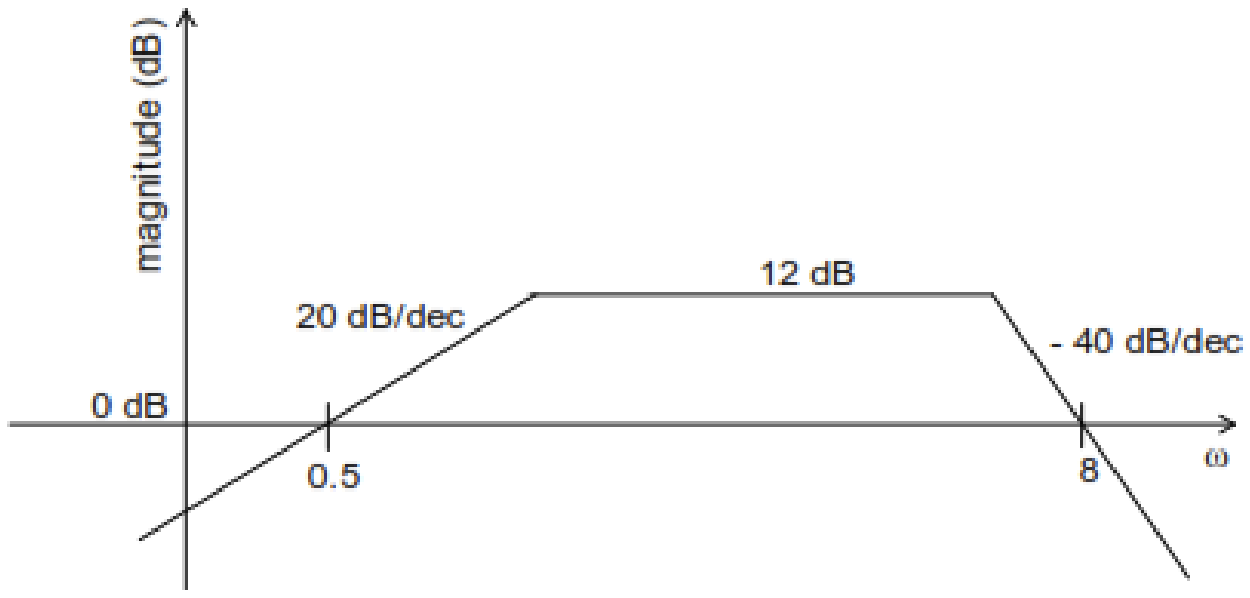

Fig. 2.1

Solution: The corner frequencies can be calculated as follows:

$$slope = \frac{M_2 - M_1}{log\omega_2 - log\omega_1}$$

Therefore for ω_{02},

-40 = $\frac{0-12}{log8 - log\omega_{02}}$

$log8 - log\omega_{02} = \frac{12}{40}$

$log\omega_{02}$ = log8 - $\frac{12}{40}$

ω_{02} = 4

And for ω_{01},

20 = $\frac{0-12}{log0.5 - log}\omega_{01}$

log0.5 - logω_{01} = $\frac{-12}{20}$

$log\omega_{01}$ = log0.5 + $\frac{12}{20}$

ω_{01} = 2

So, the corner frequencies are ω_{01}=2 and ω_{02} = 4.

2.2. Find the transfer function from the calculated frequencies.
Solution: By looking to the plot, we can say that since the initial slope is +20, there must be a zero at the origin.
At ω_{01}, the change in slope is -20dB, so their exists one pole at this frequency.
At ω_{02}, the change in slope is -40dB, so their exists two pole at this frequency.

The denominators have the form $(1 + \frac{s}{\omega})$
So, the denominator of the transfer function is $(1 + \frac{s}{2})(1 + \frac{s}{4})^2$
Therefore, the transfer function is,

$$\frac{cs}{(1 + \frac{s}{2})(1 + \frac{s}{4})^2}$$

here c is some constant

2.3. Compare the above calculated transfer function with one of the options that best represents it.

$$(A)\frac{2s}{(1+0.5s)(1+0.25s)^2} \quad (B)\frac{4(1+0.5s)}{s(1+0.25s)}$$

$$(C)\frac{2s}{(1+2s)(1+4s)} \quad (D)\frac{4s}{(1+2s)(1+4s)^2}$$

Solution: From the above given option, we can see that option (A) best represents our transfer function.

$$\frac{2s}{(1+0.5s)(1+0.25s)^2}$$

2.4. Verify the above plot by plotting the transfer function.
Solution: The bode plot is:

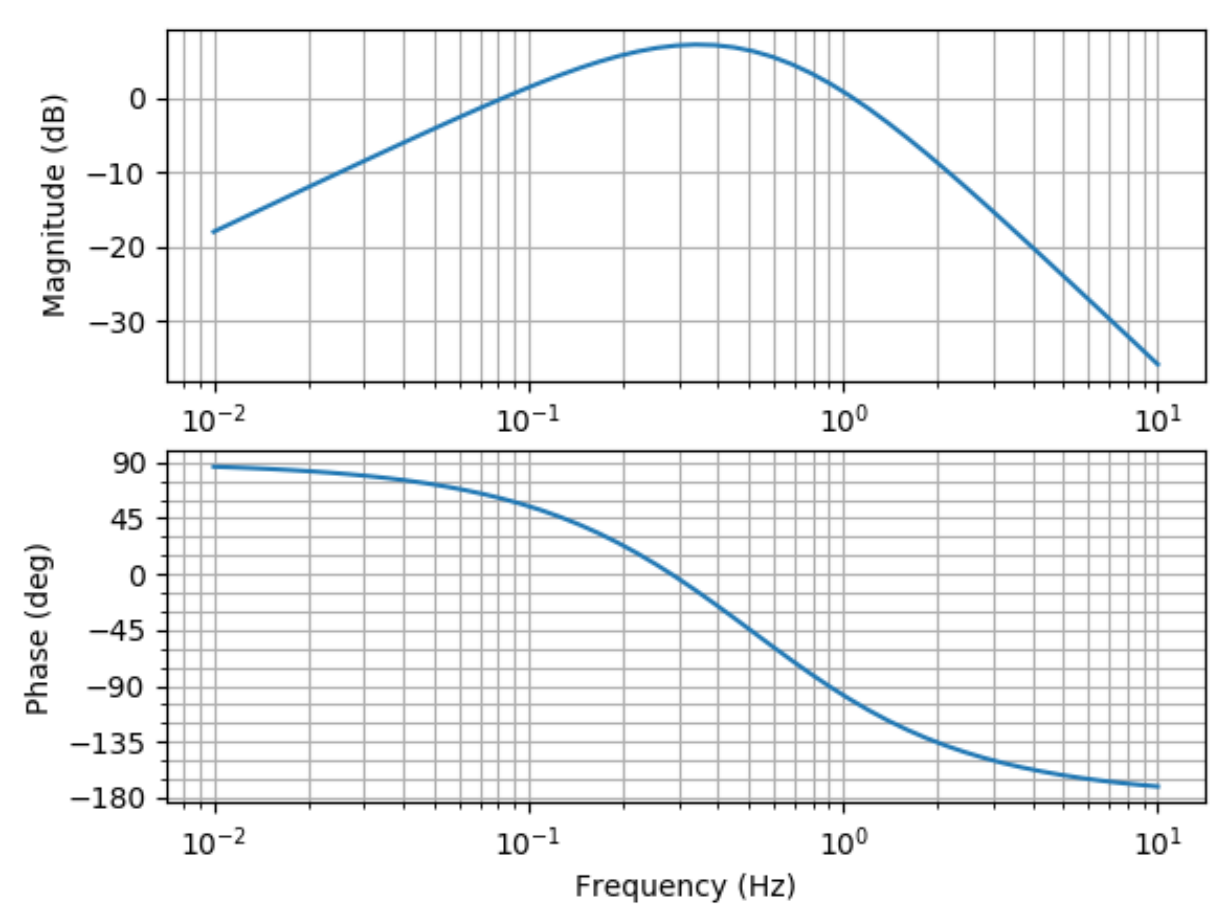

Fig. 2.4: Plot of G(s)

The plot was plotted using the following code:

```
import numpy as np
import control.matlab as ml
import matplotlib.pyplot as plt
```

```
# If using termux
import subprocess
import shlex
#end if

# num is the numerator of the trasfer function which is (2s)
# dem is the denominator of the transfer function which is (0.25s + 1)(0.25s + 1)(0.5s + 1)
num = np.array([2, 0])
den = np.polymul(np.array([0.5, 1]), np.array([0.25, 1]))
den = np.polymul(den, np.array([0.25, 1]))

# Generating the transfer function
g = ml.tf(num, den)
print("The transfer function is: ", g)
print("The poles of the above function are ", ml.pole(g))
print("The zeros of the above function are ", ml.zero(g))

# Generating the bode plot as well as plotting it
mag, phase, w = ml.bode(g)

# If using termux
plt.savefig("./figs/ep18btech11016_plot.pdf")
plt.savefig("./figs/ep18btech11016_plot.eps")
subprocess.run(shlex.split("termux-open ./figs/ep18btech11016_plot.pdf"))
# else
plt.show()
```

2.3 Phase

3 Second order System

3.1 Damping

3.2 Example

3.3 Settling Time

4 Routh Hurwitz Criterion

4.1 Routh Array

4.2 Marginal Stability

4.3 Stability

4.4 Example

4.5 Example

5 State-Space Model

5.1 Controllability and Observability

5.2 Second Order System

5.3 Example

5.4 Example

5.5 Example

5.6 Example

5.7 Example

6 Nyquist Plot

6.1 Introduction

6.2 Example

7 Compensators

7.1 Phase Lead

7.2 Lag Lead

7.3 Example

8 Gain Margin

8.1 Introduction

8.2 Example

8.3 Example

9 Phase Margin

9.1 Intoduction

9.2 Example

10 Oscillator

10.1 Introduction

10.2 Example

11 Root Locus

11.1 Introduction