EN1060 Signals and Systems: Signals

Ranga Rodrigo
ranga@uom.lk

The University of Moratuwa, Sri Lanka

September 26, 2016

Outline

Continuous-Time Sinusoidal Signal

$$x(t) = A\cos(\omega_0 t + \phi). \qquad (1)$$

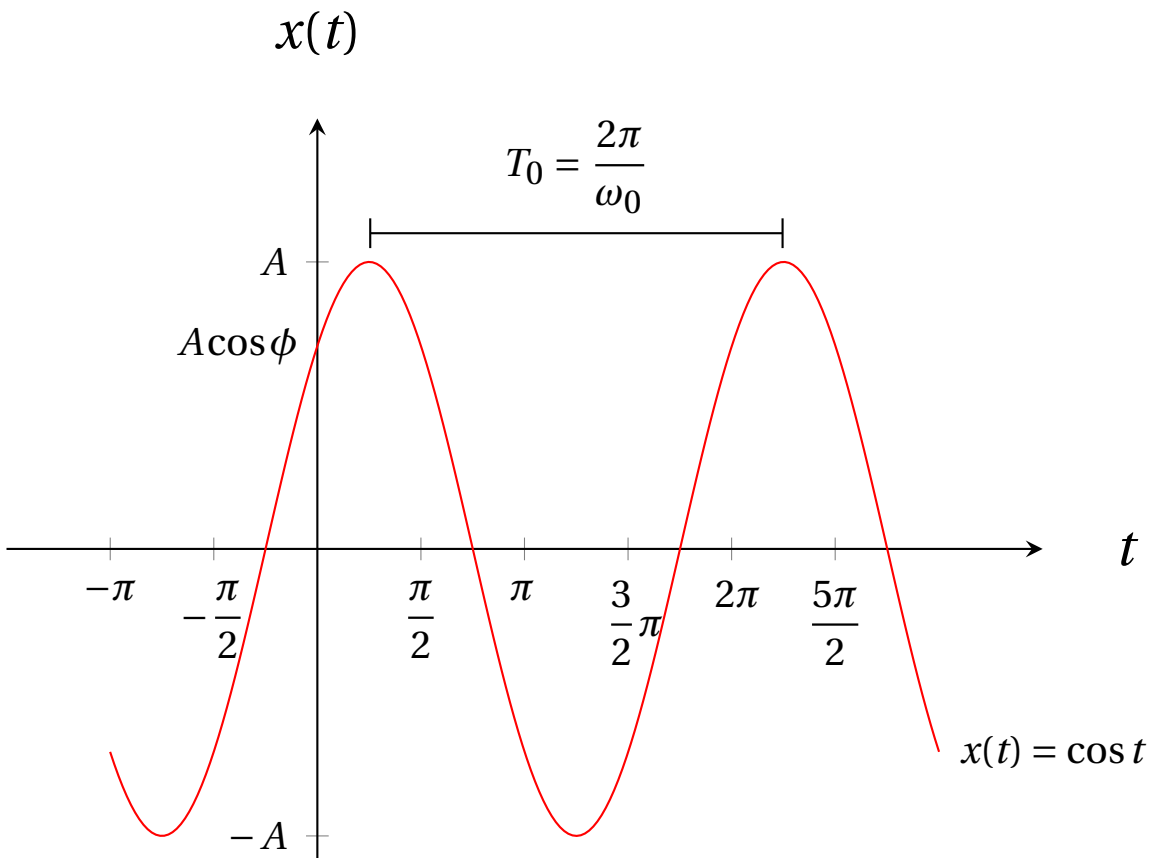

$A =$ amplitude

$\omega_0 =$ frequency (here $\omega_0 = 1$)

$\phi =$ phase (here $\phi = -\pi/4$)

Periodicity of a Sinusoidal

Sinusoidal signal is periodic.
A periodic continuous-time signal $x(t)$ has the property that there is a positive values T for which

$$x(t) = x(t+T) \tag{2}$$

for all values of t. Under an appropriate time-shift the signal repeats itself. In this case we say that $x(t)$ is periodic with period T. Fundamental period T_0 = smallest value of T for which 2 holds.
A signal that is not periodic is referred to as aperiodic.
E.g.: Consider $A\cos(\omega_0 t + \phi)$

$$\begin{aligned} A\cos(\omega_0 t + \phi) &= A\cos(\omega_0 (t+T) + \phi) \quad \text{here } \omega_0 T = 2\pi m \quad \text{an integer multiple of } 2\pi \\ &= A\cos(\omega_0 t + \phi) \end{aligned}$$

$T = \dfrac{2\pi m}{\omega_0} \Rightarrow$ fundamental period $T_0 = \dfrac{2\pi}{\omega_0}$.

Phase of a Sinusoidal

A time-shift in a CT sinusoidal is equivalent to a phase shift.
E.g.: Show that a time-shift is a sinusoidal is equal to a phase shift.

$$A\cos[\omega_0(t+t_0)] = A\cos(\omega_0 t + \omega_0 t_0) = A\cos(\omega_0 t + \Delta\phi), \quad \Delta\phi \text{ is a change in phase.}$$

$$A\cos[\omega_0(t+t_0)+\phi] = A\cos(\omega_0 t + \omega_0 t_0 + \phi) = A\cos(\omega_0(t+t_1)), \quad t_1 = t_0 + \phi/\omega_0.$$

Phase of a Sinusoidal: $\phi = 0$

$$x(t) = A\cos(\omega_0 t)$$

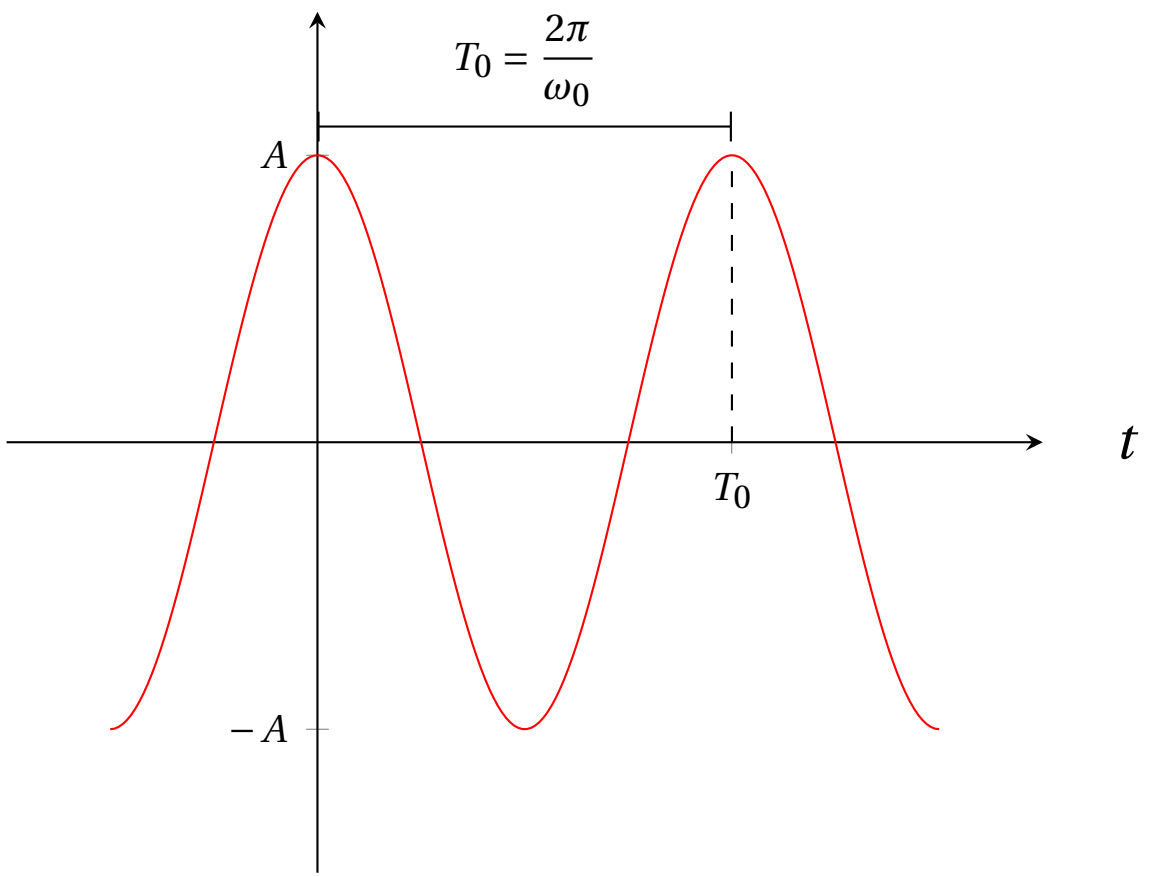

This signal is even. If we reflect an even signal about the origin, it would look exactly the same.
Periodic: $x(t) = x(t+T)$.
Even: $x(t) = x(-t)$.

Phase of a Sinusoidal: $\phi = -\pi/2$

$$x(t) = A\cos(\omega_0 t - \pi/2)$$

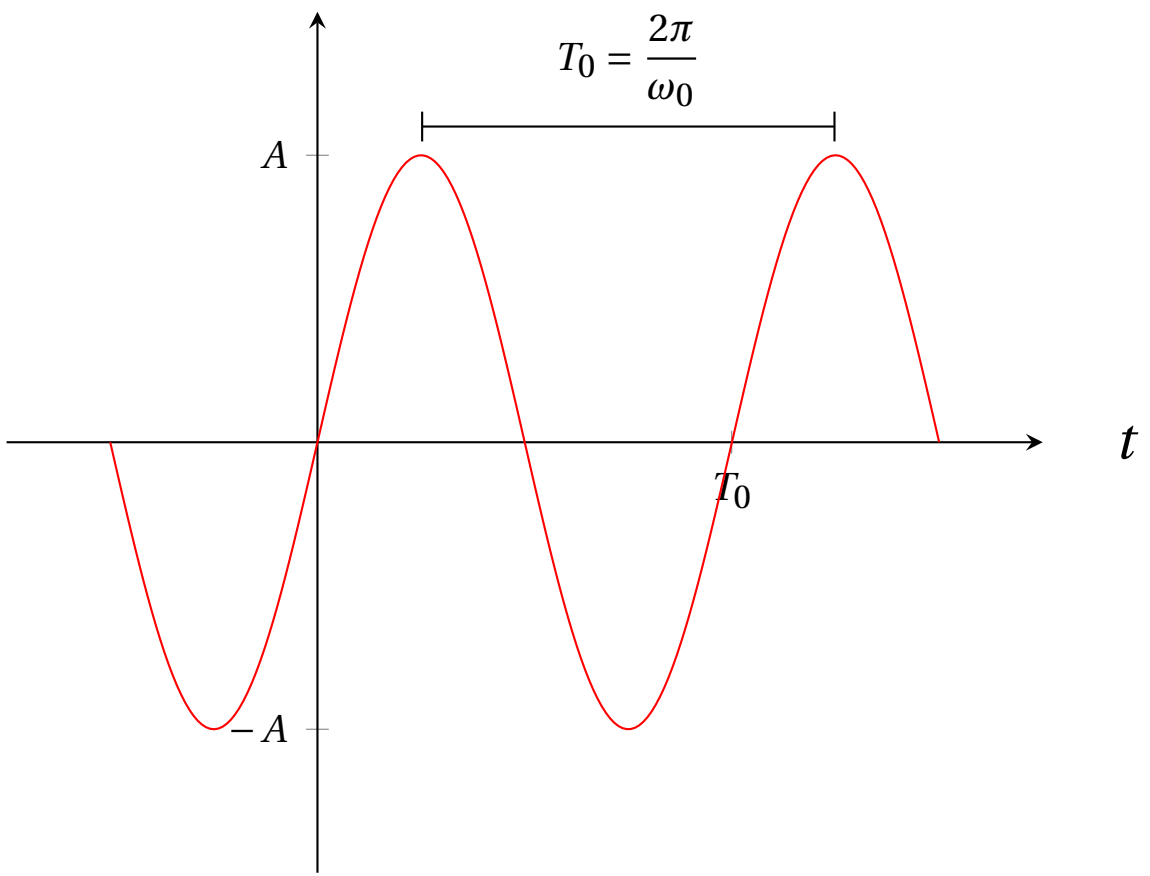

This signal is odd. If we flip an odd signal about the time origin, we also multiply it by a $(-)$ sign.
Periodic: $x(t) = x(t+T)$.
Odd: $x(t) = -x(-t)$.

Outline

$x[n] = A\cos(\omega_0 n + \phi)$ with $\phi = 0$

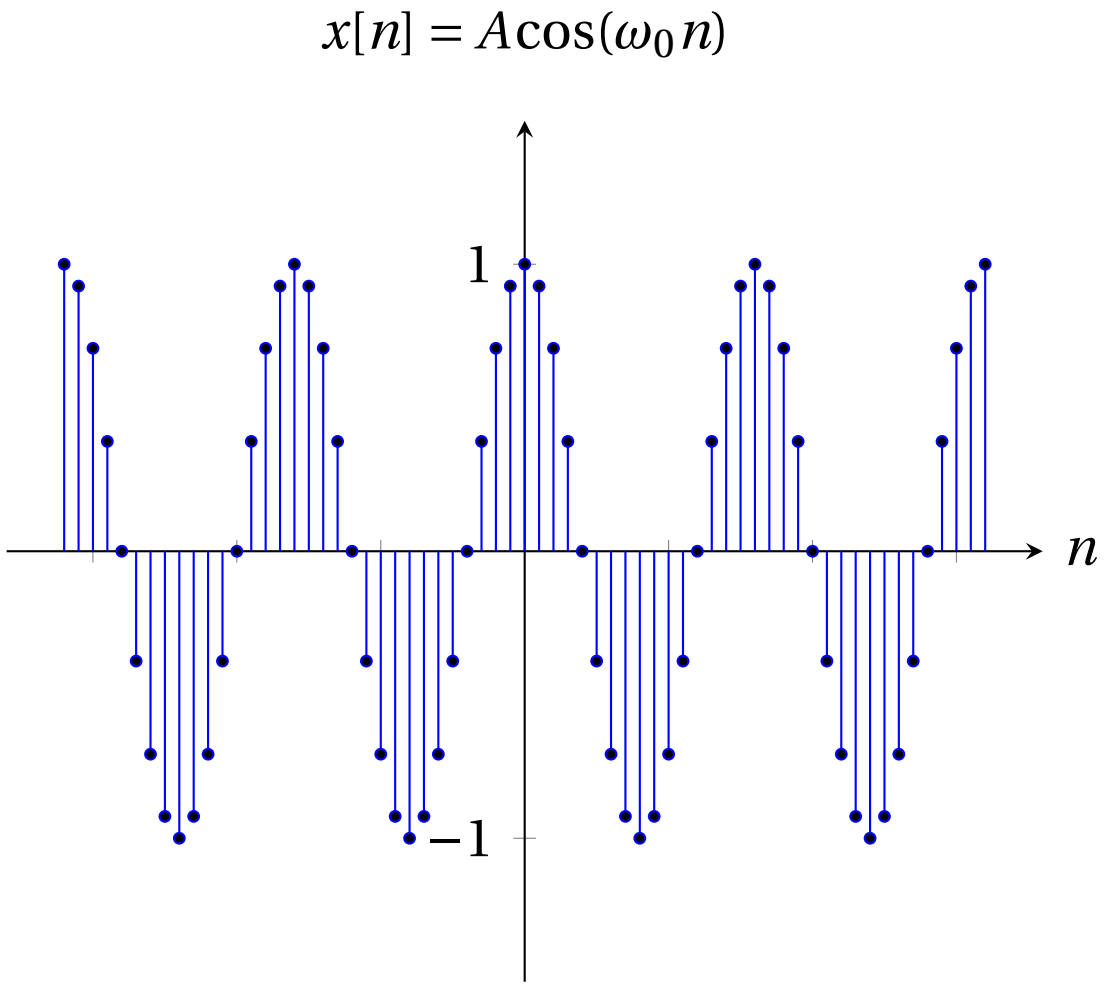

The independent variable is an integer.
The sequence takes values only at integer values of he argument.
This signal is even.
Even: $x[n] = x[-n]$.
Periodic: $x[n] = x[n+N]$, $N = 16$
$\omega_0 = \frac{2\pi}{N} = \frac{\pi}{8}$.

$x[n] = A\cos(\omega_0 n + \phi)$ with $\phi = -\pi/2$

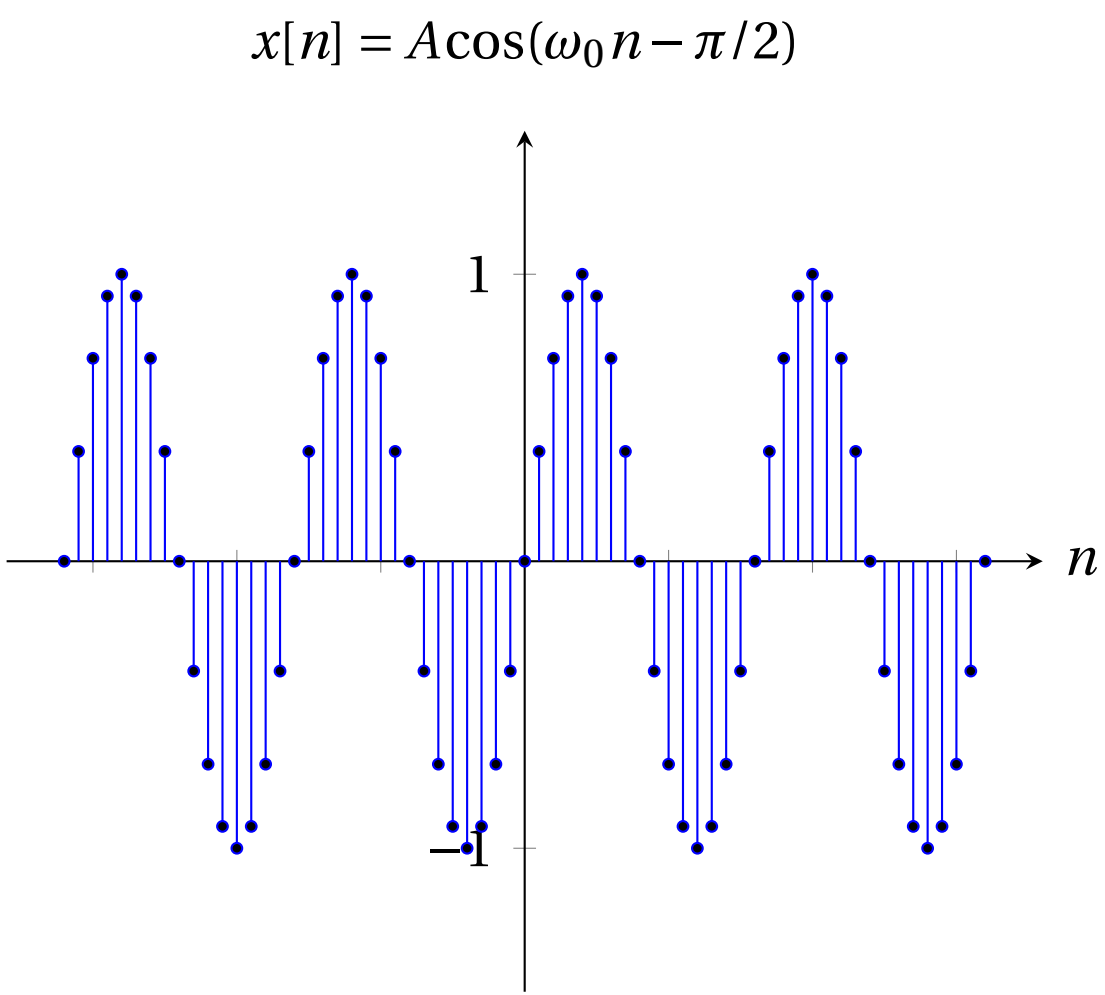

The independent variable is an integer.
The sequence takes values only at inter values of he argument.
This signal is odd.
Odd: $x[n] = -x[-n]$.
Periodic: $x[n] = x[n+N]$, $N = 16$
$\omega_0 = \frac{2\pi}{N} = \frac{\pi}{8}$. $\phi = -\pi/2$, $x[n] = A\cos(\omega_0 n + \phi) = A\cos(\omega_0(n + n_0))$. n_0 must be an integer.
$n_0 = \frac{\phi}{\omega_0} = \frac{\pi/2}{\pi/8} = 4$.

Phase Change and Time Shift in DT

Q

Does a phase change always correspond to a time shift in discrete-time signals?

Phase Change and Time Shift in DT

Q

Does a phase change always correspond to a time shift in discrete-time signals?

Answer: No.

$$A\cos[\omega_0(n+n_0)] = A\cos[\omega_0(n+n_0)]$$
$$\omega_0 n + \omega_0 n_0 = \omega_0 n + \phi$$
$$\omega_0 n_0 = \phi \quad n_0 \text{ is an integer.}$$

- Depending on ϕ and ω_0, n_0 many not come out to be an integer.
- In discrete time , the amount of time shift must be an integer.
- All continuous-time sinusoids are periodic. However, discrete-time sinusoids are not necessarily so.

Periodicity of a DT Signal

$$x[n] = x[n+N], \quad \text{smallest integer } N \text{ is the fundamental period.} \tag{3}$$

$$A\cos[\omega_0(n+N)+\phi] = A\cos[\omega_0 n + \omega_0 N + \phi]$$

$\omega_0 N$ must be an integer multiple of 2π.
Periodic $\Rightarrow$ $\omega_0 N = 2\pi m$

$$N = \frac{2\pi m}{\omega_0} \tag{4}$$

N and m must be integers.
Smallest N, if any, is the fundamental period.
N may not be an integer. In this case, the sinal is not periodic.

Outline

1. Signals
   - Sinusoids
   - Discrete-Time Sinusoidal Signal
   - Exponentials
   - CT Complex Exponentials
   - Step and Impulse Functions
   - Signal Energy and Power

CT Real Exponentials

$$\begin{aligned} x(t) &= Ce^{a(t+t_0)}, \quad C \text{ and } a \text{ are real numbers} \\ &= Ce^{at_0} e^{at}. \end{aligned}$$

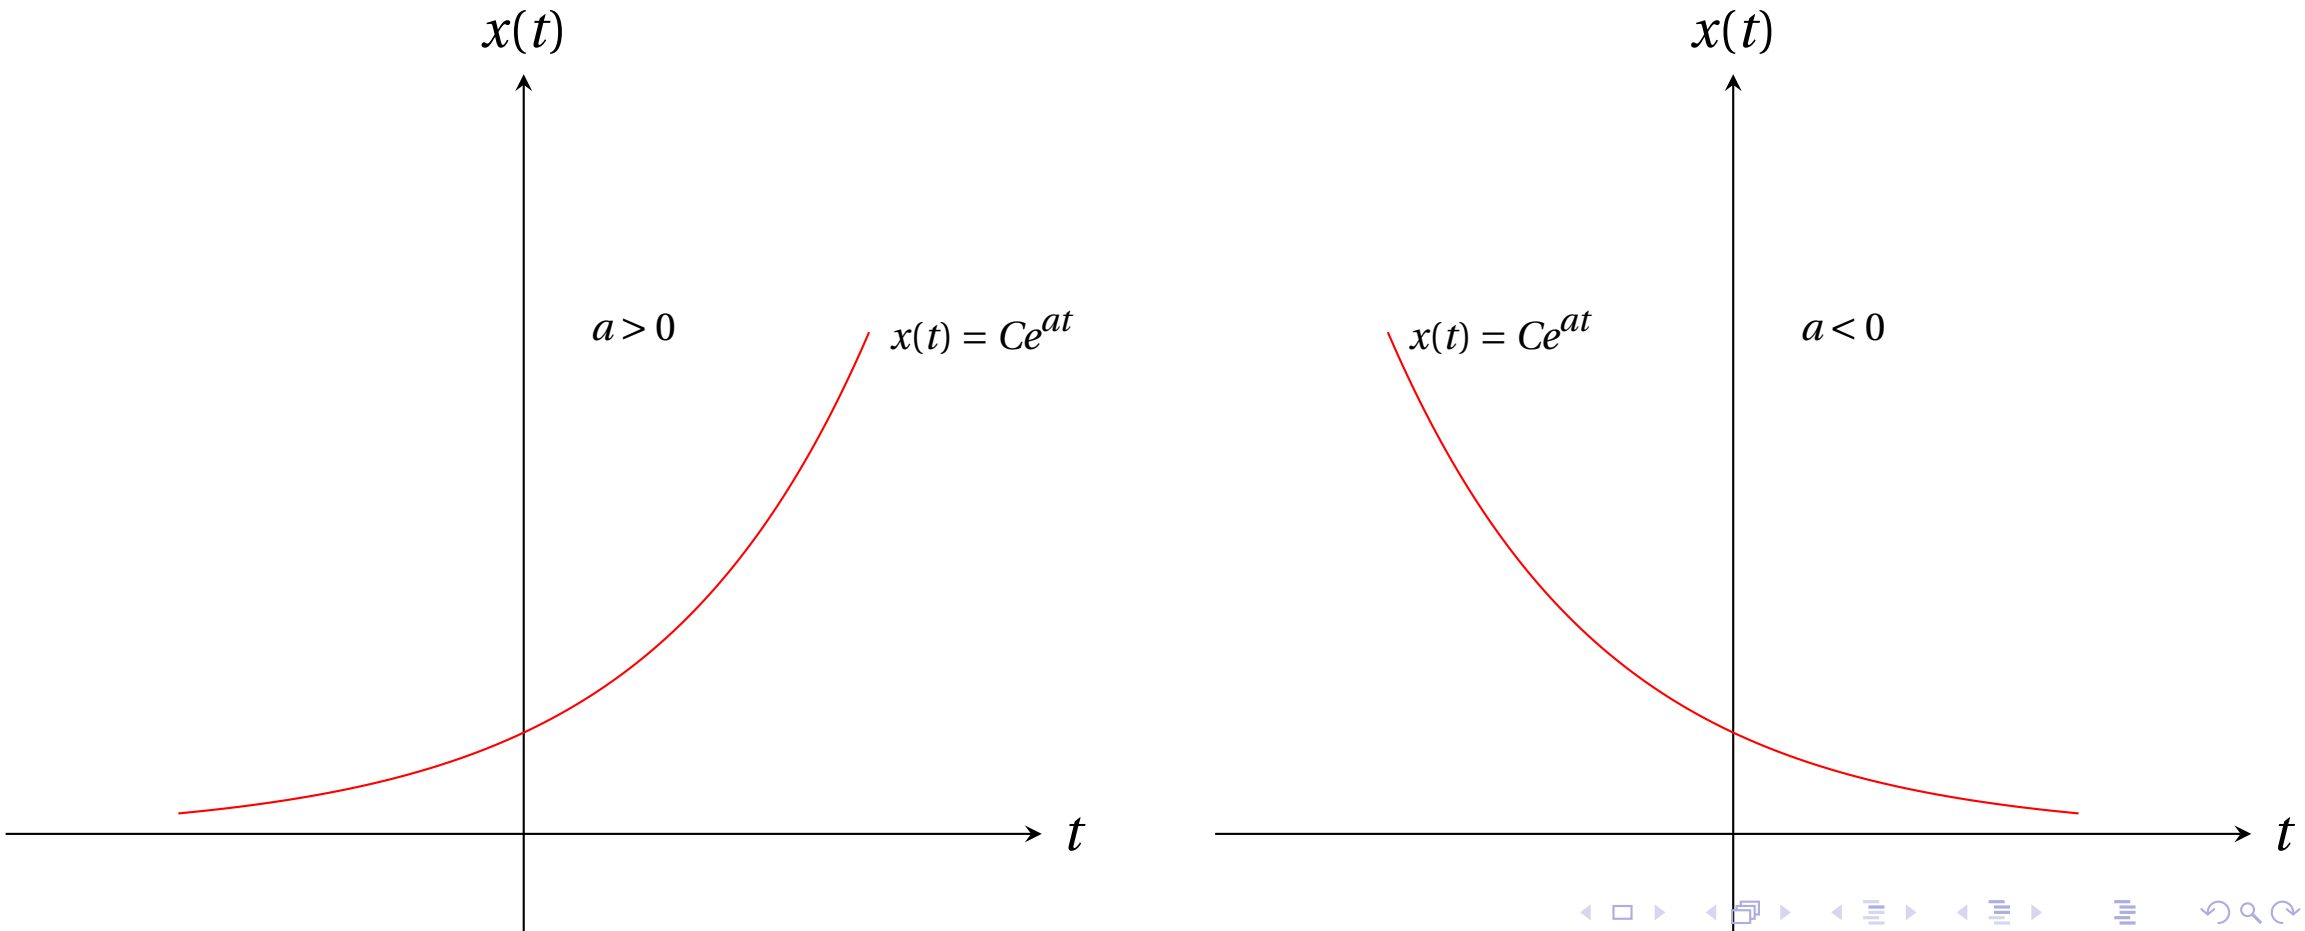

DT Real Exponentials

$$x[n] = Ce^{\beta n} = C\alpha^n, \quad C \text{ and } \alpha \text{ are real numbers}$$

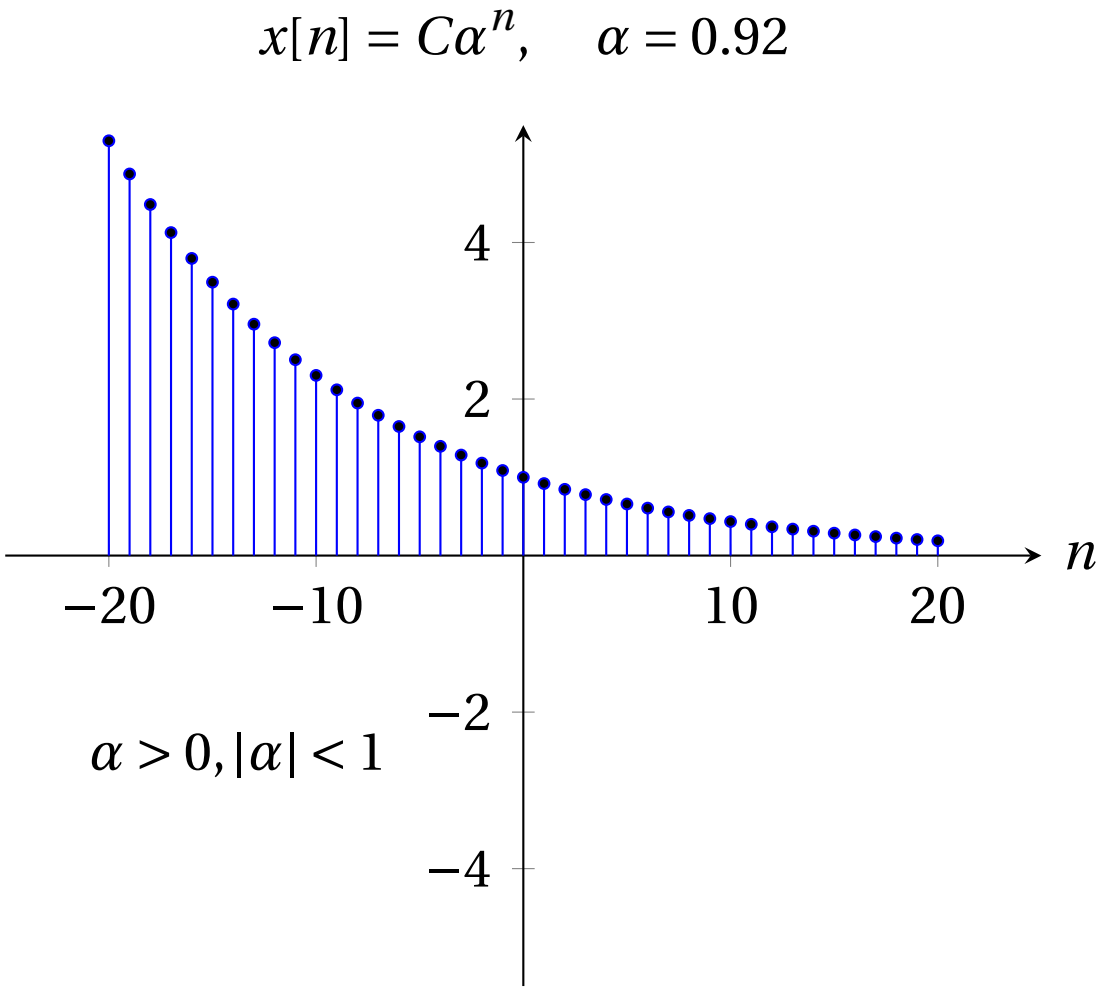
$x[n] = C\alpha^n, \quad \alpha = 0.92$
4
2
−2
−4
−20
−10
10
20
n
$\alpha > 0, |\alpha| < 1$

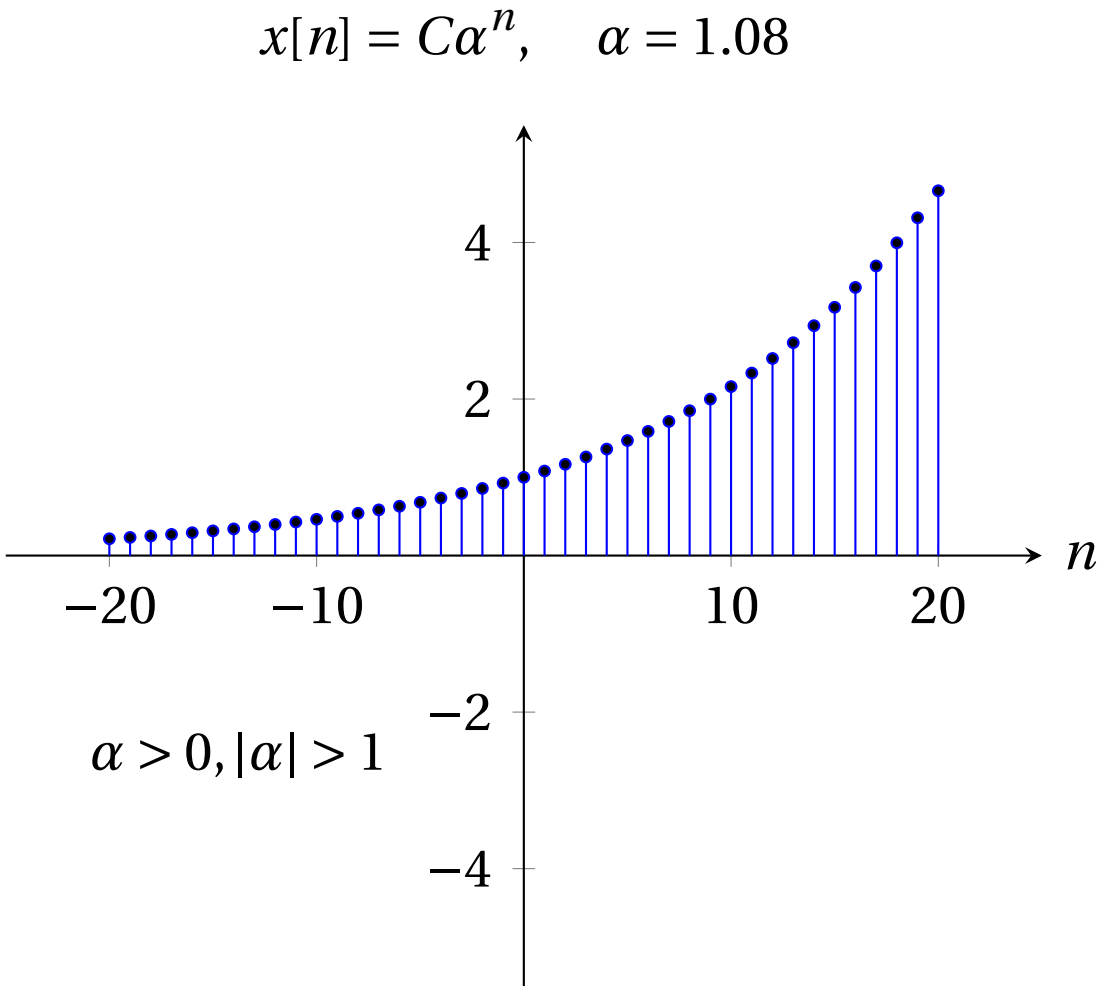
$x[n] = C\alpha^n, \quad \alpha = 1.08$
4
2
−2
−4
−20
−10
10
20
n
$\alpha > 0, |\alpha| > 1$

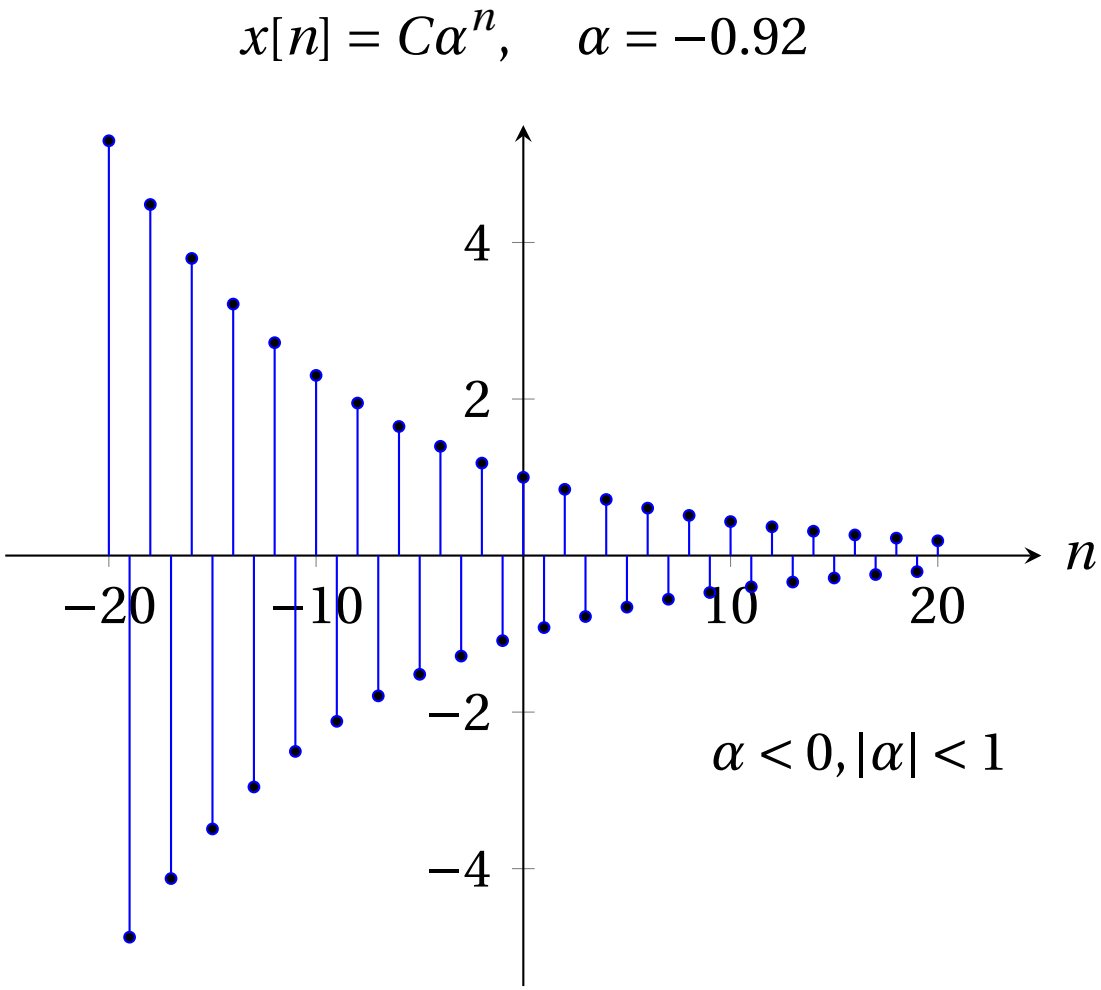

$x[n] = C\alpha^n, \quad \alpha = -0.92$
4
2
−2
−4
−20
−10
10
20
n
$\alpha < 0, |\alpha| < 1$

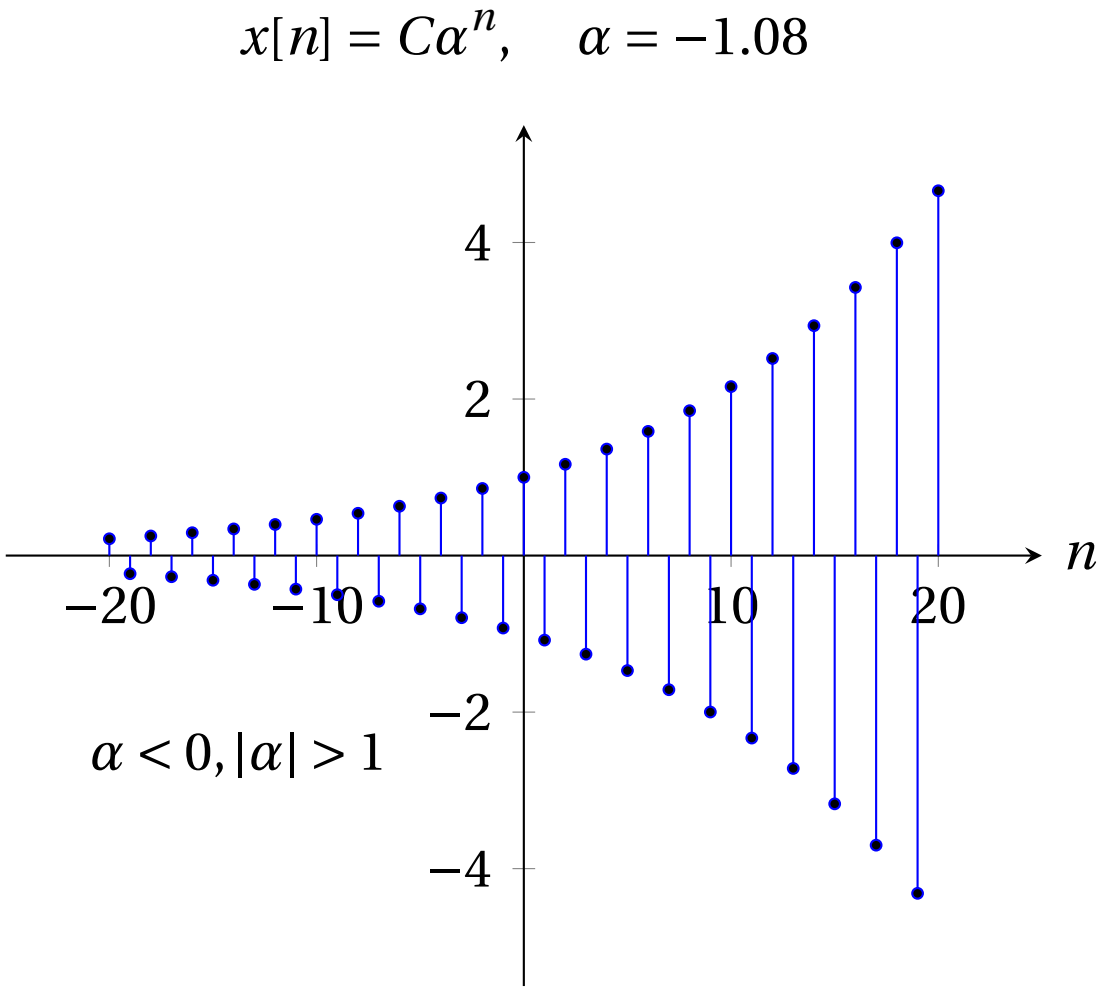

$x[n] = C\alpha^n, \quad \alpha = -1.08$
4
2
−2
−4
−20
−10
10
20
n
$\alpha < 0, |\alpha| > 1$

Outline

CT Complex Exponentials

$$x(t) = Ce^{at} \quad C \text{ and } a \text{ are complex numbers.} \tag{5}$$

$$C = |C|e^{j\theta} \tag{6}$$

$$a = r + j\omega_0 \tag{7}$$

$$x(t) = |C|e^{j\theta}\, e^{(r+j\omega_0)\,t} \tag{8}$$

$$= |C|e^{rt}\, e^{j(\omega_0 t+\theta)} \tag{9}$$

$$= |C|e^{rt}\, [\cos(\omega_0 t + \theta) + j \sin(\omega_0 t + \theta)] \tag{10}$$

$$\tag{11}$$

CT Complex Exponentials

$$x(t) = Ce^{at} \quad C \text{ and } a \text{ are complex numbers.} \tag{5}$$

$$C = |C|e^{j\theta} \tag{6}$$

$$a = r + j\omega_0 \tag{7}$$

$$x(t) = |C|e^{j\theta}\,e^{(r+j\omega_0)t} \tag{8}$$

$$= |C|e^{rt}\,e^{j(\omega_0 t+\theta)} \tag{9}$$

$$= |C|e^{rt}\,[\cos(\omega_0 t+\theta) + j\,\sin(\omega_0 t+\theta)] \tag{10}$$

$$\tag{11}$$

- $e^{j(\omega_0 t+\theta)} = \cos(\omega_0 t+\theta) + j\sin(\omega_0 t+\theta)$

CT Complex Exponentials

$$x(t) = Ce^{at} \quad C \text{ and } a \text{ are complex numbers.} \tag{5}$$

$$C = |C|e^{j\theta} \tag{6}$$

$$a = r + j\omega_0 \tag{7}$$

$$x(t) = |C|e^{j\theta}\, e^{(r+j\omega_0)\,t} \tag{8}$$

$$= |C|e^{rt}\ e^{j(\omega_0 t+\theta)} \tag{9}$$

$$= |C|e^{rt}\ [\cos(\omega_0 t + \theta)\ +\ j\ \sin(\omega_0 t + \theta)] \tag{10}$$

$$\tag{11}$$

- $e^{j(\omega_0 t+\theta)} = \cos(\omega_0 t + \theta) + j\sin(\omega_0 t + \theta)$
- Real

CT Complex Exponentials

$$x(t) = Ce^{at} \quad C \text{ and } a \text{ are complex numbers.} \tag{5}$$

$$C = |C|e^{j\theta} \tag{6}$$

$$a = r + j\omega_0 \tag{7}$$

$$x(t) = |C|e^{j\theta}\, e^{(r+j\omega_0)t} \tag{8}$$

$$= |C|e^{rt}\, \boxed{e^{j(\omega_0 t+\theta)}} \tag{9}$$

$$= \boxed{|C|e^{rt}}\, [\cos(\omega_0 t+\theta) + \boxed{j}\, \sin(\omega_0 t+\theta)] \tag{10}$$

$$\tag{11}$$

- $e^{j(\omega_0 t+\theta)} = \cos(\omega_0 t+\theta) + j\sin(\omega_0 t+\theta)$
- Real
- 90° out of phase

$$x(t) = |C|e^{rt}\cos(\omega_0 t + \phi)$$

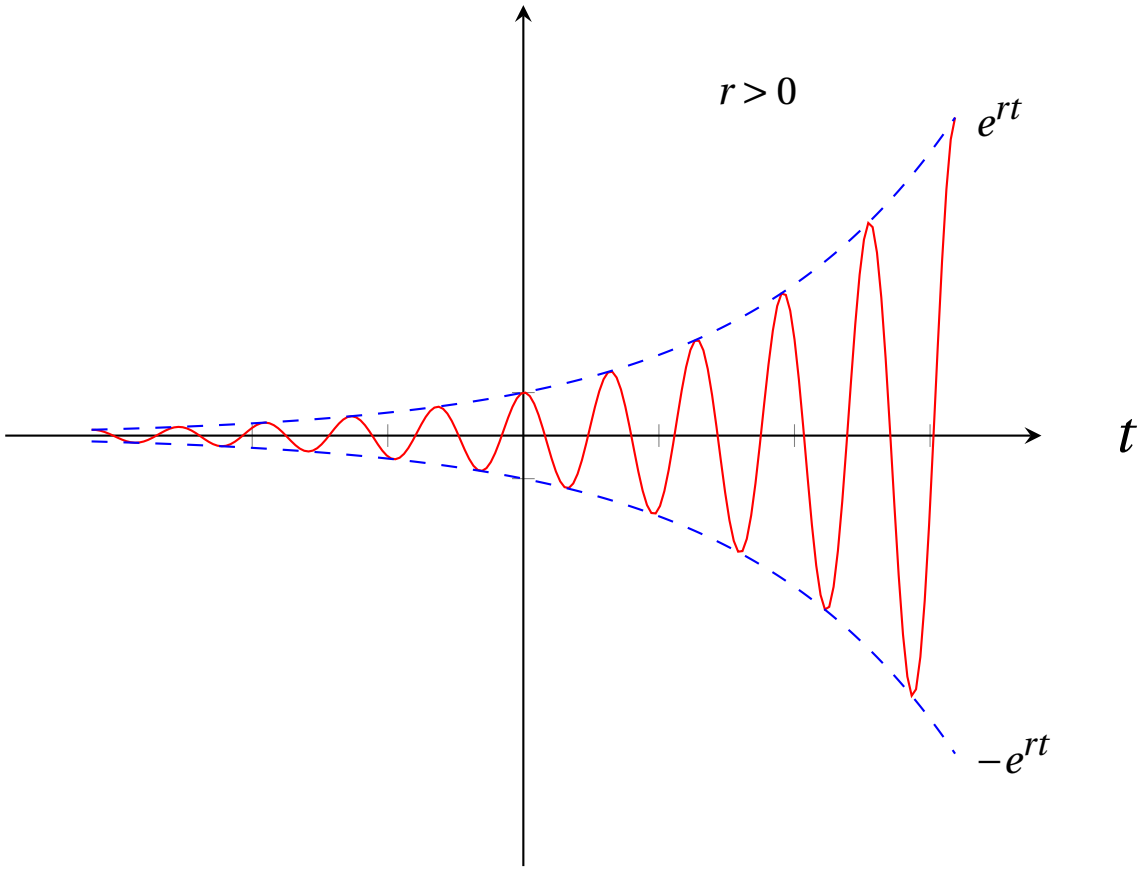

$$x(t) = |C|e^{rt}\cos(\omega_0 t + \phi)$$

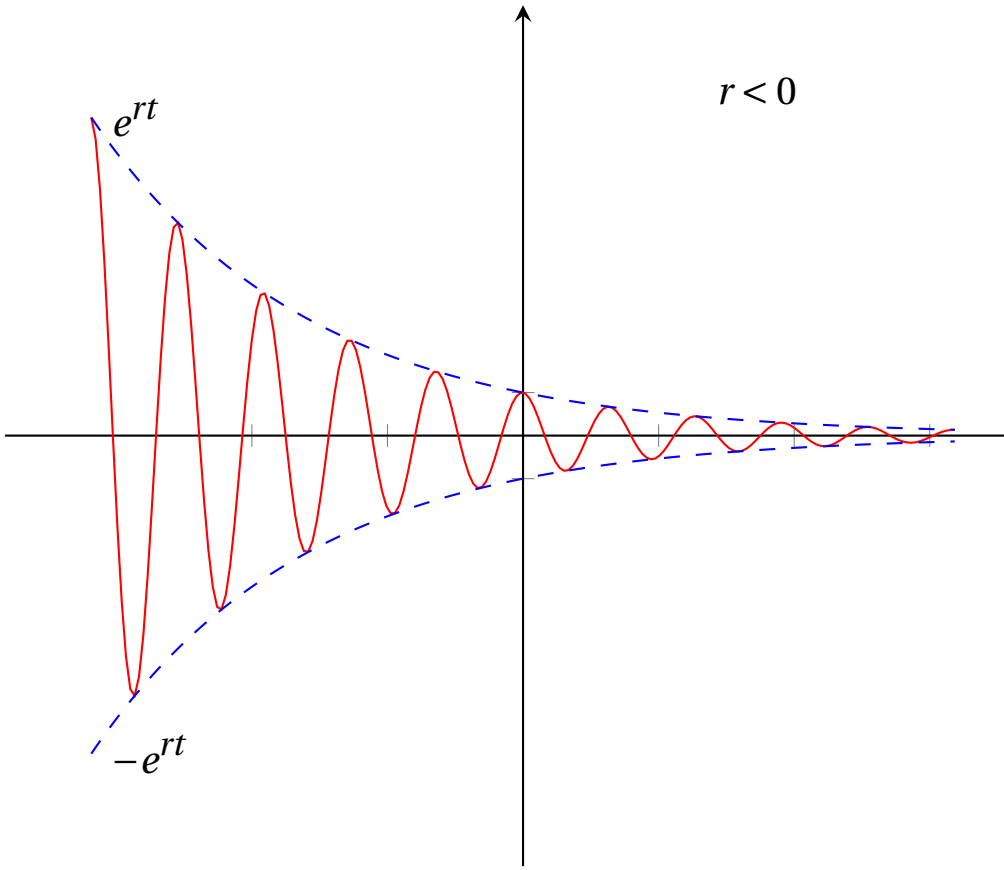

DT Complex Exponentials

$$
\begin{aligned}
x[n] &= C\alpha^n, \quad C \text{ and } \alpha \text{ are complex numbers.} && (12)\\
C &= |C|e^{j\theta} && (13)\\
\alpha &= |\alpha|e^{j\omega_0} && (14)\\
x[n] &= |C|e^{j\theta}\left(|\alpha|e^{j\omega_0}\right)^n && (15)\\
&= |C||\alpha|^n\cos(\omega_0 n+\theta) + j|C||\alpha|^n\sin(\omega_0 n+\theta) && (16)\\
& && (17)
\end{aligned}
$$

Comments:

- When $|alpha| = 1$: sinusoidal real and imaginary parts.
- $e^{j\omega_0 n}$ may or may not be periodic depending on the value of ω_0.
- Sinusoidal, exponential, step, and impulse signal form the cornerstones for signals and systems analysis.

DT Complex Exponentials Plot

$xn = |C||\alpha|^n \cos(\omega_0 n + \theta), \quad |\alpha| = 1.12, \theta = 0$

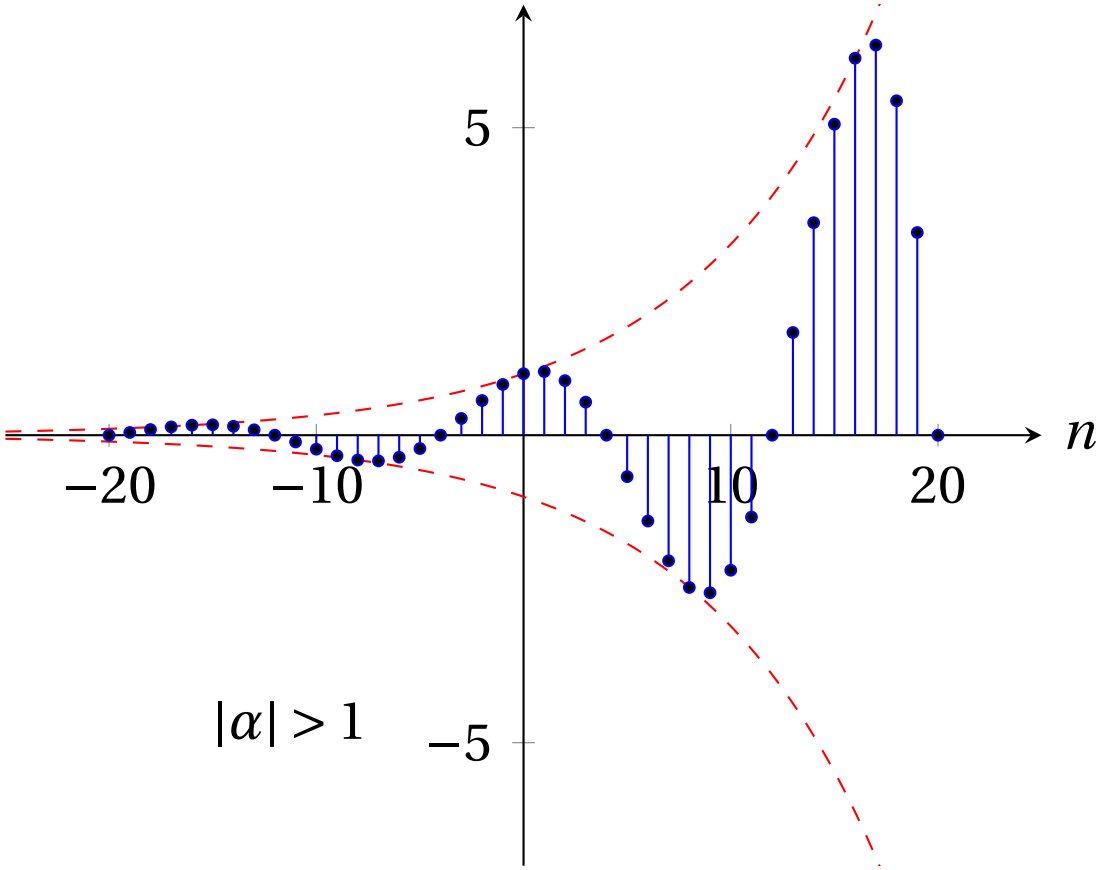

$xn = |C||\alpha|^n \cos(\omega_0 n + \theta), \quad |\alpha| = 0.92, \theta = 0$

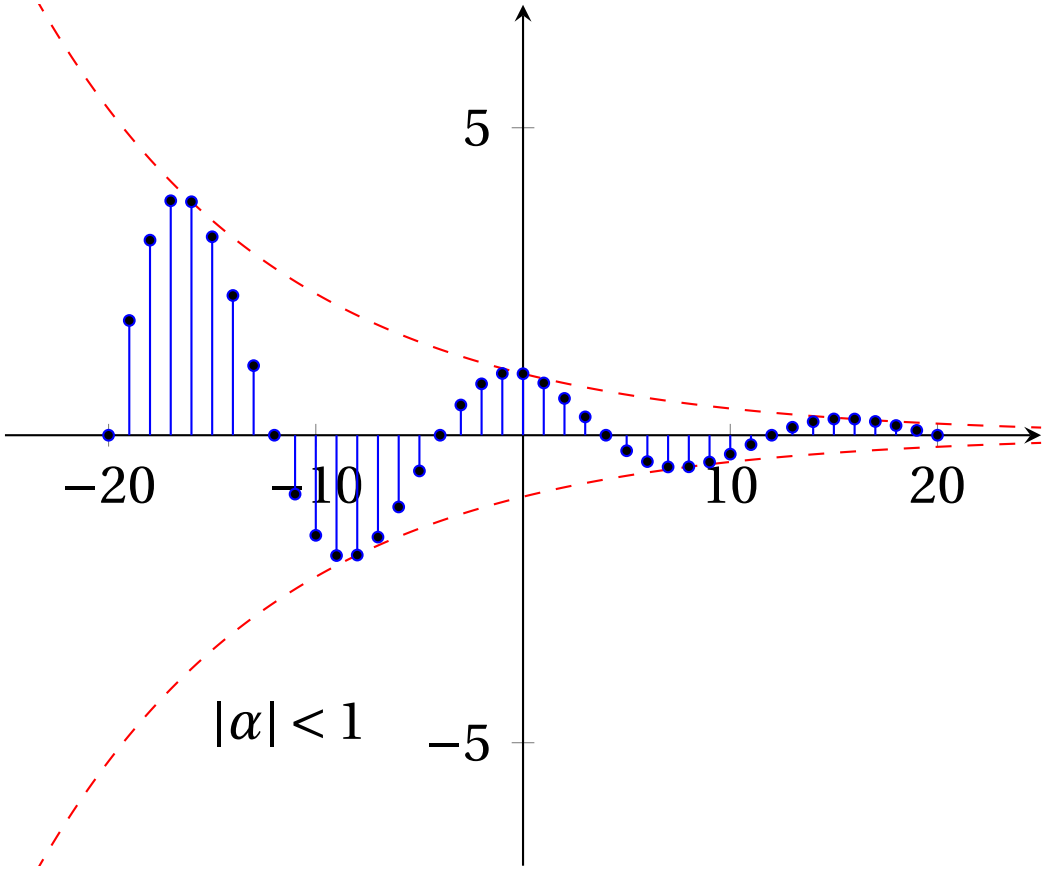

Discrete-Time Unit Step $u[n]$

$$u[n] = \begin{cases} 1, & n \geq 0, \\ 0, & n < 0. \end{cases} \tag{18}$$



Discrete-Time Unit Impulse (Unit Sample) $\delta[n]$

$$u[n] = \begin{cases} 1, & n = 0, \\ 0, & n \neq 0. \end{cases} \tag{19}$$



Outline

DT Step and Impulse

Unit impulse is the first backward difference of the unit step sequence.

$$\delta[n] = u[n] - u[n-1]. \tag{20}$$

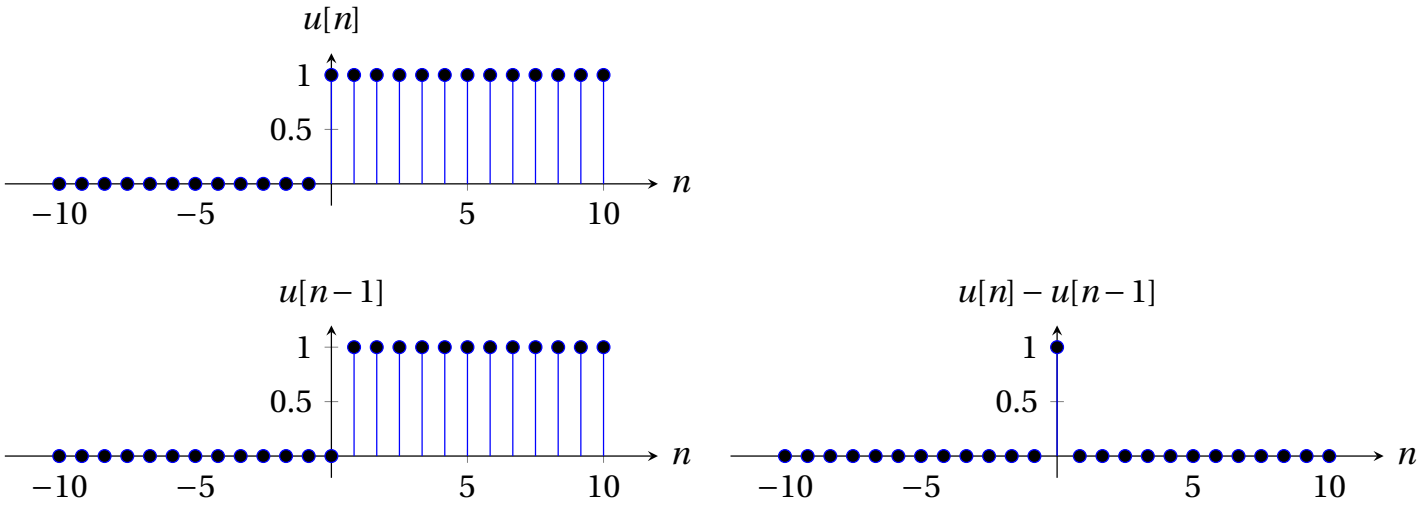

DT Step and Impulse

The unit step sequence is the running sum of the unit impulse.

$$u[n] = \sum_{m=-\infty}^{n} \delta[m]. \tag{21}$$

DT Step and Impulse

The unit step sequence is the running sum of the unit impulse.

$$u[n] = \sum_{m=-\infty}^{n} \delta[m]. \tag{21}$$



DT Step and Impulse

The unit step sequence is the running sum of the unit impulse.

$$u[n] = \sum_{m=-\infty}^{n} \delta[m]. \tag{21}$$





DT Step and Impulse

The unit step sequence is a superposition of delayed unit impulses.

$$u[n] = \sum_{k=0}^{\infty} \delta[n-k]. \tag{22}$$

DT Step and Impulse

The unit step sequence is a superposition of delayed unit impulses.

$$u[n] = \sum_{k=0}^{\infty} \delta[n-k]. \tag{22}$$



DT Step and Impulse

The unit step sequence is a superposition of delayed unit impulses.

$$u[n] = \sum_{k=0}^{\infty} \delta[n-k]. \tag{22}$$





DT Step and Impulse

The unit step sequence is a superposition of delayed unit impulses.

$$u[n] = \sum_{k=0}^{\infty} \delta[n-k]. \tag{22}$$



DT Step and Impulse

The unit step sequence is a superposition of delayed unit impulses.

$$u[n] = \sum_{k=0}^{\infty} \delta[n-k]. \tag{22}$$

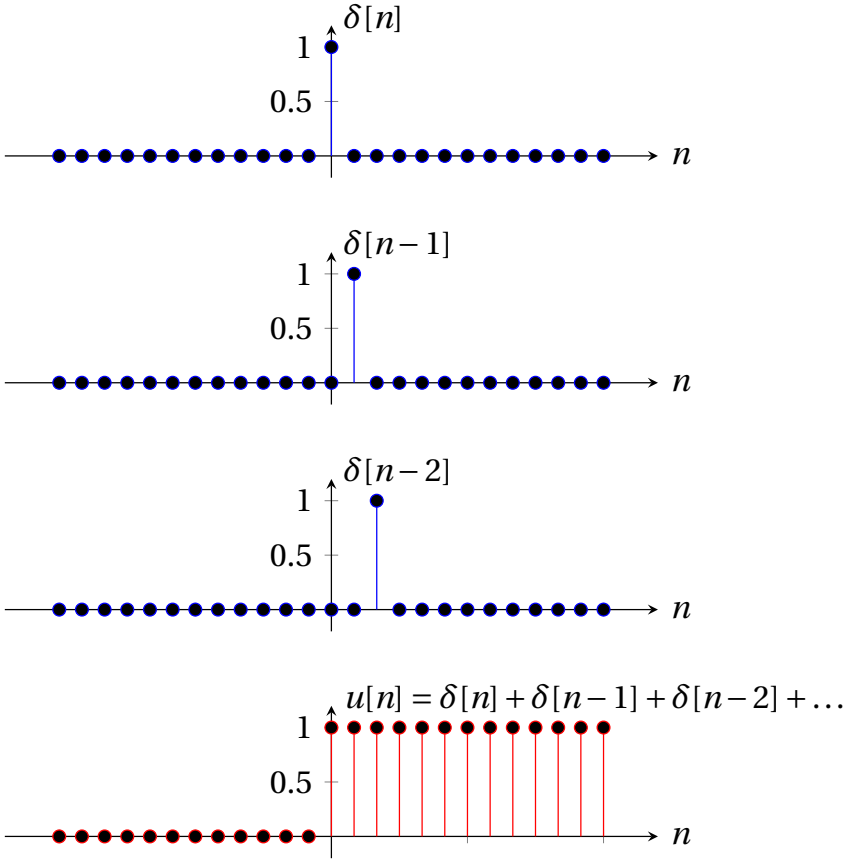

Continuous-Time Unit Step Function $u(t)$

$$u(t) = \begin{cases} 0, & t < 0, \\ 1, & t > 0. \end{cases} \tag{23}$$



Continuous-Time Unit Impulse Function $\delta(t)$

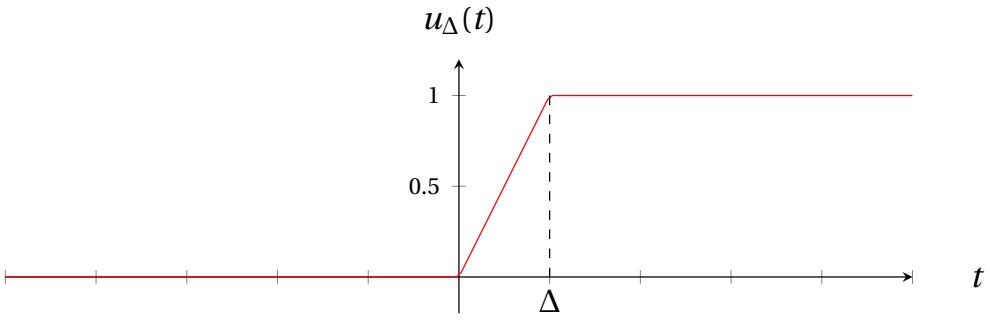

$u_\Delta(t) \rightarrow u(t)$ as $\Delta \rightarrow 0$.

$$\delta(t) = \frac{du(t)}{dt}. \tag{24}$$



Continuous-Time Unit Impulse Function $\delta(t)$

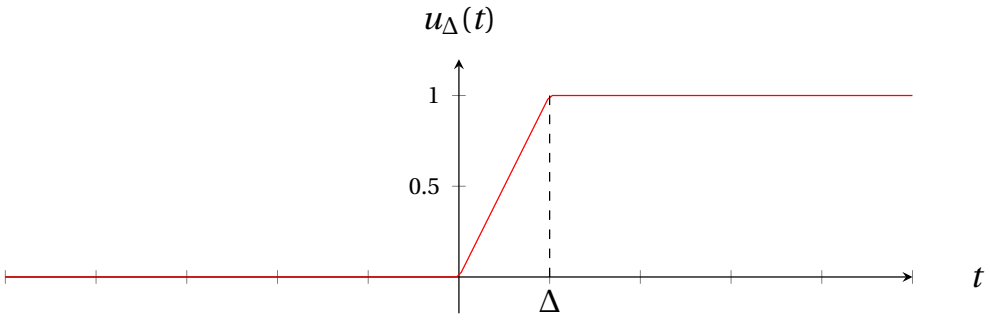

$u_\Delta(t) \to u(t)$ as $\Delta \to 0$.

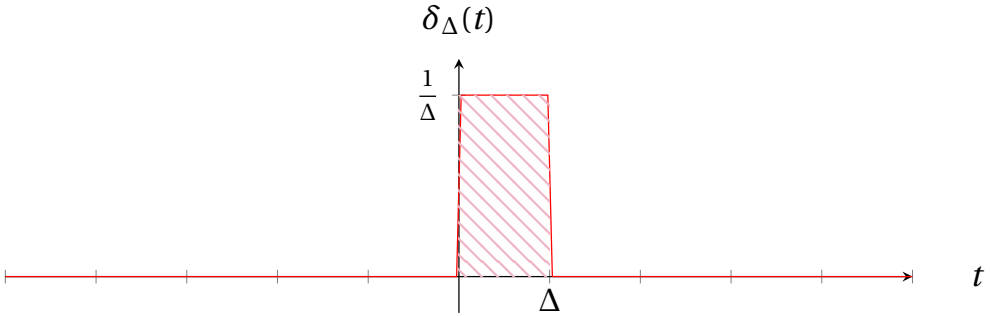

$\delta_\Delta(t) \to \delta(t)$ as $\Delta \to 0$.
area $= 1$

$$\delta(t) = \frac{du(t)}{dt}. \tag{24}$$



Continuous-Time Unit Impulse Function $\delta(t)$

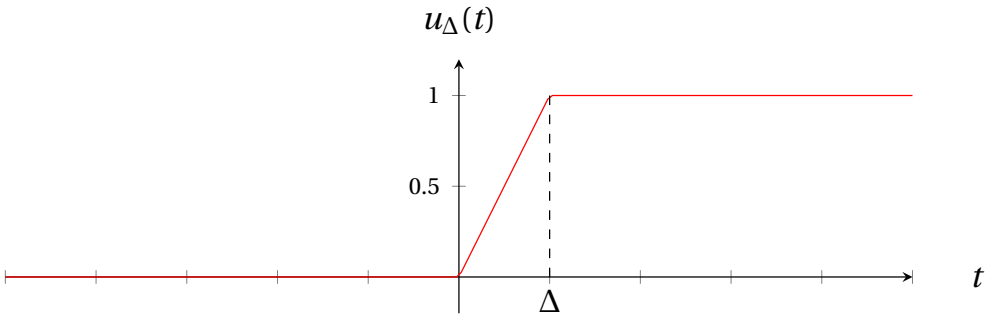

$u_\Delta(t) \to u(t)$ as $\Delta \to 0$.

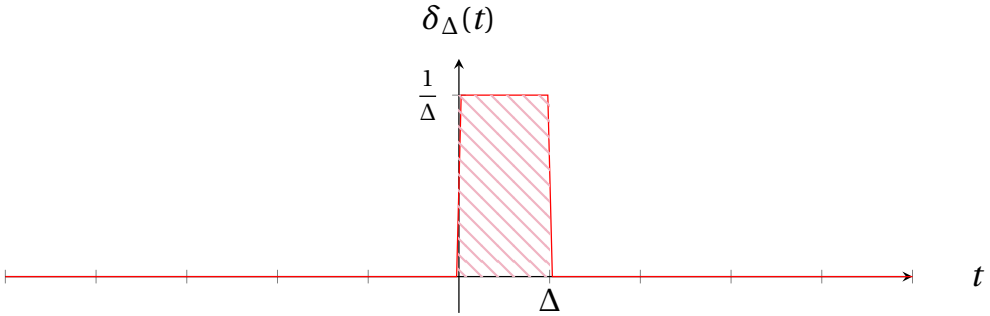

$\delta_\Delta(t) \to \delta(t)$ as $\Delta \to 0$.
area $= 1$

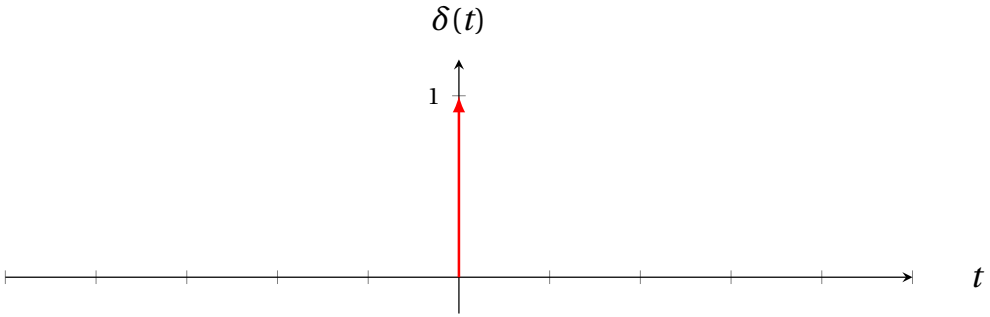

height $= \infty$, width $= 0$, area $= 1$

Continuous-Time Unit Impulse Function $\delta(t)$

$$\delta(t) = \frac{du(t)}{dt}. \tag{24}$$

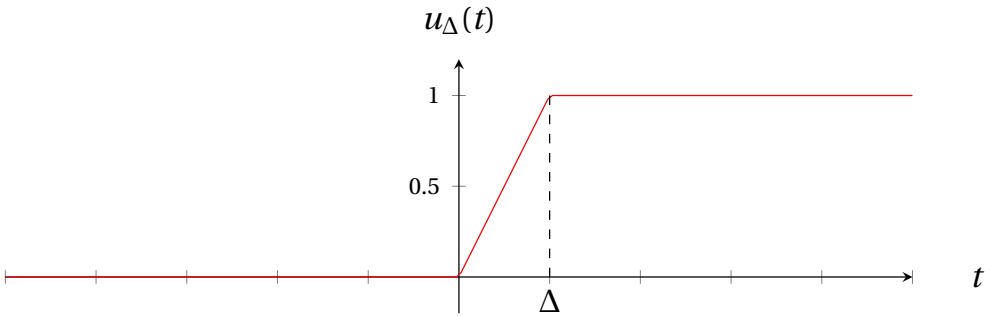

$u_\Delta(t) \to u(t)$ as $\Delta \to 0$.

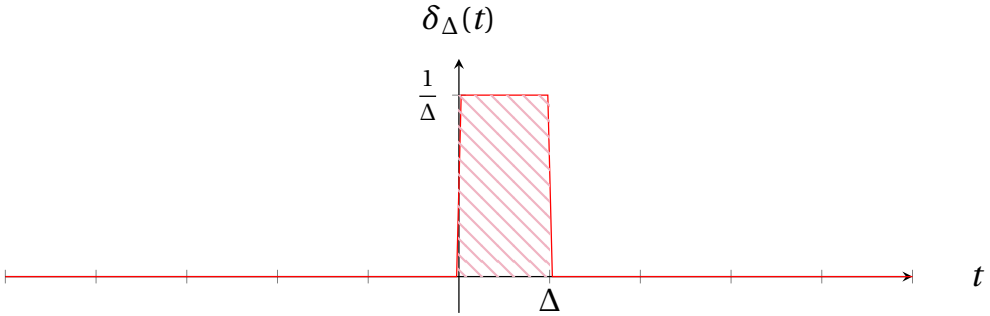

$\delta_\Delta(t) \to \delta(t)$ as $\Delta \to 0$.
area $= 1$

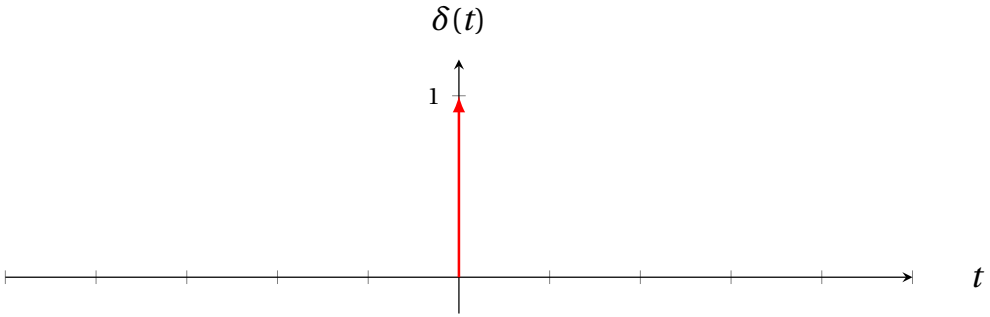

height $= \infty$, width $= 0$, area $= 1$



CT Unit Step Function and Unit Impulse Function

$$u(t) = \int_{-\infty}^{t} \delta(\tau) d\tau. \tag{25}$$



CT Unit Step Function and Unit Impulse Function

$$u(t) = \int_{-\infty}^{t} \delta(\tau) d\tau. \tag{25}$$



Outline

Energy I

The total energy over a time interval $t_1 \leq t \leq t_2$ in a continuous-time signal $x(t)$ is

$$\int_{t_1}^{t_2} |x(t)|^2 dt$$

The total energy over a time interval $n_1 \leq n \leq n_2$ in a discrete-time signal $x[n]$ is

$$\sum_{n=n_1}^{n_2} |x[n]|^2 dt$$

Total energy over an infinite interval in a CT signal:

$$E_\infty \triangleq \lim_{T \to \infty} \int_{-T}^{T} |x(t)|^2 dt = \int_{-\infty}^{+\infty} |x(t)|^2 dt. \tag{26}$$

Energy II

Total energy over an infinite interval in a DT signal:

$$E_\infty \triangleq \lim_{N\to\infty} \sum_{n=-N}^{+N} |x[n]|^2 = \int_{n=-\infty}^{+\infty} |x[n]|^2. \tag{27}$$

Note that this integral and may not converge for some signals. Such signals have infinite energy, while signals with $E_\infty < \infty$ have finite energy.

Power

Time-averaged power over an infinite interval in a CT signal:

$$P_\infty \triangleq \lim_{T\to\infty} \frac{1}{2T} \int_{-T}^{T} |x(t)|^2 dt. \tag{28}$$

Total energy in a DT signal:

$$P_\infty \triangleq \lim_{N\to\infty} \frac{1}{2N+1} \sum_{n=-N}^{+N} |x[n]|^2. \tag{29}$$

With these definitions, we can identify three important classes of signals:

1. Energy signals: Signals with finite total energy $E_\infty < \infty$. These have zero average power.
2. Power signals: Signals with finite average power $0 < P_\infty < \infty$. As $P_\infty > 0$, $E_\infty = \infty$.
3. Signals with neither E_∞ nor P_∞ are finite.