

# EN1060 Signals and Systems: Fourier Transform

Ranga Rodrigo  
ranga@uom.lk

The University of Moratuwa, Sri Lanka

December 9, 2019



## Section 1

# Continuous-Time Fourier Transform

# Outline

## Continuous-Time Fourier Transform

- Introduction

- Development of the Fourier Transform Representation

- The Fourier Transform for Periodic Signals

# Introduction

- Using the Fourier techniques we can obtain the frequency-domain representation of signals.

# Introduction

- Using the Fourier techniques we can obtain the frequency-domain representation of signals.
- We use Fourier series for periodic signals, and Fourier transform for aperiodic signals.

# Introduction

- Using the Fourier techniques we can obtain the frequency-domain representation of signals.
- We use Fourier series for periodic signals, and Fourier transform for aperiodic signals.
- Each of these have continuous-time and discrete-time versions:

# Introduction

- Using the Fourier techniques we can obtain the frequency-domain representation of signals.
- We use Fourier series for periodic signals, and Fourier transform for aperiodic signals.
- Each of these have continuous-time and discrete-time versions:
  1. Continuous-time Fourier series

# Introduction

- Using the Fourier techniques we can obtain the frequency-domain representation of signals.
- We use Fourier series for periodic signals, and Fourier transform for aperiodic signals.
- Each of these have continuous-time and discrete-time versions:
  1. Continuous-time Fourier series
  2. Continuous-time Fourier transform



# Introduction

- Using the Fourier techniques we can obtain the frequency-domain representation of signals.
- We use Fourier series for periodic signals, and Fourier transform for aperiodic signals.
- Each of these have continuous-time and discrete-time versions:
  1. Continuous-time Fourier series
  2. Continuous-time Fourier transform
  3. Discrete-time Fourier series

# Introduction

- Using the Fourier techniques we can obtain the frequency-domain representation of signals.
- We use Fourier series for periodic signals, and Fourier transform for aperiodic signals.
- Each of these have continuous-time and discrete-time versions:
  1. Continuous-time Fourier series
  2. Continuous-time Fourier transform
  3. Discrete-time Fourier series
  4. Discrete-time Fourier transform

# Introduction

- Using the Fourier techniques we can obtain the frequency-domain representation of signals.
- We use Fourier series for periodic signals, and Fourier transform for aperiodic signals.
- Each of these have continuous-time and discrete-time versions:
  1. Continuous-time Fourier series
  2. Continuous-time Fourier transform
  3. Discrete-time Fourier series
  4. Discrete-time Fourier transform
- In this part of the course, we will concentrate on how to actually compute continuous-time Fourier series and transform. Later, after we study linear, time-invariant (LTI) systems, we will study the conceptual aspects of Fourier techniques.

# Fourier Transform

- In the last lecture, we represented a periodic signal as a linear combination of complex exponentials.

# Fourier Transform

- In the last lecture, we represented a periodic signal as a linear combination of complex exponentials.
- We use Fourier transform to represent aperiodic signals. A larger class of signals, including all signals with finite energy, can be represented through a linear combination of complex exponentials.

# Fourier Transform

- In the last lecture, we represented a periodic signal as a linear combination of complex exponentials.
- We use Fourier transform to represent aperiodic signals. A larger class of signals, including all signals with finite energy, can be represented through a linear combination of complex exponentials.
- Whereas for periodic signals the complex exponential building blocks are harmonically related, for aperiodic signals they are infinitesimally close in frequency, and the representation in terms of a linear combination takes the form of an integral rather than a sum.

# Fourier Transform

- In the last lecture, we represented a periodic signal as a linear combination of complex exponentials.
- We use Fourier transform to represent aperiodic signals. A larger class of signals, including all signals with finite energy, can be represented through a linear combination of complex exponentials.
- Whereas for periodic signals the complex exponential building blocks are harmonically related, for aperiodic signals they are infinitesimally close in frequency, and the representation in terms of a linear combination takes the form of an integral rather than a sum.
- The resulting spectrum of coefficients in this representation is called the **Fourier transform**.

# Fourier Transform

- In the last lecture, we represented a periodic signal as a linear combination of complex exponentials.
- We use Fourier transform to represent aperiodic signals. A larger class of signals, including all signals with finite energy, can be represented through a linear combination of complex exponentials.
- Whereas for periodic signals the complex exponential building blocks are harmonically related, for aperiodic signals they are infinitesimally close in frequency, and the representation in terms of a linear combination takes the form of an integral rather than a sum.
- The resulting spectrum of coefficients in this representation is called the **Fourier transform**.
- The synthesis integral itself, which uses these coefficients to represent the signal as a linear combination of complex exponentials, is called the **inverse Fourier transform**.



# Outline

## Continuous-Time Fourier Transform

Introduction

Development of the Fourier Transform Representation

The Fourier Transform for Periodic Signals

# Fourier Series Representation for Square Wave

The continuous-time periodic square wave, sketched below, is defined over one period as

$$x(t) = \begin{cases} 1, & |t| < T_1, \\ 0, & T_1 < |t| < T/2, \end{cases}$$

This signal is periodically repeats with fundamental period  $T$  and fundamental frequency  $\omega_0 = 2\pi/T$ .

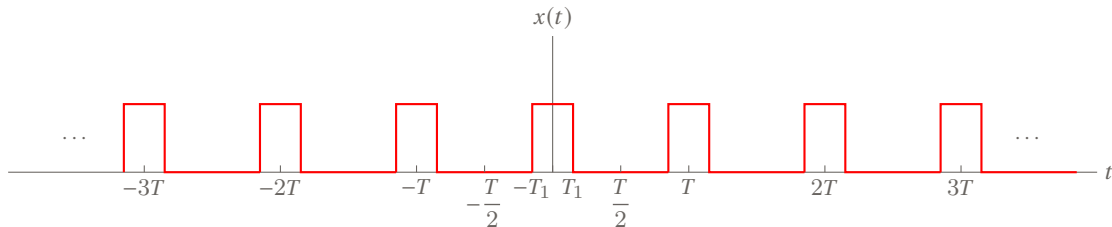


Figure: Periodic square wave

The Fourier series coefficients  $a_k$  of this wave are

$$a_k = \frac{2 \sin(k\omega_0 T_1)}{k\omega_0 T} \quad (1)$$

We plotted this for a fixed value of  $T_1$  and several values of  $T$  (shown in the next slide). An alternative way of interpreting eq. 1 is as samples of an envelope function:

$$T a_k = \left. \frac{2 \sin(\omega T_1)}{\omega} \right|_{\omega=k\omega_0}$$

For fixed  $T_1$ , the envelope of  $T a_k$  is independent of  $T$ .

Plots of scaled  
Fourier series  
coefficients  $Ta_k$  for  
the periodic square  
wave with  $T_1$  fixed  
and for several  
values of  $T$ :  $T = 4T_1$ ,  
 $T = 8T_1$ ,  $T = 16T_1$ .



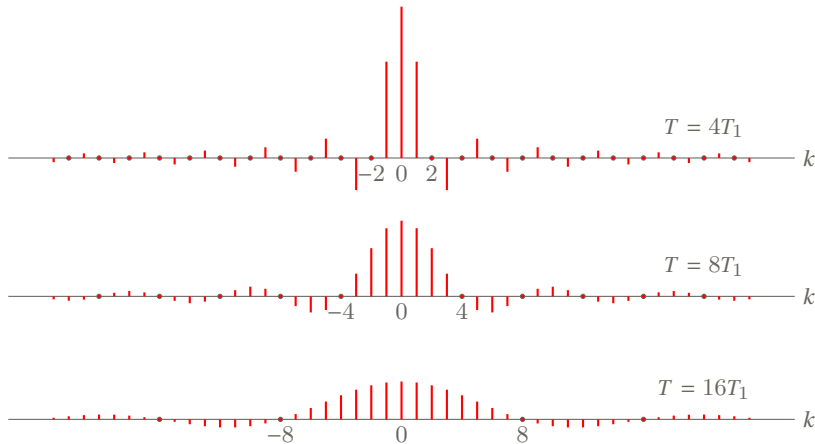


Figure: Plots of scaled Fourier series coefficients  $Ta_k$

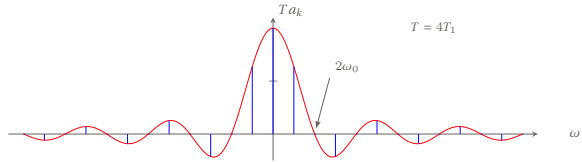


The Fourier series coefficients and their envelope for periodic square wave for several values of  $T$  (with  $T_1$  fixed):  $T = 4T_1$ ,  $T = 8T_1$ ,  $T = 16T_1$ . The coefficients are regularly-spaced samples of the envelope  $(2 \sin \omega T_1)/\omega$ , where the spacing between samples,  $2\pi/T$ , decreases as  $T$  increases.

Figure: Fourier series coefficients and their envelope for periodic square wave.

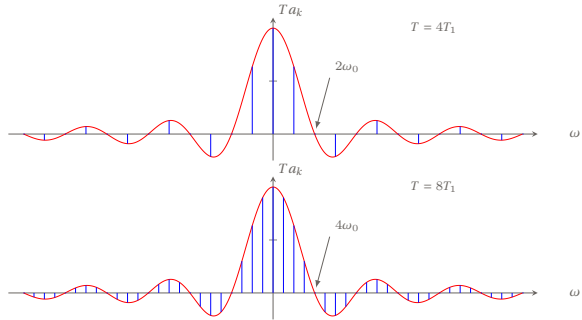

The Fourier series coefficients and their envelope for periodic square wave for several values of  $T$  (with  $T_1$  fixed):  $T = 4T_1$ ,  $T = 8T_1$ ,  $T = 16T_1$ . The coefficients are regularly-spaced samples of the envelope  $(2 \sin \omega T_1)/\omega$ , where the spacing between samples,  $2\pi/T$ , decreases as  $T$  increases.

Figure: Fourier series coefficients and their envelope for periodic square wave.

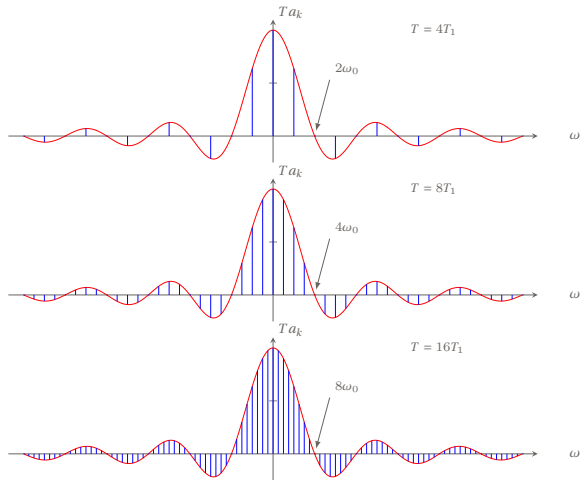

The Fourier series coefficients and their envelope for periodic square wave for several values of  $T$  (with  $T_1$  fixed):  $T = 4T_1$ ,  $T = 8T_1$ ,  $T = 16T_1$ . The coefficients are regularly-spaced samples of the envelope  $(2 \sin \omega T_1)/\omega$ , where the spacing between samples,  $2\pi/T$ , decreases as  $T$  increases.

Figure: Fourier series coefficients and their envelope for periodic square wave.

# Fourier Transform: Synthesis and Analysis Equations

Inverse Fourier transform:

$$x(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} X(j\omega) e^{j\omega t} d\omega. \quad (2)$$

Fourier transform or Fourier integral:

$$X(j\omega) = \int_{-\infty}^{\infty} x(t) e^{-j\omega t} dt. \quad (3)$$

The transform  $X(j\omega)$  of an aperiodic signal  $x(t)$  is referred to as the spectrum of  $x(t)$ .



## Relation with $a_k$

Assume that the Fourier transform of  $x(t)$  is  $X(j\omega)$ .

If we construct a periodic signal  $\tilde{x}(t)$  by repeating the aperiodic signals  $x(t)$  with period  $T$ , its Fourier series coefficients are

$$a_k = \frac{1}{T} X(j\omega) \Big|_{\omega=k\omega_0} \quad (4)$$

# Convergence of Fourier Transform

Assume that we evaluated  $X(j\omega)$  according to eq. 3, and let  $\hat{x}(t)$  denote the signal obtained by using  $X(j\omega)$  in 2:

$$\hat{x}(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} X(j\omega) e^{j\omega t} d\omega.$$

When is  $\hat{x}(t)$  a valid representation of the original signal  $x(t)$ ? We define the error between  $\hat{x}(t)$  and  $x(t)$  as

$$e(t) = \hat{x}(t) - x(t).$$

If  $x(t)$  has finite energy (square integrable), i.e.,

$$\int_{-\infty}^{\infty} |x(t)|^2 dt < \infty, \quad (5)$$

$X(j\omega)$  is finite, and

$$\int_{-\infty}^{\infty} |e(t)|^2 dt = 0, \quad (6)$$

If  $x(t)$  has finite energy, then, although  $x(t)$  and its Fourier representation  $\hat{x}(t)$  may differ significantly at individual values of  $t$ , there is no energy in their difference.

# Convergence of Fourier Transform: Dirichlet Conditions

There are alternative conditions sufficient to ensure that  $\hat{x}(t)$  is equal to  $x(t)$  for any  $t$  except at a discontinuity, where it is equal to the average of the values on either side of the discontinuity.

1.  $x(t)$  is absolutely integrable, i.e.,

$$\int_{-\infty}^{\infty} |x(t)| dt < \infty, \quad (7)$$

2.  $x(t)$  has a finite number of maxima and minima within any finite interval.
3.  $x(t)$  has a finite number of discontinuities within any finite interval. Furthermore, each of these discontinuities must be finite.

Therefore, absolutely integrable signals that are continuous or that have finite number of discontinuities have a Fourier transform.

## Example

### Example

Find the Fourier transform of the signal

$$x(t) = e^{-at}u(t), \quad a > 0.$$

# Example

## Example

Find the Fourier transform of the signal

$$x(t) = e^{-at} u(t), \quad a > 0.$$

$$X(j\omega) = \int_{-\infty}^{\infty} x(t) e^{-j\omega t} dt.$$

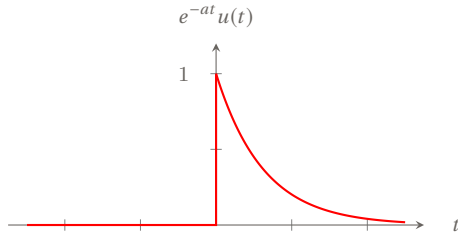


Figure:  $e^{-at} u(t)$ ,  $a > 0$ .

## Example

### Example

Find the Fourier transform of the signal

$$x(t) = e^{-at}u(t), \quad a > 0.$$

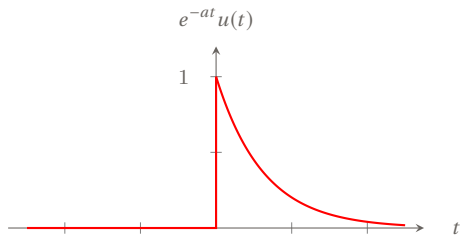


Figure:  $e^{-at}u(t)$ ,  $a > 0$ .

$$X(j\omega) = \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt.$$

$$X(j\omega) = \int_0^{\infty} e^{-at} e^{-j\omega t} dt$$

## Example

### Example

Find the Fourier transform of the signal

$$x(t) = e^{-at} u(t), \quad a > 0.$$

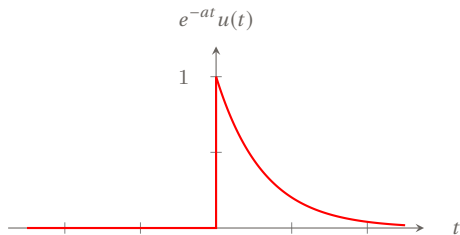


Figure:  $e^{-at} u(t)$ ,  $a > 0$ .

$$X(j\omega) = \int_{-\infty}^{\infty} x(t) e^{-j\omega t} dt.$$

$$\begin{aligned} X(j\omega) &= \int_0^{\infty} e^{-at} e^{-j\omega t} dt \\ &= \frac{1}{a + j\omega} e^{-(a+j\omega)t} \Big|_0^{\infty} \end{aligned}$$

# Example

## Example

Find the Fourier transform of the signal

$$x(t) = e^{-at}u(t), \quad a > 0.$$

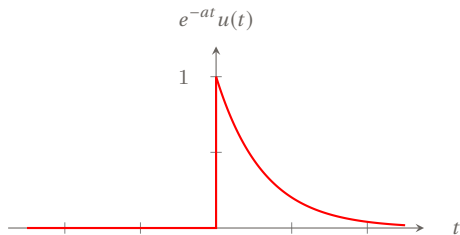


Figure:  $e^{-at}u(t)$ ,  $a > 0$ .

$$X(j\omega) = \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt.$$

$$\begin{aligned} X(j\omega) &= \int_0^{\infty} e^{-at} e^{-j\omega t} dt \\ &= \frac{1}{a + j\omega} e^{-(a+j\omega)t} \Big|_0^{\infty} \end{aligned}$$

$$X(j\omega) = \frac{1}{a + j\omega}, \quad a > 0.$$



## Example Cntd. FT of $e^{-at}u(t)$ , $a > 0$

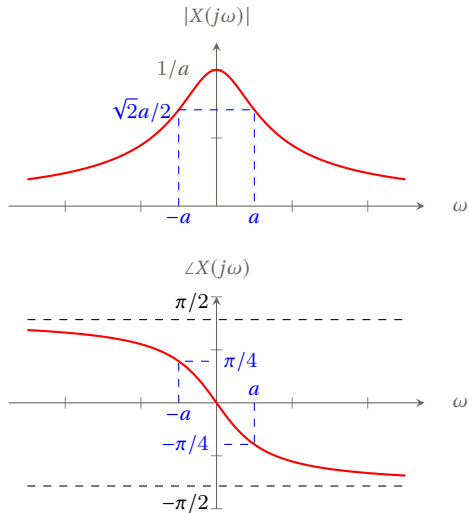


Figure: Fourier transform of the signal  $e^{-at}u(t)$ ,  $a > 0$ .

## Example

Find the Fourier transform of the signal

$$x(t) = e^{-a|t|}, \quad a > 0.$$

## Example

Find the Fourier transform of the signal

$$x(t) = e^{-a|t|}, \quad a > 0.$$

$$X(j\omega) = \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt.$$

## Example

Find the Fourier transform of the signal

$$x(t) = e^{-a|t|}, \quad a > 0.$$

$$\begin{aligned} X(j\omega) &= \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt. \\ &= \int_{-\infty}^{\infty} e^{-a|t|} e^{-j\omega t} dt. \end{aligned}$$

## Example

Find the Fourier transform of the signal

$$x(t) = e^{-a|t|}, \quad a > 0.$$

$$X(j\omega) = \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt.$$

$$= \int_{-\infty}^{\infty} e^{-a|t|} e^{-j\omega t} dt.$$

$$X(j\omega) = \int_{-\infty}^0 e^{at} e^{-j\omega t} dt + \int_0^{\infty} e^{-at} e^{-j\omega t} dt$$

## Example

Find the Fourier transform of the signal

$$x(t) = e^{-a|t|}, \quad a > 0.$$

$$X(j\omega) = \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt.$$

$$= \int_{-\infty}^{\infty} e^{-a|t|} e^{-j\omega t} dt.$$

$$X(j\omega) = \int_{-\infty}^0 e^{at} e^{-j\omega t} dt + \int_0^{\infty} e^{-at} e^{-j\omega t} dt$$

$$X(j\omega) = \frac{1}{a - j\omega} + \frac{1}{a + j\omega},$$

$$= \frac{2a}{a^2 + \omega^2}.$$

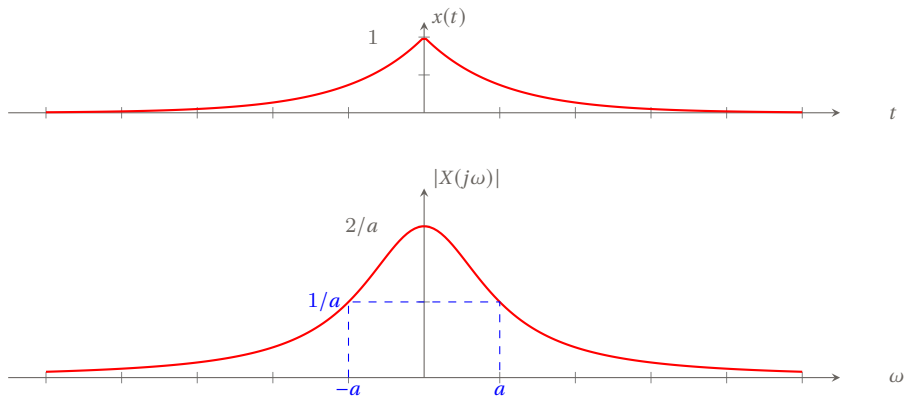


Figure: Fourier transform of the signal  $e^{-a|t|}$ ,  $a > 0$ .

## Example

Determine the Fourier transform of the unit impulse

$$x(t) = \delta(t).$$



## Example

Determine the Fourier transform of the unit impulse

$$x(t) = \delta(t).$$

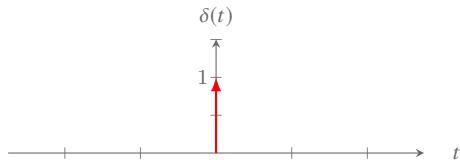


Figure:  $\delta(t)$

## Example

Determine the Fourier transform of the unit impulse

$$x(t) = \delta(t).$$

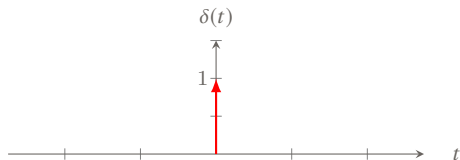


Figure:  $\delta(t)$

$$X(j\omega) = \int_{-\infty}^{\infty} \delta(t) e^{-j\omega t} dt = 1.$$

The unit impulse has a Fourier transform consisting of equal contributions at all frequencies.

# Rectangular Pulse

## Example

Determine the Fourier transform of the signal

$$x(t) = \begin{cases} 1, & |t| < T_1, \\ 0, & |t| > T_1. \end{cases}$$

# Rectangular Pulse

## Example

Determine the Fourier transform of the signal

$$x(t) = \begin{cases} 1, & |t| < T_1, \\ 0, & |t| > T_1. \end{cases}$$

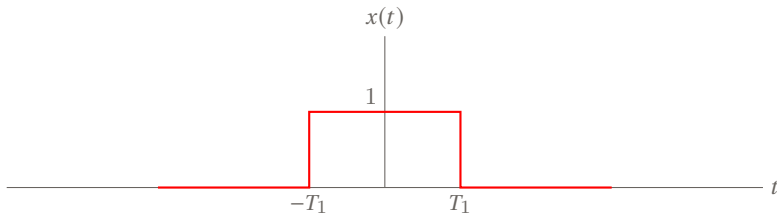


Figure: Rectangular pulse and the Fourier transform.

$$X(j\omega) = \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt.$$

$$\begin{aligned} X(j\omega) &= \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt. \\ &= \int_{-T_1}^{T_1} e^{-j\omega t} dt. \end{aligned}$$

$$\begin{aligned} X(j\omega) &= \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt. \\ &= \int_{-T_1}^{T_1} e^{-j\omega t} dt. \\ &= \left. \frac{e^{-j\omega t}}{-j\omega} \right|_{-T_1}^{T_1} \end{aligned}$$

$$\begin{aligned}
X(j\omega) &= \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt. \\
&= \int_{-T_1}^{T_1} e^{-j\omega t} dt. \\
&= \left. \frac{e^{-j\omega t}}{-j\omega} \right|_{-T_1}^{T_1} \\
&= 2 \frac{\sin \omega T_1}{\omega}.
\end{aligned}$$



$$\begin{aligned}
 X(j\omega) &= \int_{-\infty}^{\infty} x(t)e^{-j\omega t} dt. \\
 &= \int_{-T_1}^{T_1} e^{-j\omega t} dt. \\
 &= \left. \frac{e^{-j\omega t}}{-j\omega} \right|_{-T_1}^{T_1} \\
 &= 2 \frac{\sin \omega T_1}{\omega}.
 \end{aligned}$$

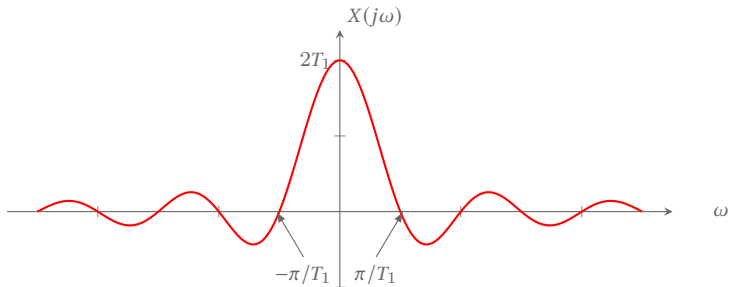


Figure: Fourier transform of the rectangular pulse.

## Example

Consider the signal  $x(t)$  whose Fourier transform is

$$X(j\omega) = \begin{cases} 1, & |\omega| < W, \\ 0, & |\omega| > W. \end{cases}$$

Determine  $x(t)$ .




Figure: Fourier transform for  $x(t)$ .

## Example

Consider the signal  $x(t)$  whose Fourier transform is

$$X(j\omega) = \begin{cases} 1, & |\omega| < W, \\ 0, & |\omega| > W. \end{cases}$$

Determine  $x(t)$ .




Figure: Fourier transform for  $x(t)$ .

Using the synthesis equation:

$$x(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} X(j\omega) e^{j\omega t} d\omega.$$

Using the synthesis equation:

$$\begin{aligned}x(t) &= \frac{1}{2\pi} \int_{-\infty}^{\infty} X(j\omega) e^{j\omega t} d\omega. \\&= \frac{1}{2\pi} \int_{-W}^W e^{j\omega t} d\omega.\end{aligned}$$

Using the synthesis equation:

$$\begin{aligned}x(t) &= \frac{1}{2\pi} \int_{-\infty}^{\infty} X(j\omega) e^{j\omega t} d\omega. \\&= \frac{1}{2\pi} \int_{-W}^W e^{j\omega t} d\omega. \\&= \frac{\sin Wt}{\pi t}.\end{aligned}$$

Using the synthesis equation:

$$\begin{aligned}x(t) &= \frac{1}{2\pi} \int_{-\infty}^{\infty} X(j\omega) e^{j\omega t} d\omega. \\&= \frac{1}{2\pi} \int_{-W}^W e^{j\omega t} d\omega. \\&= \frac{\sin Wt}{\pi t}.\end{aligned}$$

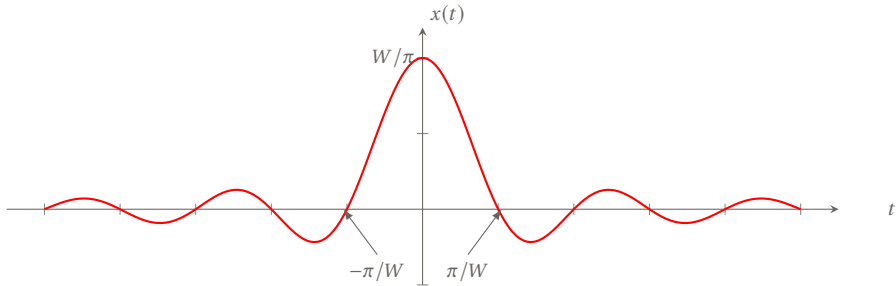


Figure: Time function.

# The sinc Function

$$\text{sinc}(\theta) = \frac{\sin \pi \theta}{\pi \theta}. \quad (8)$$

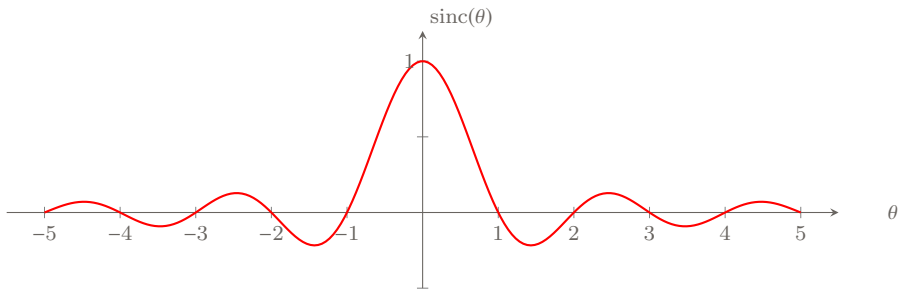


Figure: Fourier transform for  $x(t)$ .



Express

$$\frac{2 \sin \omega T_1}{\omega}$$

and

$$\frac{\sin W t}{\pi t}$$

as sinc functions.

Express

$$\frac{2 \sin \omega T_1}{\omega}$$

and

$$\frac{\sin W t}{\pi t}$$

as sinc functions.

$$\frac{2 \sin \omega T_1}{\omega} = 2T_1 \operatorname{sinc} \left( \frac{\omega T_1}{\pi} \right)$$

Express

$$\frac{2 \sin \omega T_1}{\omega}$$

and

$$\frac{\sin W t}{\pi t}$$

as sinc functions.

$$\frac{2 \sin \omega T_1}{\omega} = 2T_1 \operatorname{sinc} \left( \frac{\omega T_1}{\pi} \right)$$

$$\frac{\sin W t}{\pi t} = \frac{W}{\pi} \operatorname{sinc} \left( \frac{W t}{\pi} \right)$$

## What Happens when $W$ Increases?







- As  $W$  increases,  $X(j\omega)$  becomes broader, while the main peak of  $x(t)$  at  $t = 0$  becomes higher and the width of the first lobe of this signal (i.e., the part of the signal for  $|t| < \pi/W$ ) becomes narrower.

## What Happens when $W$ Increases?

- As  $W$  increases,  $X(j\omega)$  becomes broader, while the main peak of  $x(t)$  at  $t = 0$  becomes higher and the width of the first lobe of this signal (i.e., the part of the signal for  $|t| < \pi/W$ ) becomes narrower.
- In fact, in the limit as  $W \rightarrow \infty$ ,  $X(j\omega) = 1$  for all  $\omega$ , and consequently, we see that  $x(t)$  converges to an impulse as  $W \rightarrow \infty$ .

## What Happens when $W$ Increases?

- As  $W$  increases,  $X(j\omega)$  becomes broader, while the main peak of  $x(t)$  at  $t = 0$  becomes higher and the width of the first lobe of this signal (i.e., the part of the signal for  $|t| < \pi/W$ ) becomes narrower.
- In fact, in the limit as  $W \rightarrow \infty$ ,  $X(j\omega) = 1$  for all  $\omega$ , and consequently, we see that  $x(t)$  converges to an impulse as  $W \rightarrow \infty$ .
- The behavior is an example of the inverse relationship that exists between the time and frequency domains.

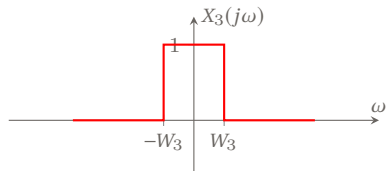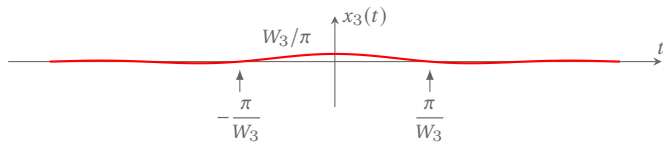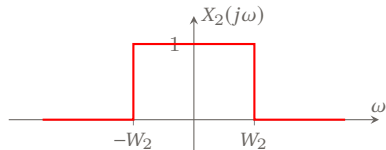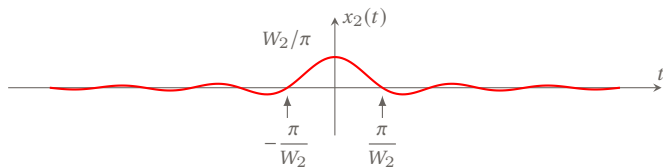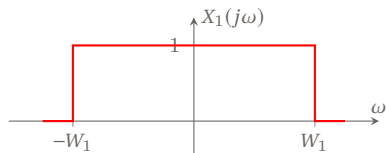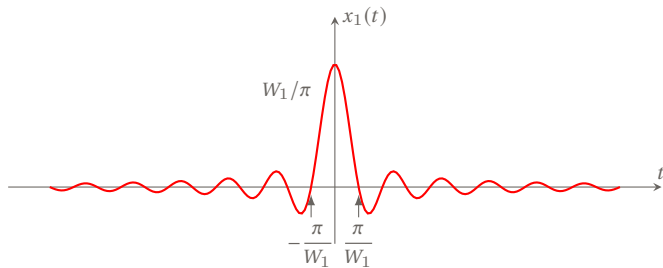

# Outline

## Continuous-Time Fourier Transform

Introduction

Development of the Fourier Transform Representation

The Fourier Transform for Periodic Signals



# The Fourier Transform for Periodic Signals: Introduction

In the previous section, we studied the Fourier transform representation, paying attention to aperiodic signals. We can also develop Fourier transform representations for periodic signals. This allows us to consider periodic and aperiodic signals in a unified context. We can construct the Fourier transform of a periodic signal directly from its Fourier series representation.

Consider a signal  $x(t)$  with Fourier transform  $X(j\omega)$  that is a single impulse of area  $2\pi$  at  $\omega = \omega_0$ , i.e.,

$$X(j\omega) = 2\pi\delta(\omega - \omega_0) \quad (9)$$

Let's determine the signal  $x(t)$ :

Let's determine the signal  $x(t)$ :

$$\begin{aligned}x(t) &= \frac{1}{2\pi} \int_{-\infty}^{\infty} 2\pi\delta(\omega - \omega_0)e^{j\omega t} d\omega, \\ &= e^{j\omega_0 t}.\end{aligned}$$

Let's determine the signal  $x(t)$ :

$$\begin{aligned}x(t) &= \frac{1}{2\pi} \int_{-\infty}^{\infty} 2\pi\delta(\omega - \omega_0)e^{j\omega t} d\omega, \\ &= e^{j\omega_0 t}.\end{aligned}$$

More generally, if  $X(j\omega)$  is of the form of a linear combination of impulses equally spaced in frequency, i.e.,

$$X(j\omega) = \sum_{k=-\infty}^{\infty} 2\pi a_k \delta(\omega - k\omega_0) \quad (10)$$

Let's determine the signal  $x(t)$ :

$$\begin{aligned}x(t) &= \frac{1}{2\pi} \int_{-\infty}^{\infty} 2\pi\delta(\omega - \omega_0)e^{j\omega t} d\omega, \\ &= e^{j\omega_0 t}.\end{aligned}$$

More generally, if  $X(j\omega)$  is of the form of a linear combination of impulses equally spaced in frequency, i.e.,

$$X(j\omega) = \sum_{k=-\infty}^{\infty} 2\pi a_k \delta(\omega - k\omega_0) \quad (10)$$

then

$$x(t) = \sum_{k=-\infty}^{\infty} a_k e^{jk\omega_0 t}. \quad (11)$$

which is exactly the Fourier series representation of a periodic signal.

Thus, the Fourier transform of a periodic signal with Fourier series coefficients  $\{a_k\}$  can be interpreted as a train of impulses occurring at the harmonically related frequencies and for which the area of the impulse at the  $k$ th harmonic frequency  $k\omega_0$  is  $2\pi$  times the  $k$ th Fourier series coefficient  $a_k$ .

## Example

Find the Fourier transform of the square wave signal whose Fourier series coefficients are

$$a_k = \frac{\sin k\omega_0 T_1}{\pi k}.$$

Method: Multiply the Fourier series coefficients  $a_k$  by  $2\pi$ , place them using the impulse function  $\delta(\omega - k\omega_0)$ , and sum.

$$X(j\omega) = \sum_{k=-\infty}^{\infty} \frac{2 \sin k\omega_0 T_1}{k} \delta(\omega - k\omega_0).$$

$$X(j\omega) = \sum_{k=-\infty}^{\infty} 2\pi a_k \delta(\omega - k\omega_0)$$

Method: Multiply the Fourier series coefficients  $a_k$  by  $2\pi$ , place them using the impulse function  $\delta(\omega - k\omega_0)$ , and sum.

$$X(j\omega) = \sum_{k=-\infty}^{\infty} 2\pi a_k \delta(\omega - k\omega_0)$$

$$X(j\omega) = \sum_{k=-\infty}^{\infty} \frac{2 \sin k\omega_0 T_1}{k} \delta(\omega - k\omega_0).$$

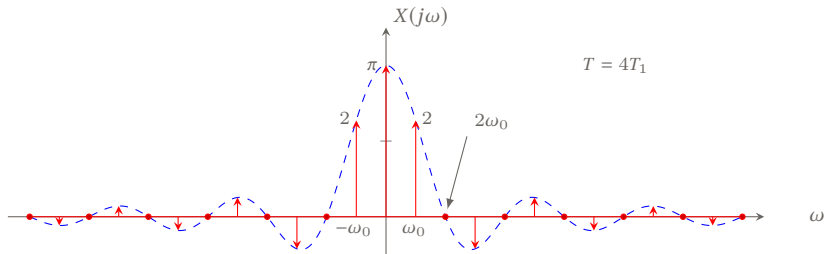


Figure: Fourier transform of a symmetric periodic square wave.



## Example

Find the Fourier transform of

$$x(t) = \sin \omega_0 t,$$

and

$$x(t) = \cos \omega_0 t.$$

$$x(t) = \sin \omega_0 t.$$

The Fourier series coefficients for this signal are

$$a_1 = \frac{1}{2j}, \quad a_{-1} = -\frac{1}{2j},$$

$$a_k = 0, \quad k \neq 1 \text{ or } -1$$

$$x(t) = \sin \omega_0 t.$$

The Fourier series coefficients for this signal are

$$a_1 = \frac{1}{2j}, \quad a_{-1} = -\frac{1}{2j},$$

$$a_k = 0, \quad k \neq 1 \text{ or } -1$$




Figure: Fourier transform of the  $x(t) = \sin \omega_0 t$ .

$$x(t) = \sin \omega_0 t.$$

The Fourier series coefficients for this signal are

$$a_1 = \frac{1}{2j}, \quad a_{-1} = -\frac{1}{2j},$$

$$a_k = 0, \quad k \neq 1 \text{ or } -1$$

$$x(t) = \cos \omega_0 t.$$

The Fourier series coefficients for this signal are

$$a_1 = \frac{1}{2}, \quad a_{-1} = \frac{1}{2},$$

$$a_k = 0, \quad k \neq 1 \text{ or } -1$$




Figure: Fourier transform of the  $x(t) = \sin \omega_0 t$ .

$$x(t) = \sin \omega_0 t.$$

The Fourier series coefficients for this signal are

$$a_1 = \frac{1}{2j}, \quad a_{-1} = -\frac{1}{2j},$$

$$a_k = 0, \quad k \neq 1 \text{ or } -1$$




Figure: Fourier transform of the  $x(t) = \sin \omega_0 t$ .

$$x(t) = \cos \omega_0 t.$$

The Fourier series coefficients for this signal are

$$a_1 = \frac{1}{2}, \quad a_{-1} = -\frac{1}{2},$$

$$a_k = 0, \quad k \neq 1 \text{ or } -1$$




Figure: Fourier transform of the  $x(t) = \cos \omega_0 t$ .

## Example

Find the Fourier transform of the impulse train

$$x(t) = \sum_{k=-\infty}^{\infty} \delta(t - kT).$$

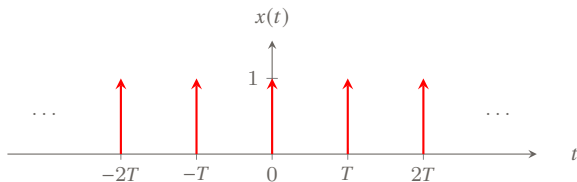


Figure: Pulse train.

The Fourier series coefficients for this signal:

$$a_k = \frac{1}{T} \int_{-T/2}^{T/2} \delta t e^{-j\omega_0 t} dt = \frac{1}{T}.$$

That is, every Fourier coefficient of the periodic impulse train has the same value,  $1/T$ .  
Substituting this value for  $a_k$

The Fourier series coefficients for this signal:

$$a_k = \frac{1}{T} \int_{-T/2}^{T/2} \delta t e^{-j\omega_0 t} dt = \frac{1}{T}.$$

$$X(j\omega) = \sum_{k=-\infty}^{\infty} 2\pi a_k \delta(\omega - k\omega_0)$$

That is, every Fourier coefficient of the periodic impulse train has the same value,  $1/T$ .  
Substituting this value for  $a_k$



The Fourier series coefficients for this signal:

$$a_k = \frac{1}{T} \int_{-T/2}^{T/2} \delta t e^{-j\omega_0 t} dt = \frac{1}{T}.$$

$$X(j\omega) = \sum_{k=-\infty}^{\infty} 2\pi a_k \delta(\omega - k\omega_0)$$

That is, every Fourier coefficient of the periodic impulse train has the same value,  $1/T$ .  
Substituting this value for  $a_k$

$$X(j\omega) = \frac{2\pi}{T} \sum_{k=-\infty}^{+\infty} \delta\left(\omega - \frac{2\pi k}{T}\right)$$

The Fourier series coefficients for this signal:

$$a_k = \frac{1}{T} \int_{-T/2}^{T/2} \delta t e^{-j\omega_0 t} dt = \frac{1}{T}.$$

$$X(j\omega) = \sum_{k=-\infty}^{\infty} 2\pi a_k \delta(\omega - k\omega_0)$$

That is, every Fourier coefficient of the periodic impulse train has the same value,  $1/T$ .  
Substituting this value for  $a_k$

$$X(j\omega) = \frac{2\pi}{T} \sum_{k=-\infty}^{+\infty} \delta\left(\omega - \frac{2\pi k}{T}\right)$$

Thus, the Fourier transform of a periodic impulse train in the time domain with period  $T$  is a periodic impulse train in the frequency domain with period  $2\pi/T$ ,

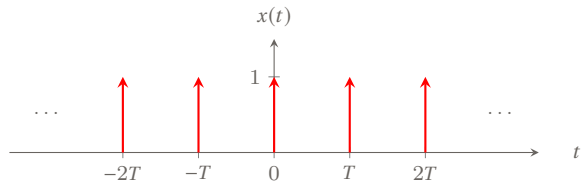


Figure: Periodic impulse train and its Fourier transform.

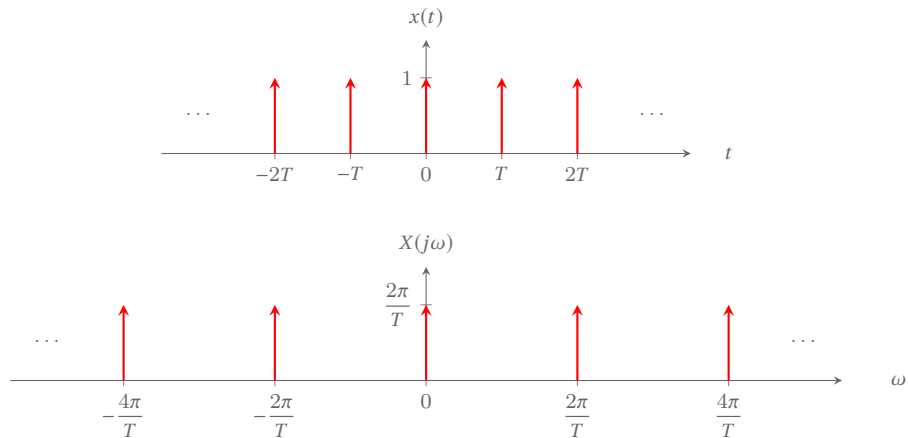


Figure: Periodic impulse train and its Fourier transform.