

EN1060 Signals and Systems: Discrete-Time Fourier Transform

Ranga Rodrigo
ranga@uom.lk

The University of Moratuwa, Sri Lanka

November 13, 2017

Section 1

Discrete-Time Fourier Transform

Discrete-Time Fourier Transform from DTFS

- We can represent the Fourier series coefficients as samples of an envelope. This envelope is determined by the behavior of the sequence over one period but is not dependent on the specific value of the period.

Discrete-Time Fourier Transform from DTFS

- We can represent the Fourier series coefficients as samples of an envelope. This envelope is determined by the behavior of the sequence over one period but is not dependent on the specific value of the period.
- As the period of the sequence increases, with the nonzero content in the period remaining the same, the Fourier series coefficients are samples of the same envelope function with increasingly finer spacing along the frequency axis (specifically, a spacing of $2\pi/N$ where N is the period).

Discrete-Time Fourier Transform from DTFS

- We can represent the Fourier series coefficients as samples of an envelope. This envelope is determined by the behavior of the sequence over one period but is not dependent on the specific value of the period.
- As the period of the sequence increases, with the nonzero content in the period remaining the same, the Fourier series coefficients are samples of the same envelope function with increasingly finer spacing along the frequency axis (specifically, a spacing of $2\pi/N$ where N is the period).
- Consequently, as the period approaches infinity, this envelope function corresponds to a Fourier representation of the aperiodic signal corresponding to one period. This is, then, the Fourier transform of the aperiodic signal.

Discrete-Time Fourier Transform from DTFS


- We can represent the Fourier series coefficients as samples of an envelope. This envelope is determined by the behavior of the sequence over one period but is not dependent on the specific value of the period.
- As the period of the sequence increases, with the nonzero content in the period remaining the same, the Fourier series coefficients are samples of the same envelope function with increasingly finer spacing along the frequency axis (specifically, a spacing of $2\pi/N$ where N is the period).
- Consequently, as the period approaches infinity, this envelope function corresponds to a Fourier representation of the aperiodic signal corresponding to one period. This is, then, the Fourier transform of the aperiodic signal.
- The discrete-time Fourier transform developed, as we have just described, corresponds to a decomposition of an aperiodic signal as a linear combination of a continuum of complex exponentials.



Discrete-Time Fourier Transform from DTFS




- The synthesis equation is then the limiting form of the Fourier series sum, specifically an integral. The analysis equation is the same one we used previously in obtaining the envelope of the Fourier series coefficients.
- While there was a duality in the expressions between the discrete-time Fourier series analysis and synthesis equations, the duality is lost in the discrete-time Fourier transform since the synthesis equation is now an integral and the analysis equation a summation. This is a difference compared to the continuous-time Fourier transform.
- Another important difference is that the discrete-time Fourier transform is always a periodic function of frequency.
- Consequently, it is completely defined by its behavior over a frequency range of 2π in contrast to the continuous-time Fourier transform, which extends over an infinite frequency range.

Approach

- Construct the periodic signal $\tilde{x}[n]$ for which one period is $x[n]$.
- $\tilde{x}[n]$ has a Fourier series.
- As the period of $\tilde{x}[n]$ increases,
 $\tilde{x}[n] \rightarrow x[n]$ and the Fourier series of $\tilde{x}[n] \rightarrow$ Fourier transform of $x[n]$.

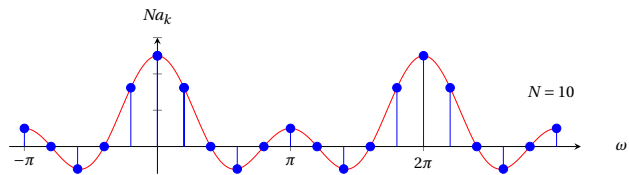

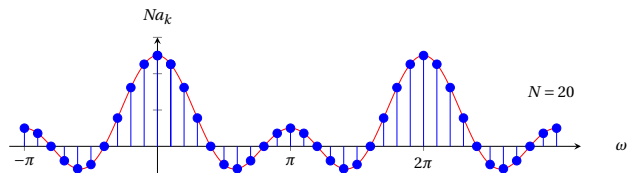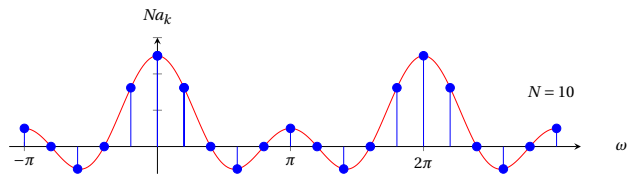

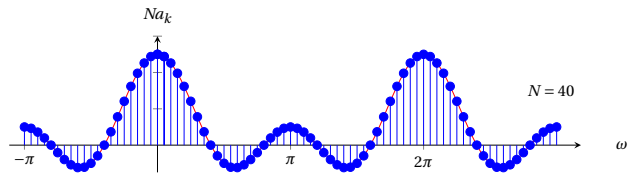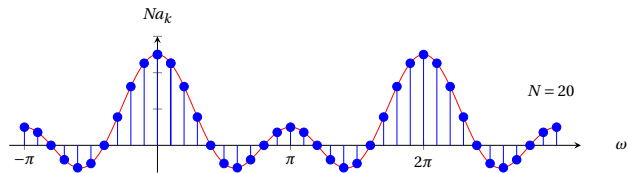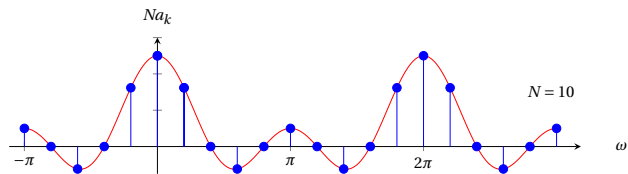

Fourier Representation of Aperiodic Signals

- $x[n]$ aperiodic
 - Construct periodic signals $\tilde{x}[n]$ for which one period is $x[n]$
 - $\tilde{x}[n]$ has a Fourier series
- As period of $\tilde{x}[n]$ increases
 - $\tilde{x}[n] \longrightarrow x[n]$
 - $\tilde{x}[n] \longrightarrow$ Fourier transform of $x[n]$.

DT Fourier series (from last lecture):

$$x[n] = \sum_{k=\langle N \rangle} a_k e^{jk\omega_0 n}.$$

$$a_k = \frac{1}{N} \sum_{n=\langle N \rangle} x[n] e^{-jk\omega_0 n}.$$

If $x[n]$ is aperiodic, for the periodic signal $\tilde{x}[n]$ whose one period is $x[n]$

$$\tilde{x}[n] = \sum_{k=\langle N \rangle} a_k e^{jk\omega_0 n}.$$

$$a_k = \frac{1}{N} \sum_{n=\langle N \rangle} \tilde{x}[n] e^{-jk(2\pi/N)n}$$

Since $x[n] = \tilde{x}[n]$ over a period that includes $-N_1 \leq n \leq N_2$

$$a_k = \frac{1}{N} \sum_{n=-N_1}^{N_2} x[n] e^{-jk(2\pi/N)n} = \frac{1}{N} \sum_{n=-\infty}^{\infty} x[n] e^{-jk(2\pi/N)n}$$

Defining the function

$$X(e^{j\omega}) = \sum_{n=-\infty}^{\infty} x[n]e^{-j\omega n},$$

we see that the coefficients a_k are proportional to the samples of $X(e^{j\omega})$, i.e.,

$$a_k = \frac{1}{N} X(e^{jk\omega_0})$$

where $\omega_0 = 2\pi/N$ is the spacing of the samples in the frequency domain. Combining

$$\tilde{x}[n] = \sum_{k=\langle N \rangle} \frac{1}{N} X(e^{jk\omega_0}) e^{jk\omega_0 n}.$$

Since $1/N = \omega_0/2\pi$,

$$\tilde{x}[n] = \frac{1}{2\pi} \sum_{k=\langle N \rangle} X(e^{jk\omega_0}) e^{jk\omega_0 n} \omega_0.$$

As $N \rightarrow \infty$

$$x[n] = \frac{1}{2\pi} \int_{2\pi} X(e^{j\omega}) e^{j\omega n} d\omega$$

Discrete-Time Fourier Transform

Synthesis:

$$x[n] = \frac{1}{2\pi} \int_{2\pi} X(e^{j\omega}) e^{j\omega n} d\omega$$

Analysis

$$X(e^{j\omega}) = \sum_{-\infty}^{\infty} x[n] e^{-j\omega n}$$

$$x[n] \overset{\mathcal{F}}{\leftrightarrow} X(e^{j\omega})$$

$$\begin{aligned} X(e^{j\omega}) &= \operatorname{Re}\{X(e^{j\omega})\} + j\operatorname{Im}\{X(e^{j\omega})\} \\ &= |X(e^{j\omega})| e^{j\angle X(e^{j\omega})} \end{aligned}$$

Example


Obtain an expression for the DTFT of



$$x[n] = a^n u[n], |a| < 1.$$




Sketch the magnitude and phase of $X(e^{j\omega})$ for





- ① $a > 0$, ($a = 0.5$) and
- ② $a < 0$, ($a = -0.5$).

$$\begin{aligned} X(e^{j\omega}) &= \sum_{n=-\infty}^{\infty} a^n u[n] e^{-j\omega n} \\ &= \sum_{n=0}^{\infty} (ae^{-j\omega})^n \\ &= \frac{1}{1 - ae^{-j\omega}}. \end{aligned}$$



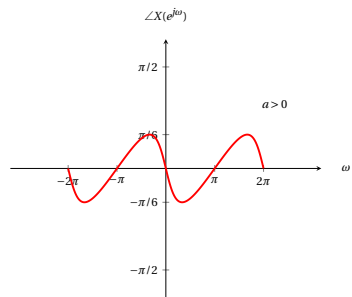

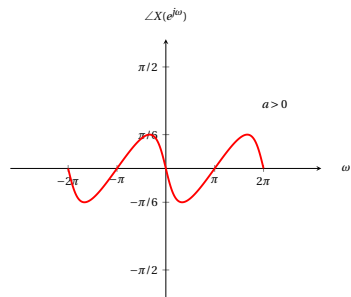

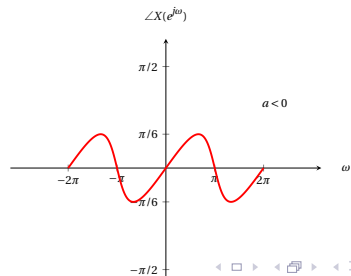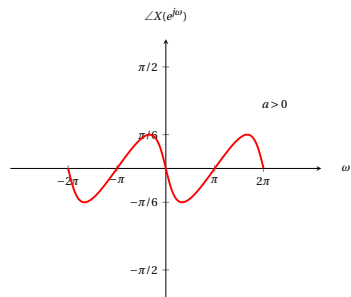


Example

Consider the rectangular pulse

$$x[n] = \begin{cases} 1, & |n| \leq N_1, \\ 0, & |n| > N_1. \end{cases}$$

- ① Obtain an expression for the DTFT $X(e^{j\omega})$ of this signal.
- ② Sketch for $N_1 = 2$.

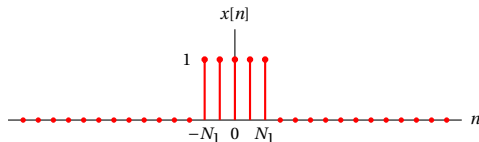


$$X(e^{j\omega}) = \sum_{-N_1}^{N_1} e^{-j\omega n}$$



As we did the simplification before for DTFS,




$$X(e^{j\omega}) = \sum_{-N_1}^{N_1} e^{-j\omega n}$$

As we did the simplification before for DTFS,

$$X(e^{j\omega}) = \frac{\sin \omega \left(N_1 + \frac{1}{2} \right)}{\sin(\omega/2)}.$$

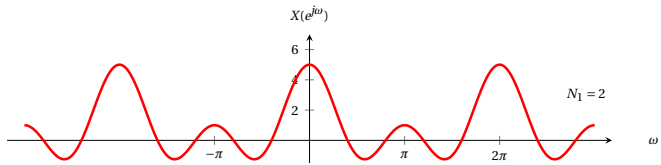

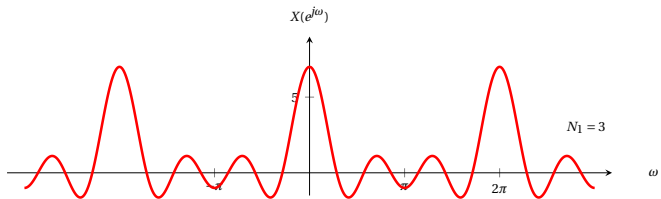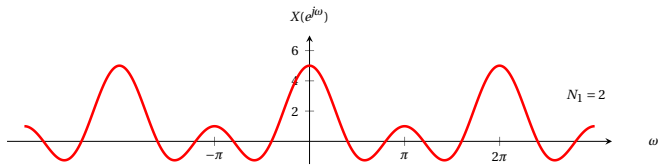

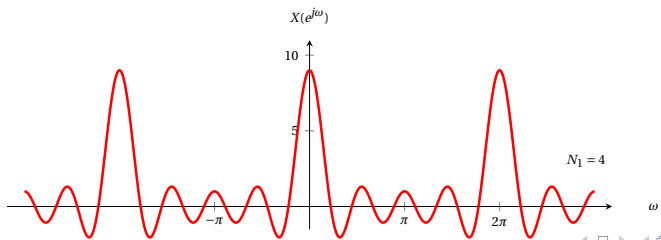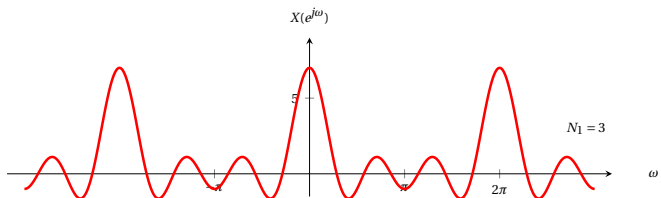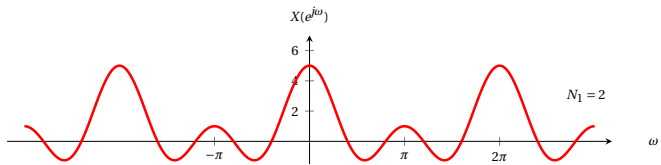

The Fourier Transform for Periodic Signals


As in the continuous-time case, discrete-time periodic signals can be incorporated within the framework of the discrete-time Fourier transform by interpreting the transform of a periodic signal as an impulse train in the frequency domain.

Consider the signal

$$x[n] = e^{j\omega_0 n}.$$

In CT the Fourier transform of $e^{j\omega_0 t}$ can be interpreted as an impulse at $\omega = \omega_0$. However, the DT Fourier transform must be periodic in ω with period 2π , requiring impulses at $\omega_0, \omega_0 \pm 2\pi, \omega_0 \pm 4\pi, \dots$. So

$$X(e^{j\omega}) = \sum_{l=-\infty}^{\infty} 2\pi\delta(\omega - \omega_0 - 2\pi l).$$

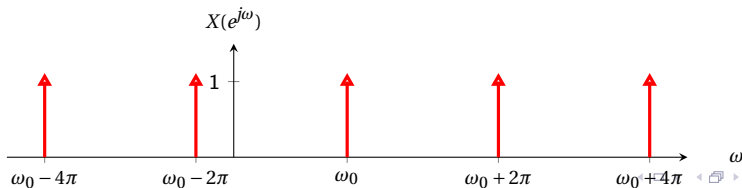

For a periodic sequence $x[n]$ with period N and with the Fourier series representation

$$x[n] = \sum_{k=\langle N \rangle} a_k e^{jk(2\pi/N)n}$$

the Fourier transform is

$$X(e^{j\omega}) = \sum_{k=-\infty}^{\infty} 2\pi a_k \delta\left(\omega - \frac{2\pi k}{N}\right).$$

Example

Consider the periodic signal

$$x[n] = \cos \omega_0 n = \frac{1}{2} e^{j\omega_0 n} + \frac{1}{2} e^{-j\omega_0 n}, \quad \text{with } \omega_0 = \frac{2\pi}{5}.$$

$$X(e^{j\omega}) = \sum_{l=-\infty}^{\infty} \pi \delta \left(\omega - \frac{2\pi}{5} - 2\pi l \right) + \sum_{l=-\infty}^{\infty} \pi \delta \left(\omega + \frac{2\pi}{5} - 2\pi l \right).$$

Example


Consider the periodic signal

$$x[n] = \cos \omega_0 n = \frac{1}{2} e^{j\omega_0 n} + \frac{1}{2} e^{-j\omega_0 n}, \quad \text{with } \omega_0 = \frac{2\pi}{5}.$$

$$X(e^{j\omega}) = \sum_{l=-\infty}^{\infty} \pi \delta \left(\omega - \frac{2\pi}{5} - 2\pi l \right) + \sum_{l=-\infty}^{\infty} \pi \delta \left(\omega + \frac{2\pi}{5} - 2\pi l \right).$$

$$X(e^{j\omega}) = \pi \delta \left(\omega - \frac{2\pi}{5} \right) + \pi \delta \left(\omega + \frac{2\pi}{5} \right), \quad -\pi \leq \omega < \pi,$$

and $X(e^{j\omega})$ repeats periodically with a period 2π .

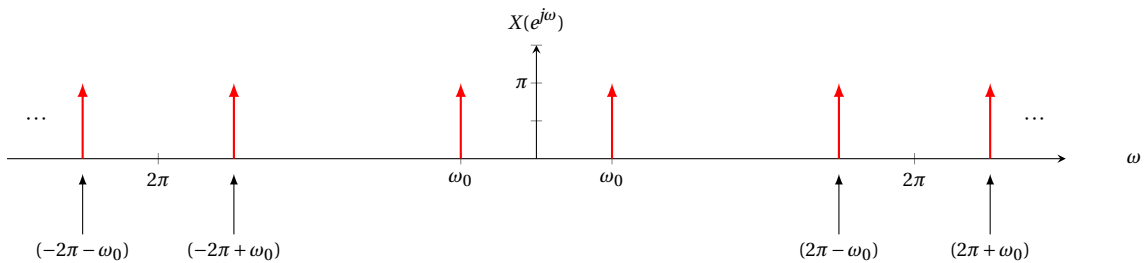

Example

The discrete-time counterpart of the periodic impulse train is the sequence

$$x[n] = \sum_{k=-\infty}^{\infty} \delta[n - kN].$$

Find its discrete-time Fourier transform.

The Fourier series coefficients for this signal can be calculated (from our previous knowledge):

$$a_k = \frac{1}{N} \sum_{n=\langle N \rangle} x[n] e^{-jk(2\pi/N)n}.$$

Example

The discrete-time counterpart of the periodic impulse train is the sequence

$$x[n] = \sum_{k=-\infty}^{\infty} \delta[n - kN].$$

Find its discrete-time Fourier transform.

The Fourier series coefficients for this signal can be calculated (from our previous knowledge):

$$a_k = \frac{1}{N} \sum_{n=\langle N \rangle} x[n] e^{-jk(2\pi/N)n}.$$

Choosing the interval of summation as $0 \leq n \leq N-1$, we have

$$a_k = \frac{1}{N}. \tag{1}$$

Example

The discrete-time counterpart of the periodic impulse train is the sequence

$$x[n] = \sum_{k=-\infty}^{\infty} \delta[n - kN].$$

Find its discrete-time Fourier transform.

The Fourier series coefficients for this signal can be calculated (from our previous knowledge):

$$a_k = \frac{1}{N} \sum_{n=\langle N \rangle} x[n] e^{-jk(2\pi/N)n}.$$

Choosing the interval of summation as $0 \leq n \leq N-1$, we have

$$a_k = \frac{1}{N}. \quad (1)$$

Then we can represent the Fourier transform of the signal as

$$X(e^{j\omega}) = \frac{2\pi}{N} \sum_{k=-\infty}^{\infty} \delta\left(\omega - \frac{2\pi k}{N}\right)$$

Section 2

Properties of the Fourier Transform

Periodicity

DTFT is always periodic in ω with period 2π

$$x[n] \xleftrightarrow{\mathcal{F}} X(e^{j\omega})$$

$$X(e^{j(\omega+2\pi)}) = X(e^{j\omega})$$

Linearity

If

$$x_1[n] \xleftrightarrow{\mathcal{F}} X_1(e^{j\omega})$$

and

$$x_2[n] \xleftrightarrow{\mathcal{F}} X_2(e^{j\omega})$$

then

$$ax_1[n] + bx_2[n] \xleftrightarrow{\mathcal{F}} aX_1(e^{j\omega}) + bX_2(e^{j\omega})$$

Time Shifting and Frequency Shifting

If

$$x[n] \xleftrightarrow{\mathcal{F}} X(e^{j\omega})$$

then

$$x[n - n_0] \xleftrightarrow{\mathcal{F}} e^{-j\omega n_0} X(e^{j\omega})$$

and

$$e^{j\omega_0 n} x[n] \xleftrightarrow{\mathcal{F}} X(e^{j(\omega - \omega_0)})$$

Example

The frequency response of an ideal low-pass filter has the cutoff frequency of ω_c .

- ① Obtain an expression for the frequency response of the corresponding high-pass filter (cutoff frequency $\pi - \omega_c$).
- ② Obtain an expression for the impulse response of this high-pass filter in terms of the impulse response of the low-pass filter.

Conjugation and Conjugate Symmetry

If

$$x[n] \xleftrightarrow{\mathcal{F}} X(e^{j\omega})$$

then

$$x^*[n] \xleftrightarrow{\mathcal{F}} X^*(e^{-j\omega}).$$

Also, if $x[n]$ is real-valued, its transform $X(e^{j\omega})$ is conjugate symmetric. That is

$$X(e^{j\omega}) = X^*(e^{-j\omega}), \quad (x[n] \text{ real.})$$

$\text{Re}\{X(e^{j\omega})\}$ is an even function of ω and $\text{Im}\{X(e^{j\omega})\}$ is an odd function of ω .

The magnitude of $X(e^{j\omega})$ is an even function and the phase angle is an odd function.

Time Reversal

$$x[-n] \stackrel{\mathcal{F}}{\leftrightarrow} X(e^{-j\omega}).$$

Example

Prove the time-reversal property.

Time Reversal

$$x[-n] \xleftrightarrow{\mathcal{F}} X(e^{-j\omega}).$$

Example

Prove the time-reversal property.

Let $x[n]$ be a signal with spectrum $X(e^{j\omega})$, and consider the transform $Y(e^{j\omega})$ of $y[n] = x[-n]$.

$$Y(e^{j\omega}) = \sum_{n=-\infty}^{\infty} y[n] e^{-j\omega n} = \sum_{n=-\infty}^{\infty} x[-n] e^{-j\omega n}$$

Substituting $m = -n$

$$Y(e^{j\omega}) = \sum_{m=-\infty}^{\infty} x[m] e^{-j(-\omega)m} = X(e^{-j\omega}).$$

Time Expansion


Because of the discrete nature of the time index for discrete-time signals, the relation between time and frequency scaling in discrete time takes on a somewhat different form from its continuous-time counterpart. In CT



$$x(at) \xleftrightarrow{\mathcal{F}} \frac{1}{|a|} X\left(\frac{j\omega}{a}\right).$$

However, if we try to define the signal $x[an]$, we run into difficulties if a is not an integer. Therefore, we cannot slow down the signal by choosing $a < 1$. On the other hand, if we let a be an integer other than ± 1 —e.g., if we consider $x[2n]$ —we do not merely speed up the original signal. That is, since n can take on only integer values, the signal $x[2n]$ consists of the even samples of $x[n]$ alone.

Let k be a positive integer, and define the signal

$$x_{(k)}[n] = \begin{cases} x[n/k], & \text{if } n \text{ is a multiple of } k, \\ 0, & \text{if } n \text{ is not a multiple of } k. \end{cases}$$

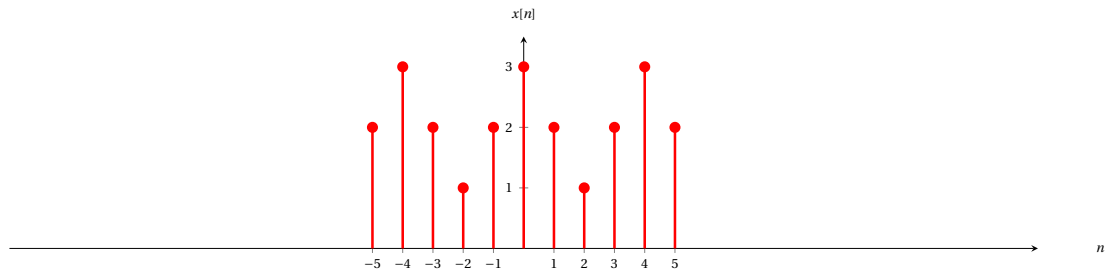

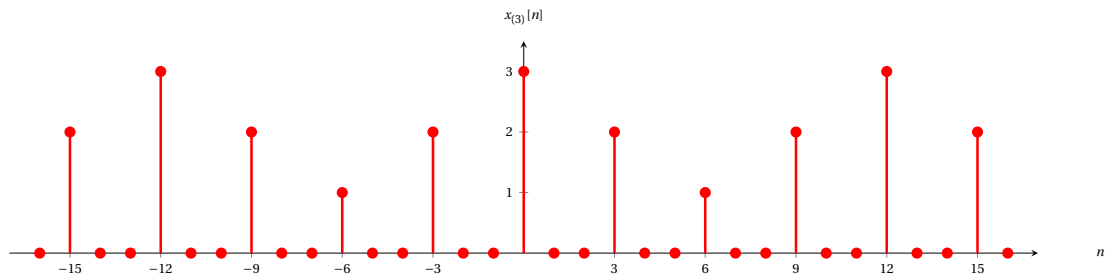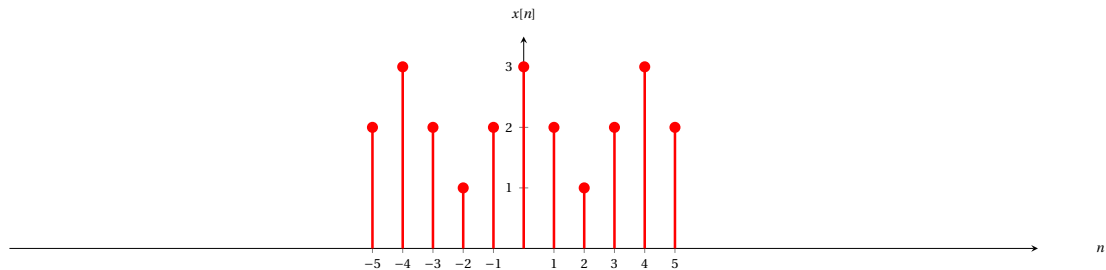




$$X_{(k)}(e^{j\omega}) = \sum_{n=-\infty}^{\infty} x_{(k)}[n] e^{-j\omega n} = \sum_{r=-\infty}^{\infty} x_{(k)}[rk] e^{-j\omega rk}$$




Furthermore, since $x_{(k)}[rk] = x[r]$,



$$X_{(k)}(e^{j\omega}) = \sum_{r=-\infty}^{\infty} x[r] e^{-j(k\omega)r} = X(e^{jk\omega})$$






$$x_{(k)}[n] \xleftrightarrow{\mathcal{F}} X(e^{jk\omega})$$






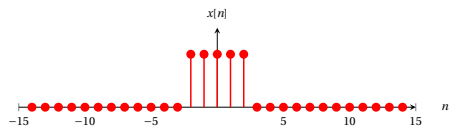


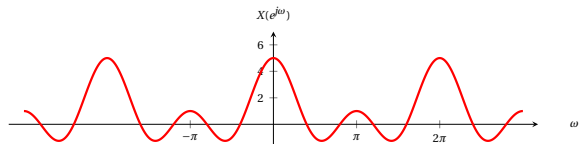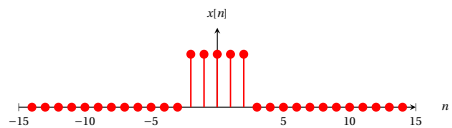

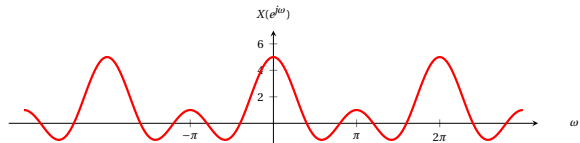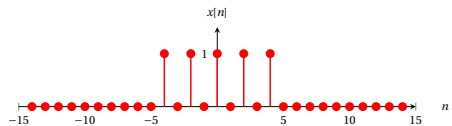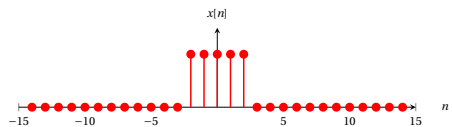

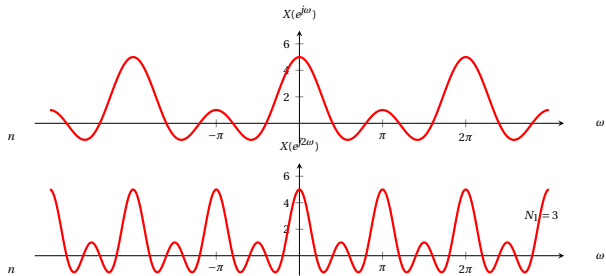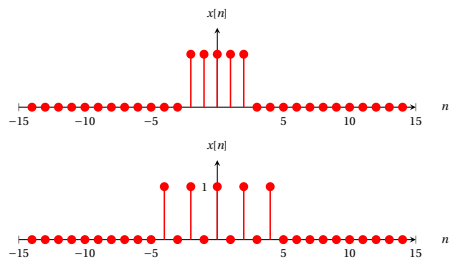


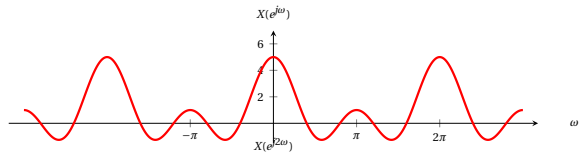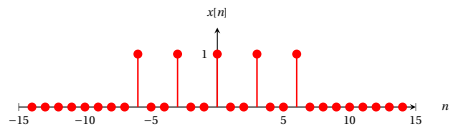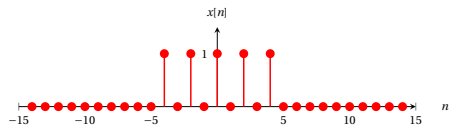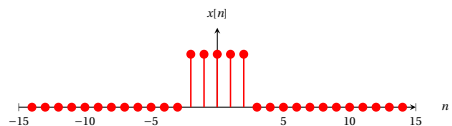


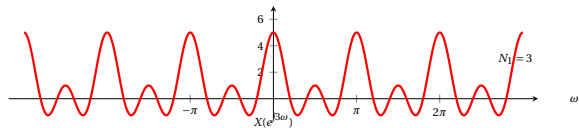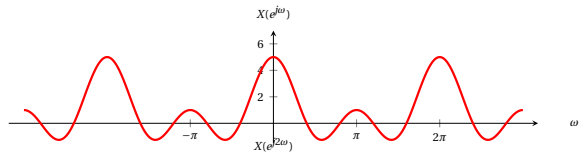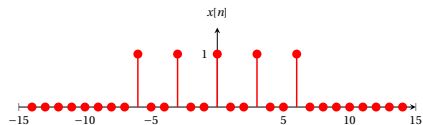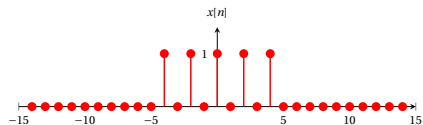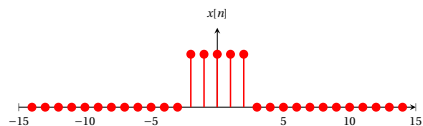



Example





Find the DTFT of the signal $x[n]$ shown in the figure, expressing the signal in terms of a simpler signal.

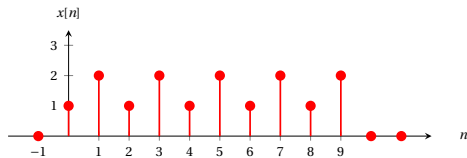

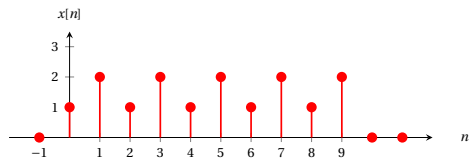

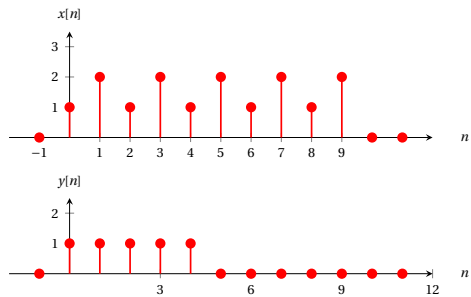

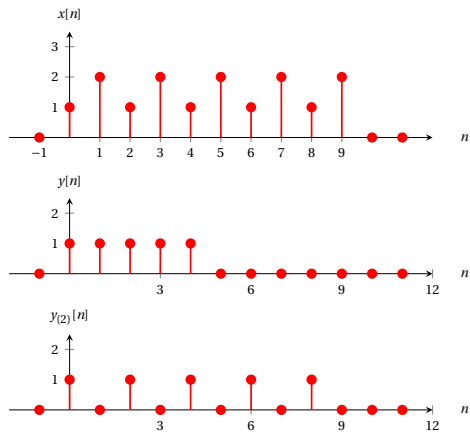

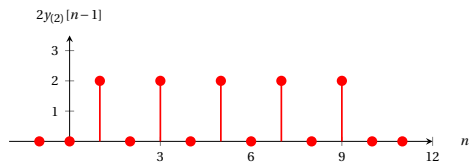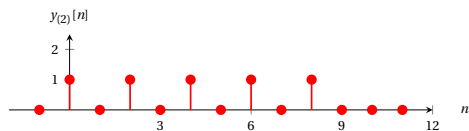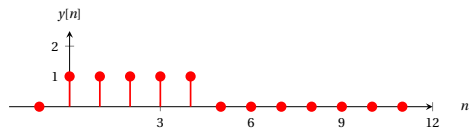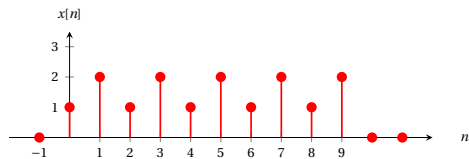

Differentiation in Frequency

$$nx[n] \xleftrightarrow{\mathcal{F}} j \frac{dX(e^{j\omega})}{d\omega}.$$

Example

Prove the differentiation property.

Differentiation in Frequency

$$nx[n] \xleftrightarrow{\mathcal{F}} j \frac{dX(e^{j\omega})}{d\omega}.$$

Example

Prove the differentiation property.

$$X(e^{j\omega}) = \sum_{n=-\infty}^{\infty} x[n] e^{-j\omega n}.$$

Differentiating

$$\frac{dX(e^{j\omega})}{d\omega} = \sum_{n=-\infty}^{\infty} -jnx[n] e^{-j\omega n}.$$

Parseval's Relation

$$\sum_{n=-\infty}^{+\infty} |x[n]|^2 = \frac{1}{2\pi} \int_{2\pi} |X(e^{j\omega})|^2 d\omega$$

The Convolution Property

If $x[n]$, $h[n]$ and $y[n]$ are the input, impulse response, and output respectively of an LTI system, so that

$$y[n] = x[n] * h[n]$$

then

$$Y(e^{j\omega}) = X(e^{j\omega})H(e^{j\omega}).$$

Example

Consider an LTI system with impulse response

$$h[n] = \delta[n - n_0]$$

Obtain the output $y[n]$ for an input $x[n]$.

The frequency response is

$$H(e^{j\omega}) = \sum_{n=-\infty}^{\infty} \delta[n - n_0] e^{-j\omega n} = e^{-j\omega n_0}$$

Thus, for any input $x[n]$ with Fourier transform $X(e^{j\omega})$, the Fourier transform of the output is

$$Y(e^{j\omega}) = e^{-j\omega n_0} X(e^{j\omega})$$

This is consistent with the time-shifting property.

Example

Consider an LTI system with impulse response

$$h[n] = \alpha^n u[n], \quad |\alpha| < 1$$

and suppose that the input to this system is

$$x[n] = \beta^n u[n], \quad |\beta| < 1$$

Obtain the output $y[n]$ for $\alpha \neq \beta$ and $\alpha = \beta$.

$$H(e^{j\omega}) = \frac{1}{1 - \alpha e^{-j\omega}}$$

$$X(e^{j\omega}) = \frac{1}{1 - \beta e^{-j\omega}}$$

If $\alpha = \beta$,

$$Y(e^{j\omega}) = \left(\frac{1}{1 - \alpha e^{-j\omega}} \right)^2$$

The Multiplication Property

Consider $y[n]$ equal to the product of $x_1[n]$ and $x_2[n]$, then

$$Y(e^{j\omega}) = \frac{1}{2\pi} \int_{2\pi} X_1(e^{j\theta}) X_2(e^{j(\omega-\theta)}) d\theta$$

This equation corresponds to the **periodic convolution** of $X_1(e^{j\omega})$ and $X_2(e^{j\omega})$, and the integral in this equation can be evaluation over any given interval of length 2π .
See example 5.15.

Summary

	CT	DT
	Series (CT)	Series (DT)
Periodic	$x(t) = \sum_{k=-\infty}^{+\infty} a_k e^{jk(\frac{2\pi}{T})t}$	$x[n] = \sum_{k=\langle N \rangle} a_k e^{jk(\frac{2\pi}{N})n}$
	$a_k = \frac{1}{T} \int_T x(t) e^{-jk(\frac{2\pi}{T})t} dt$	$a_k = \frac{1}{N} \sum_{n=\langle N \rangle} x[n] e^{-jk(\frac{2\pi}{N})n}$
	Transform (CT)	Transform (DT)
Aperiodic	$x(t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} X(j\omega) e^{j\omega t} d\omega$	$x[n] = \frac{1}{2\pi} \int_{2\pi} X(e^{j\omega}) e^{j\omega n} d\omega$
	$X(j\omega) = \int_{-\infty}^{+\infty} x(t) e^{-j\omega t} dt$	$X(e^{j\omega}) = \sum_{n=-\infty}^{+\infty} x[n] e^{-j\omega n}$
	CT: $\omega_0 = \frac{2\pi}{T}$, DT: $\omega_0 = \frac{2\pi}{N}$	