

# EN1060 Signals and Systems: Fourier Transform

Ranga Rodrigo  
ranga@uom.lk

The University of Moratuwa, Sri Lanka

September 17, 2017

# Section 1

## Continuous-Time Fourier Transform

# Introduction

- Using the Fourier techniques we can obtain the frequency-domain representation of signals.
- We use Fourier series for periodic signals, and Fourier transform for aperiodic signals.
- Each of these have continuous-time and discrete-time versions:
  - ① Continuous-time Fourier series
  - ② Continuous-time Fourier transform
  - ③ Discrete-time Fourier series
  - ④ Discrete-time Fourier transform
- In this part of the course, we will concentrate on how to actually compute continuous-time Fourier series and transform. Later, after we study linear, time-invariant (LTI) systems, we will study the conceptual aspects of Fourier techniques.

# Fourier Transform

- In the last lecture, we represented a periodic signal as a linear combination of complex exponentials.
- We use Fourier transform to represent aperiodic signals. A larger class of signals, including all signals with finite energy, can be represented through a linear combination of complex exponentials.
- Whereas for periodic signals the complex exponential building blocks are harmonically related, for aperiodic signals they are infinitesimally close in frequency, and the representation in terms of a linear combination takes the form of an integral rather than a sum.
- The resulting spectrum of coefficients in this representation is called the Fourier transform.
- The synthesis integral itself, which uses these coefficients to represent the signal as a linear combination of complex exponentials, is called the inverse Fourier transform.

## Fourier Series Representation for Square Wave

The continuous-time periodic square wave, sketched below, is defined over one period as

$$x(t) = \begin{cases} 1, & |t| < T_1, \\ 0, & T_1 < |t| < T/2, \end{cases}$$

This signal is periodically repeats with fundamental period  $T$  and fundamental frequency  $\omega_0 = 2\pi/T$ .

The Fourier series coefficients  $a_k$  of this wave are

$$a_k = \frac{2 \sin(k\omega_0 T_1)}{k\omega_0 T} \quad (1)$$

We plotted this for a fixed value of  $T_1$  and several values of  $T$  (shown in the next slide). An alternative wave of interpreting eq. 1 is as samples of an envelope function:

$$Ta_k = \left. \frac{2 \sin(\omega T_1)}{\omega} \right|_{\omega=k\omega_0}$$

For fixed  $T_1$ , the envelope of  $Ta_k$  is independent of  $T$ .

Plots of scaled Fourier series coefficients  $Ta_k$  for the periodic square wave with  $T_1$  fixed and for several values of  $T$ :  $T = 4T_1$ ,  $T = 8T_1$ ,  $T = 16T_1$ .

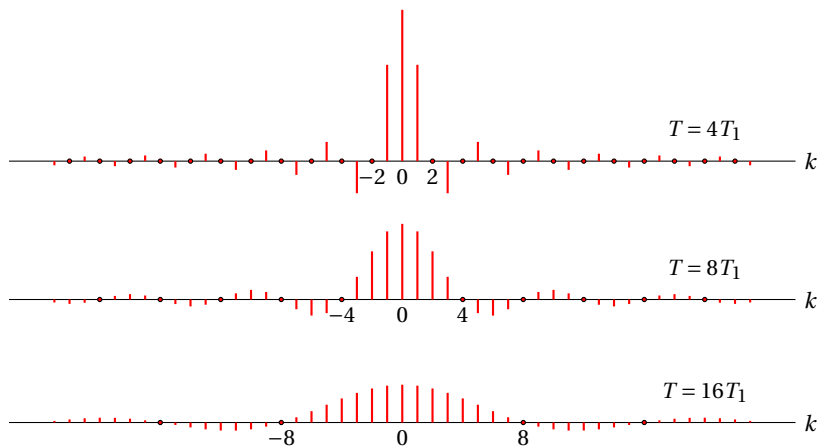


Figure: Plots of scaled Fourier series coefficients  $Ta_k$

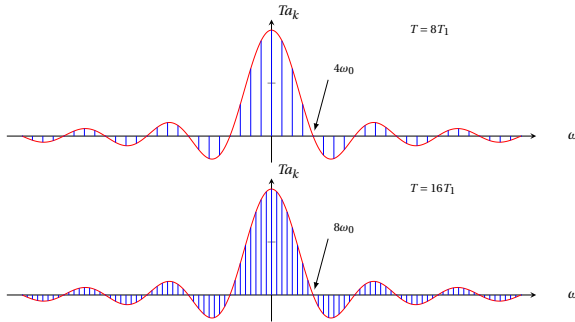


Figure: Fourier series coefficients and their envelope for periodic square wave.

The Fourier series coefficients and their envelope for periodic square wave for several values of  $T$  (with  $T_1$  fixed):  $T = 4T_1$ ,  $T = 8T_1$ ,  $T = 16T_1$ . The coefficients are regularly-spaced samples of the envelope  $(2\sin\omega T_1)/\omega$ , where the spacing between samples,  $2\pi/T$ , decreases as  $T$  increases.



# Fourier Transform: Synthesis and Analysis Equations

Relation with  $a_k$ 

Assume that the Fourier transform of  $x(t)$  is  $X(j\omega)$ .

If we construct a periodic signal  $\tilde{x}(t)$  by repeating the aperiodic signals  $x(t)$  with period  $T$ , its Fourier series coefficients are

## Convergence of Fourier Transform

Assume that we evaluated  $X(j\omega)$  according to eq. ??, and let  $\hat{x}(t)$  denote the signal obtained by using  $X(j\omega)$  in ??:

$$\hat{x}(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} X(j\omega) e^{j\omega t} d\omega.$$

When is  $\hat{x}(t)$  a valid representation of the original signal  $x(t)$ ? We define the error between  $\hat{x}(t)$  and  $x(t)$  as

$$e(t) = \hat{x}(t) - x(t).$$

## Convergence of Fourier Transform: Dirichlet Conditions

There are alternative conditions sufficient to ensure that  $\hat{x}(t)$  is equal to  $x(t)$  for any  $t$  except at a discontinuity, where it is equal to the average of the values on either side of the discontinuity.

### Example

Find the Fourier transform of the signal

$$x(t) = e^{-at}u(t), \quad a > 0.$$



### Example

Find the Fourier transform of the signal

$$x(t) = e^{-a|t|}, \quad a > 0.$$





### Example

Determine the Fourier transform of the unit impulse

$$x(t) = \delta(t).$$

## Rectangular Pulse

## Example

Determine the Fourier transform of the signal

$$x(t) = \begin{cases} 1, & |t| < T_1, \\ 0, & |t| > T_1. \end{cases}$$



### Example

Consider the signal  $x(t)$  whose Fourier transform is

$$X(j\omega) = \begin{cases} 1, & |\omega| < W, \\ 0, & |\omega| > W. \end{cases}$$

Determine  $x(t)$ .




Figure: Fourier transform for  $x(t)$ .



# The sinc Function

$$\text{sinc}(\theta) = \frac{\sin \pi \theta}{\pi \theta}. \quad (2)$$

Express

$$\frac{2 \sin \omega T_1}{\omega}$$

and

$$\frac{\sin Wt}{\pi t}$$

as sinc functions.

# What Happens when $W$ Increases?





## Section 2

# The Fourier Transform for Periodic Signals

# The Fourier Transform for Periodic Signals: Introduction

In the previous section, we studied the Fourier transform representation, paying attention to aperiodic signals. We can also develop Fourier transform representations for periodic signals. This allows us to consider periodic and aperiodic signals in a unified context. We can construct the Fourier transform of a periodic signal directly from its Fourier series representation.

Consider a signal  $x(t)$  with Fourier transform  $X(j\omega)$  that is a single impulse of area  $2\pi$  at  $\omega = \omega_0$ , i.e.,

Let's determine the signal  $x(t)$ :

### Example

Find the Fourier transform of the square wave signal whose Fourier series coefficients are

$$a_k = \frac{\sin k\omega_0 T_1}{\pi k}.$$



### Example

Find the Fourier transform of

$$x(t) = \sin \omega_0 t.$$

and

$$x(t) = \cos \omega_0 t.$$





### Example

Find the Fourier transform of the impulse train

$$x(t) = \sum_{k=-\infty}^{\infty} \delta(t - kT).$$



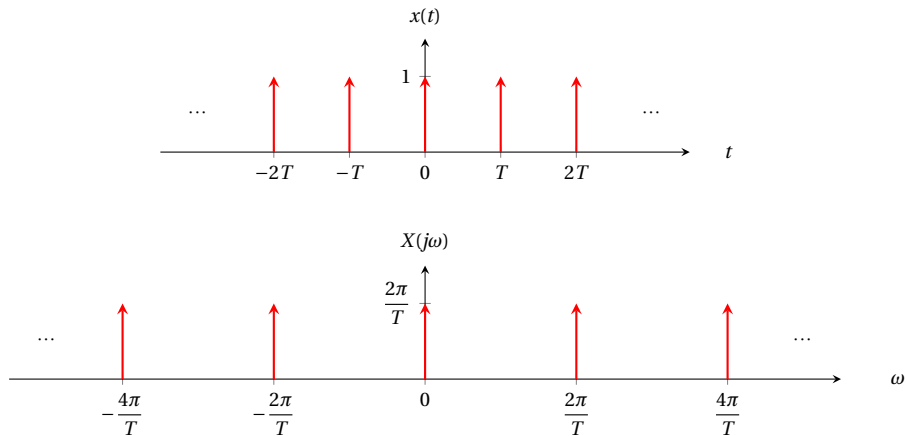


Figure: Periodic impulse train and its Fourier transform.