Model AR2 Electrical Enclosure

ELECTRICAL PANEL ASSEMBLY

BILL OF MATERIALS

All Stepper motors, drivers and power supplies are available at:
www.omc-stepperonline.com

---

by BUD Industries

BUD Industries NBF-32026 Plastic ABS NEMA Economy Box with Solid Door, 15-47/64" Length x 11-51/64" Width x 6-9/32" Height, Light Gray Finish

⭐⭐⭐⭐ ▾ | 34 customer reviews | 11 answered questions

Price: $38.83 ✓Prime

In Stock.
Want it Sunday, Feb. 26? Order within **40 mins** and choose **Two-Day Shipping** at checkout. De
Ships from and sold by Amazon.com in easy-to-open packaging. Gift-wrap available.

Used & new (9) from $32.23 ✓Prime

Specifications for this item

| Part Number | NBF-32026 | Length | 15-47/64 inches |
| Number of Items | 1 | Material Type | Plastic |

---

by BUD Industries

BUD Industries NBX-32926-PL ABS Plastic Internal Pa 14-1/4" Length x 10-27/64" Width x 9/64" Thick, for NBF Boxes

⭐⭐⭐⭐⭐ ▾ | 3 customer reviews

Price: $20.10 ✓Prime

In Stock.
Want it Sunday, Feb. 26? Order within **39 mins** and choose **Two-Day Shipping** at che
Ships from and sold by Amazon.com.

New (3) from $20.10 ✓Prime

Specifications for this item

| Part Number | NBX-32926-PL | Material Type | Plastic |

BUD Industries

BUD Industries IPV-1116 IP32 Air Vent, 3.9" x 3.9"

See all 3 in this Product Family

⭐⭐⭐⭐ ▾ | 6 customer reviews | 3 answered questions

Was: $11.81
Price: $6.28 ✓prime
You Save: $5.53 (47%)

In Stock.
Want it Sunday, Aug. 6? Order within **7 hrs 17 mins** and choose Two-Day

---

uxcell Switch Power Supply Driver for LED Strip Ligh 110/220V 5V 2A 10W

by uxcell

⭐⭐⭐⭐ ▾ | 66 customer reviews | 12 answered questions

Price: $6.99 ✓Prime

ⓘ Get $50.00 off instantly: Pay $0.00 upon approval for the Amazon.com Rewards Visa C more

Only 9 left in stock.
Want it Sunday, Feb. 26? Order within **37 mins** and choose Two-Day Shipping at Details
Sold by uxcell and Fulfilled by Amazon. Gift-wrap available.

Size: DC 5V 2A 10W

| DC 5V 2A 10W | DC 5V 3A 15W | DC 5V 5A 25W | DC 5V 8A 40W |
| DC 5V 10A 50W | DC 5V 12A 60W | DC 5V 20A 100W | DC 5V 30A 15 |

Ieik Mega 2560 R3 ATmega2560-16AU + ATME USB Cable for Robot Arduino UNO MEGA2560 Duemilanove 2013

by IEIK

⭐⭐⭐⭐ ▾ | 89 customer reviews | 7 answered questions

Price: $11.89 ✓Prime

In Stock.
Want it Sunday, Feb. 26? Order within **1 min** and choose Two-Day Shippi Details
Sold by Smileshopper and Fulfilled by Amazon. Gift-wrap available.

- Our development boards and modules are compatible with the Arduino
- 1 x IEIK Mega 2560 R3 Bule
- 1 x USB Cable

Arduino Mega Case Enclosure New Black Co with Switch

by SB Components

⭐⭐⭐ ▾ | 8 customer reviews

Price: $6.99 Free shipping for Prime members when buying this Add-o

ⓘ Your cost could be $1.99: Reload $100, get $5 free. Learn more

In Stock.
Want it Monday, Feb. 27? Add it to a qualifying order within **17 hrs 39 m** Two-Day Shipping at checkout. Details
Sold by SB Components and Fulfilled by Amazon. Gift-wrap available.

- This is a no-nonsense protective case designed specifically for the Ard
- The case is a two-piece injection-molded ABS enclosure that snaps to Arduino. Holds the Arduino firmly in place

---

JBtek 8 Channel DC 5V Relay Module for A Pi DSP AVR PIC ARM

by JBtek

⭐⭐⭐⭐ ▾ | 147 customer reviews | 42 answered questions

Price: $8.98 ✓Prime

In Stock.
Want it Monday, Feb. 27? Order within **17 hrs 37 mins** and choose checkout. Details
Sold by JBtek and Fulfilled by Amazon. Gift-wrap available.

- 5V 8-Channel Relay interface board, and each one needs 15-20mA
- Equiped with high-current relay, AC250V 10A ; DC30V 10A
- Standard interface that can be controlled directly by microcontrolle DSP, ARM, ARM, MSP430, TTL logic)
- Indication LED's for Relay output status

Phanteks 24 Pin M/B Premium Sleeved E 19.68" Length, Black/Red(PH-CB24P_BR

⭐⭐⭐⭐⭐ ▾ | 8 customer reviews | 4 answered questions

List Price: $16.99
Price: $14.99 ✓Prime
You Save: $2.00 (12%)

ⓘ Your cost could be $9.99: Qualified customers get $5 in Gift Card fun Amazon Gift Card Balance. Learn more

Only 20 left in stock (more on the way).
Want it Tuesday, Feb. 14? Order within **4 hrs 34 mins** and choose checkout. Details
Ships from and sold by Amazon.com. Gift-wrap available.

Color: Black/Red

Switchcraft EHUSBBABX USB-B to USB-A Feedthru Panel Mount Finish
by Switchcraft

$9⁷⁰ ✔prime
Only 1 left in stock - order soon.

More Buying Choices
$9.70 (2 new offers)

★★★★☆

UGREEN Ethernet Extension Cable Network Cat6 Patch Cable RJ45 Cords Shielded Male to Female Connector, 1.5ft/0.5m
★★★★☆ ▾ | 182 customer reviews | 5 answered questions

Sale: $5.59 ✔Prime

ⓘ Your cost could be $0.59. Qualified customers get $5 in Gift Card funds on first $100 Amazon Gift Card Balance. Learn more

In Stock.
Want it Tuesday, Feb. 14? Order within 4 hrs 37 mins and choose Two-Day Shipping at checkout. Details
Sold by UGREEN GROUP LIMITED and Fulfilled by Amazon. Gift-wrap available.

Size: 1.5ft

1.5ft	3ft	6ft	10ft
$5.59 ✔Prime	$6.99 ✔Prime	$7.55 ✔Prime	$8.55 ✔Prime

---

uxcell AC 600V 10A Red Mushroom Emergency Stop Push Button Switch 22mm NO NC
★★★★☆ ▾ | 33 customer reviews | 5 answered questions

Price: $6.94 ✔Prime

In Stock.
Want it Tuesday, May 16? Order within 11 hrs 22 mins and choose Two-Day Shipping at checkout. Details
Sold by uxcell and Fulfilled by Amazon. Gift-wrap available.

- Item Name : Emergency Stop Push Switch;Type : Self Locking Rotary;Ith : 10A
- Ui : 600V;Voltage Category : AC 125V, 5A; AC 300V, 3A;Button Diameter : 4cm/1.5"
- Contact Type : 1 NO (Normally Open) + 1 NC (Normally Closed);Mount Hole Diameter : 2 / 0.87"(7/8");Fit Panel Thickness(Adjustable) : Max 0.6cm / 0.24"
- Size : 3.7 x 3 x 7cm/ 1.4" x 1.2" x 2.8"(L*W*H);Material : Plastic and Metal;Main Color : Red, Fuchsia, Blue, Gray
- Net Weight : 45g;Package Content : 1 x Emergency Stop Switch
  › See more product details

Hilitchi 30 Piece Nylon Plastic Waterproof Adjustable 3.5 - 13mm Cable Glands Joints Cable Gland - PG7, PG9, PG11, PG13.5, PG16
★★★★★ ▾ 2 customer reviews

Price: $10.41 ✔Prime

ⓘ Your cost could be $5.41. Qualified customers get $5 in Gift Card funds on first $100 reload of their Amazon Gift Card Balance. Learn more

In Stock.
Sold by Hilitchi and Fulfilled by Amazon. Gift-wrap available.

Color: Black-30pcs

$10.41 ✔Prime	$14.36

- High Quality Cable Gland Kit; Applied to Cable Fixing, Waterproof Design
- Package Includes: 30pcs (6 each size)
- Model: PG7, PG9, PG11, PG13.5, PG16

ASI ASIUK5N Din Rail Mounted Terminal Block, Screw (Pack of 50)
★★★★★ ▾ 4 customer reviews

List Price: $24.42
Price: $21.01 ($0.42 / DIN Rail Terminal) ✔Prime
You Save: $3.41 (14%)

In Stock.
Want it tomorrow, Feb. 26? Order within 11 hrs 11 mins and choose One-Day Shipping at checkout. Details
Ships from and sold by Amazon.com. Gift-wrap available.

Used & new (4) from $15.76 ✔Prime

Specifications for this item

Part	ASIUK5N	Current	Amp

---

by Amico
15 Pcs 35mm Width Slotted Design Aluminum DIN Rail 9.8"
★★★★☆ ▾ 10 customer reviews

Price: $11.35 & FREE Shipping

Note: Not eligible for Amazon Prime.

Only 1 left in stock.
Get it as soon as March 2 - 7 when you choose Expedited Shipping at checkout.
Ships from and sold by uxcell.

New (5) from $11.35 & FREE shipping.

Specifications for this item

Part Number	a12022900ux0297

Automation Systems Interconnect
ASI ASIEB106 Din Rail Terminal Block External Bridge (Pack of 10)
★★★★★ ▾ 4 customer reviews

Price: $22.11 ($2.21 / Din Rail Terminal) ✔prime

In Stock.
Want it Monday, Sept. 11? Order within 2 hrs 15 mins and choose Two-Day Shipping at checkout. Details
Ships from and sold by Amazon.com. Gift-wrap available.

New (1) from $22.11 ✔prime

Specifications for this item

Part Number	ASIEB106

**eBoot 130 Pieces Solderless Flexible Breadboard Jumper W
to Male for Arduino Prototype Shield**
by eBoot

$6.99 $10.99 ✓prime
Get it by **Monday, Sep 11**

Smraza

**Smraza 120pcs Multicolored Jumper Wire 40p
Female, 40pin Male to Male, 40pin Female to
Breadboard Jumper Wires Ribbon Cables Kit f
connections S02**

⭐⭐⭐⭐½ ▼   10 customer reviews

Price: $7.99 ✓Prime

In Stock.
Want it Thursday, March 9? Order within **2 hrs 26 mins** and choose **Two**
checkout. Details
Sold by SmrazaDirect and Fulfilled by Amazon. Gift-wrap available.

- Multicolored 3 pieces Breadboard Jumper Wires as a set, High-grade C

There are different options for main power supplies and drivers – you can use 24vdc Power supply with ST-6600 drivers

**350W 24V 14.6A 115/230V Switching Power Supply Stepper
Motor CNC Router Kits**

SKU: S-350-24

This professional 350W 24V 14.6A Switching CNC Power Supply can be widely
used in Industrial Automation and CNC Stepper/Servo System. 115V and 230V
can be chosed by switch. Powerful functions(eg. PWM control) and professiona
de..

$23.96 As low as : $21.06 **STEPPERONLINE**

**Bipolar Stepper Motor Driver Max 4A Current 40VDC Input 16
Subdivision**

SKU: ST-6600

This bipolar stepper motor driver is builded with THB6600 IC, the Max output
current is 5.0A with 8 current options, and the microstep resolution can reach
16(3200 steps/rev). This low cost high subdivision stepper motor driver ..

$18.98 As low as : $15.53 **STEPPERONLINE**

Or you can use 36vdc power supply with DM542T digital drivers.
(this combination is recommended)

**400W 36V 11A 115/230V Switching Power Supply Stepper
Motor CNC Router Kits**

SKU: S-400-36

This professional 400W 36V 11A Switching CNC Power Supply can be widely us
in Industrial Automation and CNC Machines. 115V and 230V can be chosed by
switch. Powerful functions(eg. PWM control) and professional designs (Built-i..

$25.16 As low as : $22.11 **STEPPERONLINE**

SALE

**Digital Stepper Driver 1.0-4.2A 20-50VDC for Nema 17, 23, 24
Stepper Motor**

SKU: DM542T

This driver is brand STEPPERONLINE and manufactured by Leadshine (The m
famous stepper driver company in China). The DM542T is a fully digital steppe
driver developed with advanced DSP control algorithm based on the lates..

$32.84 $25.49 As low as : $22.09 **STEPPERONLINE**

ASSEMBLY

Install backplane into bottom of enclosure using the supplied screws.

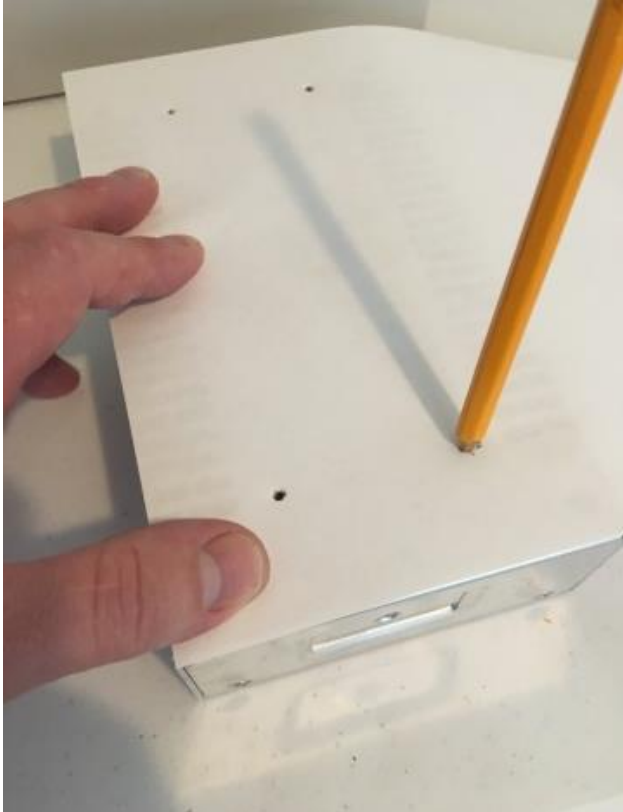
Cut 48mm x 30mm rectangular hole in right side of enclosure centered in panel with the top parallel to hasp as shown.

Install fused inlet socket, drill pilot holes and secure with (2) flat head screws.

Align sheet of paper on back of power supply and mark each of the 4 mounting holes.

Align sheet of paper even with backplane and then use marker to transfer the hole pattern.

Drill marked holes with 4mm drill bit then secure power supply with (4) 4mm x 10 button head screws to bottom of enclosure.

Cut length of DIN rail down to approx 6.5''
long.

Use #6 and #4 sheet metal screws to secure

- (6) ST-6600 stepper drivers
- 5vdc power supply
- Arduino mega enclosure
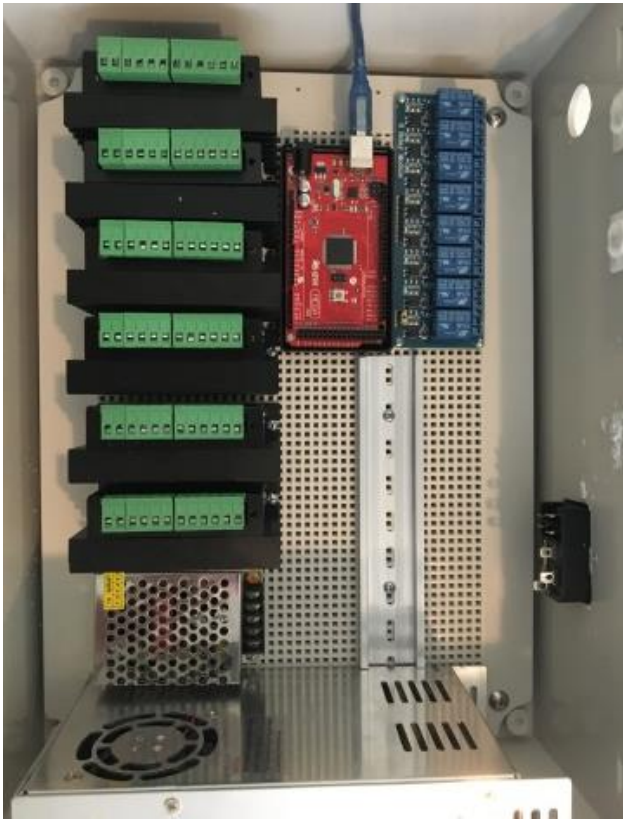- 8 channel relay board
- DIN rail

In the orientation shown.

ALTERATE LAYOUT

This alternate layout places the relay board on the right side providing easier access to the relay terminals. This layout uses DM542T digital stepper instead of the lower cost ST6600 drivers and a 35vdc power supply.
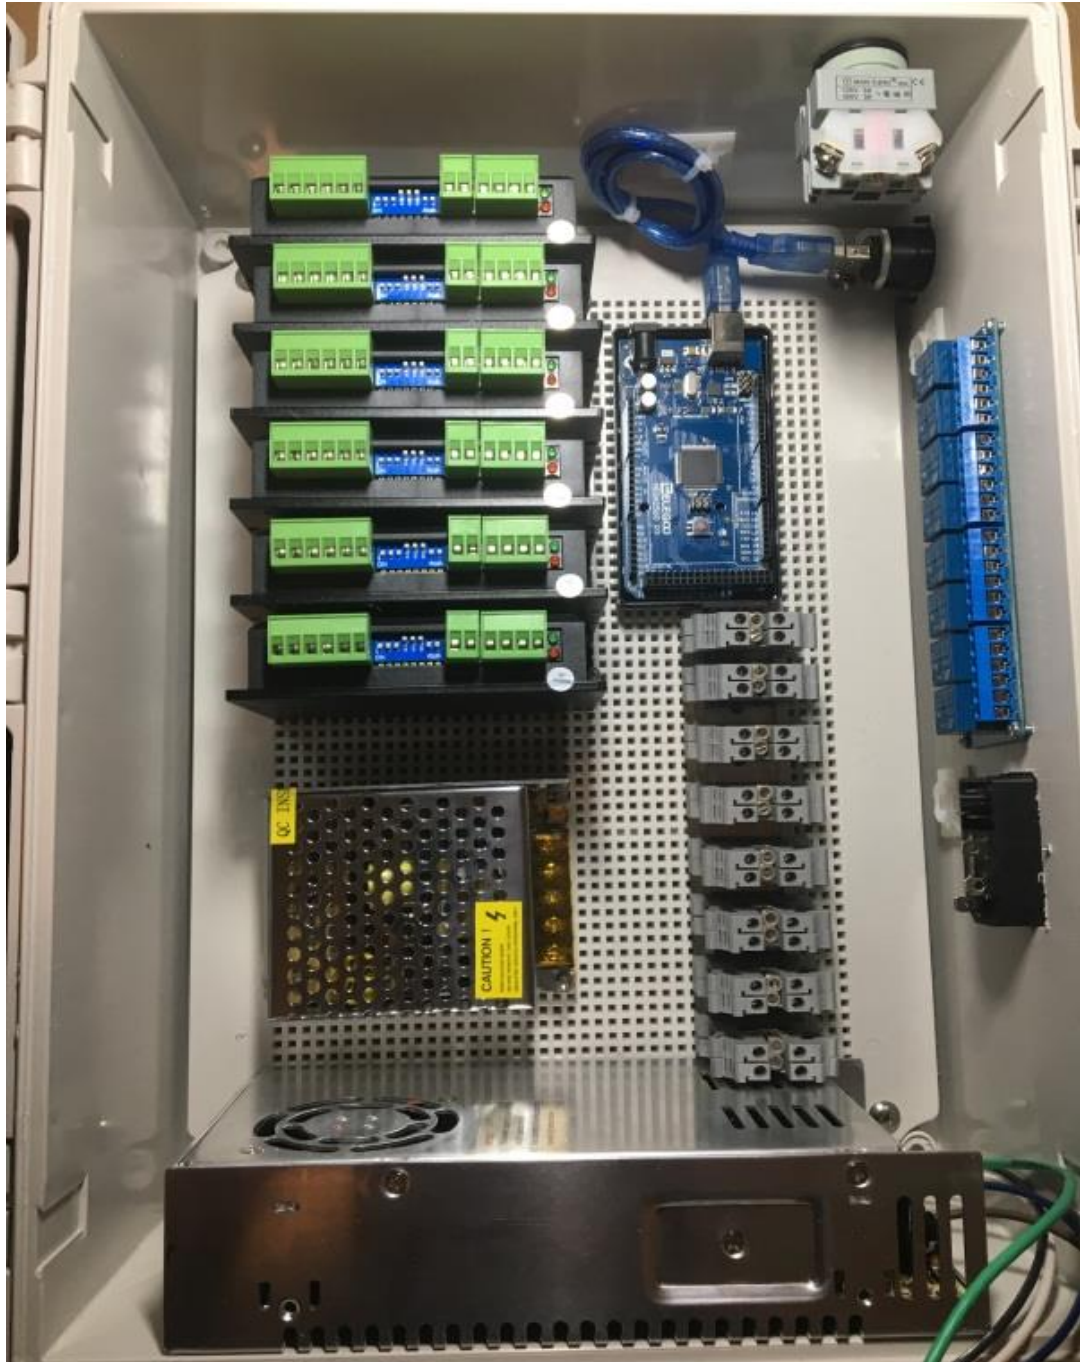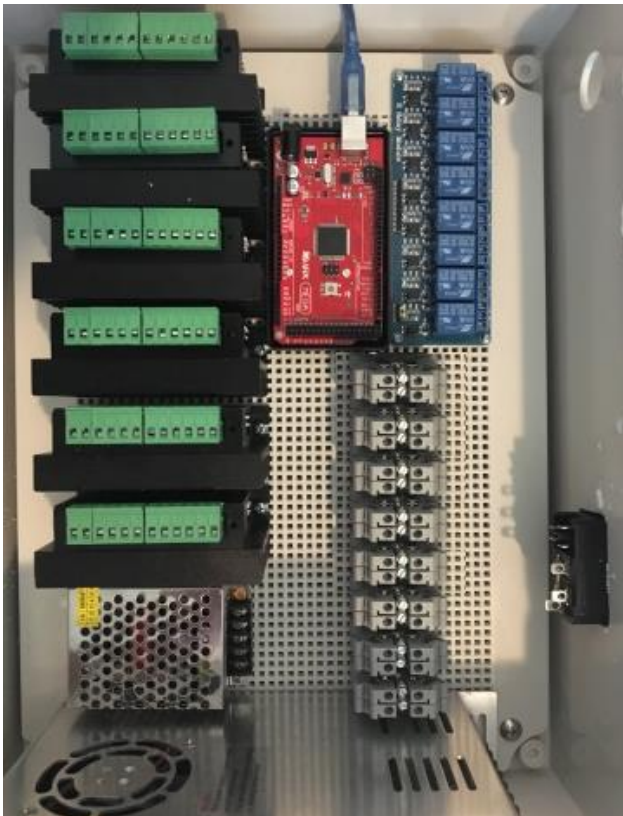

Install Arduino 2560 mega control board with supplied USB cord inserted and secure board to enclosure base using #2 screws.
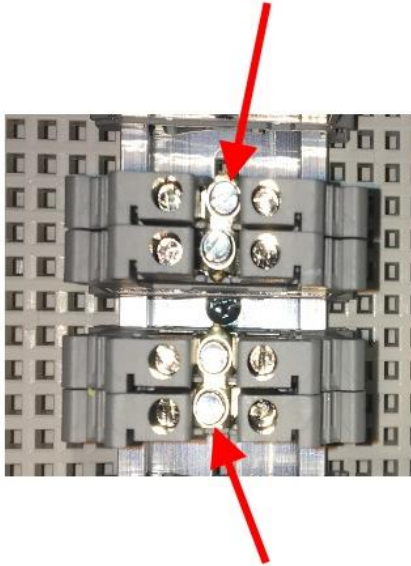

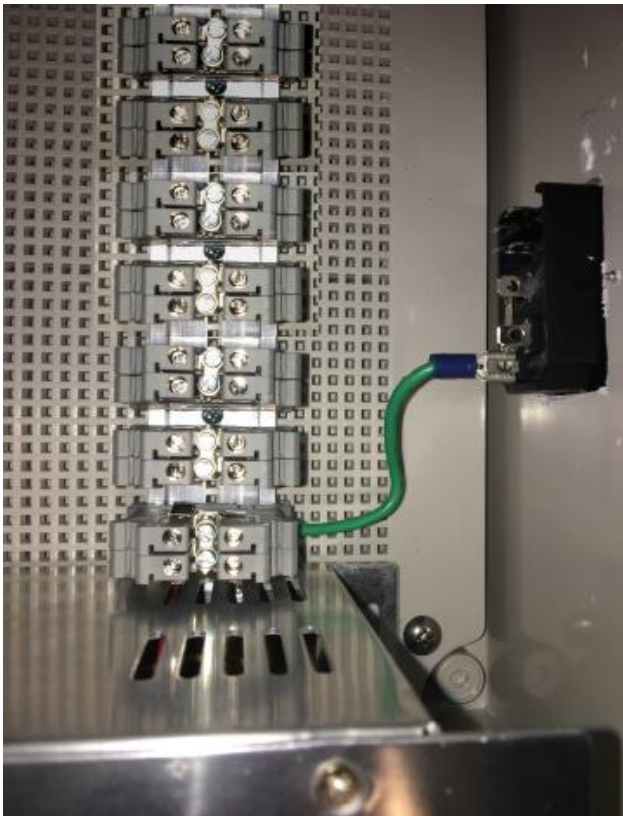Install (16) terminal blocks onto DIN rail. Install in 8 groups of 2 as shown.

Install terminal jumpers across each set of 2 terminals so that each group of 2 becomes bridged together.

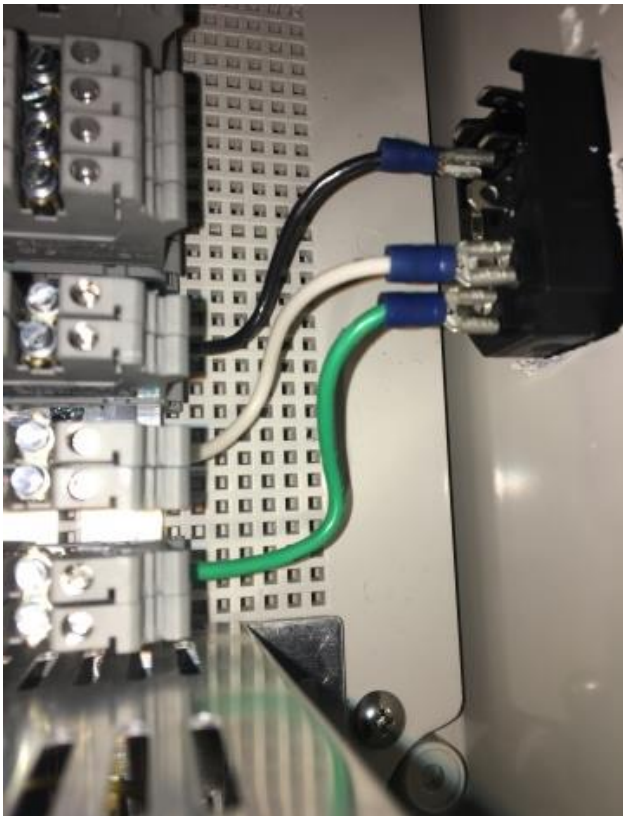Install green 16awg wire from bottom set of terminal blocks to terminal shown on fused inlet socket.

Install white16awg wire from 2nd set of terminal blocks to terminal shown on fused inlet socket.

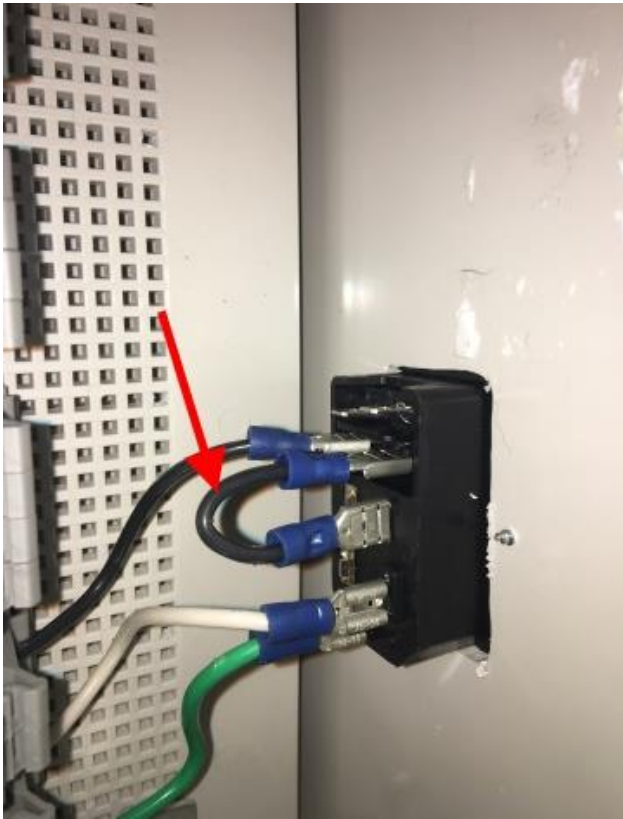
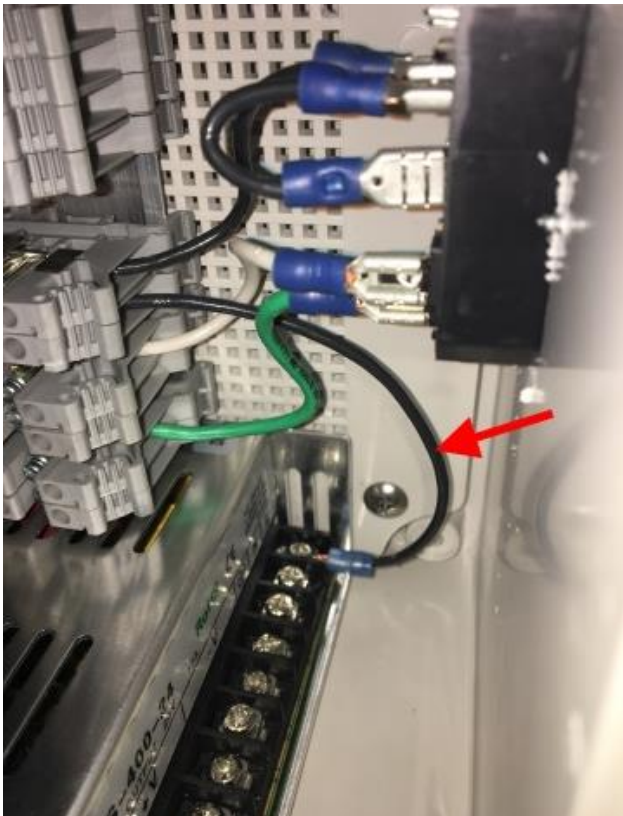Install black16awg wire from 3rd set of terminal blocks to terminal shown on fused inlet socket.
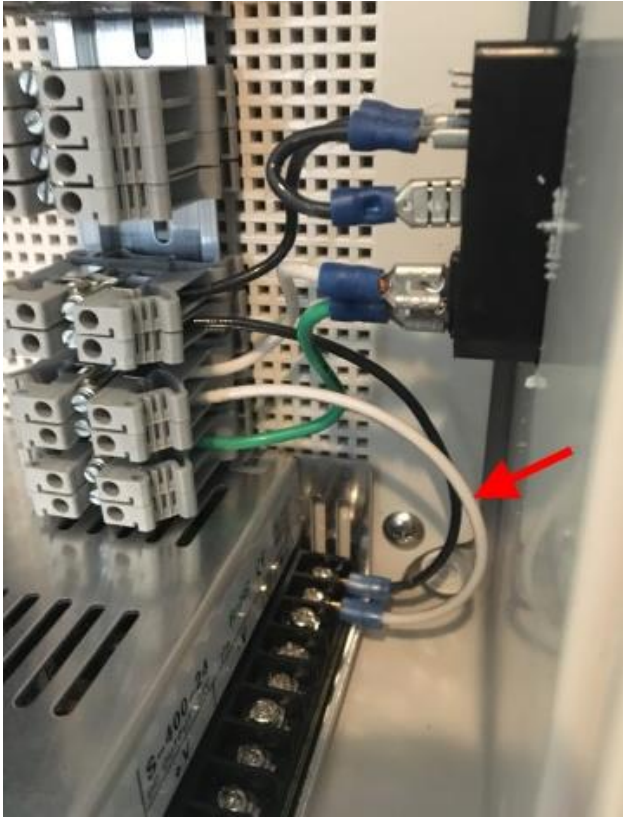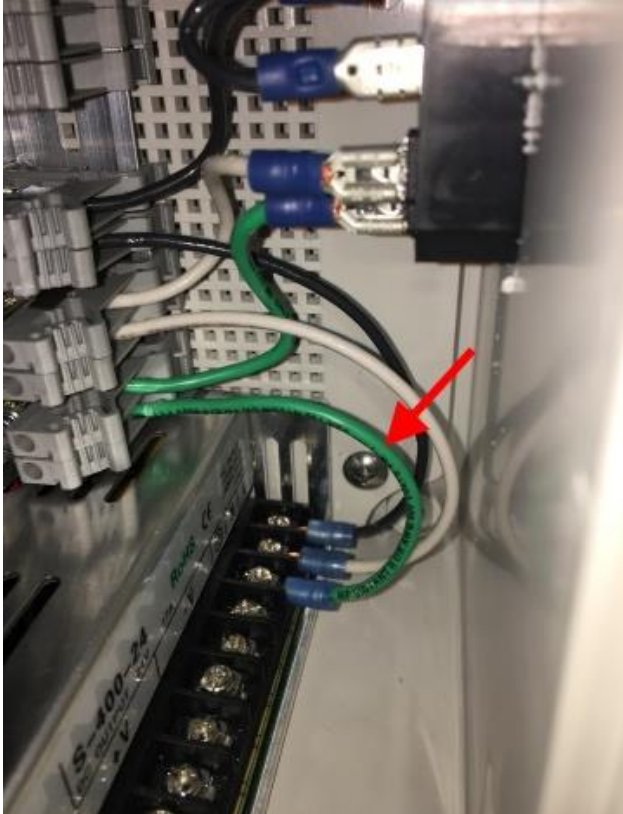
Install jumper as shown on inlet socket.

Install black 16awg wire from 3rd terminal block from bottom to the Line terminal on power supply.

Install white 16awg wire from 2nd terminal block from bottom to the Neutral terminal on power supply.

Install green16awg wire from terminal block from bottom to the Ground terminal on power supply.

Install blue 16 awg wire from the 4th from the bottom terminal block to the DC- terminal on bottom stepper driver and then install jumpers all the way up across all 6 drivers.

Install brown 16 awg wire from the 5th from the bottom terminal block to the DC+ terminal on bottom stepper driver and then install jumpers all the way up across all 6 drivers.
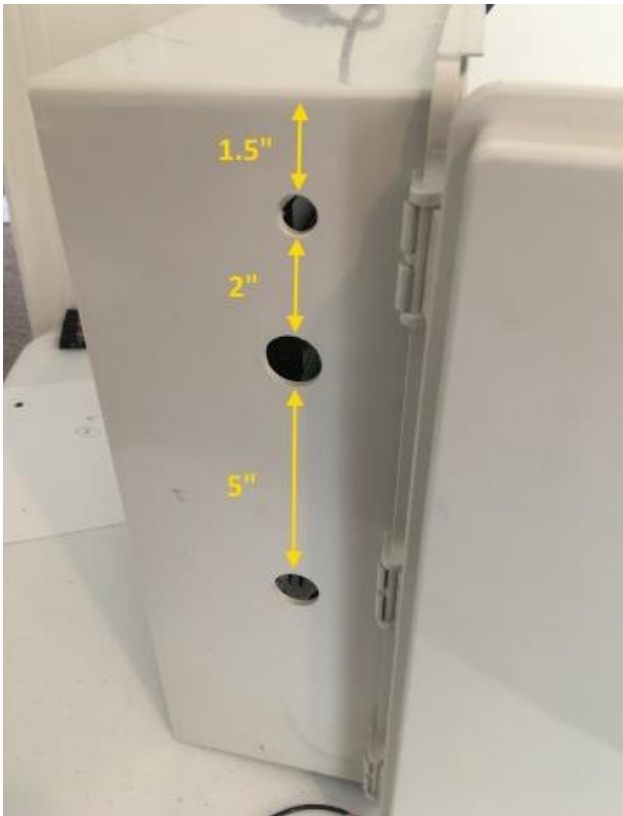
Use stepped drill bit to drill ½" diameter hole on left side of enclosure 1.5" from top. Drill 7/8" hole 2" down from ½" hole and then another 7/8" hole 5" down from the first 7/8" hole.

Install (1) ½" gland nut and (2) 7/8" gland nuts as shown.

Cut female end off of ATX 24 pin extension cable as shown and then strip back ¼" of sheathing from the end of each wire.

With ATX male end clip facing out toward you as shown insert the top 12 wires into the top gland nut and then insert the bottom 12 wires into the bottom gland nut.

B-   B+   A-   A+
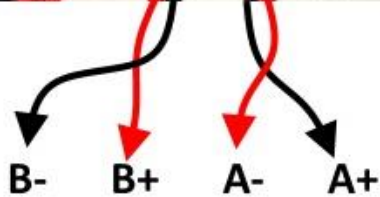
J1 DRIVER (top)

The next step is to land the ATX extension wires to the correct terminal on all 6 drivers. This and the following 5 slides will illustrate which wires go to the correct driver terminals. You will need to trace each wire inside the enclosure and connect as shown. The top driver in the enclosure is for J1 the second down is for J2 and down on. Also refer to the full wiring diagram at the end of this manual as well as the ATX pinout diagram.

Connect the J1 driver to the wires shown

(note the male connector tab is on top in the picuture)

B-   B+   A-   A+
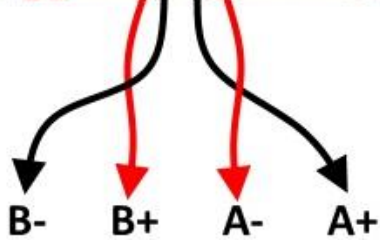
J2 DRIVER (2nd down)

Connect the J2 driver to the wires shown

(note the male connector tab is on top in the picuture)

B-   B+   A-   A+
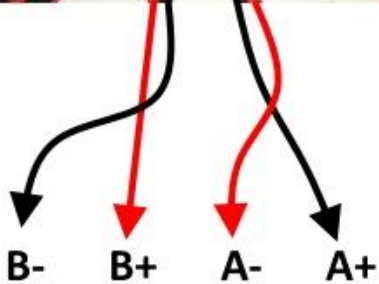
J3 DRIVER (3rd down)

Connect the J3 driver to the wires shown

(note the male connector tab is on top in the picuture)
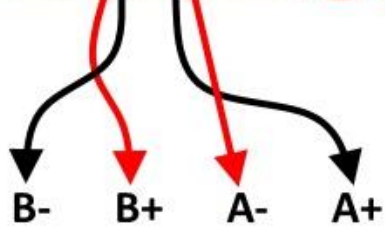
B- **B+** **A-** **A+**

J4 DRIVER (4th down)

Connect the J4 driver to the wires shown

(note the male connector tab is on top in the picuture)
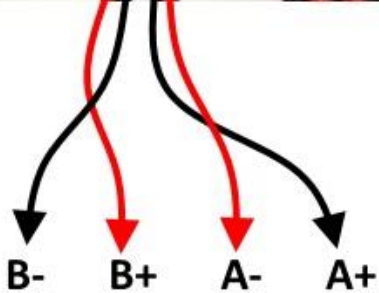
B- **B+** **A-** **A+**

J5 DRIVER (5th down)

Connect the J5 driver to the wires shown

(note the male connector tab is on top in the picuture)

B- B+ A- A+

J6 DRIVER(6th down)

Connect the J6 driver to the wires shown

(note the male connector tab is on top in the picuture)

From inside the enclosure with all the ATX extension wires landed to the 6 drivers it should look like this.

Trace the circle from the vent onto front cover door, cut out circle and mount vent in front of stepper drivers as shown.
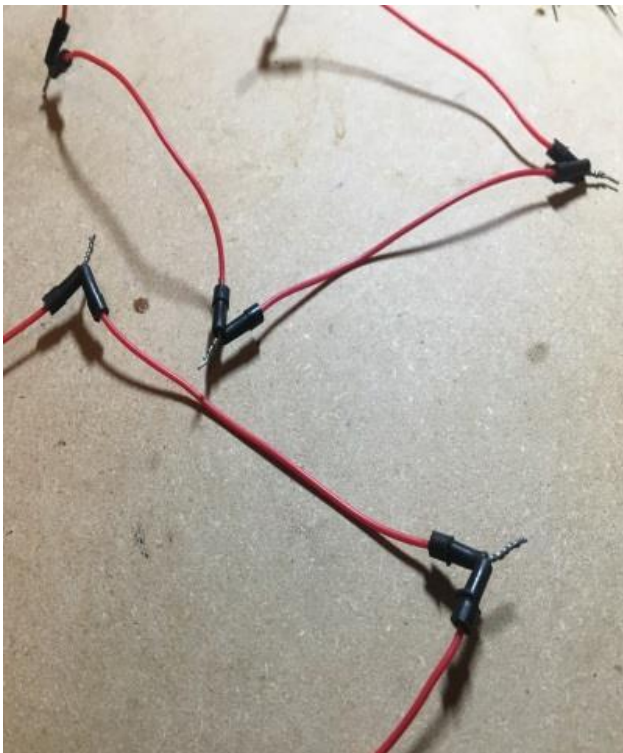
- For the next step you will need to jumper +5vdc across all +driver terminals. Use 17 short red jumpers and one long red jumper - twist ends together end to end so you have a chain of jumpers. Test continuity across all jumpers before installing.

The next step is to run 5vdc from the arduino to all the (+5v) terminals across all of the stepper drivers. The drivers are NPN or negative switching which means the step and direction pulses will be made by the negative wire and the positive is high or on all the time on all the (+5v) terminals. Each driver has (3) positive terminals that require a constant +5v signal:

- PUL+(+5)
- DIR+(+5)
- ENA+(+5)

Run a long jumper from the arduino +5v to the J1 stepper drivers ENA+(+5v) terminal, then jumper that over to the DIR+(+5) and jumper that over to the PUL+(+5), then jumper to the next driver and across its (3) (+5) terminals and continue down and across all drivers – you will need a total of (17) short jumper wires.

(Also refer to the full wiring diagram at the end of this manual)
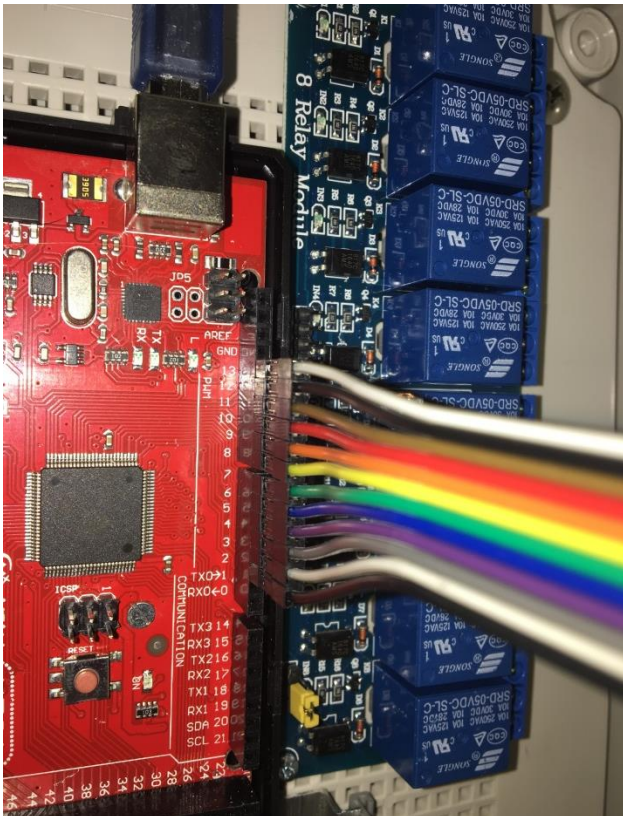
Connect a ribbon of (12) jumper wires to pins 2 through 13 on the arduino board as follows:

- Pin 2 to black to J1 PUL(-5)
- Pin 3 to white to J1 DIR(-5)
- Pin 4 to grey to J2 PUL(-5)
- Pin 5 to purple to J2 DIR(-5)
- Pin 6 to blue to J3 PUL(-5)
- Pin 7 to green to J3 DIR(-5)
- Pin 8 to yellow to J4 PUL(-5)
- Pin 9 to orange to J4 DIR(-5)
- Pin 10 to red to J5 PUL(-5)
- Pin 11 to brown to J5 DIR(-5)
- Pin 12 to black to J6 PUL(-5)
- Pin 13 to white to J6 DIR(-5)

Extend the jumper wires with matching color wires and connect to the stepper drivers negative pulse and direction terminals as outlined in the previous step.

(Also refer to the full wiring diagram at the end of this manual)
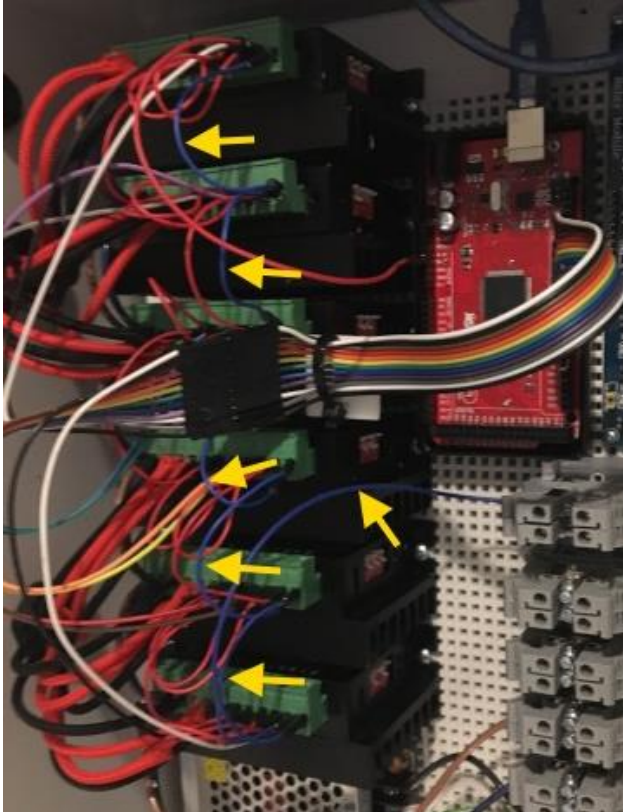
Connect a long blue jumper from the top set of terminal blocks over to the ENA-(ENA) on the J6 driver and then use 5 short blue jumpers to jump across the ENA-(ENA) on all stepper drivers. The purpose of these wires is to disable all the stepper drivers. If you were to provide a negative input to any of the other 3 inputs on the top set of terminal blocks this would disable all drivers. This circuit will not be used any further in this manual but its purpose would be if you had a safety switch or gate protecting your robot you would wire your safety gate to these terminals to provide -5v when the gate is open and this will disable any motors while the gate or safety circuit is open.

Use stepped drill bit to drill a 7/8" hole in right side of enclosure centered in panel toward the top of enclosure as shown.

Install USB (B) to (A) panel jack as shown.

On inside of enclosure connect USB cable from arduino to USB panel jack. Secure cable with adhesive cable tie mount.

Use stepped drill bit to drill a 7/8" hole in top of enclosure where shown.

Install E-Stop button as shown.
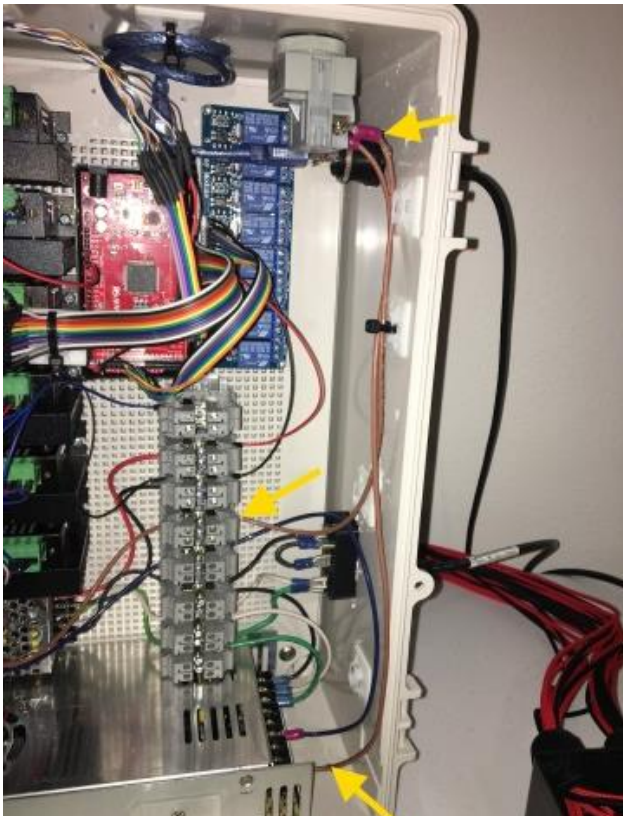
Connect brown 16awg wire from +V terminal on 24vdc power supply up to terminal on E-Stop switch – then from opposite terminal on E-Stop switch down to the 5th from the bottom terminal block group on DIN rail.

The E-Stop button will cut off the 24vdc power to the stepper drivers.
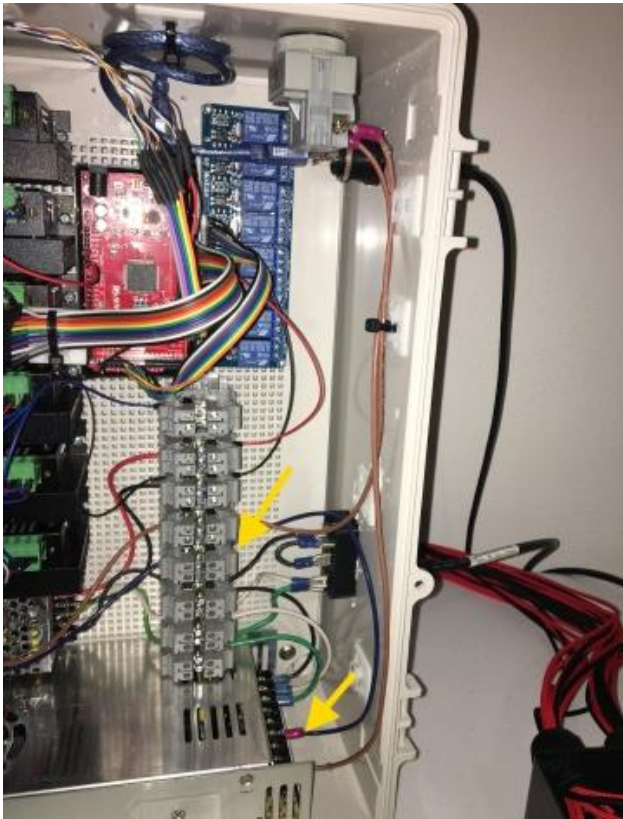
Connect blue 16awg wire from –V terminal on 24vdc power supply to 4th from the bottom terminal block group on DIN rail.
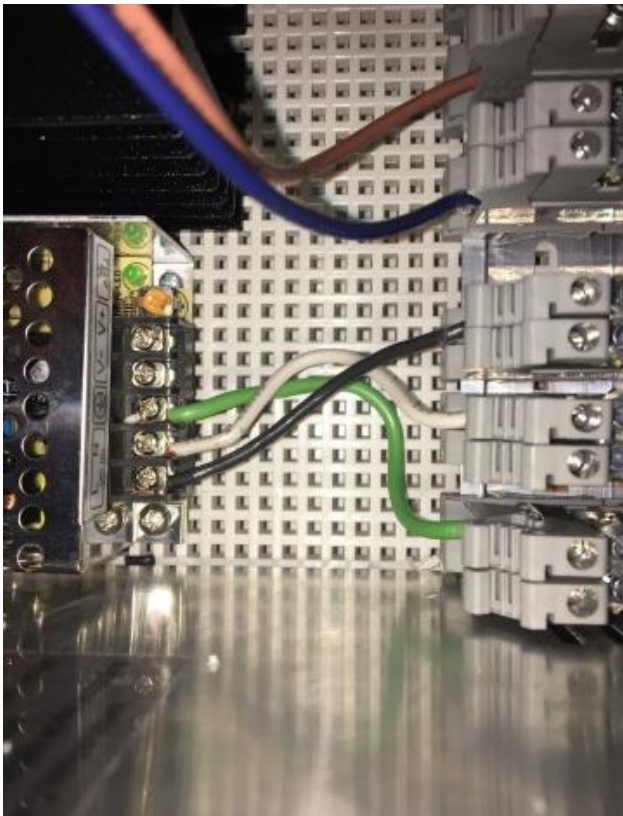
Connect black, white and green wires from the 3 bottom terminal blocks over to the corresponding terminals on the 5vdc power supply as shown.
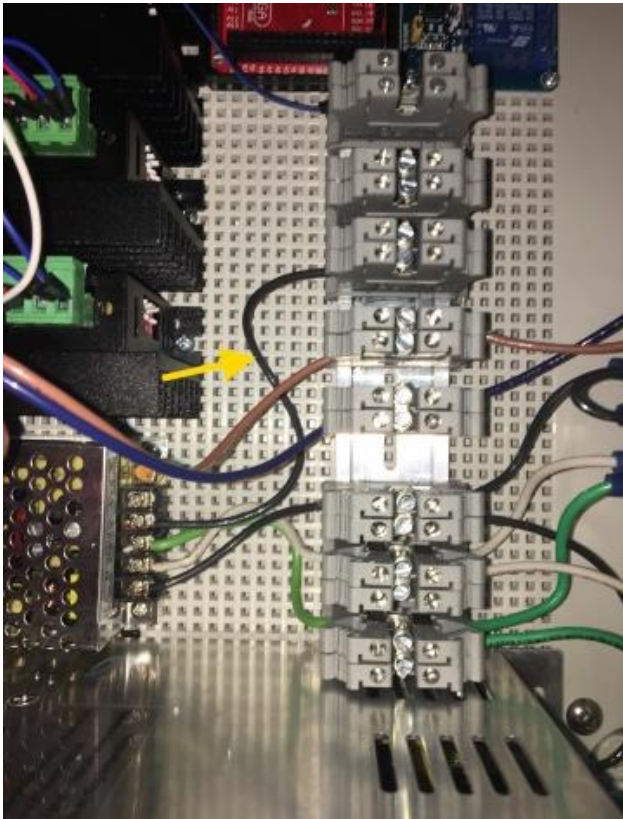
Connect black 16awg wire from –V terminal on 5vdc power supply to the 6th from the bottom terminal block group.
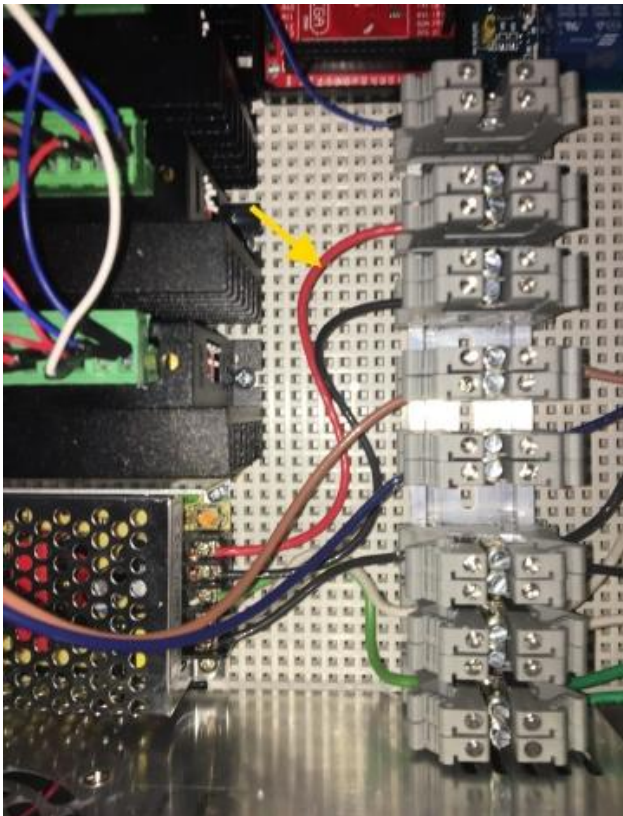
Connect red 16awg wire from +V terminal on 5vdc power supply to the 7th from the bottom terminal block group.
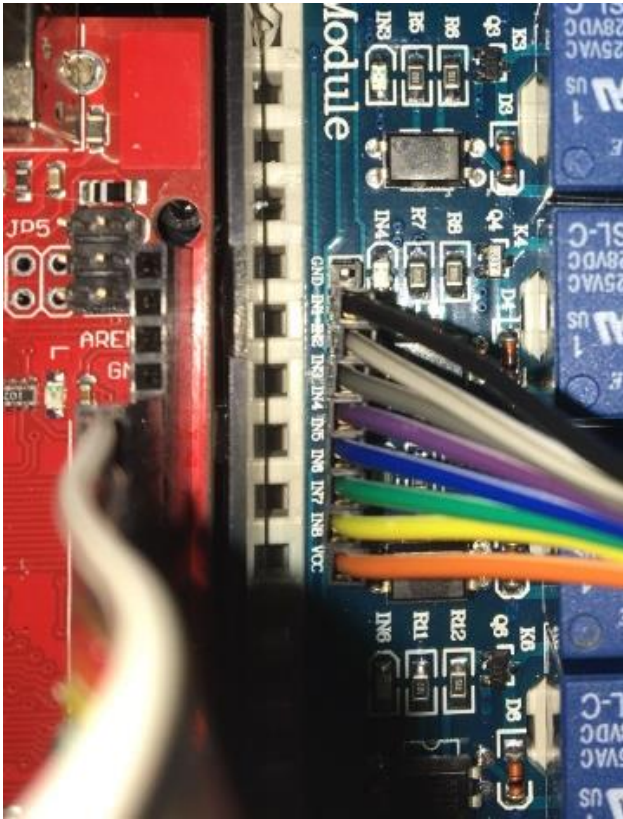
Connect a ribbon of (8) wires from the 8 channel relay board to the arduino as follows:

- IN1 to black to arduino pin 38
- IN2 to white to arduino pin 39
- IN3 to grey to arduino pin 40
- IN4 to purple to arduino pin 41
- IN5 to blue to arduino pin 42
- IN6 to green to arduino pin 43
- IN7 to yellow to arduino pin 44
- IN8 to orange to arduino pin 45
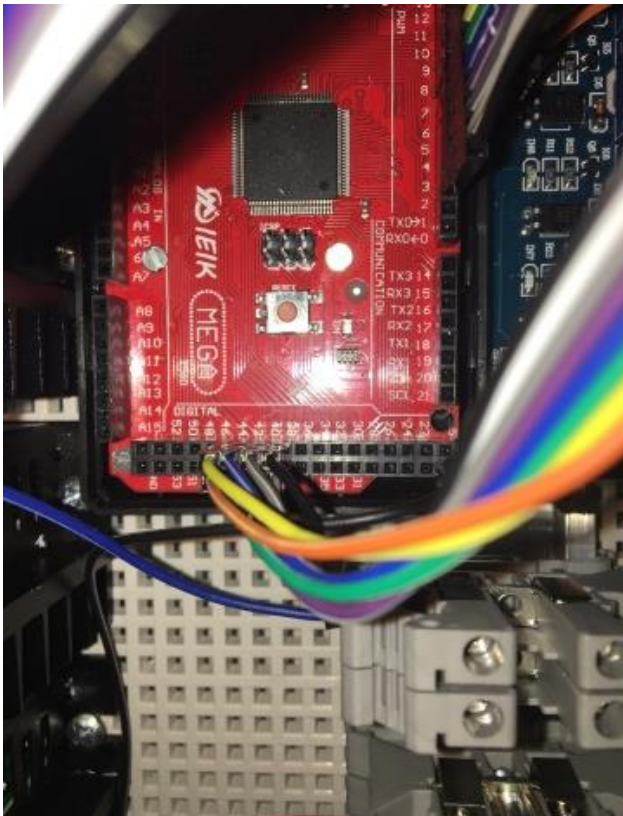
This photo shown the other end of the ribbon connected to pins 38 through 45 on the arduino.
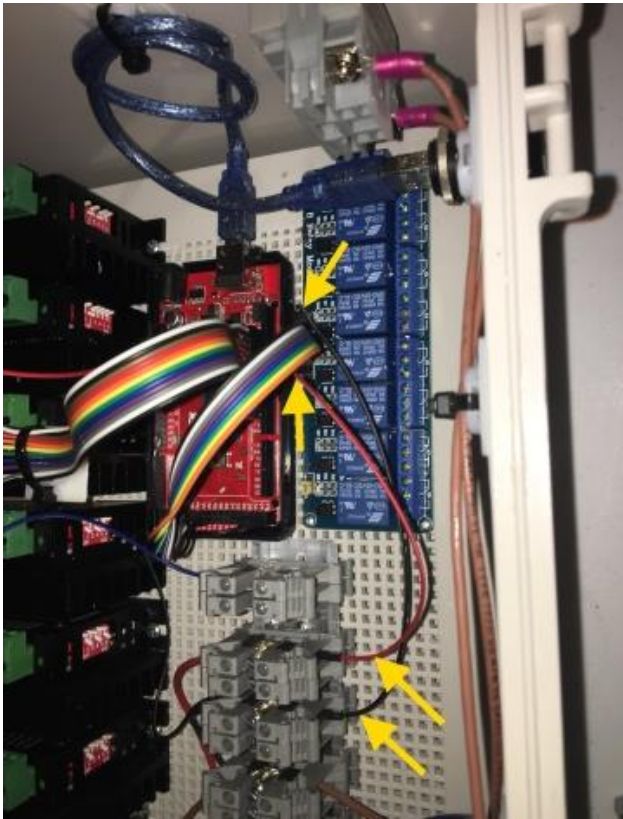
Connect a long red jumper from the VCC terminal on the relay board to the +5vdc terminal blocks on the DIN rail (7th from the bottom)

Connect a long black jumper from the GND terminal on the relay board to the -5vdc terminal blocks on the DIN rail (6th from the bottom)
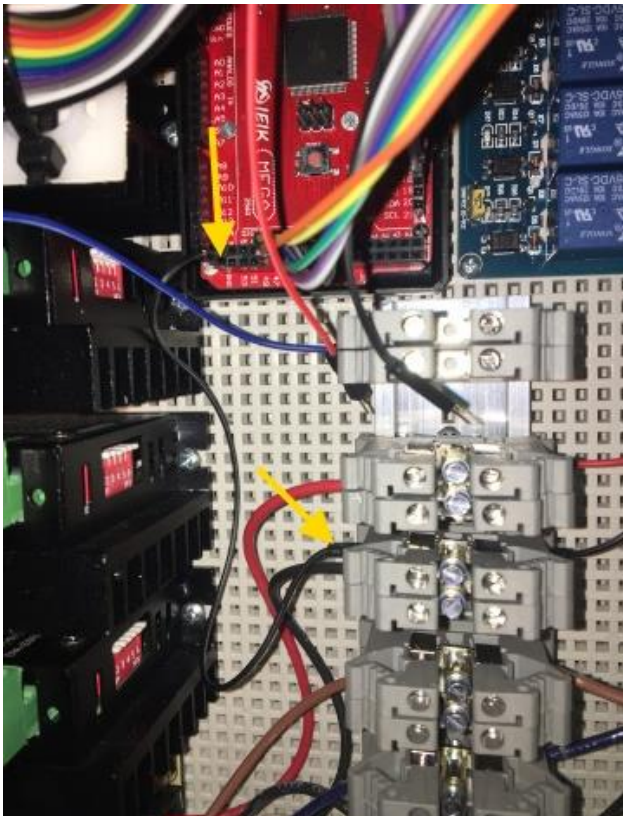
Connect a long black jumper from the far bottom left GND terminal on the arduino to the -5vdc terminal group on the DIN rail (6th from the bottom)

The arduino and the 5vdc power supply must share ground connection – the 5vdc supply powers the relays as the arduino tends to run short on power.
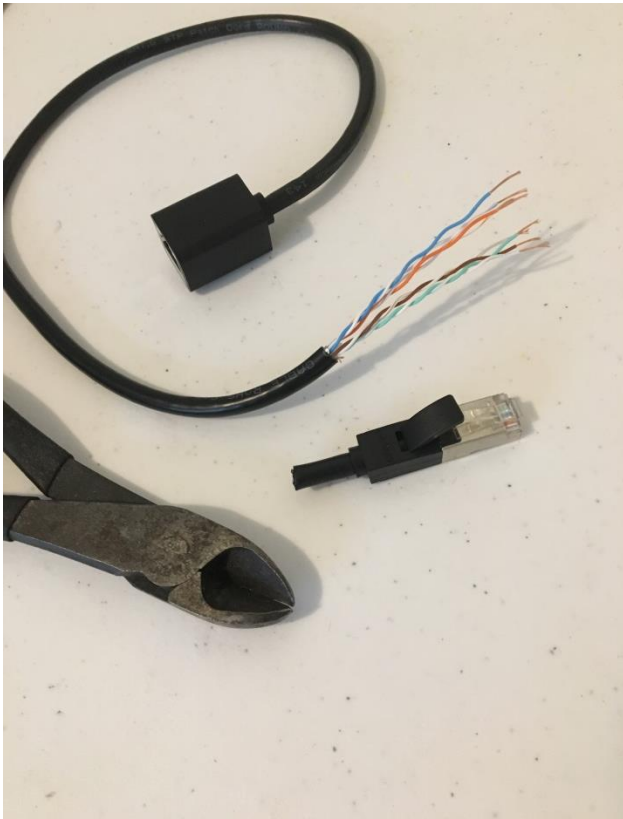
Cut off the male end of an RJ45 extension cable, remove 2" of outer sheathing then strip ¼" sheathing off each individual wire.

Solder and heat shrink tube a (6) ribbon set of jumpers as follows:

- RJ45 white/or stripe to orange to arduino pin 14
- RJ45 or/white stripe to yellow to arduino pin 15
- RJ45 white/gr stripe to green to arduino pin 16
- RJ45 blue/white stripe to blue to arduino pin 17
- RJ45 white/blue stripe to purple to arduino pin 18
- RJ45 green/white stripe to grey to arduino pin 19
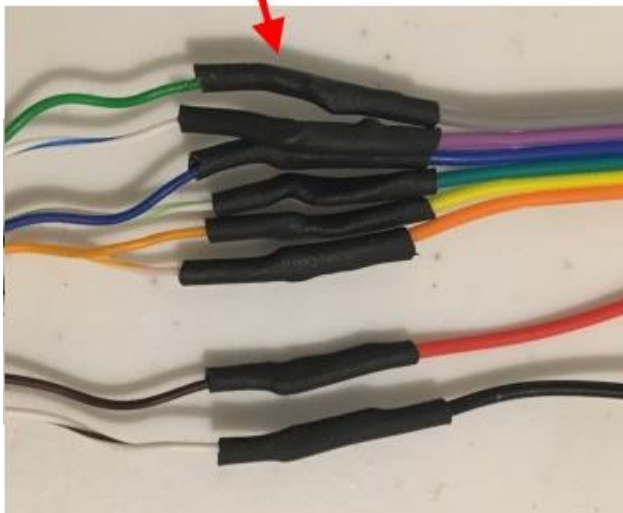
Then connect:

- RJ45 brown/wh stripe to red jumper to arduino +5v
- RJ45 white/brown stripe to black jumper to arduino GND

Feed RJ45 cable assembly through ½" gland nut on left side of enclosure and plug (6) wire ribbon into arduino pins 14 through 19 as shown.
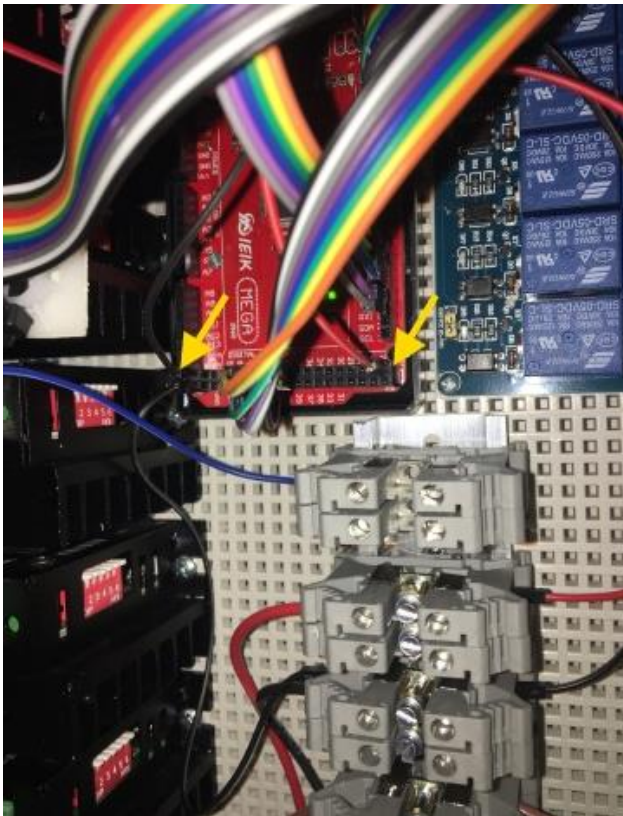
Connect red wire from RJ45 cable assembly to the +5v pin on far bottom right of board.

Connect black wire from RJ45 cable assembly to the other unoccupied GND pin on far bottom left of board.

DIP SWITCH SETTING USING ST-6600 DRIVERS AND ECONOMY SERIES GEARDRIVE MOTORS

THESE SETTINGS ARE USED FOR THE FOLLOWING ECONOMY SERIES MOTORS:
- J1 - 17HS19-1684S-PG5   1/4 STEPS   1.5 AMP
- J2 - 23HS30-2804S-PG47   1/4 STEPS   3 AMP
- J3 - 17HS19-1684S-PG19   1/8 STEPS   2 AMP
- J4 - 11HS20-06742-PG5   1/2 STEPS   1 AMP
- J5 - 17LS19-1684E-200G   1/4 STEPS   1.5 AMP
- J6 - 14HS13-0804S-PG19   1/4 STEPS   1 AMP

Set the dip switches for J1 stepper driver:

J1= ¼ step – 1.5amp
  Switch 1 – down
  Switch 2 – up
  Switch 3 – up
  Switch 4 – up
  Switch 5 – down
  Switch 6 – up

Set the dip switches for J2 stepper driver:

J2= ¼ step – 3amp
  Switch 1 – down
  Switch 2 – up
  Switch 3 – up
  Switch 4 – down
  Switch 5 – up
  Switch 6 – down

Set the dip switches for J3 stepper driver:

J3= 1/8 step 2amp
  Switch 1 – down
  Switch 2 – up
  Switch 3 – down
  Switch 4 – down
  Switch 5 – down
  Switch 6 – up

Set the dip switches for J4 stepper driver:

J4= ½ step – 1amp
Switch 1 – up
Switch 2 – down
Switch 3 – up
Switch 4 – down
Switch 5 – up
Switch 6 – up

Set the dip switches for J5 stepper driver:

J5= ¼ step – 1.5amp
Switch 1 – down
Switch 2 – up
Switch 3 – up
Switch 4 – up
Switch 5 – down
Switch 6 – up

Set the dip switches for J6 stepper driver:

J6= ¼ step – 1amp
Switch 1 – down
Switch 2 – up
Switch 3 – up
Switch 4 – down
Switch 5 – up
Switch 6 – up

DIP SWITCH SETTING USING DM542T DRIVERS AND
3 PRECISION / 3 ECONOMY SERIES GEARDRIVE MOTORS

THESE SETTINGS ARE USED FOR THE FOLLOWING SERIES MOTORS:
(J1,J2 &J3 are precision series J4,J5 & J6 are economy series)

- J1 - 17HS15-1684S-HG20   1/4 STEPS   1.46 AMP
- J2 - 23HS22-2804S-HG50   1/4 STEPS   2.37 AMP
- J3 - 17HS15-1684S-HG50   1/4 STEPS   1.46 AMP
- J4 - 11HS20-06742-PG5   1/4 STEPS   .5 AMP
- J5 - 17LS19-1684E-200G   1/4 STEPS   1.46 AMP
- J6 - 14HS13-0804S-PG19   1/4 STEPS   1 AMP

J1:
SW1 = OFF SW2 = ON   SW3 = ON   SW4 = ON
SW5 = ON   SW6 = OFF SW7 = ON   SW8 = ON

J2:
SW1 = OFF SW2 = OFF SW3 = ON   SW4 = ON
SW5 = ON   SW6 = OFF SW7 = ON   SW8 = ON

J3:
SW1 = OFF SW2 = ON   SW3 = ON   SW4 = ON
SW5 = ON   SW6 = OFF SW7 = ON   SW8 = ON

J4:
SW1 = ON   SW2 = ON   SW3 = ON   SW4 = OFF
SW5 = ON   SW6 = OFF SW7 = ON   SW8 = ON

J5:
SW1 = OFF SW2 = ON   SW3 = ON   SW4 = ON
SW5 = ON   SW6 = OFF SW7 = ON   SW8 = ON

J6:
SW1 = ON   SW2 = ON   SW3 = ON   SW4 = ON
SW5 = ON   SW6 = OFF SW7 = ON   SW8 = ON

AR2 - 6 AXIS STEPPER MOTOR ROBOT WIRING SCHEMATIC

J1 limit switch
J2 limit switch
J3 limit switch
J4 limit switch
J5 limit switch
J6 limit switch

8 Relay Module

IN1 to arduino pin 38
IN2 to arduino pin 39
IN3 to arduino pin 40
IN4 to arduino pin 41
IN5 to arduino pin 42
IN6 to arduino pin 43
IN7 to arduino pin 44
IN8 to arduino pin 45

RJ45 white/or stripe   to arduino pin 14
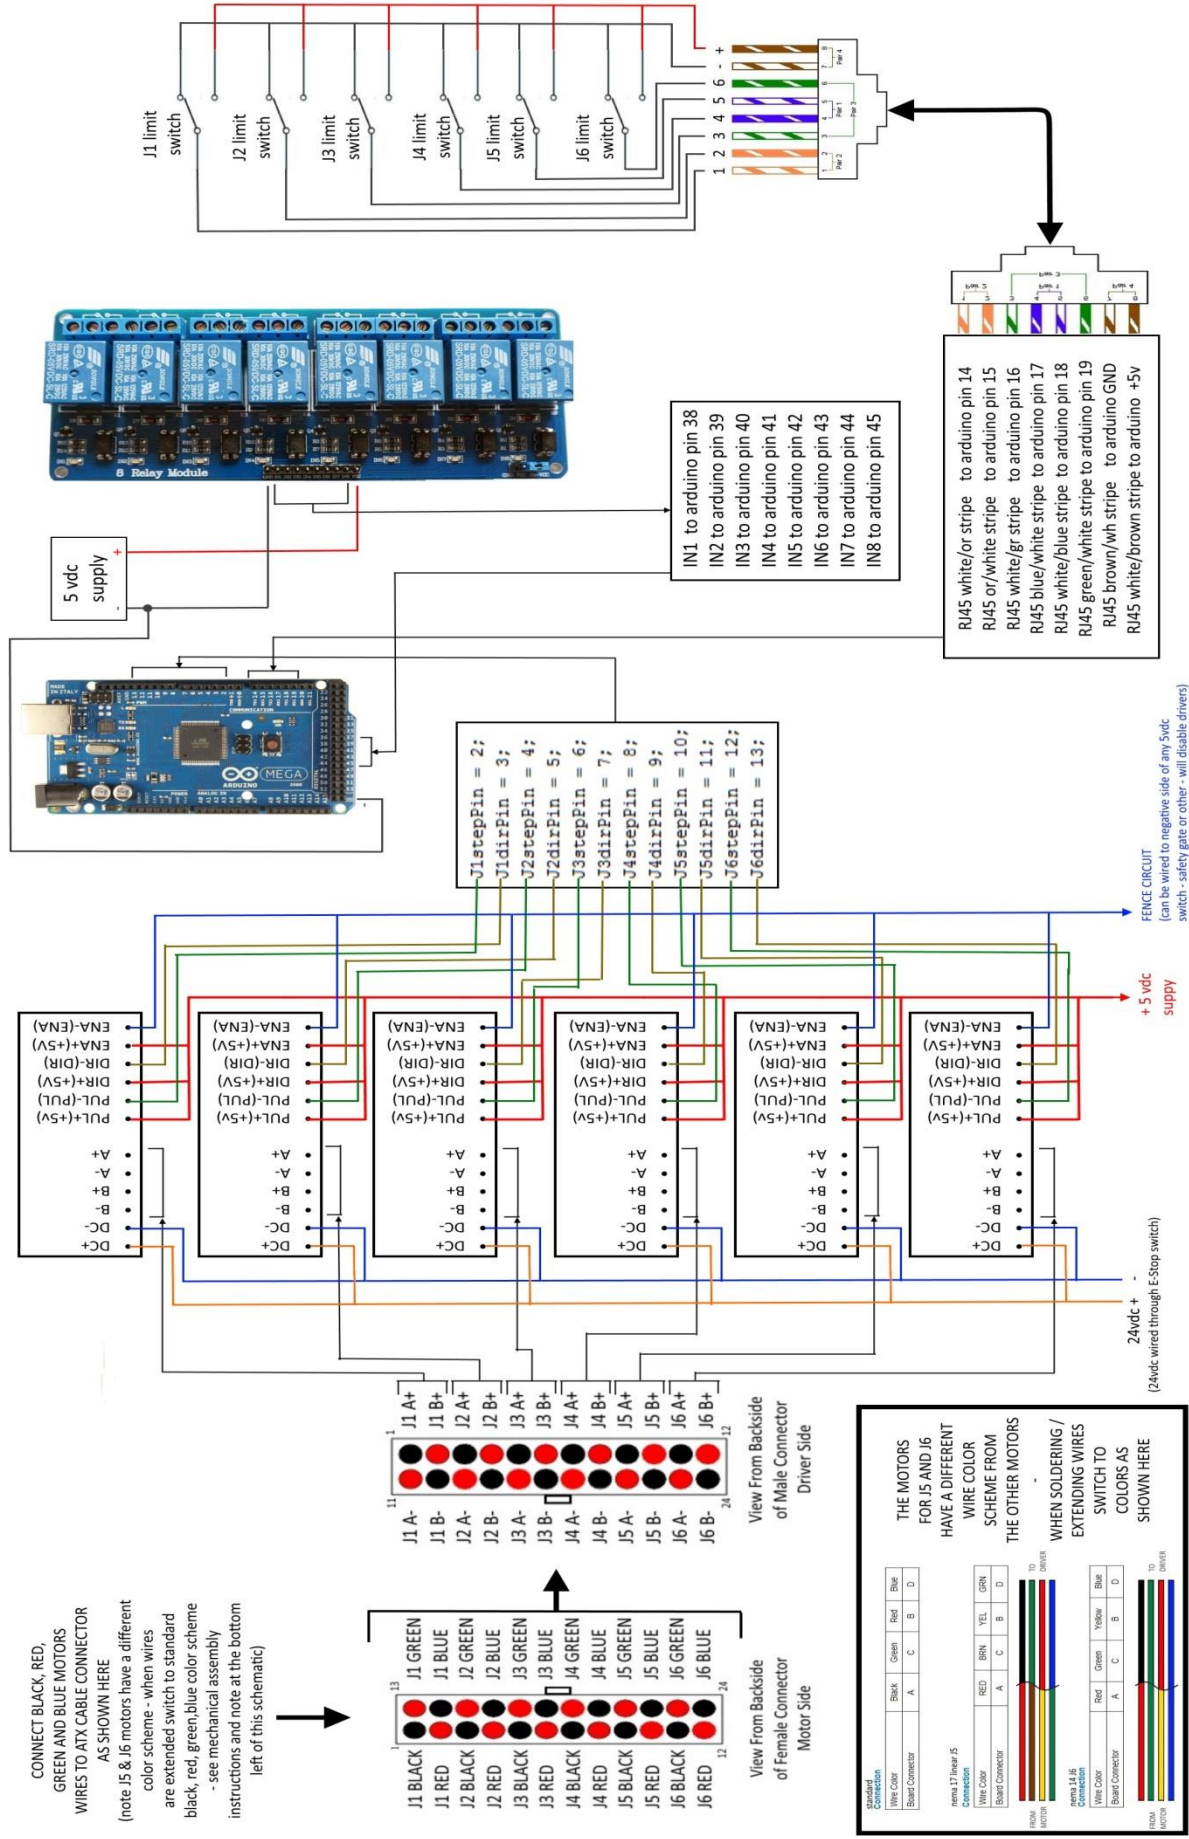RJ45 or/white stripe   to arduino pin 15
RJ45 white/gr stripe   to arduino pin 16
RJ45 blue/white stripe to arduino pin 17
RJ45 white/blue stripe to arduino pin 18
RJ45 green/white stripe to arduino pin 19
RJ45 brown/wh stripe   to arduino GND
RJ45 white/brown stripe to arduino +5v

5 vdc supply

ARDUINO MEGA

J1stepPin = 2;
J1dirPin = 3;
J2stepPin = 4;
J2dirPin = 5;
J3stepPin = 6;
J3dirPin = 7;
J4stepPin = 8;
J4dirPin = 9;
J5stepPin = 10;
J5dirPin = 11;
J6stepPin = 12;
J6dirPin = 13;

FENCE CIRCUIT
(can be wired to negative side of any 5vdc switch - safety gate or other - will disable drivers)

+ 5 vdc suppy

For each driver:
ENA-(ENA)
ENA+(+5V)
DIR-(DIR)
DIR+(+5V)
PUL-(PUL)
PUL+(+5V)
A+
A-
B+
B-
DC-
DC+

24vdc + -
(24vdc wired through E-Stop switch)

J1 A+ J1 B+ J2 A+ J2 B+ J3 A+ J3 B+ J4 A+ J4 B+ J5 A+ J5 B+ J6 A+ J6 B+
J1 A- J1 B- J2 A- J2 B- J3 A- J3 B- J4 A- J4 B- J5 A- J5 B- J6 A- J6 B-

View From Backside of Male Connector Driver Side

J1 GREEN J1 BLUE J2 GREEN J2 BLUE J3 GREEN J3 BLUE J4 GREEN J4 BLUE J5 GREEN J5 BLUE J6 GREEN J6 BLUE
J1 BLACK J1 RED J2 BLACK J2 RED J3 BLACK J3 RED J4 BLACK J4 RED J5 BLACK J5 RED J6 BLACK J6 RED

View From Backside of Female Connector Motor Side

CONNECT BLACK, RED, GREEN AND BLUE MOTORS WIRES TO ATX CABLE CONNECTOR AS SHOWN HERE

(note J5 & J6 motors have a different color scheme - when wires are extended switch to standard black, red, green,blue color scheme - see mechanical assembly instructions and note at the bottom left of this schematic)

THE MOTORS FOR J5 AND J6 HAVE A DIFFERENT WIRE COLOR SCHEME FROM THE OTHER MOTORS

WHEN SOLDERING / EXTENDING WIRES SWITCH TO COLORS AS SHOWN HERE

standard Connection

Wire Color	Black	Green	Red	Blue
Board Connector	A	C	B	D

nema 17 linear J5 Connection

Wire Color	RED	BRN	YEL	GRN
Board Connector	A	C	B	D

TO DRIVER
FROM MOTOR

nema 14 J6 Connection

Wire Color	Red	Green	Yellow	Blue
Board Connector	A	C	B	D

TO DRIVER
FROM MOTOR

Startup

- I would recommend making a wiring harness per the wiring harness manual from the project page. If you are direct wiring per the 3D printed robot assembly manual I recommend waiting to loom all the wires on the robot until after you have started up the robot so you can make sure all axis fully articulate and you have plenty of slack on the wires.

- Load the "sketch_Annin_Robot.ino" to the arduino and take note which COM port your arduino is connected to.

- Before opening the AR2 software and establishing a serial connection toggle each limit switch on the robot and make the the LED on the arduino lights up. Every switch should make the LED come on its imperative these all work otherwise you cannot calibrate the robot.

- Open the AR2 software and set the COM port (you should only have to do this the first time)

- Carefully test each axis – jog J1 through J6 a couple degrees *(be careful – robot is not calibrated yet and you can drive an axis too far and bend one of your switches)* in each direction to make sure you can jog in each direction. If you find an axis not moving or if the + and – jog buttons make the axis go in the same direction then you very likely have an issue with the step or direction wires to the stepper drivers or an issue with one of the many jumpers. I have found every problem I have encountered has been due to a jumper not making connection or coming loose. I cant stress enough the need to secure each wire and check with a meter. If you hit axis limits when testing before you have calibrated you can press the "Force Calibration to Mid Range" button and this will set your current calibration to mid point and allow you to jog – but be careful this button is only for testing to allow you to get around axis limits before you calibrate.

- Note different drivers can rotate the motors in different directions; in the arduino sketch near the top of the program you can change the motor direction values. If using DM542T driver(CW) set to 0 // if using ST6600 driver(CCW) set to 1 then load then reload the sketch.

- Press the auto calibrate button – the robot should move to each limit switch and calibrate each axis to its limit.