MP2016

42V, 30mA, Low Power Adjustable Output Linear Regulator

The Future of Analog IC Technology

DESCRIPTION

The MP2016 is a low power linear regulator that supplies power to systems with high voltage batteries. It includes a wide 4V to 42V input range, low dropout voltage and low quiescent supply current.

The MP2016 provides excellent line transient response time and 50dB power supply rejection ratio (PSRR). The MP2016 can be set externally from 1.2V to 40V through a simple resistor divider network.

The MP2016 also includes thermal shutdown and current limiting fault protection. It is available in TSOT23-5 and QFN-8 packages.
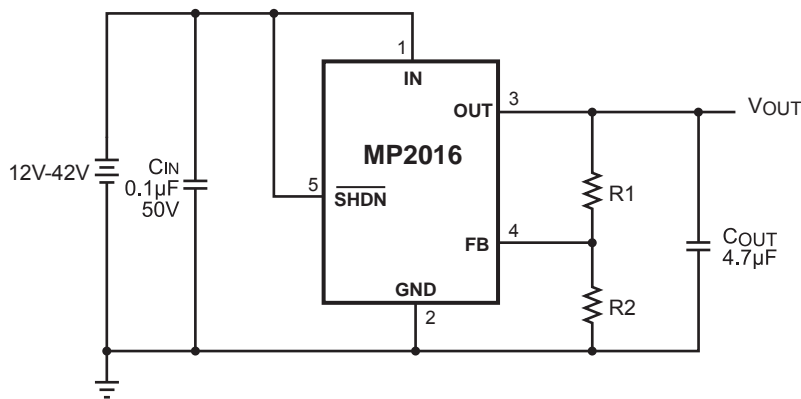
FEATURES

- 4V to 42V Input Range
- 12µA Quiescent Supply Current
- <1.5µA Shutdown Current
- 1.2V to 40V Adjustable Output
- 30mA Output Current with 50mA Peak Current Limit
- ±2% Accuracy
- Thermal Shutdown
- Available in Tiny TSOT23-5 and QFN-8 Packages

APPLICATIONS

- Notebook Computers
- Smart-Battery Packs
- PDAs
- Handheld Devices
- Battery-Powered Systems

TYPICAL APPLICATION

ORDERING INFORMATION

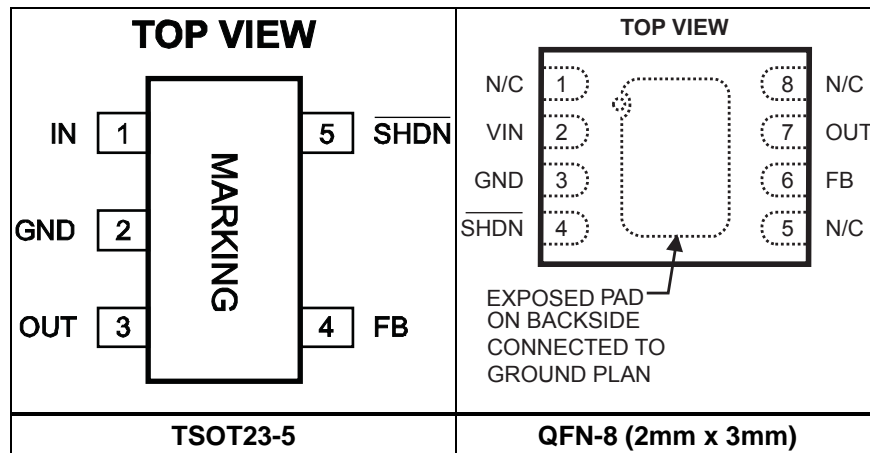| Part Number	Package	Top Marking	Free Air Temperature (T$_A$)
MP2016DJ*	TSOT23-5	❘R2	-40°C to +85°C
MP2016DD**	QFN-8 (2 x 3mm)	$\overline{R2}$	-40°C to +85°C

* For Tape & Reel, add suffix –Z (g. MP2016DJ–Z).
For RoHS compliant packaging, add suffix –LF (e.g. MP2016DJ–LF–Z)
** For Tape & Reel, add suffix –Z (g. MP2016DD–Z).
For RoHS compliant packaging, add suffix –LF (e.g. MP2016DD–LF–Z)

PACKAGE REFERENCE

TSOT23-5

QFN-8 (2mm x 3mm)

ABSOLUTE MAXIMUM RATINGS [1]

IN , $\overline{SHDN}$ ....–0.3V to +45V
GND...................................–0.3V to V$_{IN}$ + 0.3V
FB ....–0.3V to + 1.5V
Continuous Power Dissipation (T$_A$ = +25°C) [2]
TSOT23-5…………………………………...0.6 W
QFN8 (2X3mm)…………………………2.3W
Lead Temperature ....260°C
Storage Temperature.............. –65°C to +150°C

Recommended Operating Conditions [3]

Supply Voltage V$_{IN}$ ....4V to 42V
Output Voltage V$_{OUT}$.........................1.2V to 40V
Maximum Junction Temp. (T$_J$)................+125°C

Thermal Resistance [4]   θ$_{JA}$ θ$_{JC}$

TSOT23-5 ....220 .... 110 .. °C/W
QFN8 (2 x 3mm) ....55 ...... 12 ... °C/W

Notes:
1) Exceeding these ratings may damage the device.
2) The maximum allowable power dissipation is a function of the maximum junction temperature T$_J$ (MAX), the junction-to-ambient thermal resistance θ$_{JA}$, and the ambient temperature T$_A$. The maximum allowable continuous power dissipation at any ambient temperature is calculated by P$_D$ (MAX) = (T$_J$ (MAX)-T$_A$)/θ$_{JA}$. Exceeding the maximum allowable power dissipation will cause excessive die temperature, and the regulator will go into thermal shutdown. Internal thermal shutdown circuitry protects the device from permanent damage.
3) The device is not guaranteed to function outside of its operating conditions.
4) Measured on JESD51-7, 4-layer PCB.

ELECTRICAL CHARACTERISTICS

V_{IN} = 15V, I_{LOAD} = 5µA, T_A = +25°C, unless otherwise noted.

Parameter	Symbol	Condition	Min	Typ	Max	Units
Input Voltage	V_{IN}		4		42	V
Input Supply Current	I_{IN}	T_A = +25°C		12		µA
		T_A = –40°C to +85°C			30	
Minimum Load Current					0	µA
Shutdown Supply Current	I_S	Shutdown Mode, T_A = +25°C			8	µA
		Shutdown Mode, T_A = –40°C to +85°C			10	
FB Threshold	V_{FB}	FB = OUT, I_{LOAD} = 1mA	1.205	1.23	1.254	V
		FB = OUT, I_{LOAD} = 5µA to 30mA, T_A = –40°C to +85°C	1.181	1.23	1.279	
FB Input Current	I_{FB}	V_{FB} = 1.3V	–30	+4	+30	nA
Dropout Voltage [6]	$V_{DROPOUT}$	I_{LOAD} = 30mA		700	900	mV
PSRR		DC, I_{OUT}=10mA		65		dB
Current Limit		V_{IN} = 6V		50		mA
Ground current		I_{OUT}=35mA		35		µA
Capacitive Load Requirements			0.23			µF/mA
Startup Response Time		R_L = 500Ω, C2 = 6.8µF, V_{OUT} = 5V			1	ms
Startup Overshoot	V_{OSH}	R_L = 500Ω, C2 = 10µF within 90% of the nominal output voltage		0.58		% V_{OUT}
$\overline{SHDN}$ Input Threshold Voltage	V_{IL}				0.22	V
	V_{IH}		1.8			
$\overline{SHDN}$ Input Current		$\overline{SHDN}$ = 0V or 15V		0.6	1.5	µA
Line Regulation				0.023		%/V
Load Regulation				0.003		%/mA
Thermal Shutdown		$\overline{SHDN}$ = 0V or 15V, Hysteresis = +20°C		150		°C

Note:
5) 100% production tested at TA=25°C Specifications over the temperature range are guaranteed by design and characterization.
6) Dropout Voltage is defined as the in put to output differential when the output voltage drops 1% below its nominal value.

この部分は日本語ではないので無視

PIN FUNCTIONS

QFN Pin #	TSOT23 Pin #	Name	Description
2	1	VIN	Input Voltage. Connect a 4V to 42V supply to this pin.
3	2	GND, Exposed Pad	Ground (the exposed pad and GND pin must be connected to the same ground plane for QFN package).
7	3	OUT	Regulator Output.
6	4	FB	Feedback. This is the feedback input pin, regulated to 1.23V nominally.
4	5	$\overline{SHDN}$	Shutdown. A logic LOW on this pin will shut down the IC; a logic HIGH will start it up. Connect this pin to IN for automatic startup.
1, 5, 8		N/C	No Connect.

TYPICAL PERFORMANCE CHARACTERISTICS

C_{IN} = 1uF, C_{OUT} = 4.7uF, T_A = +25ºC, unless otherwise noted.

Output Voltage vs. Load Current
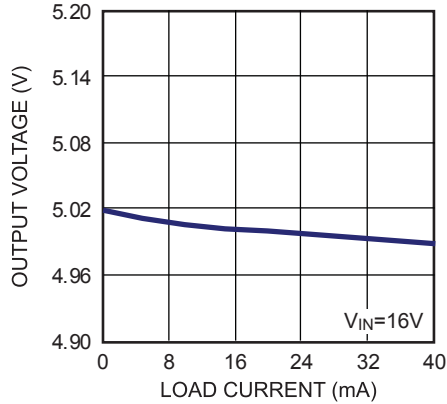
Output Voltage vs. Load Current
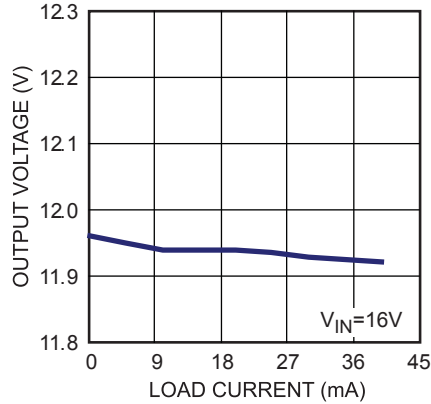
Output Voltage vs. Input Voltage
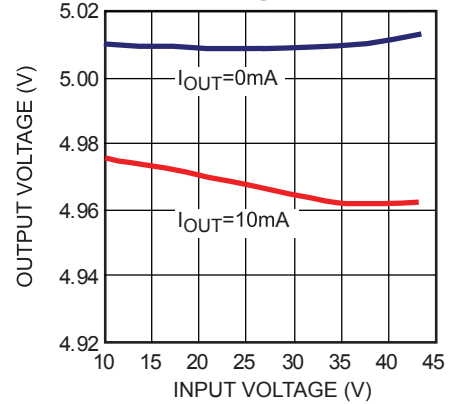
Output Voltage vs. Input Voltage
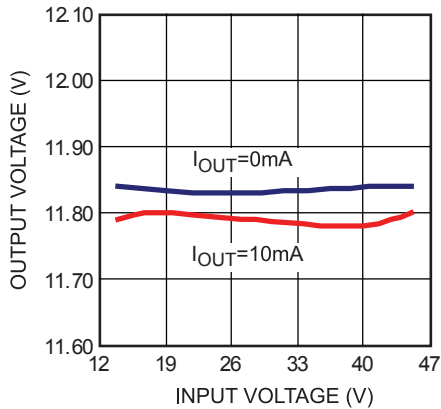
Dropout Voltage

PSRR vs.Frequency
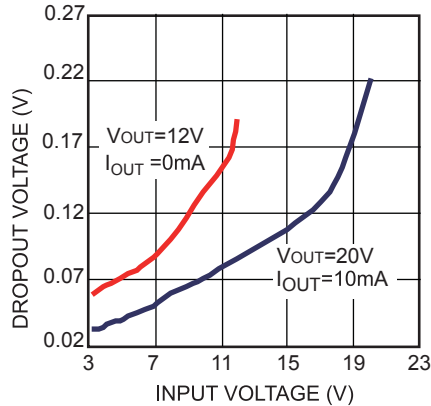
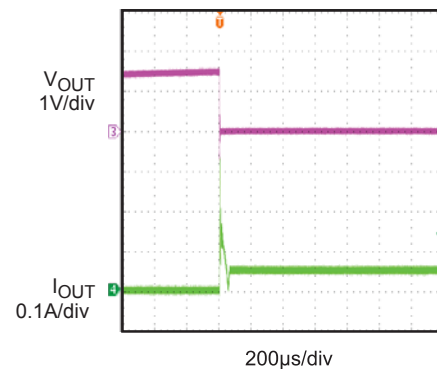V_{IN}=$V_{\overline{SHDN}}$=4V,
V_{OUT}=1.8V, I_{OUT}=10mA,
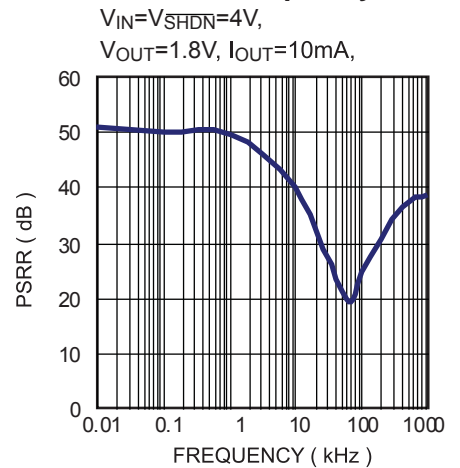
V_{OUT} vs. Temperature
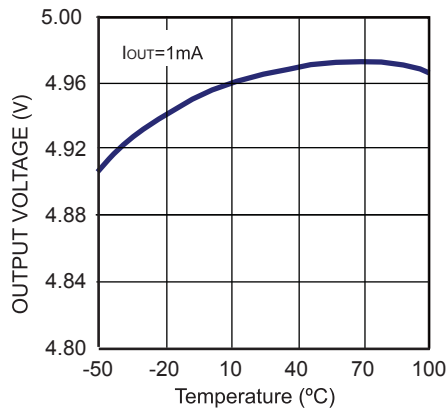
V_{FB} vs. Temperature
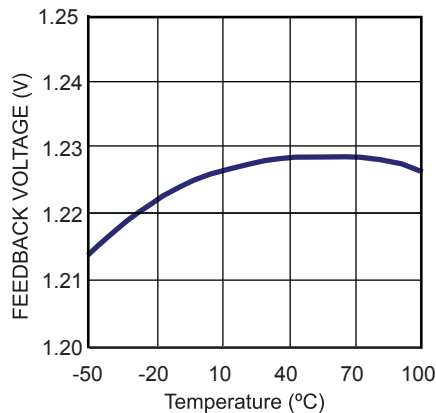
TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

C_{IN} = 1uF, C_{OUT} = 4.7uF, T_A = +25ºC, unless otherwise noted.

Line Transient
$V_{IN}=V_{\overline{SHDN}}$=7V to 12V, V_{OUT}=5V, I_{OUT}=20mA
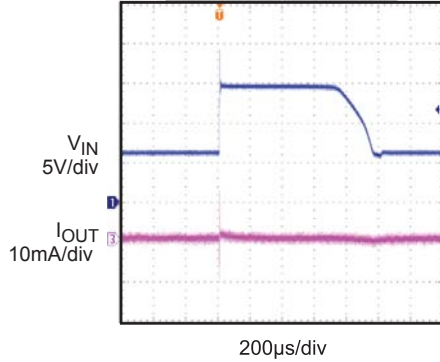
Load Transient
$V_{IN}=V_{\overline{SHDN}}$=15V, V_{OUT}=12V, I_{OUT}=10mA to 30mA
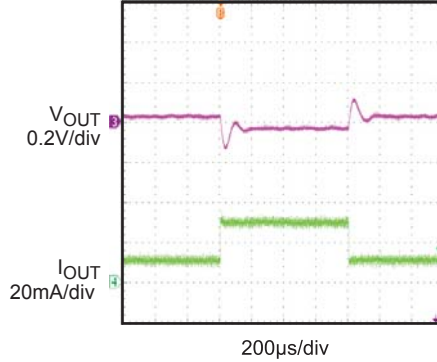
V_{IN} Ramp Up
$V_{IN}=V_{\overline{SHDN}}$=16V, V_{OUT}=12V, I_{IN}=20mA
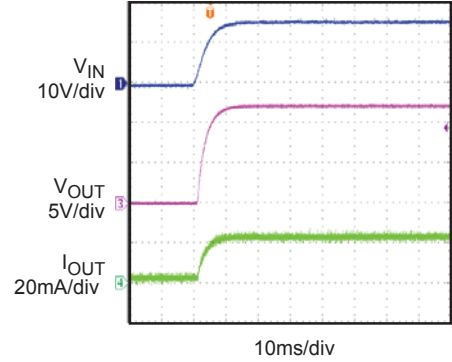
V_{IN} Ramp Down
$V_{IN}=V_{\overline{SHDN}}$=16V, V_{OUT}=12V, I_{IN}=20mA
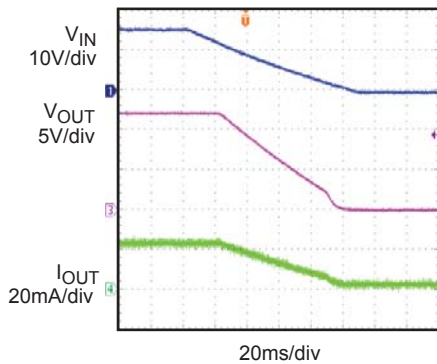
Enable Response
V_{IN}=35V, $V_{\overline{SHDN}}$=6V, V_{OUT}=5V, I_{OUT}=30mA
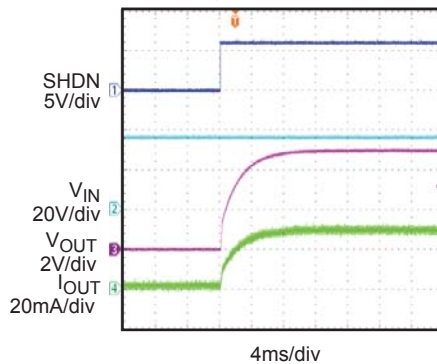
Shutdown Response
V_{IN}=35V, $V_{\overline{SHDN}}$=6V, V_{OUT}=5V, I_{OUT}=30mA
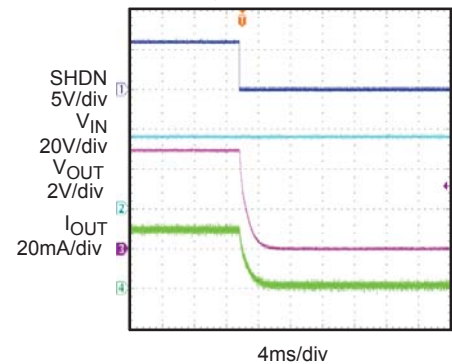
Load Ripple
$V_{IN}=V_{\overline{SHDN}}$=28V, V_{OUT}=24V, I_{OUT}=20mA
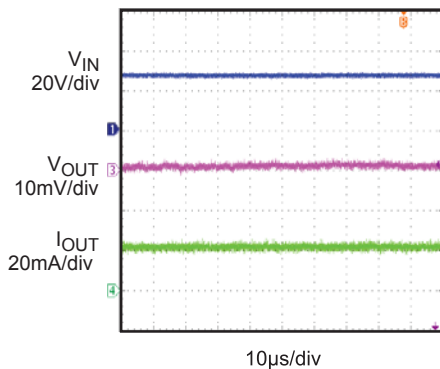
Short Circuit
$V_{IN}=V_{\overline{SHDN}}$=5V, V_{OUT}=1.8V

Short Circuit Recovery
$V_{IN}=V_{\overline{SHDN}}$=5V, V_{OUT}=1.8V
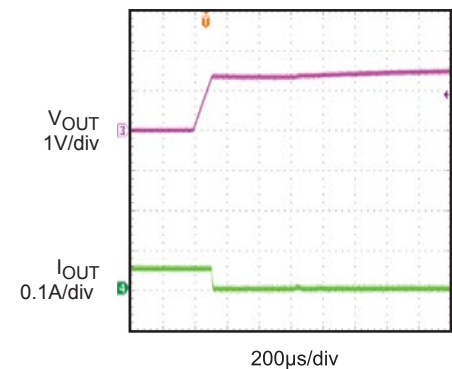
OPERATION
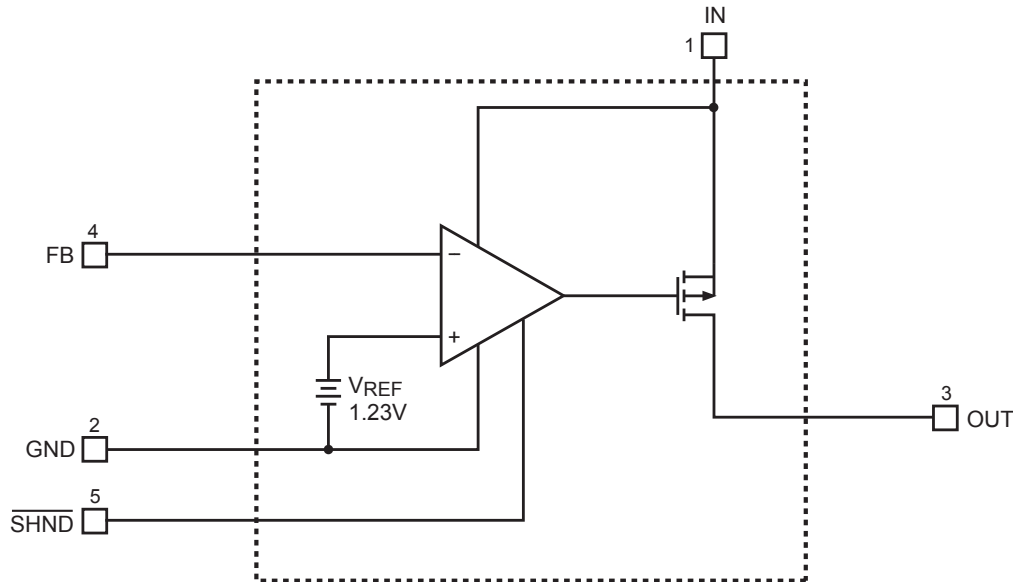
Figure 1—Functional Block Diagram

The MP2016 is a linear regulator designed primarily for high input voltage applications. The MP2016 has an output that is adjustable from 1.2V to 40V with a simple resistor divider. The maximum power output current is a function of the package's maximum power dissipation for a given temperature.

The MP2016 uses external feedback, allowing the user to set the output voltage with an external resistor divider. The typical FB pin threshold is 1.23V.

The IC enters shutdown mode when $\overline{\text{SHDN}}$ is low. In shutdown mode, the pass transistor, control circuitry, reference and all biases turn off, reducing the supply current to <2µA. Connect $\overline{\text{SHDN}}$ to IN for automatic startup.

The peak output current is limited to 50mA, which exceeds the 30mA recommended continuous output current. The output can be shorted to ground for 30 seconds without damaging the part.

When the junction temperature is too high, the thermal sensor sends a signal to the control logic that will shutdown the IC. The IC will restart when the temperature has sufficiently cooleds.

The maximum power dissipation is dependent on the thermal resistance of the case and the circuit board, the temperature difference between the die junction and the ambient air, and the rate of air flow. The GND pin and Exposed Pad must be connected to the ground plane for proper dissipation.

APPLICATION INFORMATION

COMPONENT SELECTION

Setting the Output Voltage

Set the output voltage of the MP2016 by using a resistor divider as shown:
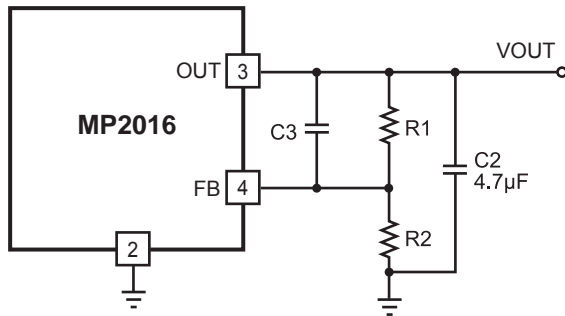
Figure 2—MP2016 with External Resistor Divider

Choose R2=250kΩ to maintain a 5µA minimum load. Calculate the value for R1 using the following equation:

$$R1 = R2 \times \left(\frac{V_{OUT}}{1.23V} - 1 \right)$$

Input Capacitor

For proper operation, place a ceramic capacitor (C1) between 1µF and 10µF of dielectric type X5R or X7R between the input pin and ground. Larger values in this range will help improve line transient response.

Output Capacitor

For stable operation, use a ceramic capacitor (C2) of type X5R or X7R between 1µF and 10µF. Larger values in this range will help improve load transient response and reduce noise. Output capacitors of other dielectric types may be used, but are not recommended as their capacitance can deviate greatly from their rated value over temperature.

To improve load transient response, add a small ceramic (X5R, X7R or Y5V dielectric) 22nF feed forward capacitor in parallel with R1. The feed forward capacitor is not required for stable operation.
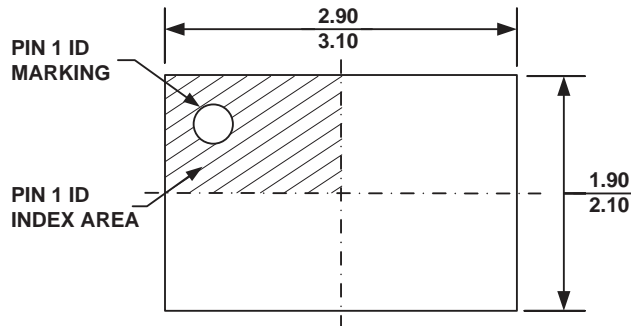
Output Noise

The MP2016 will exhibit noise on the output during normal operation. This noise is negligible for most applications. However, in applications that include analog-to-digital converters (ADCs) of more than 12 bits, one needs to consider the ADC's power supply rejection specifications.

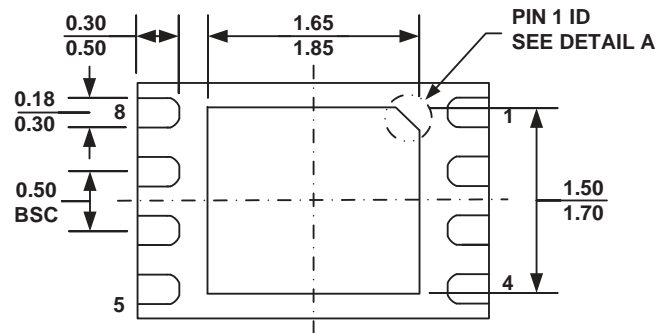The feed forward capacitor C3 across R1 will significantly reduce the output noise.
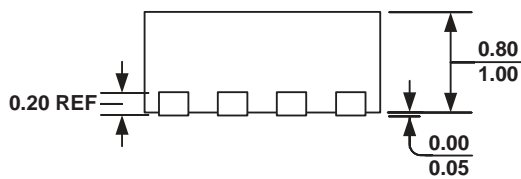
PACKAGE INFORMATION

2mm x 3mm QFN8

PIN 1 ID
MARKING

PIN 1 ID
INDEX AREA

2.90
3.10

1.90
2.10

TOP VIEW

0.30
0.50

1.65
1.85

PIN 1 ID
SEE DETAIL A

0.18
0.30

8

0.50
BSC

1

5

4

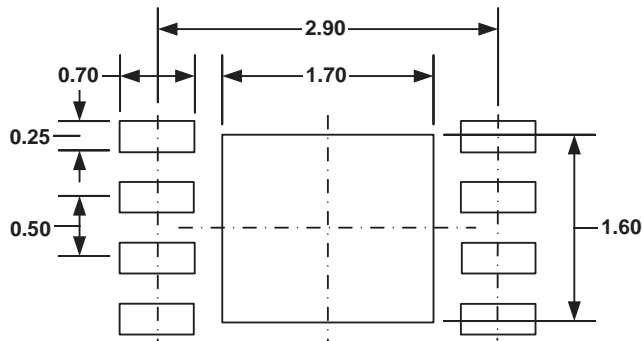1.50
1.70

BOTTOM VIEW

0.20 REF

0.80
1.00

0.00
0.05

SIDE VIEW

PIN 1 ID OPTION A
0.30x45" TYP.

PIN 1 ID OPTION B
R0.20 TYP.

DETAIL A

2.90

0.70

1.70

0.25

0.50

1.60
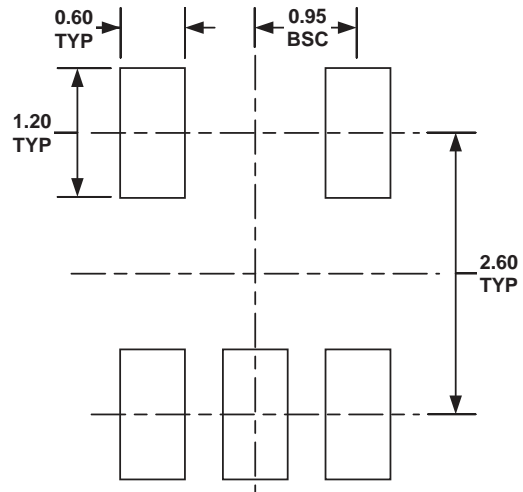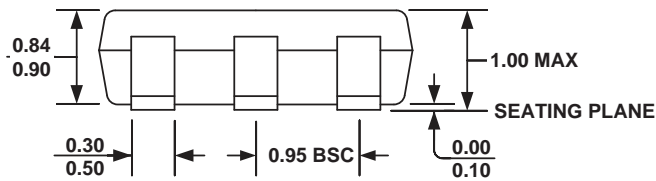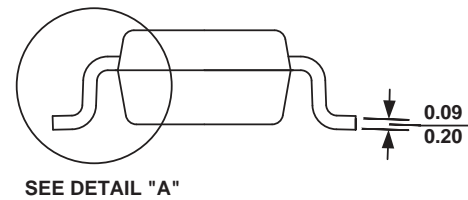
RECOMMENDED LAND PATTERN

NOTE:

1) ALL DIMENSIONS ARE IN MILLIMETERS.
2) EXPOSED PADDLE SIZE DOES NOT INCLUDE MOLD FLASH.
3) LEAD COPLANARITY SHALL BE 0.10 MILLIMETER MAX.
4) DRAWING CONFORMS TO JEDEC MO-229, VARIATION VCED-2.
5) DRAWING IS NOT TO SCALE.

TSOT23-5

2.80
3.00

5   4

1.50   2.60
1.70   3.00

1   3

TOP VIEW

0.60
TYP   0.95
BSC

1.20
TYP

2.60
TYP

RECOMMENDED LAND PATTERN

0.84
0.90

1.00 MAX

SEATING PLANE

0.30
0.50   0.95 BSC   0.00
0.10

FRONT VIEW

SEE DETAIL "A"

0.09
0.20

SIDE VIEW

GAUGE PLANE
0.25 BSC

0°-8°   0.30
0.50
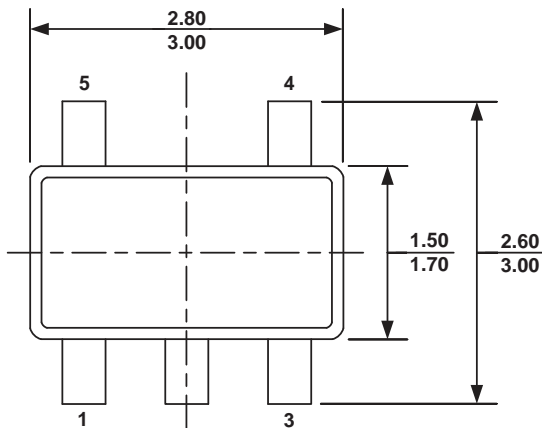
DETAIL A

NOTE:

1) ALL DIMENSIONS ARE IN MILLIMETERS.
2) PACKAGE LENGTH DOES NOT INCLUDE MOLD FLASH, PROTRUSION OR GATE BURR.
3) PACKAGE WIDTH DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION.
4) LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.10 MILLIMETERS MAX.
5) DRAWING CONFORMS TO JEDEC MO-193, VARIATION AA.
6) DRAWING IS NOT TO SCALE.