PRODUCTION PERFORMANCE & QUALITY REPORT

Facility: Main Manufacturing Plant **Reporting Period:** Weekly Summary

Executive Summary:

During the reporting period, total production output reached 8,690 units against a target of 8,700 units, representing a 99.9% target achievement rate. Overall Equipment Effectiveness (OEE) averaged 86.3%, with Line B leading performance at 92.0%, while Line C lagged at 78.3% due to tooling misalignment. Shift-level analysis revealed a correlation between night shifts and elevated defect rates (6.0%), primarily driven by dimensional deviations. Corrective actions have been scheduled, including urgent recalibration of Line C tooling to mitigate scrap rates and improve overall operational quality.

1. Weekly Production Trends

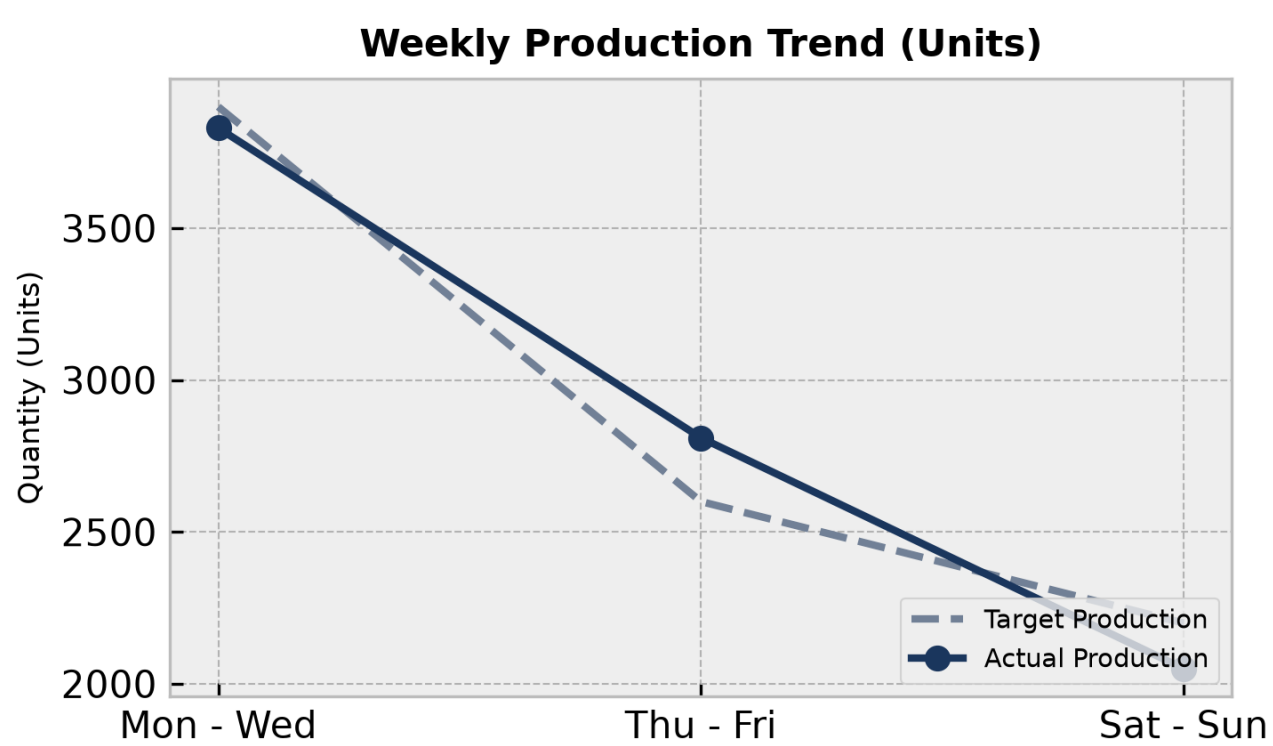

Production Analysis:

The daily output trends show strong performance mid-week, with Thursday and Friday exceeding targets by 8.1% due to streamlined material handling and minimal changeover delays. Early-week performance (Monday to Wednesday) remained stable and nearly met the 3,900 unit target. However, weekend production (Saturday to Sunday) dipped to 2,050 units against a 2,200 unit target, primarily caused by reduced staffing levels and unscheduled maintenance on Line C.

Day	Target	Actual	Status
Mon - Wed	3900	3830	On Track
Thu - Fri	2600	2810	Exceeded
Sat - Sun	2200	2050	Below Target

2. Machine Performance (OEE Breakdown)

OEE Overview:

Machine utilization and OEE metrics highlight significant variances across the production lines. Line B demonstrated outstanding performance, achieving 92.0% OEE through optimized cycle times and preventive maintenance compliance. Line A maintained a stable 88.5% OEE, keeping pace with demand. Conversely, Line C registered an OEE of 78.3%, falling into 'Needs Review' status. This underperformance was triggered by frequent micro-stops and feed-rate slowdowns aimed at preventing tool wear before its scheduled replacement.

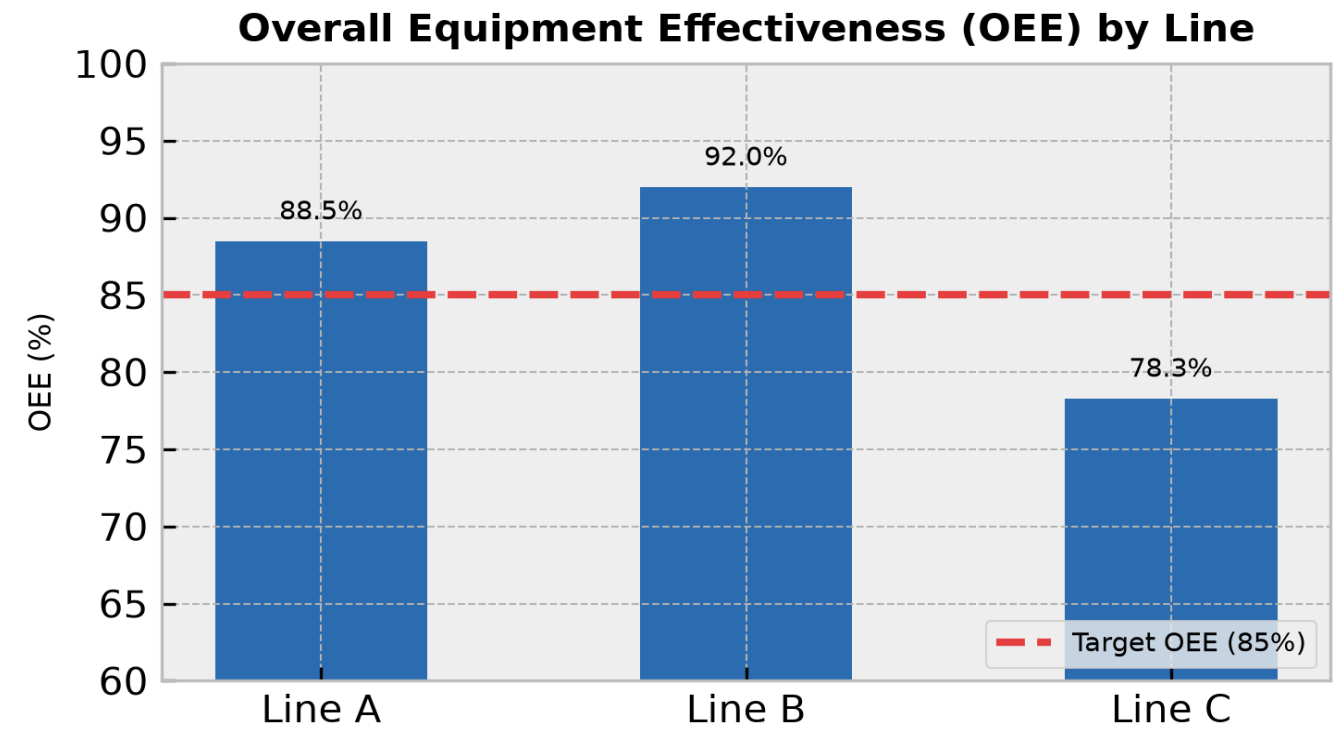

Line	OEE Score	Status
Line A	88.5%	Optimal
Line B	92.0%	Optimal
Line C	78.3%	Needs Review

3. Rejection vs. Production Volume by Shift

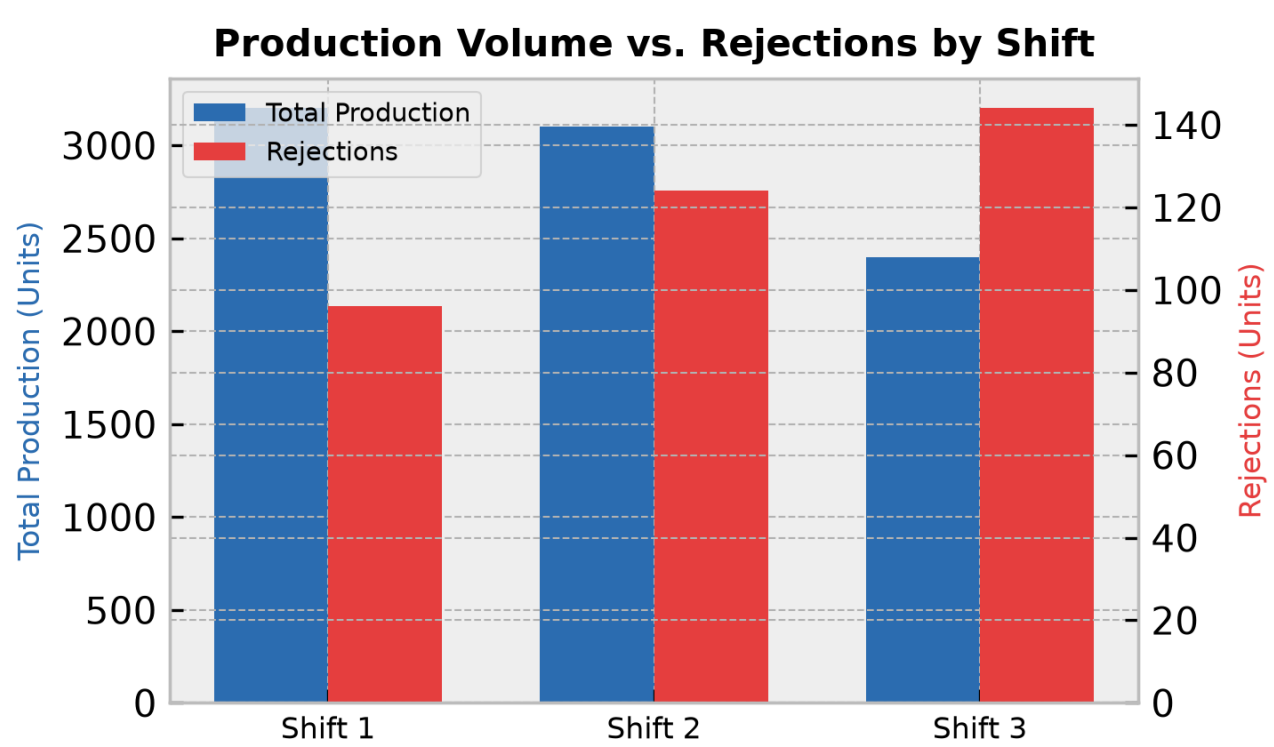

Shift Efficiency Analysis:

Shift performance metrics indicate a clear downward trend in efficiency and quality during later hours. Shift 1 (Day) maintained a highly efficient 3.0% defect rate with 3,200 units produced. Shift 2 (Evening) experienced a slight increase in defect rates to 4.0%, with 124 rejected units out of 3,100. Shift 3 (Night) experienced the most significant drop, producing 2,400 units with 144 rejections, representing a high 6.0% defect rate. This increase is attributed to operator fatigue and lower oversight during late-night runs.

Shift	Output	Rejections	Defect Rate
Shift 1 (Day)	3200	96	3.0%
Shift 2 (Eve)	3100	124	4.0%
Shift 3 (Night)	2400	144	6.0%

4. Scrap Analysis & Waste Distribution

Key Scrap Drivers:

Scrap analysis shows that Dimensional Deviations remain the primary driver of material loss, accounting for 42.0% of all recorded scrap. This is followed by Surface Defects at 28.0%, which are linked to nozzle clogging during the coating phase. Material Flaws (such as raw material impurity) contributed 10.0%, while other minor errors accounted for the remaining 20.0%. Addressing tooling precision on Line C is expected to eliminate over half of the dimensional deviations.

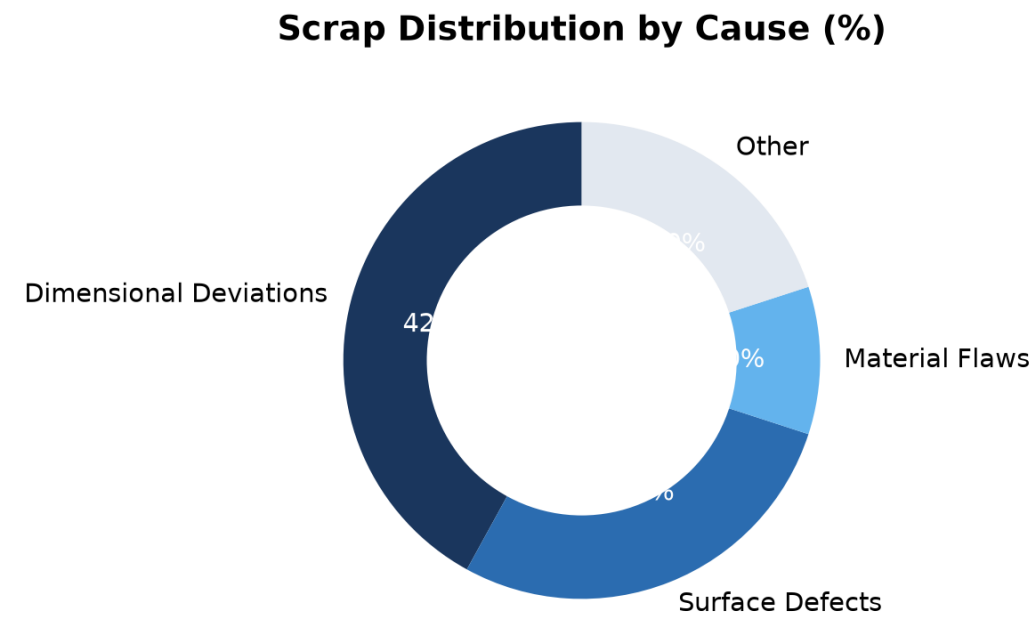

5. Corrective Action Plan

Action Item	Target Area	Owner	Deadline
Recalibrate tooling on Line C to address dimensional deviations	Line C	Maintenance	Aug 14, 2026
Conduct operator training on Shift 3 quality standards and inspection protocols	Shift 3	QA Department	Aug 18, 2026
Clean and service coating nozzles to reduce surface defects	Line A & B	Engineering	Aug 15, 2026