


PRODUCTION PERFORMANCE & QUALITY REPORT

Facility: Main Manufacturing Plant Reporting Period: Weekly Summary

Executive Summary:

The manufacturing production report encompasses 4 work orders across various statuses with a total planned quantity of 9,002,101.0 and 1,000.0 completed. Capacity analysis indicates machine utilization ranging from 60.0% to 120.0% across 11 recorded entries. Shift performance data shows a total finished goods output of 9,250.0 units with 225.0 total rejections and 123.0 total scrap quantities. Scrap and rejection distributions highlight key material losses led by items such as HDPE Cap 28mm and PET Bottle 500ml.

1. Weekly Production Trends

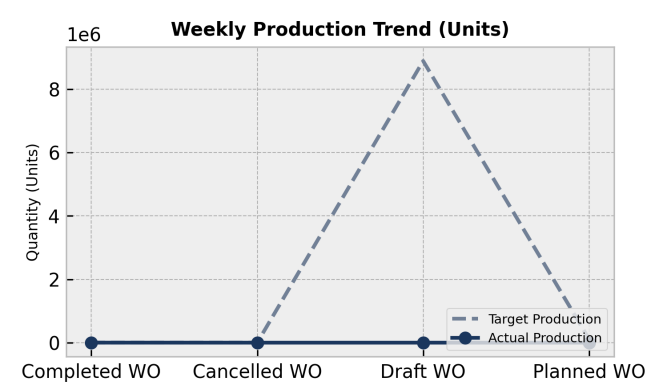

Production Analysis:

Work order records show 4 distinct statuses: 1 Completed order with 1,000.0 planned and 1,000.0 completed units, 1 Cancelled order with 2.0 planned and 0.0 completed, 1 Draft order with 8,888,888.0 planned and 0.0 completed, and 1 Planned order with 111,111.0 planned and 0.0 completed. The total planned quantity across all work orders stands at 9,002,101.0 with only 1,000.0 completed.


Day	Target	Actual	Status
Completed WO	1000.0	1000.0	On Track
Cancelled WO	2.0	0.0	Below Target
Draft WO	8888888.0	0.0	Below Target
Planned WO	111111.0	0.0	Below Target

2. Machine Performance (OEE Breakdown)


OEE Overview:

Machine utilization analysis from CapacityAnalysis data shows varying performance levels across 11 entries, with utilizations ranging from a low of 60.0% on CNC Lathe #1 up to a high of 120.0% on Assembly Station #1. Several machines achieved optimal utilization rates of 85% or greater, while others dropped below the optimal threshold.

Line	OEE Score	Status
CNC-001	115.0%	Optimal
CNC-002	80.0%	Below Target
CNC-003	95.0%	Optimal
ASM-001	110.0%	Optimal
CNC_001	80.0%	Below Target
CNC-001	90.0%	Optimal
CNC-002	70.0%	Below Target
CNC-003	100.0%	Optimal
ASM-001	80.0%	Below Target
CNC-001	60.0%	Below Target
ASM-001	120.0%	Optimal

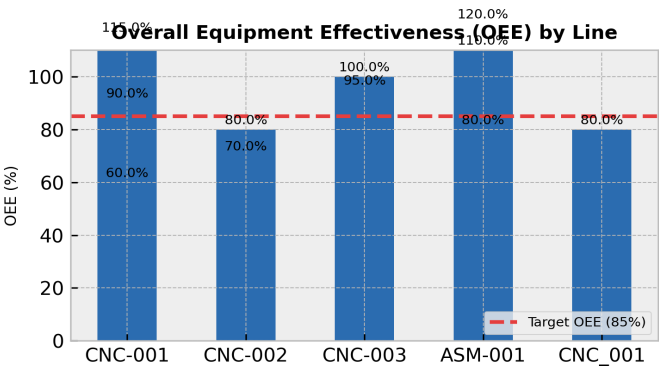

3. Rejection vs. Production Volume by Shift

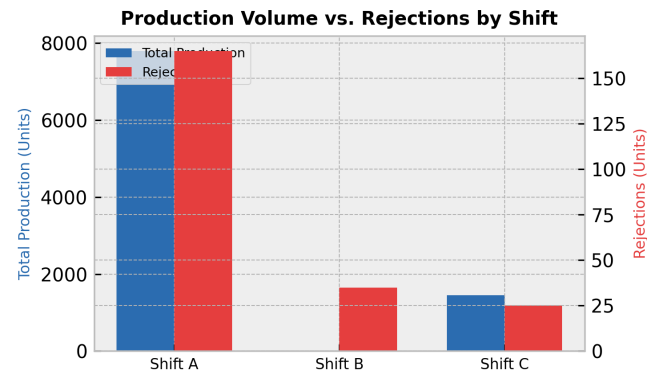

Shift Efficiency Analysis:


Shift-wise production data from WeighingMachine records Shift A with 7,800.0 FG units, 165.0 rejections, and a defect rate of 2.1%. Shift B recorded 0.0 FG units, 35.0 rejections, and Shift C recorded 1,450.0 FG units with 25.0 rejections resulting in a defect rate of 1.7%.

Shift	Output	Rejections	Defect Rate
Shift A	7800.0	165.0	2.1%
Shift B	0.0	35.0	N/A
Shift C	1450.0	25.0	1.7%

4. Scrap Analysis & Waste Distribution

Key Scrap Drivers:

Scrap analysis by material indicates that HDPE Container 5L is the highest contributor to scrap at 26.8% of the total 112.0 scrap quantity, followed by HDPE Drum 20L at 22.3% and PET Bottle 500ml at 17.9%.

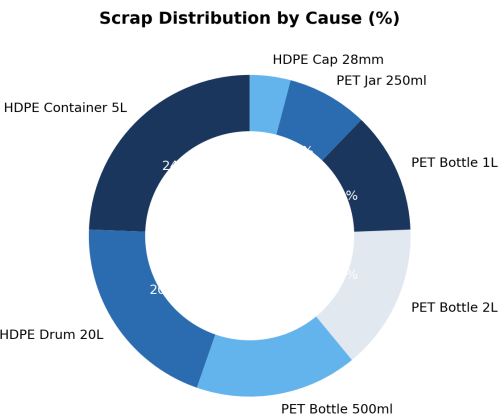

5. Corrective Action Plan

Action Item	Target Area	Owner	Deadline
Investigate flash defects causing high rejections in HDPE Cap 28mm	Assembly/Molding	Quality Control	2026-06-30
Address low machine utilization on CNC Lathe #1 and #2	CNC-001 / CNC-002	Maintenance	2026-06-30
Review zero finished goods output and process issues during Shift B	Shift B Production	Operations	2026-06-30