


PRODUCTION PERFORMANCE & QUALITY REPORT

Facility: Main Manufacturing Plant Reporting Period: Weekly Summary

Executive Summary:

The manufacturing production report evaluates two work orders totaling 1500 planned units, with WO202608030002 fully completed at 1000 units and WO202608030001 currently planned at 500 units. Capacity analysis across multiple machines shows utilization rates ranging from 60.0% to 120.0%, with several instances of overload flags. Total scrap recorded across materials reached 113.0 KG, while rejections across 7 batches totaled 225.0 PCS due to various defects.

1. Weekly Production Trends

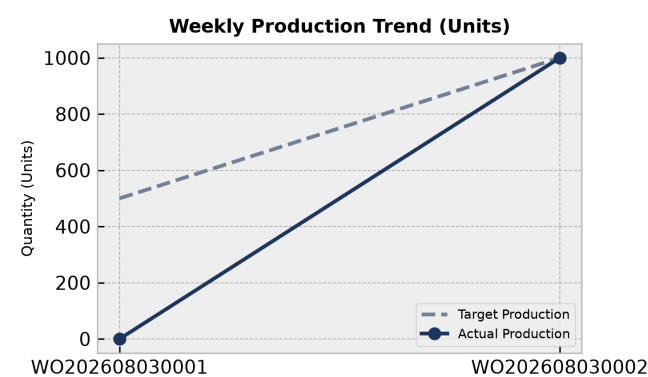

Production Analysis:

The work order database contains two distinct records: WO202608030001 which is in a Planned status with a target of 500.0 units and 0.0 completed, and WO202608030002 which is Completed with a target of 1000.0 units and 1000.0 completed units. This results in an overall completion rate matching the active finished work order.


Day	Target	Actual	Status
WO202608030001	500.0	0.0	Below Target
WO202608030002	1000.0	1000.0	On Track

2. Machine Performance (OEE Breakdown)

OEE Overview:

Capacity utilization analysis indicates significant variance across machines and dates. Machine 6 on 2026-06-30 recorded the highest utilization at 120.0% with an overload flag, whereas Machine 1 recorded the lowest utilization at 60.0% on 2026-06-30. Machines operating at or above 85% utilization include Machine 1 (115.0%, 90.0%), Machine 3 (95.0%, 100.0%), Machine 6 (110.0%, 120.0%), and Machine 8 (80.0%).

Line	OEE Score	Status
Machine 1	115.0%	Optimal
Machine 2	80.0%	Below Target
Machine 3	95.0%	Optimal
Machine 6	110.0%	Optimal
Machine 8	80.0%	Below Target
Machine 1	90.0%	Optimal
Machine 2	70.0%	Below Target
Machine 3	100.0%	Optimal
Machine 6	80.0%	Below Target
Machine 1	60.0%	Below Target
Machine 6	120.0%	Optimal

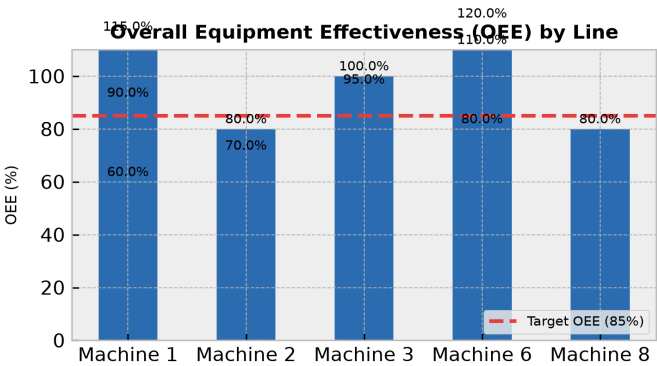

3. Rejection vs. Production Volume by Shift

[Chart Missing]

Shift Efficiency Analysis:


Shift-wise production data from WeighingMachine and Weighing/Rejection tables is aggregated by material/scrap records since specific shift IDs are primarily designated in capacity logs. Scrap quantities span 7 materials totaling 113.0 KG of scrap generated.

Shift	Output	Rejections	Defect Rate
-------	--------	------------	-------------

4. Scrap Analysis & Waste Distribution

Key Scrap Drivers:

Scrap distribution analysis identifies HDPE Container 5L as the highest scrap driver at 26.55% of the total 113.0 KG scrap volume, followed by HDPE Drum 20L at 22.12%. Other contributors include PET Bottle 500ml (17.70%), PET Bottle 2L (15.93%), PET Bottle 1L (13.27%), PET Jar 250ml (8.85%), and HDPE Cap 28mm (4.42%).

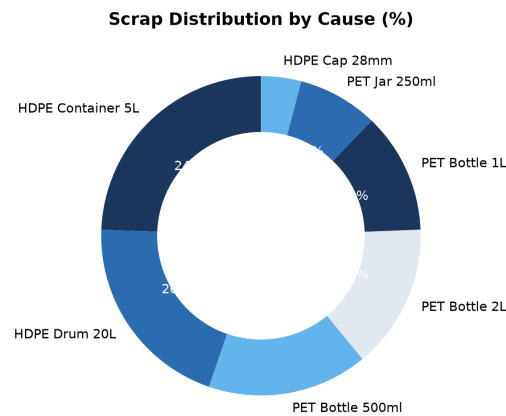

5. Corrective Action Plan

Action Item	Target Area	Owner	Deadline
Investigate machine overload conditions on Machine 6 and Machine 1 during peak utilization periods exceeding 100%.	Capacity Management	Operations	2026-08-15
Address high scrap rates for HDPE Container 5L (30 KG) and HDPE Drum 20L (25 KG).	Material Processing	Quality Control	2026-08-20
Resolve neck defects causing rejections in PET Bottle 500ml (50 PCS) and PET Bottle 2L (25 PCS).	Molding Line	Maintenance	2026-08-18