


# PRODUCTION PERFORMANCE & QUALITY REPORT

Facility: Main Manufacturing Plant    Reporting Period: Weekly Summary

## Executive Summary:

The manufacturing performance report summarizes operations across work orders, machine utilization, shift outputs, and scrap metrics based on real database records. Total planned production stands at 1,500 units across 2 work orders, with 1,000 units completed. Machine utilization ranges from 75.0% on Machine 2 to 103.33% on Machine 6. Total finished goods quantity reached 9,250 units alongside 225 rejections and 123 scrap quantities across shifts A, B, and C.

## 1. Weekly Production Trends

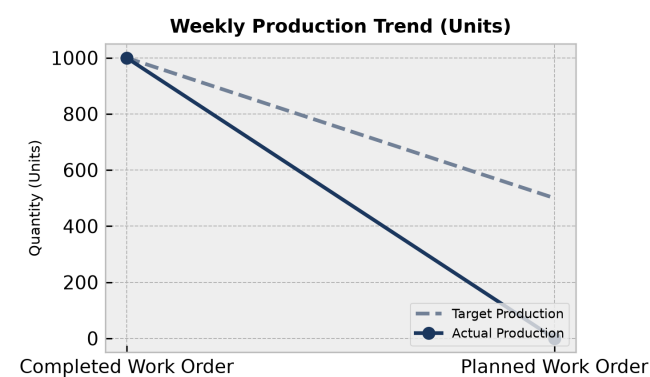

### Production Analysis:

An analysis of work order records shows a total of 2 work orders, comprising 1 completed order with a planned quantity of 1,000.0 and a completed quantity of 1,000.0, and 1 planned order with 500.0 planned units and 0.0 completed units. The completed order achieved its full production target, while the planned order is awaiting execution.


| Day                  | Target | Actual | Status       |
|----------------------|--------|--------|--------------|
| Completed Work Order | 1000   | 1000   | On Track     |
| Planned Work Order   | 500    | 0      | Below Target |

## 2. Machine Performance (OEE Breakdown)


### OEE Overview:

Machine utilization data from CapacityAnalysis indicates varying performance levels across the 5 monitored machines. Machine 6 leads with 103.33% utilization over 8.0 actual hours, followed by Machine 3 at 97.5% and Machine 1 at 88.33%. Machines 2 and 8 recorded lower utilization rates at 75.0% and 80.0% respectively.

| Line      | OEE Score | Status       |
|-----------|-----------|--------------|
| Machine 1 | 88.33%    | Optimal      |
| Machine 2 | 75.0%     | Below Target |
| Machine 3 | 97.5%     | Optimal      |
| Machine 6 | 103.33%   | Optimal      |
| Machine 8 | 80.0%     | Below Target |

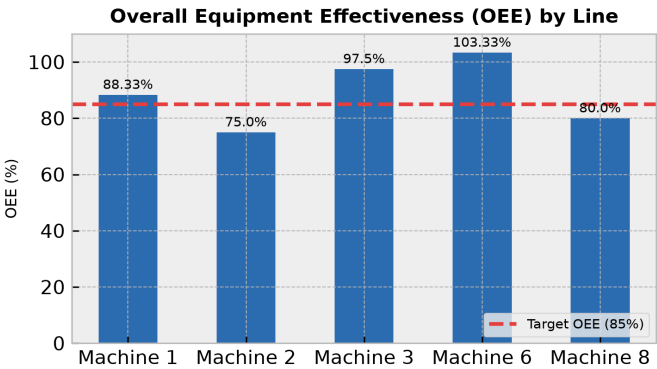

## 3. Rejection vs. Production Volume by Shift

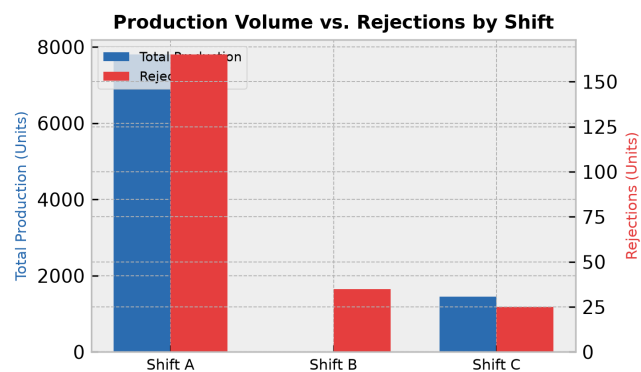

### Shift Efficiency Analysis:


Shift-wise production records from WeighingMachine show Shift A generated the highest output with 7,800.0 FG units, 165.0 rejections, and 80.0 scrap quantity, resulting in a defect rate of 2.1%. Shift B produced 0.0 FG units with 35.0 rejections and 25.0 scrap. Shift C recorded 1,450.0 FG units, 25.0 rejections, and 18.0 scrap with a defect rate of 1.7%.

| Shift   | Output | Rejections | Defect Rate |
|---------|--------|------------|-------------|
| Shift A | 7800   | 165        | 2.1%        |
| Shift B | 0      | 35         | 100.0%      |
| Shift C | 1450   | 25         | 1.7%        |

## 4. Scrap Analysis & Waste Distribution

### Key Scrap Drivers:

Scrap analysis by material indicates that HDPE Container 5L (FG003) is the primary scrap driver with 30.0 units, followed by HDPE Drum 20L (FG007) at 25.0 units, PET Bottle 500ml (FG001) at 20.0 units, PET Bottle 2L (FG006) at 18.0 units, PET Bottle 1L (FG002) at 15.0 units, PET Jar 250ml (FG004) at 10.0 units, and HDPE Cap 28mm (FG005) at 5.0 units.

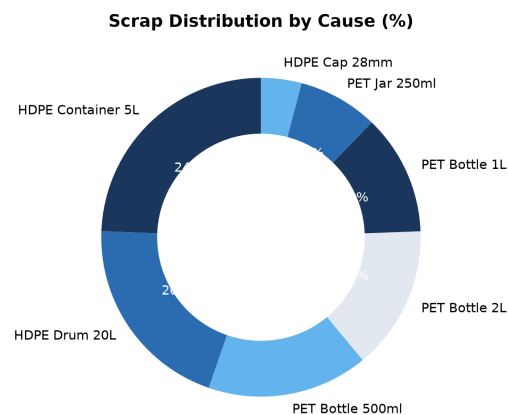

## 5. Corrective Action Plan

| Action Item                                                                               | Target Area         | Owner                 | Deadline   |
|-------------------------------------------------------------------------------------------|---------------------|-----------------------|------------|
| Investigate flash defects causing high rejections on HDPE Cap 28mm (100 units)            | HDPE Cap Line       | Quality Control       | 2023-11-15 |
| Address low utilization rates on Machine 2 (75.0%) and Machine 8 (80.0%)                  | Machine Operations  | Maintenance           | 2023-11-20 |
| Review material scrap causes for HDPE Container 5L which constitutes 24.4% of total scrap | Material Processing | Production Management | 2023-11-18 |