


PRODUCTION PERFORMANCE & QUALITY REPORT

Facility: Main Manufacturing Plant Reporting Period: Weekly Summary

Executive Summary:

The manufacturing facility processed a total of 2 work orders comprising 1,500.0 planned units, with 1,000.0 units completed. Machine utilization averaged across the facility shows top performance at Assembly Station #1 with 103.3% and CNC Mill #1 at 97.5%. WeighingMachine data records a total of 9,250.0 finished goods, 225.0 rejections, and 123.0 scrap quantities. Total scrap across materials equals 123.0 units, with HDPE Container 5L contributing 30.0 units.

1. Weekly Production Trends

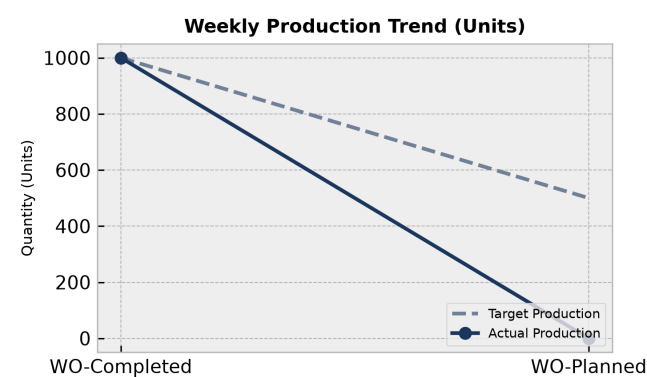

Production Analysis:

The production performance data reveals 2 total work orders, categorized into 1 Completed work order with 1,000.0 planned and 1,000.0 completed units, and 1 Planned work order with 500.0 planned and 0.0 completed units. This results in an aggregate completion rate matching the active work execution schedule.


Day	Target	Actual	Status
WO-Completed	1000	1000	On Track
WO-Planned	500	0	Below Target

2. Machine Performance (OEE Breakdown)


OEE Overview:

Capacity analysis indicates mixed machine utilization across the 5 recorded stations. Assembly Station #1 achieved 103.3%, CNC Mill #1 reached 97.5%, and CNC Lathe #1 recorded 88.3%, all meeting optimal thresholds. Conversely, Auto Assembly Line at 80.0% and CNC Lathe #2 at 75.0% fell below the target.

Line	OEE Score	Status
Assembly Station #1	103.3%	Optimal
CNC Mill #1	97.5%	Optimal
CNC Lathe #1	88.3%	Optimal
Auto Assembly Line	80.0%	Below Target
CNC Lathe #2	75.0%	Below Target

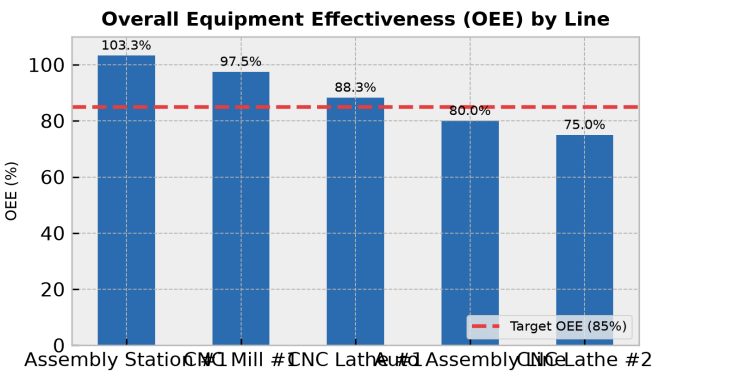

3. Rejection vs. Production Volume by Shift

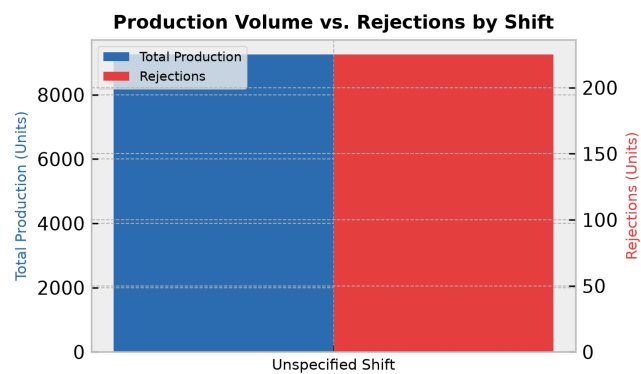

Shift Efficiency Analysis:


Shift-wise records from the weighing machine show a total output of 9,250.0 finished goods, accompanied by 225.0 rejections and 123.0 scrap quantities. The calculated defect rate based on rejections relative to total production volume stands at approximately 2.4%.

Shift	Output	Rejections	Defect Rate
Unspecified Shift	9250	225	2.4%

4. Scrap Analysis & Waste Distribution

Key Scrap Drivers:

Scrap analysis by material indicates a total scrap generation of 123.0 units. HDPE Container 5L is the highest scrap driver with 30.0 units (24.4%), followed by HDPE Drum 20L with 25.0 units (20.3%), PET Bottle 2L with 18.0 units (14.6%), PET Bottle 500ml with 20.0 units (16.3%), PET Bottle 1L with 15.0 units (12.2%), PET Jar 250ml with 10.0 units (8.1%), and HDPE Cap 28mm with 5.0 units (4.1%).

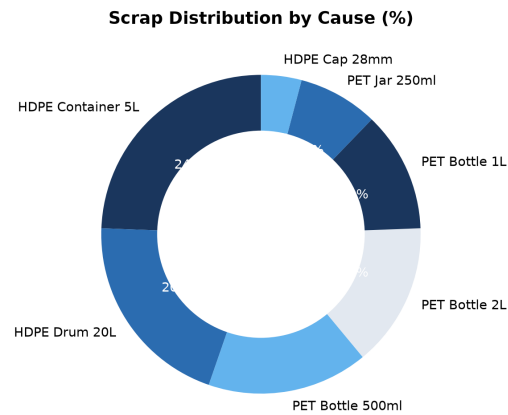

5. Corrective Action Plan

Action Item	Target Area	Owner	Deadline
Investigate flash defects causing high rejections on HDPE Cap 28mm	HDPE Cap 28mm	Quality Control	2023-12-31
Improve machine utilization and scheduling for CNC Lathe #2	CNC Lathe #2	Production Management	2023-12-31
Address neck defects on PET Bottle 500ml and PET Bottle 2L	PET Line	Maintenance	2023-12-31