Manufacturing & Video-Analytics Intelligent Report

“I want the data from the mes application for machine utilization and from video analytics I want camera configuration information”

Generated: 2026-10-21 09:49:40
Time filter applied

Contents

Executive Summary 3
MES Machine Utilization & Capacity Overview 4
Video Analytics Camera Configuration & Health 5
Appendix — Data Quality 6

Executive Summary


2	12	333	Applied	0
DATABASES QUERIED	TABLES MATCHED	TOTAL RECORDS	TIME FILTER	FAILED QUERIES

Matched keywords: camera, configuration, machine, utilization

Telemetry window: 2026-10-20T04:19:40Z → 2026-10-21T04:19:40Z (bucketed every 5m)

MES Machine Utilization & Capacity Overview

The MES application tracks 40 machines categorized into five main types: Injection Molding, Thermoforming, Assembly, Extrusion, and Blow Molding. Overall machine utilization averages 68.61%, spanning from a minimum of 43.40% to a maximum of 92.70%. Shift-level capacity analysis across 50 records indicates an average utilization of 72.92%, with certain shifts reaching 100.00% capacity. Average production capacity per hour across all active machines is 216.60 units.

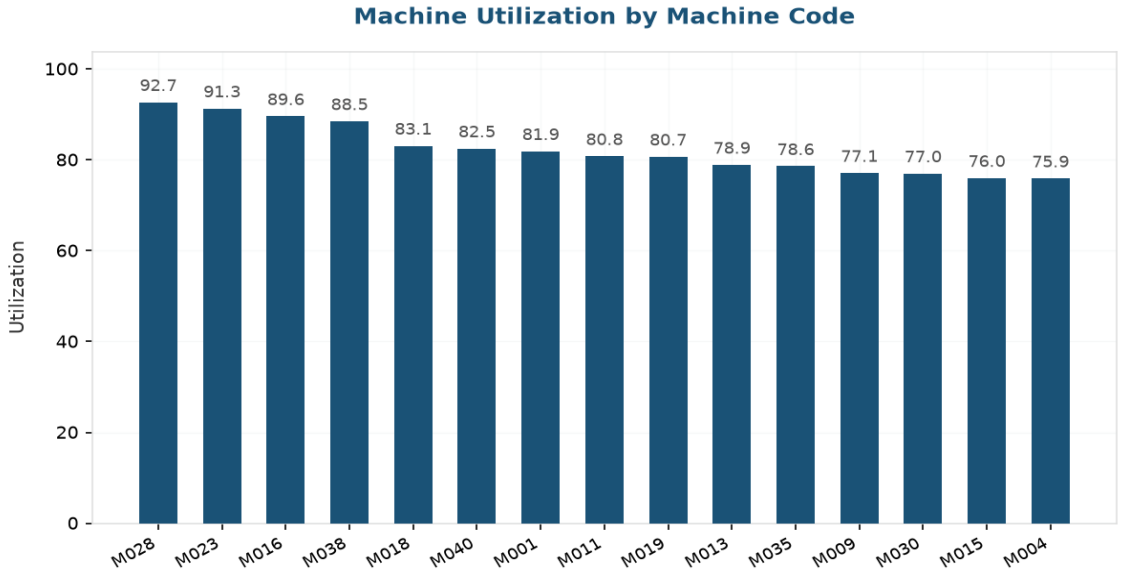

Data preview — MachineMaster (showing 10 of 40 points/rows)

Utilization	MachineCode	MachineId	MachineName	MachineType	Capacity	CapacityPerHour	CustomerId
81.90	M001	1	Injection Molding Line 1	Injection Molding	772.96	178.64	1
45.00	M002	2	Thermoforming Line 2	Thermoforming	554.94	77.34	1
58.90	M003	3	Thermoforming Line 3	Thermoforming	826.22	229.64	1
75.90	M004	4	Thermoforming Line 4	Thermoforming	681.29	150.48	1
59.00	M005	5	Assembly Line 5	Assembly	120.46	235.09	1
69.70	M006	6	Injection Molding Line 6	Injection Molding	190.81	333.32	1
43.40	M007	7	Extrusion Line 7	Extrusion	705.28	335.53	1
56.50	M008	8	Thermoforming Line 8	Thermoforming	572.02	66.41	1
77.10	M009	9	Assembly Line 9	Assembly	283.00	388.73	1
70.40	M010	10	Blow Molding Line 10	Blow Molding	943.44	217.79	1

Video Analytics Camera Configuration & Health

The Video Analytics application maintains configuration records for 3 primary cameras: Flarehub (Camera 1), Luxsphere (Camera 2), and Entry Gate (Camera 6, assigned to Plant 1 and Department 1). All configured camera profiles currently indicate an 'online' operational status under the admin user account. However, camera status logs show 50 event records exclusively recording 'offline' states across camera IDs 1, 2, and 3, signaling potential network instability or unrecorded dropouts in camera telemetry.

Data preview — cameras (showing 3 of 3 points/rows)

camera_number	department_id	location_id	name	plant_id	status	user_id
1	None	None	Flarehub	None	online	admin
2	None	None	Luxsphere	None	online	admin
6	1	1	Entry Gate	1	online	admin

Appendix — Data Quality

Table	Records	Completeness	Outliers	Score
cameras	3	71.4%	0	Needs review
camera_status_logs	50	100.0%	0	Good
MachineMaster	40	100.0%	0	Good
CapacityAnalysis	50	100.0%	0	Good
Machine	40	100.0%	0	Good
MachineFGMapping	50	100.0%	0	Good
MachineMaterialMapping	50	100.0%	0	Good
WeighingMachine	50	100.0%	0	Good

LLM Usage & Cost

Model	Input tokens	Output tokens	Total tokens	Estimated cost
gemini/gemini-3.5-flash	5,372	1,735	7,107	$0.0237