


PRODUCTION PERFORMANCE & QUALITY REPORT

Facility: Main Manufacturing Plant Reporting Period: Weekly Summary

Executive Summary:

During the reporting period, Work Order 139 successfully completed its target of 1,000.0 units, while other work orders remained unfulfilled. Capacity analysis shows Machine 6 achieved the highest individual utilization of 120.0%, while Machine 1 recorded a low of 60.0%. Shift A led production with 7,800.0 units of finished goods and 165.0 rejections, whereas Shift B recorded 0.0 finished goods and 35.0 rejections. Total scrap generated was 123.0 KG, with HDPE Container 5L being the largest contributor at 30.0 KG (24.39%).

1. Weekly Production Trends

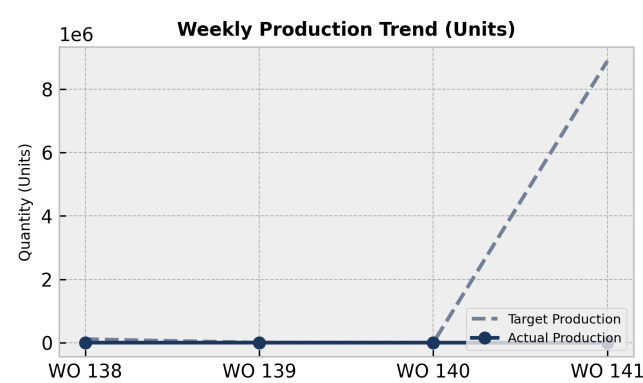

Production Analysis:

Out of 4 logged work orders, only Work Order 139 was completed, achieving 100% of its 1,000.0 unit target on Machine 1. Work Order 138 (planned for 111,111.0 units) and Work Order 141 (draft for 8,888,888.0 units) have not started, while Work Order 140 (planned for 2.0 units) was cancelled.


Day	Target	Actual	Status
WO 138	111111.0	0.0	Below Target
WO 139	1000.0	1000.0	On Track
WO 140	2.0	0.0	Below Target
WO 141	8888888.0	0.0	Below Target

2. Machine Performance (OEE Breakdown)


OEE Overview:

Capacity analysis indicates strong machine utilization overall. Machine 6 performed exceptionally well, peaking at 120.0% utilization on June 30, and maintaining 110.0% on June 14. Machine 3 also demonstrated optimal performance with utilization rates of 95.0% and 100.0%. However, Machine 2 (70.0% and 80.0%) and Machine 8 (80.0%) fell below the 85% optimal threshold, indicating potential bottlenecks or maintenance requirements.

Line	OEE Score	Status
Machine 1	115.0%	Optimal
Machine 2	80.0%	Below Target
Machine 3	95.0%	Optimal
Machine 6	110.0%	Optimal
Machine 8	80.0%	Below Target
Machine 1	90.0%	Optimal
Machine 2	70.0%	Below Target
Machine 3	100.0%	Optimal
Machine 6	80.0%	Below Target
Machine 1	60.0%	Below Target
Machine 6	120.0%	Optimal

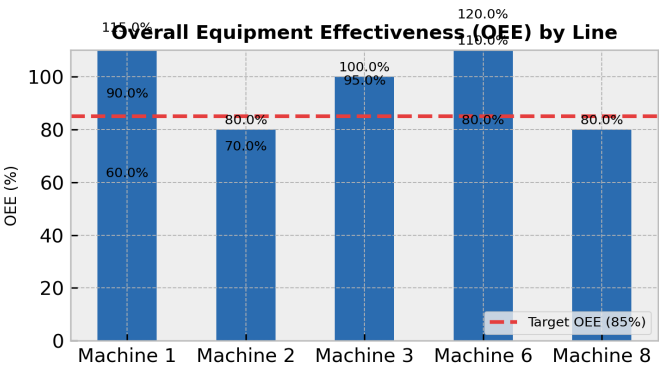

3. Rejection vs. Production Volume by Shift

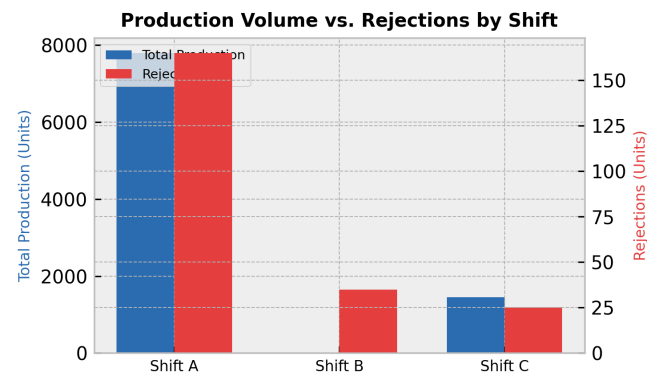

Shift Efficiency Analysis:


Shift A was the primary driver of output, producing 7,800.0 units of finished goods with a defect rate of 2.1% (165.0 rejections). Shift C produced 1,450.0 units with a 1.7% defect rate (25.0 rejections). Shift B reported 0.0 finished goods but recorded 35.0 rejections, resulting in a 100.0% defect rate, which requires immediate investigation into setup issues or downtime.

Shift	Output	Rejections	Defect Rate
Shift A	7800.0	165.0	2.1%
Shift B	0.0	35.0	100.0%
Shift C	1450.0	25.0	1.7%

4. Scrap Analysis & Waste Distribution

Key Scrap Drivers:

A total of 123.0 KG of scrap was generated. The primary driver was HDPE Container 5L (FG003) with 30.0 KG (24.39%), followed by HDPE Drum 20L (FG007) with 25.0 KG (20.33%) and PET Bottle 500ml (FG001) with 20.0 KG (16.26%). Together, these three materials account for over 60% of all scrap.

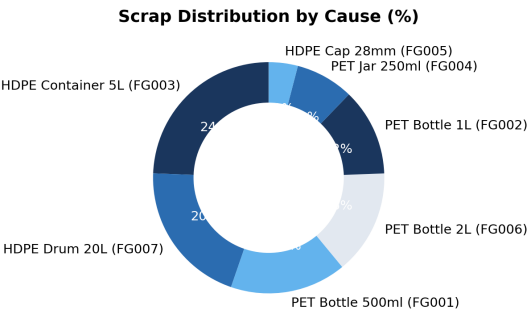

5. Corrective Action Plan

Action Item	Target Area	Owner	Deadline
Investigate Shift B's zero finished goods output and high rejection rate (35.0 units).	Shift B Operations	Production Supervisor	2026-08-15
Address high scrap rates for HDPE Container 5L (30.0 KG) and HDPE Drum 20L (25.0 KG).	Blow Molding Line	Process Engineering	2026-08-20
Perform maintenance and process optimization on Machine 2 to improve utilization from 70.0% to above 85.0%.	Machine 2 (CNC Lathe #2)	Maintenance Department	2026-08-25
Investigate neck defects (75.0 PCS) and flash defects (100.0 PCS) in PET and HDPE products.	Quality Control	QA Manager	2026-08-18