


PRODUCTION PERFORMANCE & QUALITY REPORT

Facility: Main Manufacturing Plant Reporting Period: Weekly Summary

Executive Summary:

During the performance period, work order WO202608030002 successfully completed 1,000.0 units out of 1,000.0 planned. Across all shifts, Shift A recorded the highest finished goods output of 7,800.0 units with 165.0 rejections, while Shift B produced 0.0 finished goods and had 35.0 rejections. Machine utilization analysis showed that Machine 6 achieved a peak utilization of 120.0% on June 30, 2026, while Machine 1 averaged 88.33% utilization. A total of 123.0 kg of scrap was generated, with HDPE Container 5L representing the largest scrap driver at 30.0 kg (24.4%).

1. Weekly Production Trends

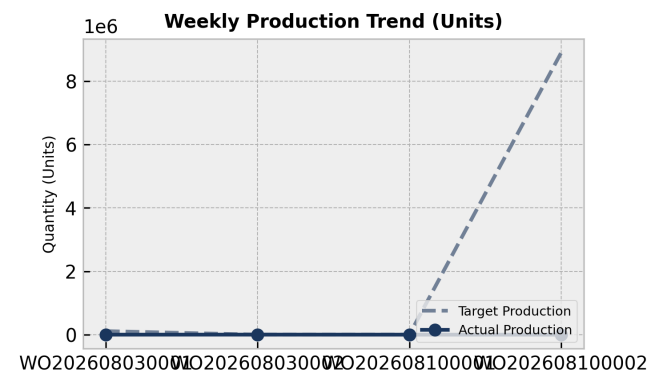

Production Analysis:

The production analysis shows that out of four work orders, only WO202608030002 was completed, achieving 100% of its 1,000.0 unit target. Work order WO202608030001 remains in Planned status with a target of 111,111.0 units, while WO202608100002 is in Draft status with a target of 8,888,888.0 units. Work order WO202608100001 was Cancelled. This indicates a heavy backlog of unstarted or draft orders that need scheduling.


Day	Target	Actual	Status
WO202608030001	111111.0	0.0	Below Target
WO202608030002	1000.0	1000.0	On Track
WO202608100001	2.0	0.0	Below Target
WO202608100002	8888888.0	0.0	Below Target

2. Machine Performance (OEE Breakdown)


OEE Overview:

Capacity analysis indicates strong machine utilization across the board. Machine 6 demonstrated high utilization, reaching up to 120.0% on June 30, 2026, and averaging 103.33%, which flags potential overload conditions. Machine 3 also performed optimally with an average utilization of 97.5%. Conversely, Machine 2 averaged 75.0% utilization, and Machine 8 was at 80.0%, indicating available capacity for rescheduling.

Line	OEE Score	Status
Machine 1	88.33%	Optimal
Machine 2	75.0%	Below Target
Machine 3	97.5%	Optimal
Machine 6	103.33%	Optimal
Machine 8	80.0%	Below Target

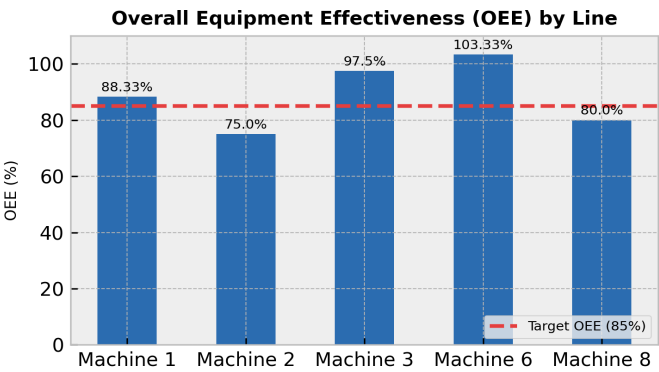

3. Rejection vs. Production Volume by Shift

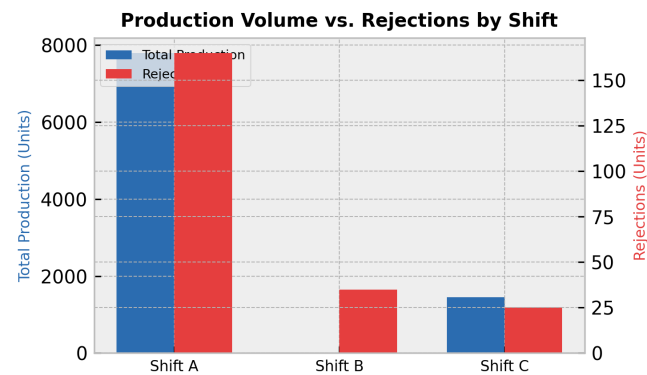

Shift Efficiency Analysis:


Shift A was the primary driver of production, yielding 7,800.0 units of finished goods with 165.0 rejections, resulting in a 2.1% defect rate. Shift C produced 1,450.0 units with 25.0 rejections (1.7% defect rate). Shift B reported 0.0 finished goods output but recorded 35.0 rejections, indicating that operations during this shift were entirely focused on non-conforming products or setup issues.

Shift	Output	Rejections	Defect Rate
Shift A	7800.0	165.0	2.1%
Shift B	0.0	35.0	100.0%
Shift C	1450.0	25.0	1.7%

4. Scrap Analysis & Waste Distribution

Key Scrap Drivers:

A total of 123.0 kg of scrap was generated during the period. The primary driver of scrap was HDPE Container 5L, contributing 30.0 kg (24.4% of total scrap), followed closely by HDPE Drum 20L at 25.0 kg (20.3%). PET Bottle 500ml and PET Bottle 2L accounted for 20.0 kg (16.3%) and 18.0 kg (14.6%) respectively, highlighting the need for material-specific process optimization.

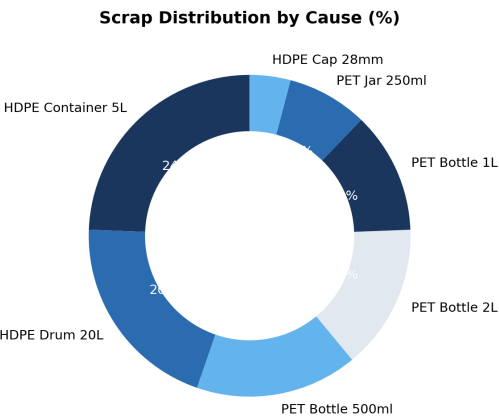

5. Corrective Action Plan

Action Item	Target Area	Owner	Deadline
Address neck defects in PET Bottle 500ml and 2L (75 total rejected pieces) by calibrating blow molding nozzle alignment.	Blow Molding Line	Maintenance Department	2026-08-15
Investigate flash defects on HDPE Cap 28mm (100 rejected pieces) by inspecting mold clamping pressure.	Injection Molding	Quality Assurance	2026-08-18
Resolve high scrap rate for HDPE Container 5L (30.0 kg scrap) by optimizing extrusion parison programming.	Extrusion Blow Molding	Production Engineering	2026-08-20