


PRODUCTION PERFORMANCE & QUALITY REPORT

Facility: Main Manufacturing Plant Reporting Period: Weekly Summary

Executive Summary:

This report analyzes production performance across multiple work orders, machine utilization, shift outputs, and scrap/rejection drivers. A total of 4 work orders were tracked, with WO202608030002 successfully completing its target of 1,000 units. Capacity analysis shows high machine utilization, with Machine 6 reaching up to 120% utilization and Machine 1 reaching up to 115%. Shift A recorded the highest finished goods output of 7,800 units with 165 rejections, while total scrap generated across all operations was 123.0 KG, primarily driven by HDPE Container 5L (24.4%) and HDPE Drum 20L (20.3%).

1. Weekly Production Trends

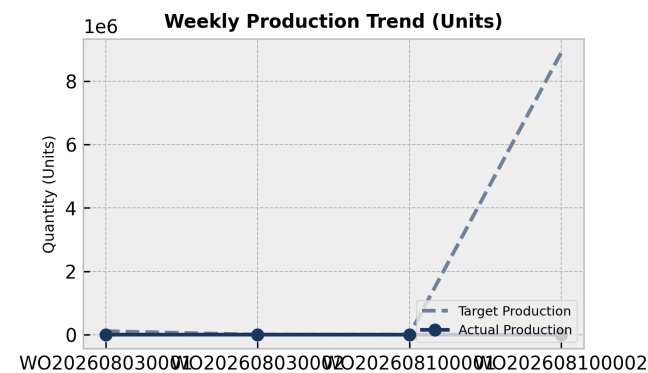

Production Analysis:

Analysis of the WorkOrder table reveals that out of 4 logged work orders, only WO202608030002 has been completed, achieving 100% of its 1,000 unit target. WO202608030001 remains in Planned status with a target of 111,111 units, while WO202608100002 is in Draft status with a target of 8,888,888 units. WO202608100001 was cancelled. This indicates a significant volume of planned and draft production that has not yet commenced.


Day	Target	Actual	Status
WO202608030001	111111.0	0.0	Below Target
WO202608030002	1000.0	1000.0	On Track
WO202608100001	2.0	0.0	Below Target
WO202608100002	8888888.0	0.0	Below Target

2. Machine Performance (OEE Breakdown)


OEE Overview:

Capacity analysis indicates strong machine utilization across the monitored dates. Machine 6 demonstrated exceptional utilization, peaking at 120% on June 30, 2026, and averaging 103.3% across three recorded shifts. Machine 1 also showed high utilization, peaking at 115% on June 13, 2026, but dropping to 60% by June 30, 2026. Machine 3 maintained optimal utilization levels of 95% and 100% on June 15 and June 18 respectively. Machine 2 and Machine 8 operated below optimal levels, with Machine 2 dropping to 70% utilization on June 19.

Line	OEE Score	Status
Machine 1	115.0%	Optimal
Machine 2	80.0%	Below Target
Machine 3	95.0%	Optimal
Machine 6	110.0%	Optimal
Machine 8	80.0%	Below Target
Machine 1	90.0%	Optimal
Machine 2	70.0%	Below Target
Machine 3	100.0%	Optimal
Machine 6	80.0%	Below Target
Machine 1	60.0%	Below Target
Machine 6	120.0%	Optimal

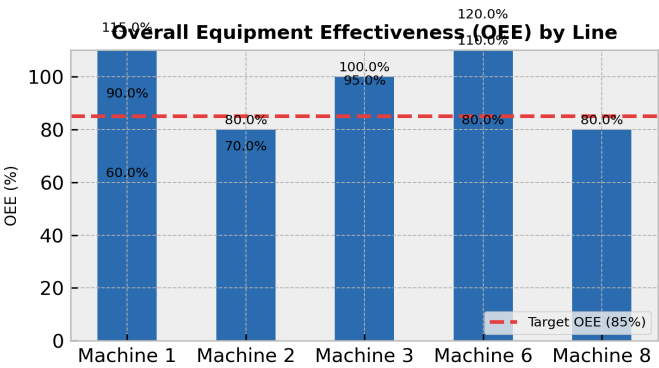

3. Rejection vs. Production Volume by Shift

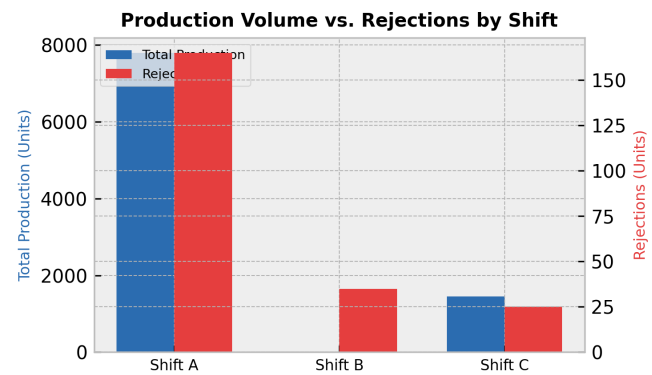

Shift Efficiency Analysis:


Shift-wise production data from the WeighingMachine table shows that Shift A is the primary driver of finished goods output, producing 7,800.0 units with 165.0 rejections, resulting in a defect rate of 2.1%. Shift C produced 1,450.0 units with 25.0 rejections (1.7% defect rate). Shift B recorded 0.0 finished goods output but had 35.0 rejections, indicating that its activities were focused on setup, testing, or resulted in total rejection of the batch.

Shift	Output	Rejections	Defect Rate
Shift A	7800.0	165.0	2.1%
Shift B	0.0	35.0	100.0%
Shift C	1450.0	25.0	1.7%

4. Scrap Analysis & Waste Distribution

Key Scrap Drivers:

Scrap analysis indicates that a total of 123.0 KG of scrap was generated. The primary driver of scrap is HDPE Container 5L, contributing 30.0 KG (24.4%), followed by HDPE Drum 20L at 25.0 KG (20.3%). PET Bottle 500ml and PET Bottle 2L contributed 20.0 KG (16.3%) and 18.0 KG (14.6%) respectively. Rejection analysis shows that HDPE Cap 28mm had the highest number of rejections with 100.0 units due to flash defects, while PET Bottle 500ml had 50.0 rejections due to neck defects.

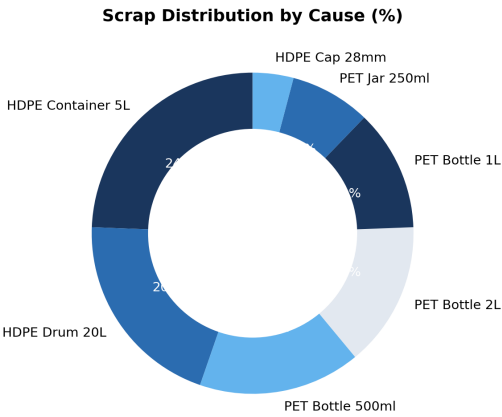

5. Corrective Action Plan

Action Item	Target Area	Owner	Deadline
Investigate and resolve flash defects on HDPE Cap 28mm production line to reduce the 100 rejected units.	HDPE Cap Line	Quality Assurance	2026-08-15
Address neck defects on PET Bottle 500ml and 2L lines which caused 75 total rejections.	PET Bottle Line	Maintenance / Engineering	2026-08-18
Investigate Shift B's zero finished goods output and 35 rejections.	Shift B Operations	Production Supervisor	2026-08-12