

Proposal Report: Mach Zehnder Interferometer

Ian Lim Teon Keng, DSO National Laboratories, LTeonKen@dso.org.sg

Edx username: Ian_desx

Abstract— This proposal presents the design and simulation of a Mach-Zehnder Interferometer (MZI) for photonic integrated circuit applications using Lumerical MODE and INTERCONNECT. Waveguide characteristics such as effective refractive index, mode confinement, and propagation loss will be analyzed in MODE, while device-level performance including insertion loss, extinction ratio, and transmission response will be evaluated in INTERCONNECT. The study aims to establish an optimized MZI design and provide insights into the relationship between waveguide properties and interferometric performance.

I. INTRODUCTION

Silicon photonics has emerged as a key enabling technology for next-generation optical systems, offering the ability to integrate optical and electronic functionalities on a common silicon platform using mature complementary metal-oxide-semiconductor (CMOS) manufacturing processes. This approach enables compact, low-cost, and highly scalable photonic devices while supporting the increasing demand for high-bandwidth and energy-efficient data transmission. Recent advancements in silicon photonics have demonstrated its potential across telecommunications, data communications, sensing, and integrated optical computing applications. [1], [2]

The development of Photonic Integrated Circuits (PICs) has further accelerated the adoption of silicon photonics by integrating multiple optical components, such as waveguides, couplers, modulators, filters, and photodetectors, onto a single chip. Compared to discrete optical assemblies, PICs offer reduced size, weight, power consumption, and overall system complexity. As a result, PICs have become essential in applications including optical communications, data center interconnects, LiDAR, optical sensing, microwave photonics, quantum technologies, and advanced defense systems. [2], [3]

Among the fundamental building blocks of PICs, the Mach-Zehnder Interferometer (MZI) is one of the most widely utilized devices due to its versatility and robust operating

principle. An MZI function by splitting an optical signal into two separate paths, introducing a relative phase difference, and subsequently recombining the signals to generate constructive or destructive interference. This structure forms the basis of numerous photonic functions, including optical modulation, switching, filtering, sensing, and signal processing. Owing to its simplicity and effectiveness, the MZI remains a cornerstone component in modern silicon photonic circuits. [4]

This design proposal focuses on the simulation and analysis of a silicon photonic MZI using Ansys Lumerical MODE and INTERCONNECT. The work aims to investigate key waveguide properties, including modal profiles and effective refractive indices, through MODE simulations, while evaluating circuit-level performance metrics such as transmission response, insertion loss, and extinction ratio using INTERCONNECT. The ultimate goal is to establish an optimized MZI design and develop a simulation framework that can support future photonic integrated circuit development and electro-optic device implementations.

II. THEORY

MZI can be visualized into as a splitter, and a combiner with a certain path length between them. The path length difference $\Delta L = L_1 - L_2$ will result in the phase difference where L_1 and L_2 represent path 1 and path 2 respectively.

Assuming an input optical field E_i is launched into an ideal 3-dB splitter, the optical field is equally divided between the two arms such that

$$E_1 = \frac{E_i}{\sqrt{2}} e^{-j\beta L_1} \quad (1)$$

$$E_2 = \frac{E_i}{\sqrt{2}} e^{-j\beta L_2} \quad (2)$$

where β is the propagation constant of the waveguide, given by

$$\beta = \frac{2\pi n_{\text{eff}}}{\lambda} \quad (3)$$

with n_{eff} being the effective refractive index and λ the operating wavelength.

At the output combiner, the two optical fields interfere coherently, producing a total output field

$$E_o = E_1 + E_2 \quad (4)$$

$$E_o = \frac{E_i}{\sqrt{2}} (e^{-j\beta L_1} + e^{-j\beta L_2}) \quad (5)$$

Factoring out $e^{-j\beta L_2}$,

$$E_o = \frac{E_i}{\sqrt{2}} e^{-j\beta L_2} (1 + e^{-j\beta \Delta L}) \quad (6)$$

The output intensity is proportional to the squared magnitude of the output field:

$$I_o = \frac{1}{2} I_i |1 + e^{-j\beta \Delta L}|^2 \quad (7)$$

Expanding the magnitude term,

$$I_o = \frac{1}{2} I_i (2 + 2\cos(\beta \Delta L)) \quad (8)$$

Therefore, the output intensity of the Mach-Zehnder Interferometer can be expressed as

$$I_o = \frac{I_i}{2} [1 + \cos(\beta \Delta L)] \quad (9)$$

where I_i is the input optical intensity and $\beta \Delta L$ represents the accumulated phase difference between the two interferometer arms. The output intensity periodically varies between constructive and destructive interference as the phase difference changes.

The other property to consider is the Free Spectral Range (FSR). It is the distance between two consecutive peaks in a output intensity vs wavelength graph.

$$\text{FSR} = \frac{\lambda^2}{n_g \Delta L} \quad (10)$$

$$n_g = n - \lambda \frac{dn}{d\lambda} \quad (11)$$

III. METHODOLOGY

A. Waveguide

A strip waveguide of 500nm width and 220nm height was used to simulate the waveguide mode profiles. Below are the figures.




Fig 1. Electric field intensity of TE mode in the waveguide

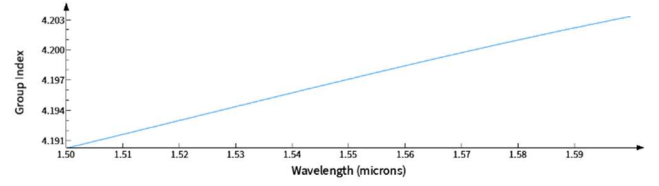


Fig 2. Effective index vs Wavelength of first TE mode

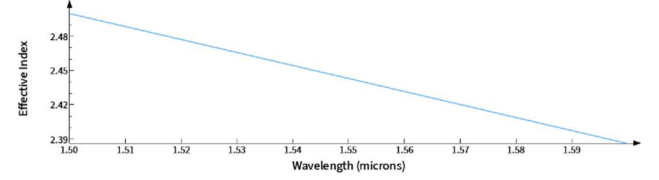


Fig 3. Group index vs Wavelength of first TE mode

The effective index and group index values obtained were 2.500 and 4.190.

B. Mach Zehnder Interferometer

Based on the found group index value, FSR with different path lengths in the design is shown in Table 1.

Path Difference, ΔL (μm)	FSR (nm)
100	5.734
120	4.778
140	4.096
160	3.584
180	3.186
200	2.867

Table 1. FSR with different path lengths
MZI simulations were conducted using Lumerical INTERCONNECT. The SiEPIC-EBeam-PDK was used. A couple of components were characterized and simulated on the software to visualize insertion loss. The Y splitter from Fig 3. Displays around 3.18dB of loss and the grating coupler from Fig 4 shows a loss of around 2.4dB at 1550nm mark. The combined schematic is shown in Fig 5.

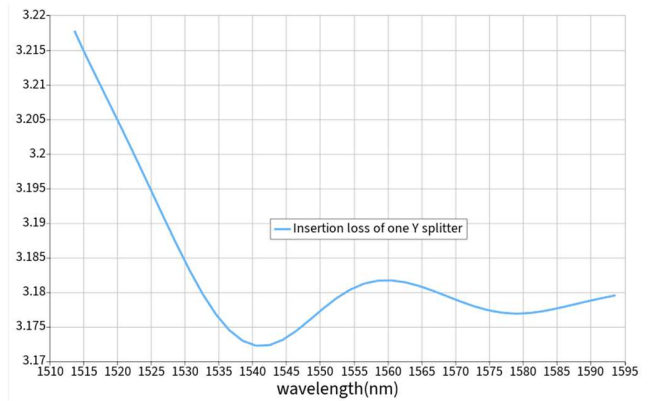


Fig 3. Insertion loss of Y splitter

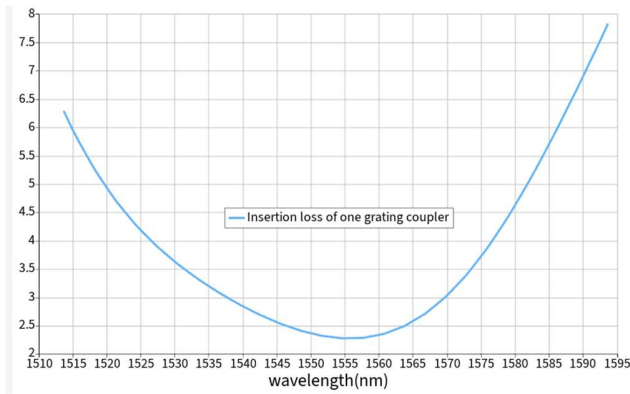


Fig 4. Insertion loss of grating coupler

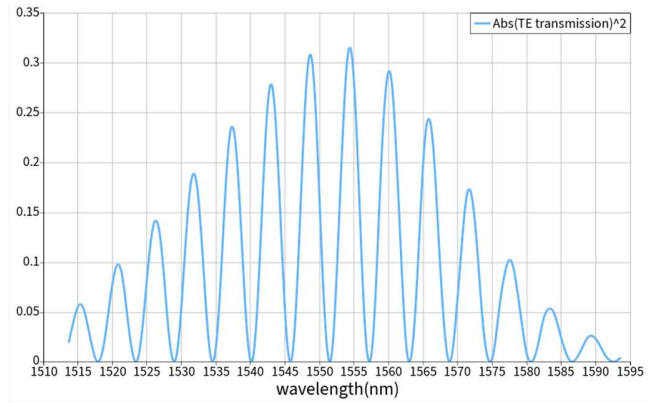


Fig 7. Transmission of MZI with two grating couplers

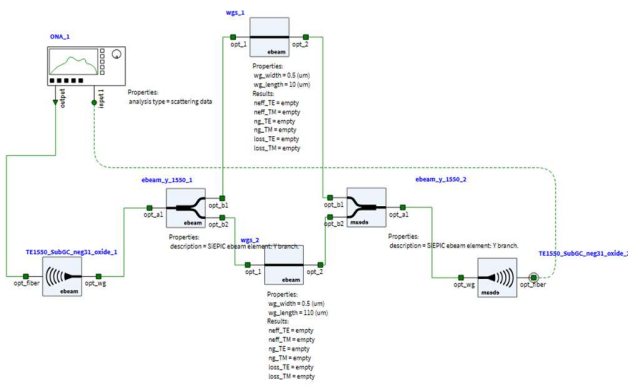


Fig 5. Schematic of the MZI layout on Lumerical INTERCONNECT

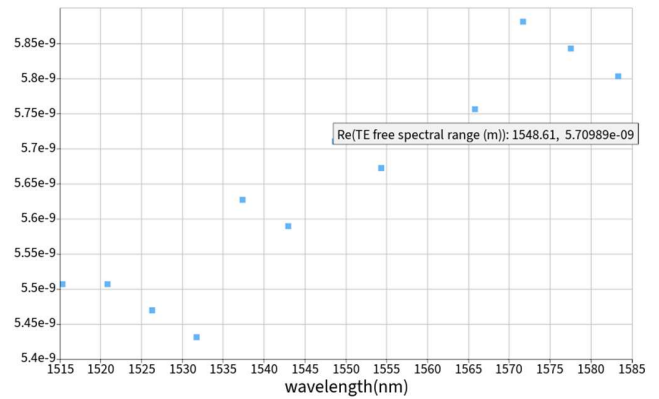


Fig 8. Free Spectral Range vs Wavelength of MZI with a pathlength difference of 100 μm as seen from Optical Network Analyzer (ONA) in Lumerical INTERCONNECT
Fig 6 shows the expected sinusoidal behavior of the MZI vs wavelength, with FSR at about 5.7 at 1550 nm as seen from Fig 8.

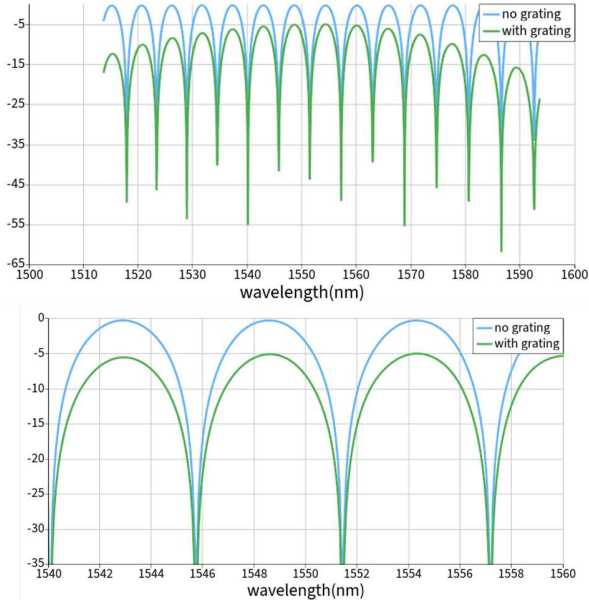


Fig 6. Spectrum of MZI with path difference $L = 100 \mu\text{m}$

Based on the simulated result from Lumerical INTERCONNECT, we have verified that there is consistency with the values attained via Lumerical MODE and indicated from Table 1. This allows us to perform a sanity check on the MZI's performance.

REFERENCES

- [1] A. B. Adisa and L. N. Abdulkadir, "Silicon Photonics: An Overview," *IntechOpen*, 2026.
- [2] W. Li and D. Huang, "Silicon Photonics Devices and Integrated Circuits," *Photonics*, vol. 12, no. 3, 2025.
- [3] A. N. Bozovich, "Photonic Integrated Circuits (PICs) for Next Generation Space Applications," *NASA NEPP Electronics Technology Workshop*, 2020.
- [4] W. Bogaerts, "Introduction to Silicon Photonics Circuit Design," *Optical Fiber Communication Conference (OFC) Short Course*, 2018.