

AERO-MACH

LABS - WILCO - TCO



We keep you flying.



AERO-MACH LABS

Instrument MRO & Manufacturing



With MRO service and exchange inventory, we keep you flying!

Power Plant & Electronic Instruments

- Oil Pressure Transmitters
- Torque Pressure Transmitters
- RPM Indicators
- Oil Temp / Press Combination
- N-1 and N-2 Turbine Tachometers
- Secondary Flight Displays
- Fuel Flow Transmitter
- Autosynch Systems
- Engine Combination Gauges
- Cylinder Head Temperature
- Vertical Scales

Mechanical & Pneumatic Instruments

- Mach Airspeed Indicators
- True Airspeeds
- Max-Allowable Airspeeds
- Vertical Speed Indicators
- I.V.S.I.
- Mach Meters
- Altimeters; Encoding, Standard, Cabin, and Ground Station

Gyro-Operated Instruments

- Air & Electric
- Auto-pilot Gyros
- Vertical Gyros
- Flight Director Gyros
- H.S.I.
- Turn & Slip Indicators
- Attitude Gyros
- Directional Gyros
- Rate Gyros
- Turn Gyros

Fuel Management Systems

- Probes
- Quantity Indicators
- Flow Indicators
- Signal Conditioners
- Status Indicators
- Totalizers




AERO-MACH WILCO

Aerospace Parts Distributor



AERO-MACH WILCO

We Keep You Flying

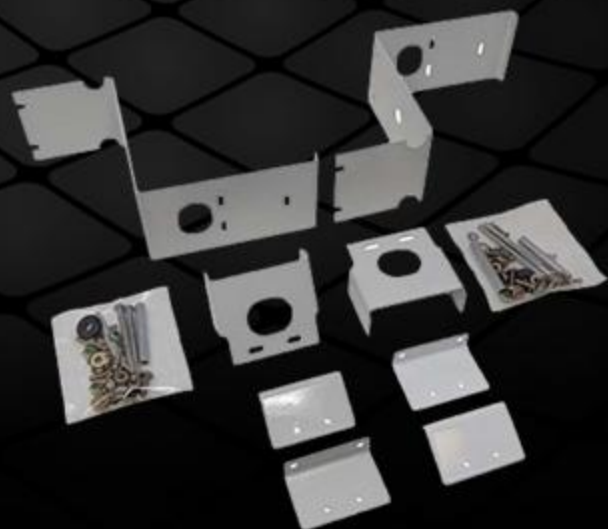

WILCO BEECHCRAFT LED WINGTIP STC KIT

Description:

Note: This kit is used for models with larger Beechcraft wingtip lenses used on 1974 and after Bonanzas and Barons.

Our STC covers the following Beechcraft models in 28V: F33A, G36, V35B, 36, A36, A36TC, B36TC, 95-B55, 95-B55A, 95-B55B (T-42), G58, E55, E55A, 58, 58P, 58TC.



www.wilcoaircraftparts.com



AERO-MACH WILCO

We Keep You Flying



Before & After



WILCO CESSNA ORION STC KIT

Description:

Note: This kit is used for models with original Cessna wingtips.

Our STC covers the following Cessna models in 28V: 150L, 150M, 152, 172L, 172M, 172N, 172Q, 172R, 172S, 172RG, 177B, 177RG, 180H, 180J, 180K, 182N, 182P, 182Q, 182R, 182S, 182T, T182T, R182, A185F, 185E, U206F, U206G, TU206F, TU206G, 210K, T210K, 210L, T210L, 210M, T210M, 210N, T210N, P210N, 210R, T210R, P210R

www.wilcoaircraftparts.com


WAT
WILCOEN AEROSPACE TECHNOLOGIES

ADAPTER PLATES AND BRACKETS



WHELEN ORION OR500 TAIL POSITION ADAPTER PLATE

This is an adapter plate that allows for the installation of the Whelen Orion OR500 tail position light to be installed where aircraft mounting screws are at 9 & 3 o'clock positions. This keeps correct orientation of the light pattern per the FARs.

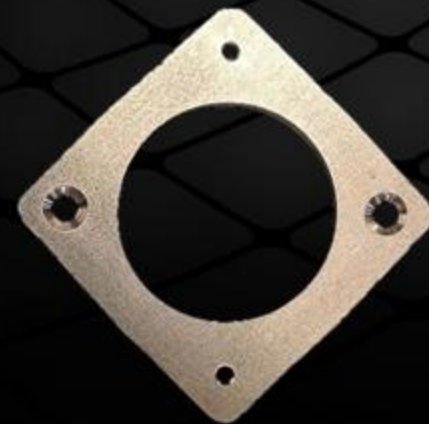

AERO-MACH WILCO


We Keep You Flying

www.wilcoaircraftparts.com



WAT
WHELEN AEROSPACE TECHNOLOGIES

ADAPTER PLATES AND BRACKETS

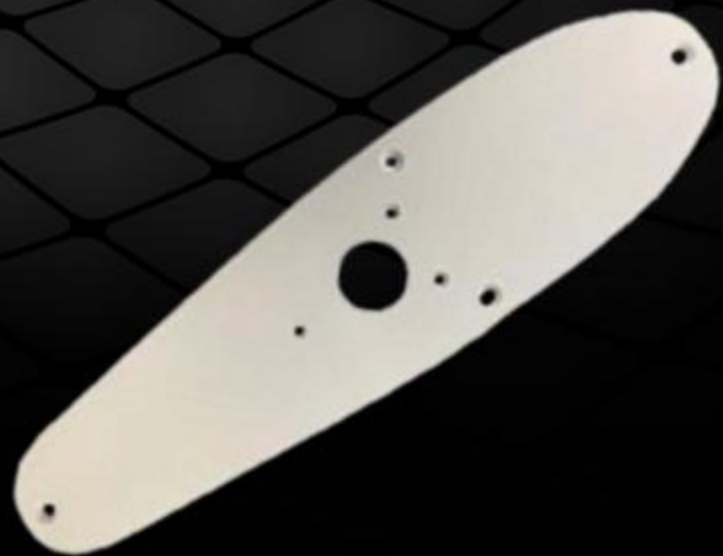

ADAPTER PLATE FOR CESSNA TWIN 400 SERIES

The W-OR400 is an uncertified plate that allows installation of the Whelen Orion 600 Series LED lights on Cessna Twin 400 series aircraft without Tip Tanks. This plate will not work on aircraft equipped with Tip Tanks. The plate comes powder coated Matterhorn White and pre-drilled for necessary mounting points both on the aircraft and for the OR600 light fixture. Installation will need to be accomplished via a Form 337.




AERO-MACH WILCO

We Keep You Flying

www.wilcoaircraftparts.com




WAT
WHELEN AEROSPACE TECHNOLOGIES

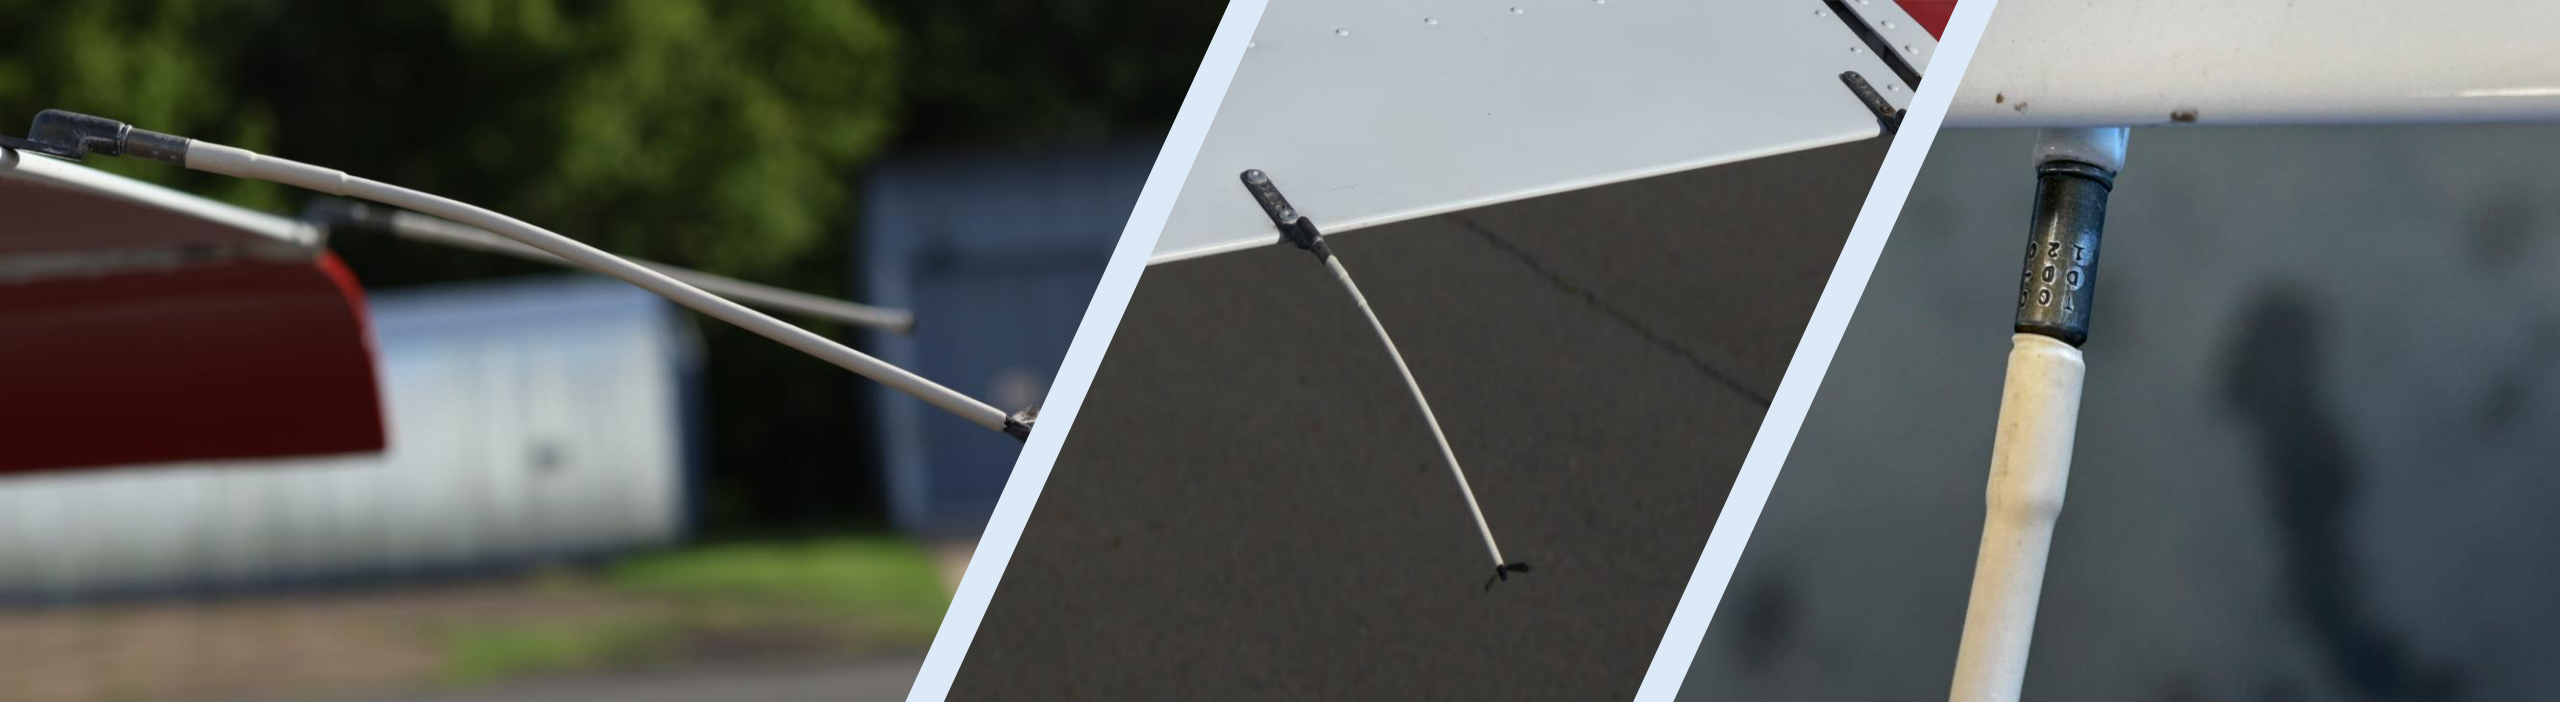

AERO-MACH TCO

Static Dischargers



AERO-MACH TCO

Static Dischargers



TCO Part Number	Compare to Cust PN	Description
DD-1	101-380053-11	Male Threaded Discharger
TID-1W	101-380053-13	Male Threaded Discharger (Obsolete)
DP-1W	101-380053-15	Male Threaded Discharger
TID-1W	101-380053-9	Male Threaded Discharger
ESD-1	C592001-0201	Rivet Attach Integrated Discharger
ESD-3	C592001-0202	Rivet Attach Integrated Discharger
DD-1W + B-4 Base	C592001-0203	DD-1W (w/B-4 base attached)
DD-1W	C592001-0204	Male Threaded Discharger/White
B-4	C592001-0205	Base- Rivet Attach-Female Threads
DD-2W	C592001-0206	Male Threaded Discharger
ESD-1	HS4731-2 (Sold as ESD-1)	Rivet Attach Integrated Discharger
ESD-3	HS4731-3 (Sold as ESD-3)	Rivet Attach Integrated Discharger
		Female Threaded Discharger (Rotor
RID-2	HS5689-1	Blades)
		Male Threaded Discharger/Heli Fuse
DD-3	HS5689-2	Trailing
B-4	HS5689-3	Rivet Attach-Female Threads
ESD-3	456-802	Rivet Attach Integrated Discharger

Top 5 Killers of Aircraft Batteries



- 1.Parasitic Loads**
- 2.Improper Voltage Reg Setting**
- 3.High Temps w/o Charge**
- 4.Prolonged Discharged State**
- 5.Poor Maintenance Practices**



Parasitic Load

Current draw on the aircraft battery when the Master Switch is in the OFF position.



Confirm by removing negative battery terminal and checking for current between cable and negative post with a DMM.



Voltage Regulator Settings



Table 1. Recommended Voltage Regulator Settings

Battery Temperature	Voltage Regulator Setting (Volts DC)	
	12V System	24V System
Below 0°C (32°F)	14.5 – 14.75	29.0 – 29.5
0 to 15°C (32 to 59°F)	14.25 – 14.5	28.5 – 29.0
16 to 30°C (60 to 86°F)	14.0 – 14.25	28.0 – 28.5
31 to 45°C (87 to 113°F)	13.75 – 14.0	27.5 – 28.0
Above 45°C (113°F)	13.5 – 13.75	27.0 – 27.5



High Temps Can Kill Your Battery



Table 4

Battery Temperature*	Charging Frequency	Charging Duration
Below 15°C	Once every 4 months	72 - 96 hours
15 - 35°C	Once every 2 months	48 – 72 hours
Above 35°C	Once every month	24 – 48 hours

* Battery temperature can be estimated using average daytime high of air temperature.



Keep Your Battery Fully Charged



Sulfation is the formation of hard lead sulfate crystals on the lead plates. These crystals degrade performance, inhibit charging and in flooded batteries can create a “dead short” in the battery. Accumulation rate of lead sulfate crystals is minimized by keeping a battery fully charged.



Your Aircraft Battery has a CMM



CONCORDE BATTERY CORPORATION
2009 San Bernardino Road
West Covina, CA 91790
Phone: 626-813-1234
www.concordebattery.com


RG® SERIES MAIN AIRCRAFT BATTERY
COMPONENT MAINTENANCE MANUAL

Document Number	5-0171
Initial Issue Date	Oct 10/2007
Current Revision Date	Dec 04/2018 (Rev. Q)



AERO-MACH

LABS - WILCO - TCO

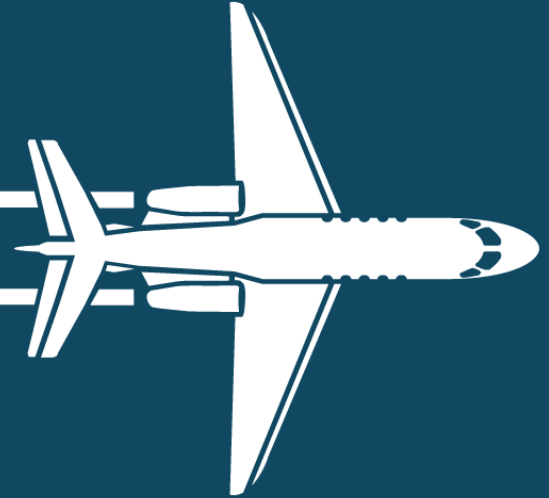

Matt Farrell

The Flying Salesman

Mfarrell@Aeromach.com

512-922-7796

Aeromach.com

