



2025 AEA South Pacific Regional

Ryan Reid, Account Manager/Senior Pilot

TA245 Series USB Chargers

NEW

45-watt USB Chargers for 14-volt and 28-volt aircraft

Charging Technology

USB-C	Power Delivery 3.0 Programmable Power Supply 3.0 Qualcomm® Quick Charge™ 3.0 Battery Charging 1.2
USB-A	Qualcomm® Quick Charge™ 3.0 Battery Charging 1.2



TA245 Series USB Chargers


NEW

Halo Ring Lighting

- Adjustable brightness control
- Color status indication
 - Blue = On
 - Green = Charging
 - Yellow = Fault

Configurations

- Dual USB-C (45 W / 45 W)
- Dual USB-C (45 W) / USB-A (36 W)
- Single USB-C (45 W)

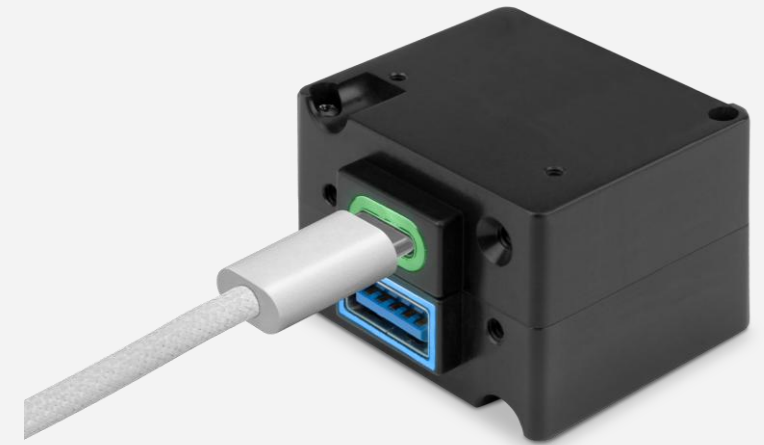

Adjustable Halo Ring Lighting

MAX Power TA360 Series USB Chargers

NEW

**The ONLY TSO-certified USB chargers
compatible with Starlink® Mini**

Delivers up to 100 W per port

Features USB-C Power Deliver (PD) technology

Configurations

- Dual USB-C (100 W) / USB-A (15 W)
- Single USB-C (100 W)



Starlink® Mini Compatible

Panel Upgrade Cirrus SR Series

NEW

Easy Digital Standby and 100-watt USB Upgrade

- Custom Adapter Plate
- Dual USB-C PD (100 W) / USB-A (15 W) chargers
- SAM[®] Standby Attitude Module

The **ONLY TSO-certified USB chargers**
compatible with Starlink[®] Mini



New Panel



Legacy Panel

TS28 Emergency Battery Power Supply

NEW

Power emergency lighting in the event of electrical system failure

Input Voltage	26.5 – 32 VDC
Output Power	24 VDC nominal, 3 amps max
Run Time	60 minutes @ 1A (28 Wh capacity)
Weight	1.7 lbs
Dimensions	5.5"L x 4.4"W x 1.5"H



Direct replacement for
Radiant Battery Power Supply CBS28-1
on Citation 550 / 560 / 680 / 680A / 700

TS28 Emergency Battery Power Supply

NEW

Technology

- Rechargeable, field-replaceable NiMH battery pack
- No memory effect

Maintenance

- 2-year cycle

Life Expectancy

- 4 – 6 years battery life



Direct replacement for
Radiant Battery Power Supply CBS28-1
on Citation 550 / 560 / 680 / 680A / 700



mcico.com

truebluepowerusa.com