



1. Description

1.1. Project

Project Name	pedal_ecu
Board Name	NUCLEO-F446RE
Generated with:	STM32CubeMX 6.15.0
Date	10/06/2026


1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F446
MCU name	STM32F446RETx
MCU Package	LQFP64
MCU Pin number	64

1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------

2. Pinout Configuration

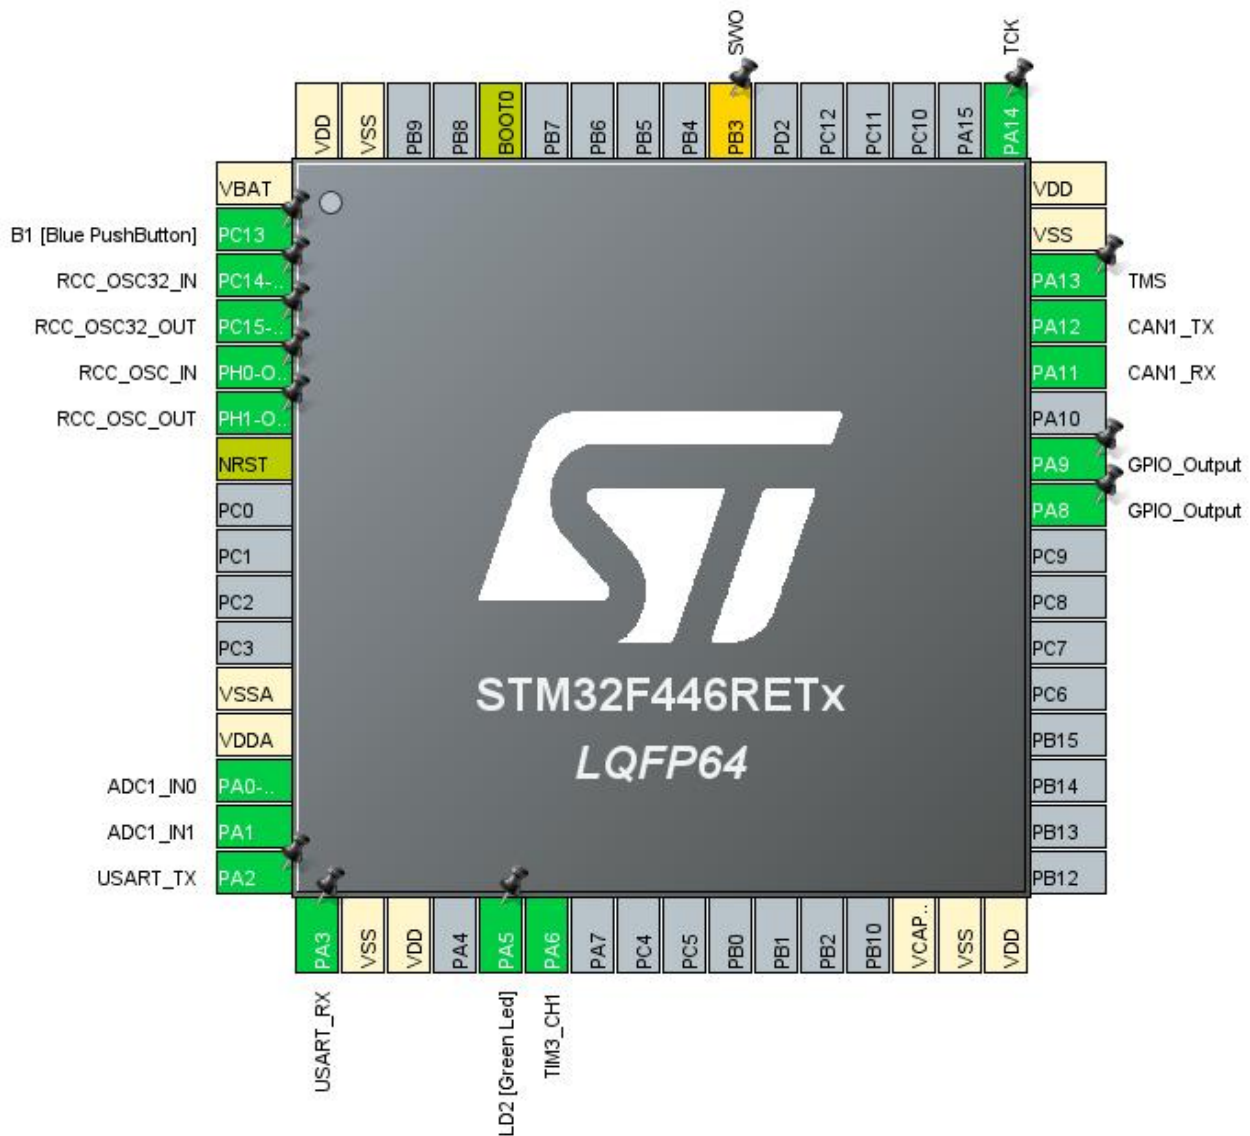


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PH0-OSC_IN	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
14	PA0-WKUP	I/O	ADC1_IN0	
15	PA1	I/O	ADC1_IN1	
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 *	I/O	GPIO_Output	LD2 [Green Led]
22	PA6	I/O	TIM3_CH1	
30	VCAP_1	Power		
31	VSS	Power		
32	VDD	Power		
41	PA8 *	I/O	GPIO_Output	
42	PA9 *	I/O	GPIO_Output	
44	PA11	I/O	CAN1_RX	
45	PA12	I/O	CAN1_TX	
46	PA13	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	TCK
55	PB3 **	I/O	SYS_JTDO-SWO	SWO
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

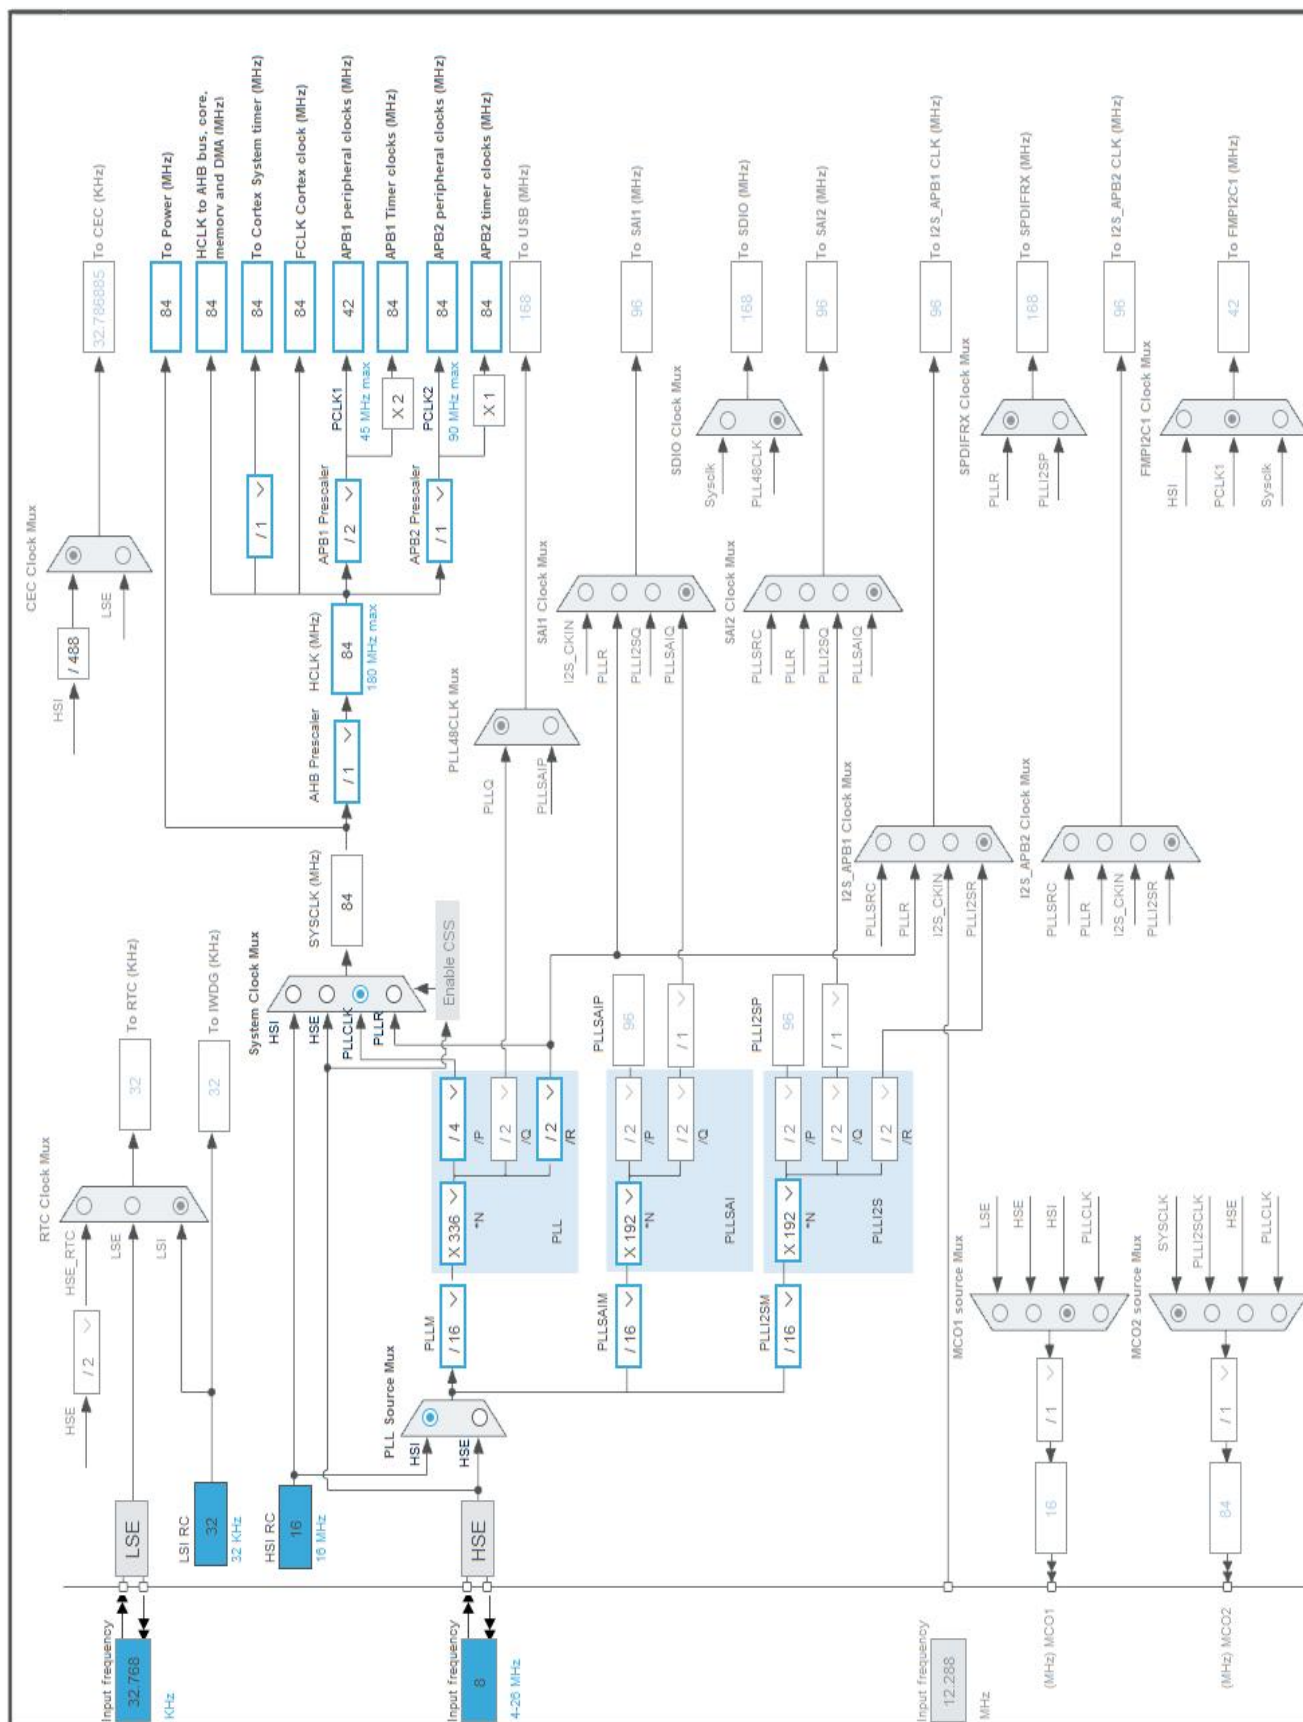

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32F4
Line	STM32F446
MCU	STM32F446RETx
Datasheet	DS10693 Rev6

1.2. Parameter Selection

Temperature	25
Vdd	3.3

1.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP_UDM (Under Drive)
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	RAM/FLASH/REGON/ART/P REFETCH	n/a
CPU Frequency	180 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	46 mA	55 μ A
Duration	0.1 ms	0.9 ms
DMIPS	225.0	0.0
Ta Max	98.02	104.99
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	4.65 mA
Battery Life	1 month	Average DMIPS	225.0 DMIPS

1.6. Chart

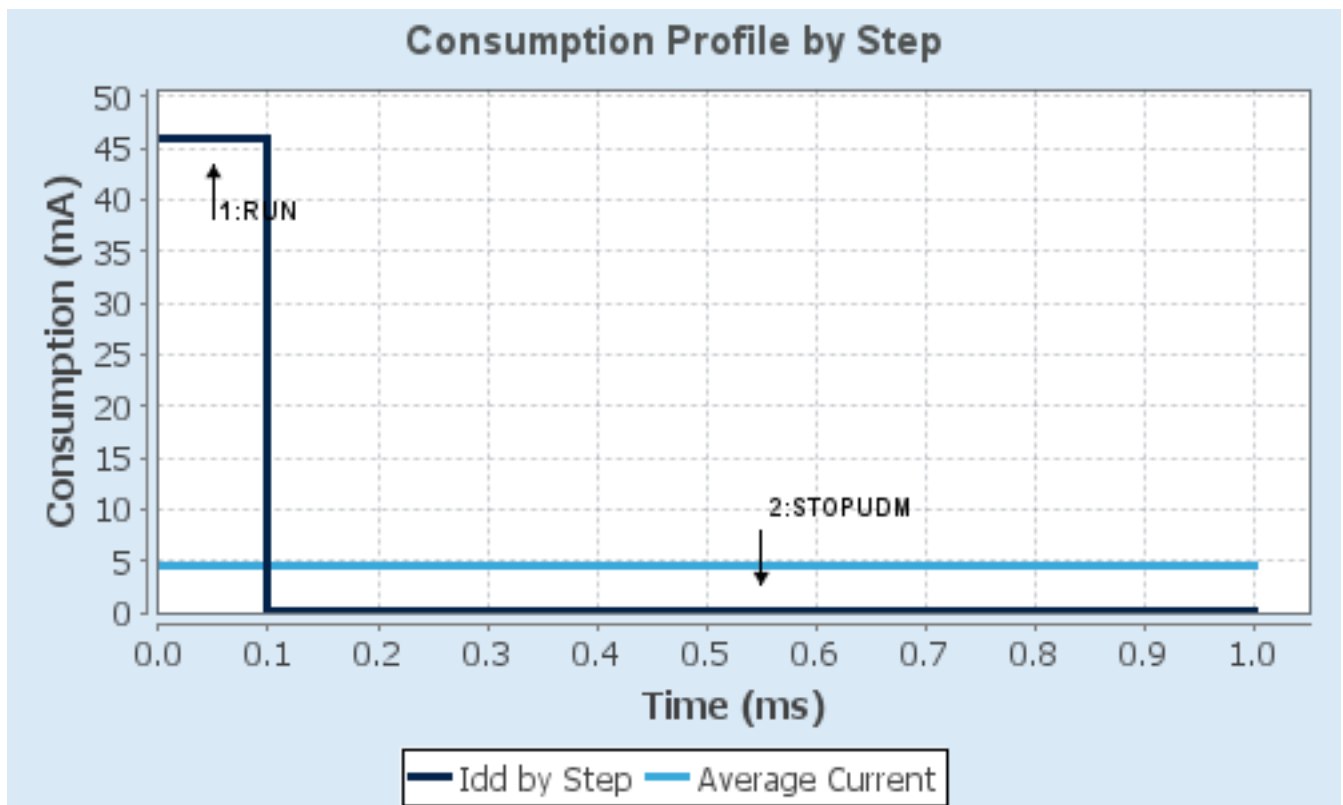

2. Software Project

2.1. Project Settings

Name	Value
Project Name	pedal_ecu
Project Folder	C:\Users\imgyumin\STM32CubeIDE\workspace_1.19.0\pedal_ecu
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F4 V1.28.3
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_USART2_UART_Init	USART2
4	MX_ADC1_Init	ADC1
5	MX_CAN1_Init	CAN1
6	MX_TIM3_Init	TIM3

3. Peripherals and Middlewares Configuration

3.1. ADC1

mode: IN0

mode: IN1

3.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode	Independent mode
ADC_Settings:	
Clock Prescaler	PCLK2 divided by 4
Resolution	12 bits (15 ADC Clock cycles)
Data Alignment	Right alignment
Scan Conversion Mode	Enabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	EOC flag at the end of single channel conversion

ADC_Regular_ConversionMode:

Number Of Conversion	2 *
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
<u>Rank</u>	1
Channel	Channel 0
Sampling Time	84 Cycles *
<u>Rank</u>	2 *
Channel	Channel 0
Sampling Time	84 Cycles *

ADC_Injected_ConversionMode:

Number Of Conversions	0
-----------------------	---

WatchDog:

Enable Analog WatchDog Mode	false
-----------------------------	-------

3.2. CAN1

mode: Activated

3.2.1. Parameter Settings:

Bit Timings Parameters:

Prescaler (for Time Quantum)	6 *
Time Quantum	142.85714285714286 *
Time Quanta in Bit Segment 1	11 Times *
Time Quanta in Bit Segment 2	2 Times *
Time for one Bit	2000 *
Baud Rate	500000 *
ReSynchronization Jump Width	1 Time

Basic Parameters:

Time Triggered Communication Mode	Disable
Automatic Bus-Off Management	Enable *
Automatic Wake-Up Mode	Disable
Automatic Retransmission	Enable *
Receive Fifo Locked Mode	Disable
Transmit Fifo Priority	Disable

Advanced Parameters:

Operating Mode	Normal
----------------	--------

3.3. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

3.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 3
Power Over Drive	Disabled

3.4. SYS

Debug: Serial Wire

Timebase Source: SysTick

3.5. TIM3

Clock Source : Internal Clock

Channel1: PWM Generation CH1

3.5.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	83 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	999 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High

3.6. USART2

Mode: Asynchronous

3.6.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
----------------	----------------------

Over Sampling

16 Samples

*** User modified value**

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA0-WKUP	ADC1_IN0	Analog mode	No pull-up and no pull-down	n/a	
	PA1	ADC1_IN1	Analog mode	No pull-up and no pull-down	n/a	
CAN1	PA11	CAN1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA12	CAN1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
TIM3	PA6	TIM3_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_RX
Single Mapped Signals	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PC13	GPIO_EXTI13	External Interrupt Mode with Falling edge trigger detection	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [Green Led]
	PA8	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA9	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	

4.2. DMA configuration

nothing configured in DMA service

4.3. NVIC configuration

4.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1, ADC2 and ADC3 interrupts	unused		
CAN1 TX interrupt	unused		
CAN1 RX0 interrupt	unused		
CAN1 RX1 interrupt	unused		
CAN1 SCE interrupt	unused		
TIM3 global interrupt	unused		
USART2 global interrupt	unused		
EXTI line[15:10] interrupts	unused		
FPU global interrupt	unused		

4.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true

*** User modified value**

5. System Views

5.1. Category view

5.1.1. Current

Middleware

System Core

Analog

Timers

Connectivity

Multimedia

Computing

DMA

ADC1



TIM3



CAN1



GPIO



IIVIC



RCC



SYS



USART2



6. Docs & Resources

Type

Link