

### 3DO Nozzle Camera Mount for Prusa i3 MK3S+

Clamika  
Mount for 3DO HiRes 4K Nozzle Cam with Sony Chips for my Prusa i3MK3S+.

2h 14m Druckzeit: 1x 0.20 mm 0.40 mm PET 17.00 g Prusa MK3S+ & MK3S2

[Download](#)

Like [Comment](#) [Share](#) [Email](#) [Print](#)

[Modell bearbeiten](#) [Neuer Wettbewerb](#)

aktualisiert 20. März 2023

Details

Dateien

Makes & Kommentare

Nutzer-Druckdateien

Remixes

Kollektionen

Verwandte Modelle

[PDF](#)

#### Beschreibung

I found the Hires nozzlecam by 3DO with 4K resolution and a high quality Sony video chip on the web. A nice improvement over the standard endoscope type nozzle cams you find on Amazon etc.


But how to mount it to my Prusa i3 MK3S+? There is no model for it (at least I could not find one). So I had to design it by myself. It was a long process and because the PCB of the camera and its USB cable mount are VERY brittle pieces of electronics I managed to break some of them during the development process.

So here is my WARNING: be very careful with the PCB and all the tiny cables. Do not stress this parts or they will break and you have to buy a new one (like me...).


#### HANDLE THE CAMERA, THE PCB AND CABLEADAPTERS WITH EXTREME CARE!

The design has three parts:


the camera mount.

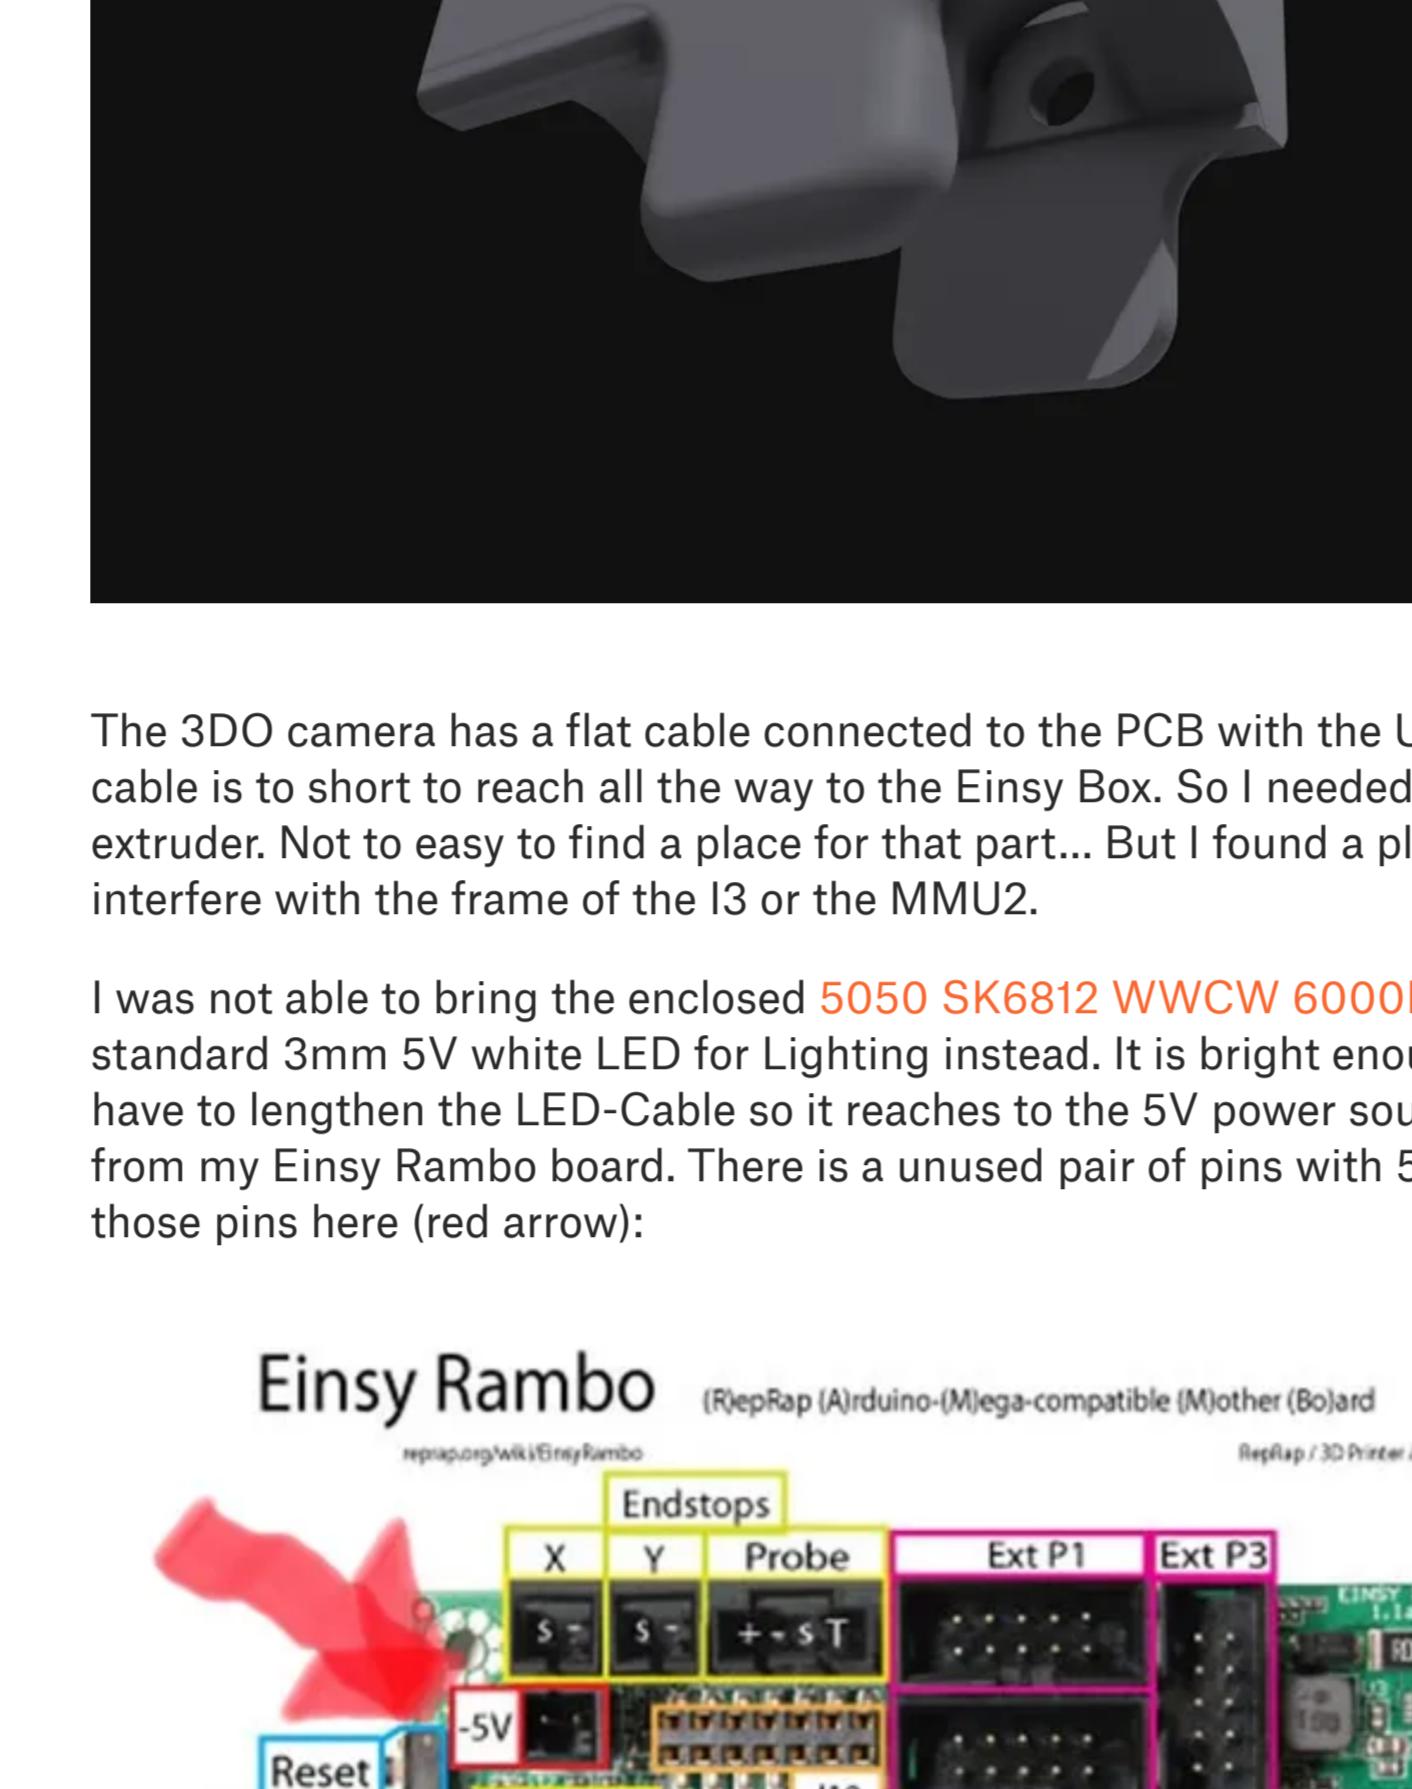

the PCB box with lid

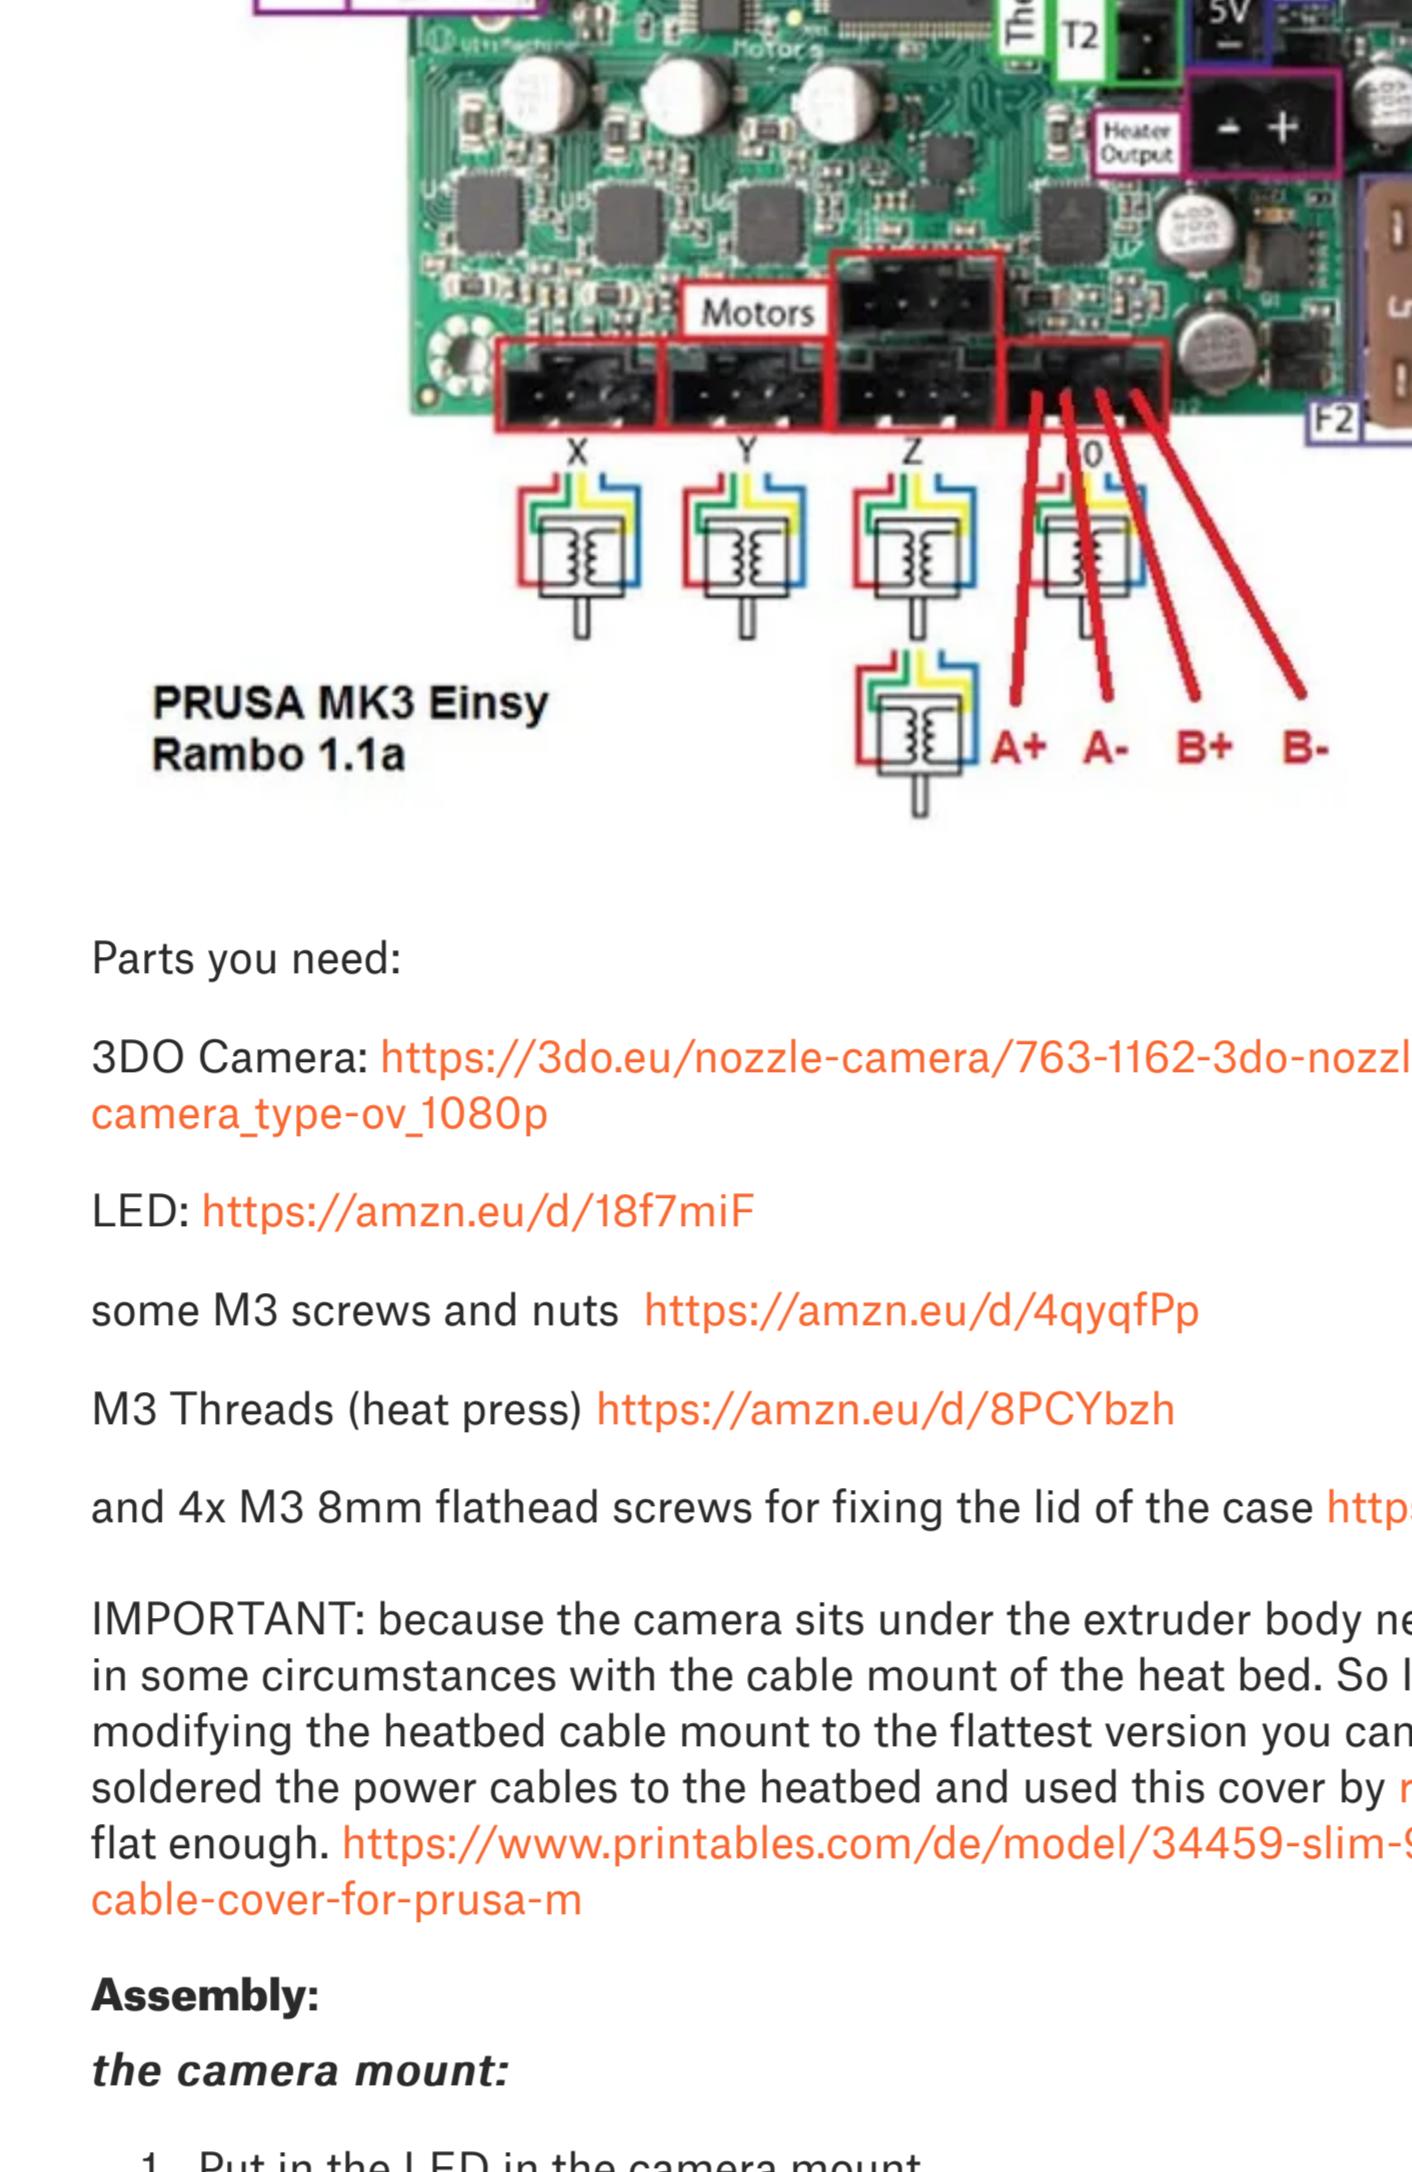

the boxmount.

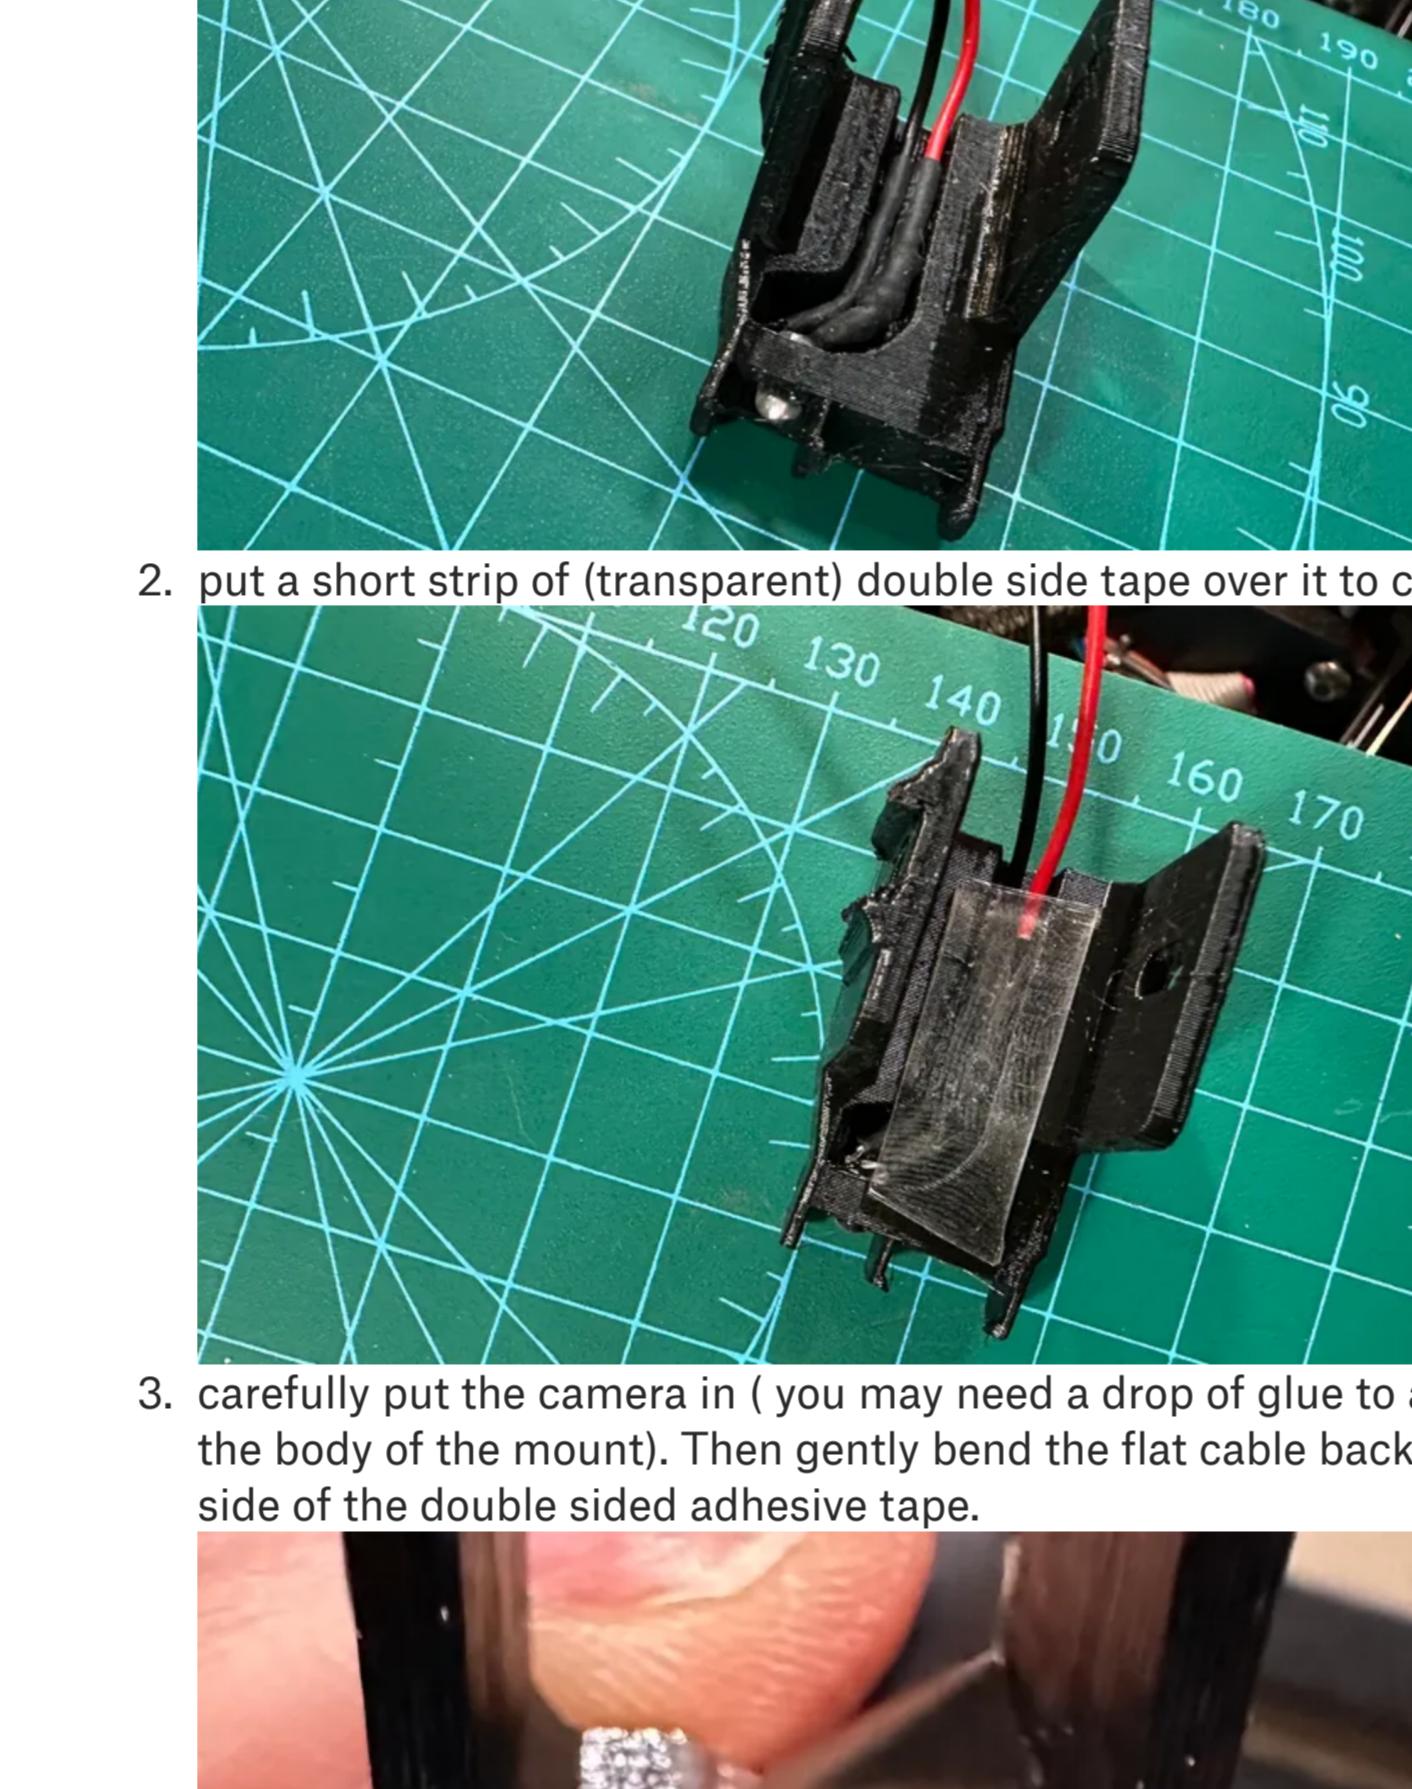

The 3DO camera has a flat cable connected to the PCB with the USB cable Adapter. This flat cable is to short to reach all the way to the Einsky Box. So I needed a PCB box near the extruder. Not so easy to find a place for that part... But I found a place for it where it does not interfere with the frame of the i3 or the MMU2.

I was not able to bring the enclosed 5050 SK6812 WWCW 6000K LEDS to life. So I used a standard 3mm 5V white LED instead. It is bright enough and a bit smaller. You have to lengthen the LED-Cable so it reaches to the 5V power source. I took the 5V power from my Einsky RAMBO board. There is a unused pair of pins with 5V DC (or a 5V f.L.) you find those pins here (red arrow).



Parts you need:

3DO Camera: [https://3do.eu/nozzle-camera/763-1162-3do-nozzle-camera.html#/142-camera\\_type-ov\\_1080p](https://3do.eu/nozzle-camera/763-1162-3do-nozzle-camera.html#/142-camera_type-ov_1080p)

LED: <https://amzn.eu/d/4qytfPp>

some M3 screws and nuts: <https://amzn.eu/d/4qytfPp>

M3 Threads (heat press) <https://amzn.eu/d/8PCYbzH>


and 4x M3 8mm flathead screws for fixing the lid of the case: <https://amzn.eu/d/09IlsNok>

IMPORTANT: because the camera sits under the extruder body near the nozzle it will interfere in some circumstances with the cable mount of the heat bed. So I strongly recommend modifying the heating cable mount to the flattest version you can find. I discarded the screws, soldered the power cables to the heated bed and used this cover by robomagus for them. This is flat enough. <https://www.printables.com/de/model/34459-slim-90degree-mk52-heated-cable-cover-for-prusa-m>

#### Assembly:

the camera mount:

- Put in the LED in the camera mount.

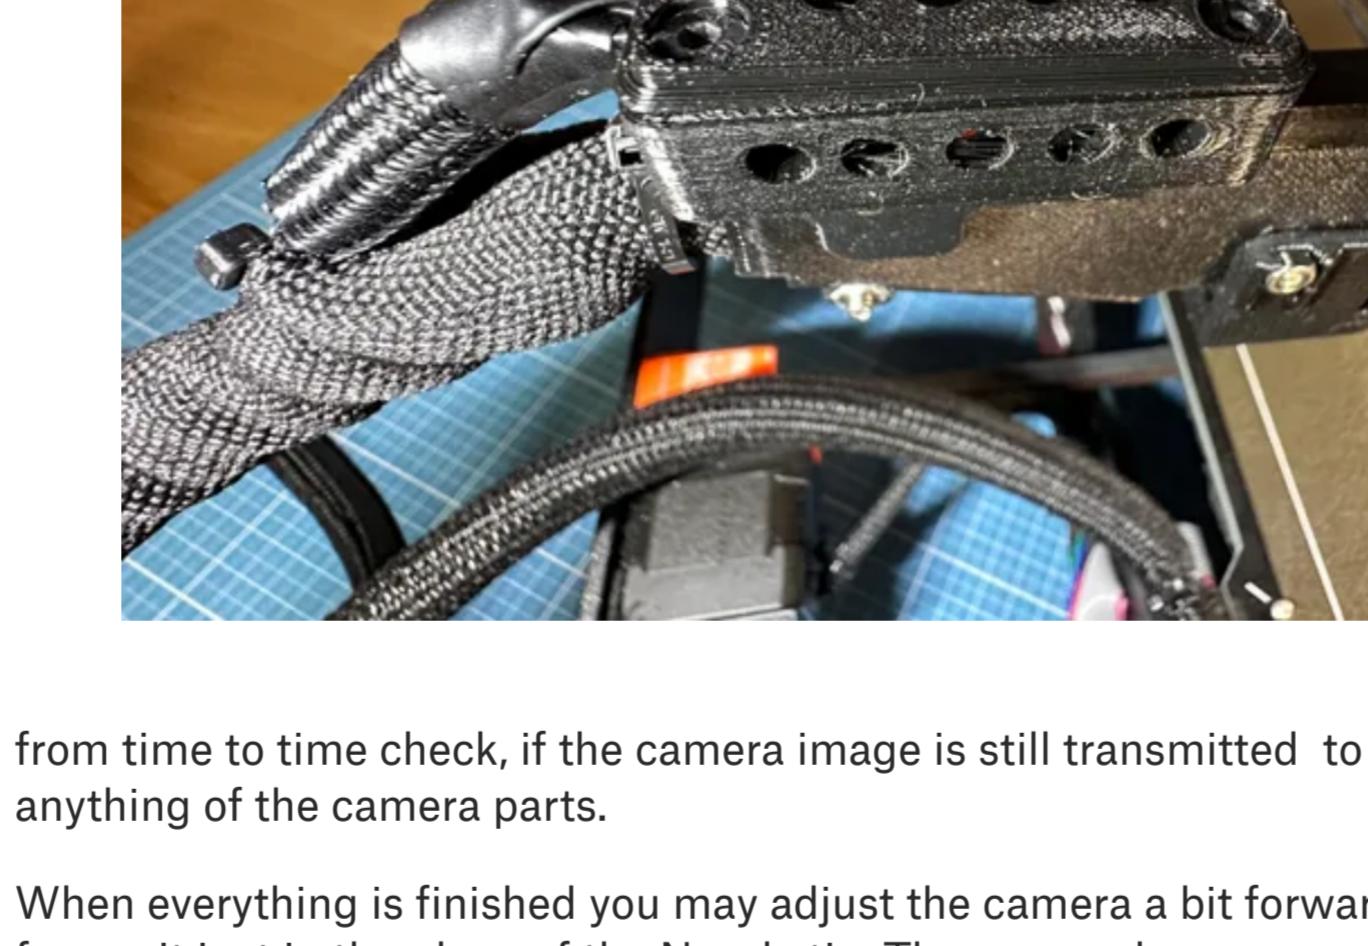

- put a short strip of (transparent) double side tape over it to close the cable canal




- carefully put the camera in! you may need a drop of glue to attach the camera back to the body of the mount. Then gently bend the flat cable back and attache it to the upper side of the double sided adhesive tape.




- the camera mount is complete and can be attached to the extruder cable arm later.

The PCB box:


- VERY gently put the PCB in the case. Do not press it in by using any force. The SMD components are really brittle. I once used two tiny pieces of double sided sticky tape to attach the PCB to the base of the box. Later I found out it is not necessary and left out the sticky tape here.

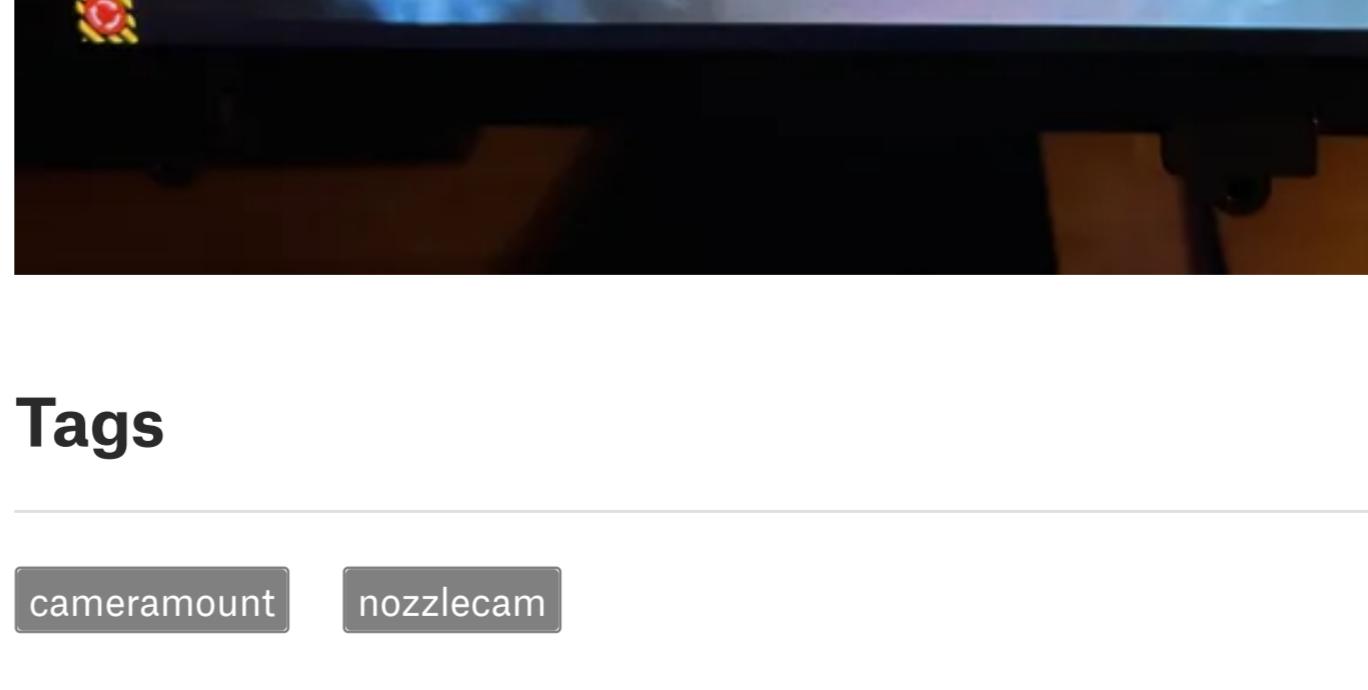

- Attach the base for the PCB box to the top of the cable arm. Remove the upper M3 screw and replace it with a longer one. Insert it through both the base and the cable arm. The PCB case is glued with a drop of super glue on top of the base. Be sure that the left (when looking from behind) side of the PCB box and the base are even aligned. The case will overlap the right side of the base. That is intentional. If you do not put together the box in this way (a bit of the middle to the right) it will crash into the case of the power source when in max X position. The PCB box should not cut over the left side of the extruder body.

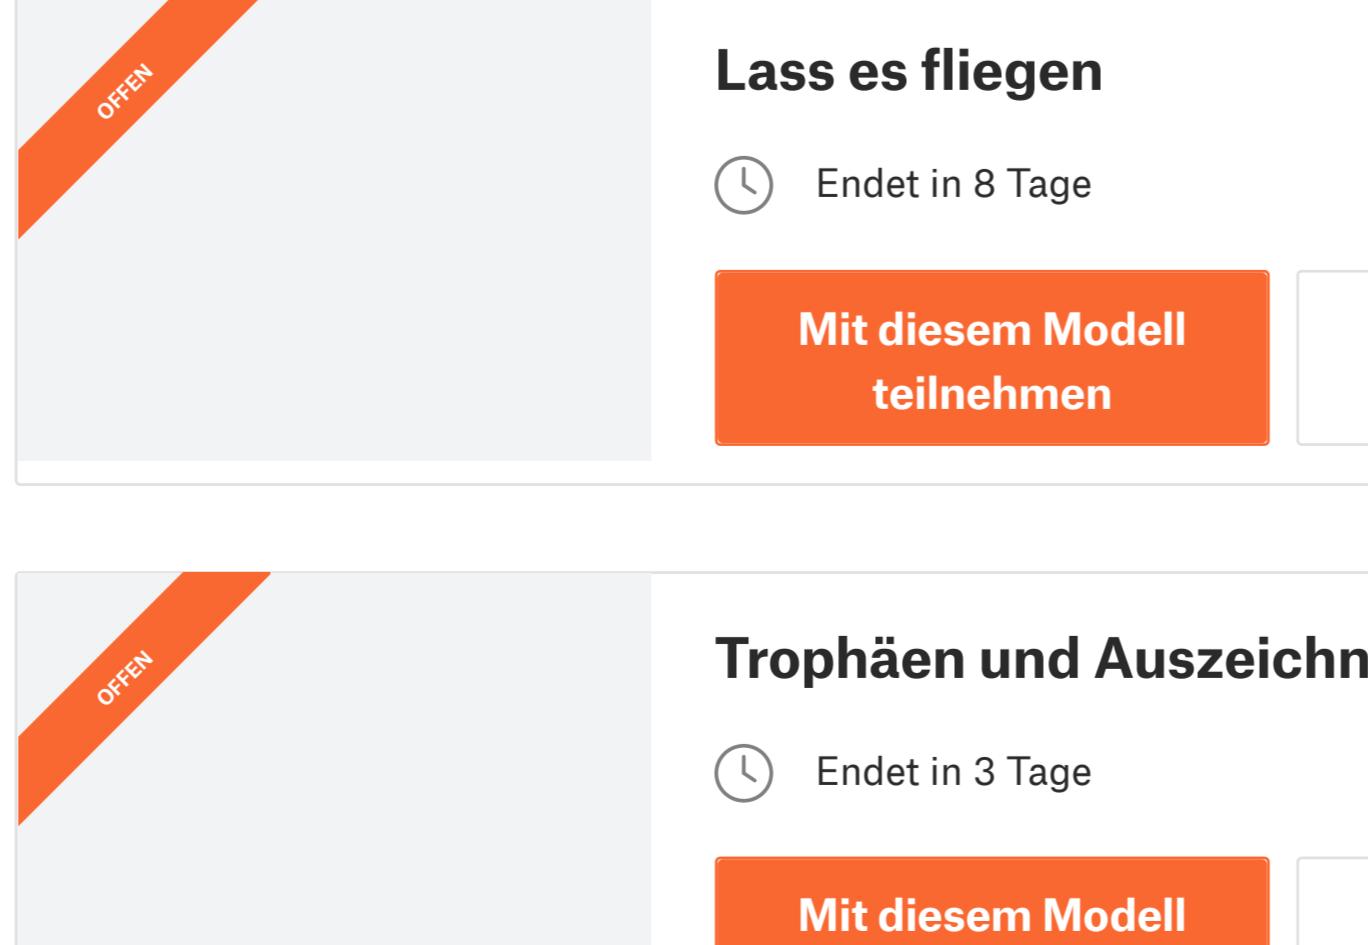


- Gently bend the USB cable through the hole at the short side of the case. Keep an eye on the tiny flat cable when setting in the lid.

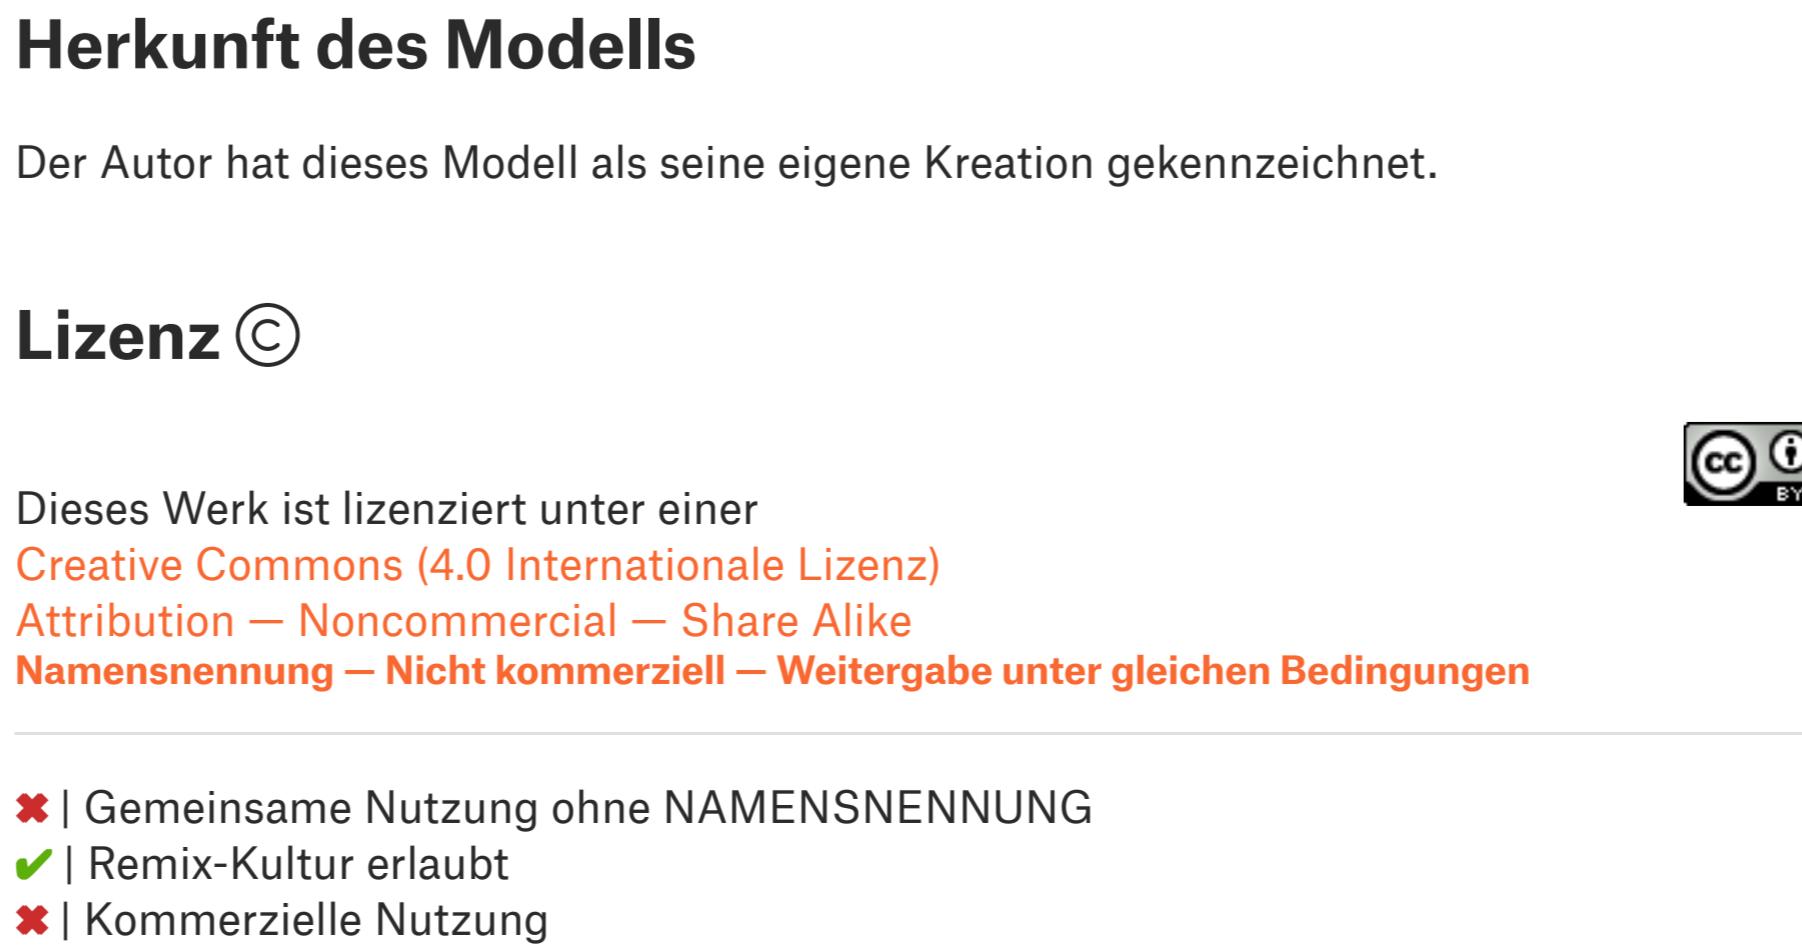

from time to time check, if the camera image is still transmitted to assure you did not damage anything of the camera parts.

When everything is finished you may adjust the camera a bit forward or backward to make the focus sit just in the plane of the Nozzle tip. The camera has a very small field of depth because it is a macro camera. So you have to find the best camera position. That's why there is a slit for the screw and not just a hole.

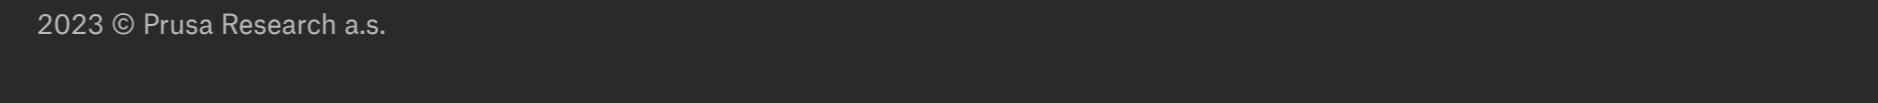

Tags

cameramount nozzlecam

#### Verfügbare Wettbewerbe



#### Herkunft des Modells

Der Autor hat dieses Modell als seine eigene Kreation gekennzeichnet.

#### Lizenz

Dieses Werk ist lizenziert unter einer Creative Commons (CC) International Lizenz

Attribution – NonCommercial – ShareAlike

Namensnennung – Nicht kommerziell – Weitergabe unter gleichen Bedingungen

Gemeinsame Nutzung ohne NAMENSNENNUNG

Remix-Kultur erlaubt

Kommerzielle Nutzung

Freie Kulturarbeiten

Erfüllt offene Definition

[Wettbewerbsdetails](#)

[Wettbewerbsdetails](#)