Power and FPGA

Power.sch

Ethernet

Ethernet.sch

Clock

Clock.sch

RF Frontend

RFFrontend.sch

Input Output

InputOutput.sch

PA

PA.sch

Do Not Include (DNI) any components
on this page fo assembly





KF7O Steve Haynal
SofterHardware

Sheet: /
File: hermeslite.sch

Title: Hermes-Lite

Size: USLetter	Date: 2019-08-15	**Rev: 2.0-build9**
KiCad E.D.A. kicad 5.0.2-bee76a070ubuntu16.04.1		Id: 1/7

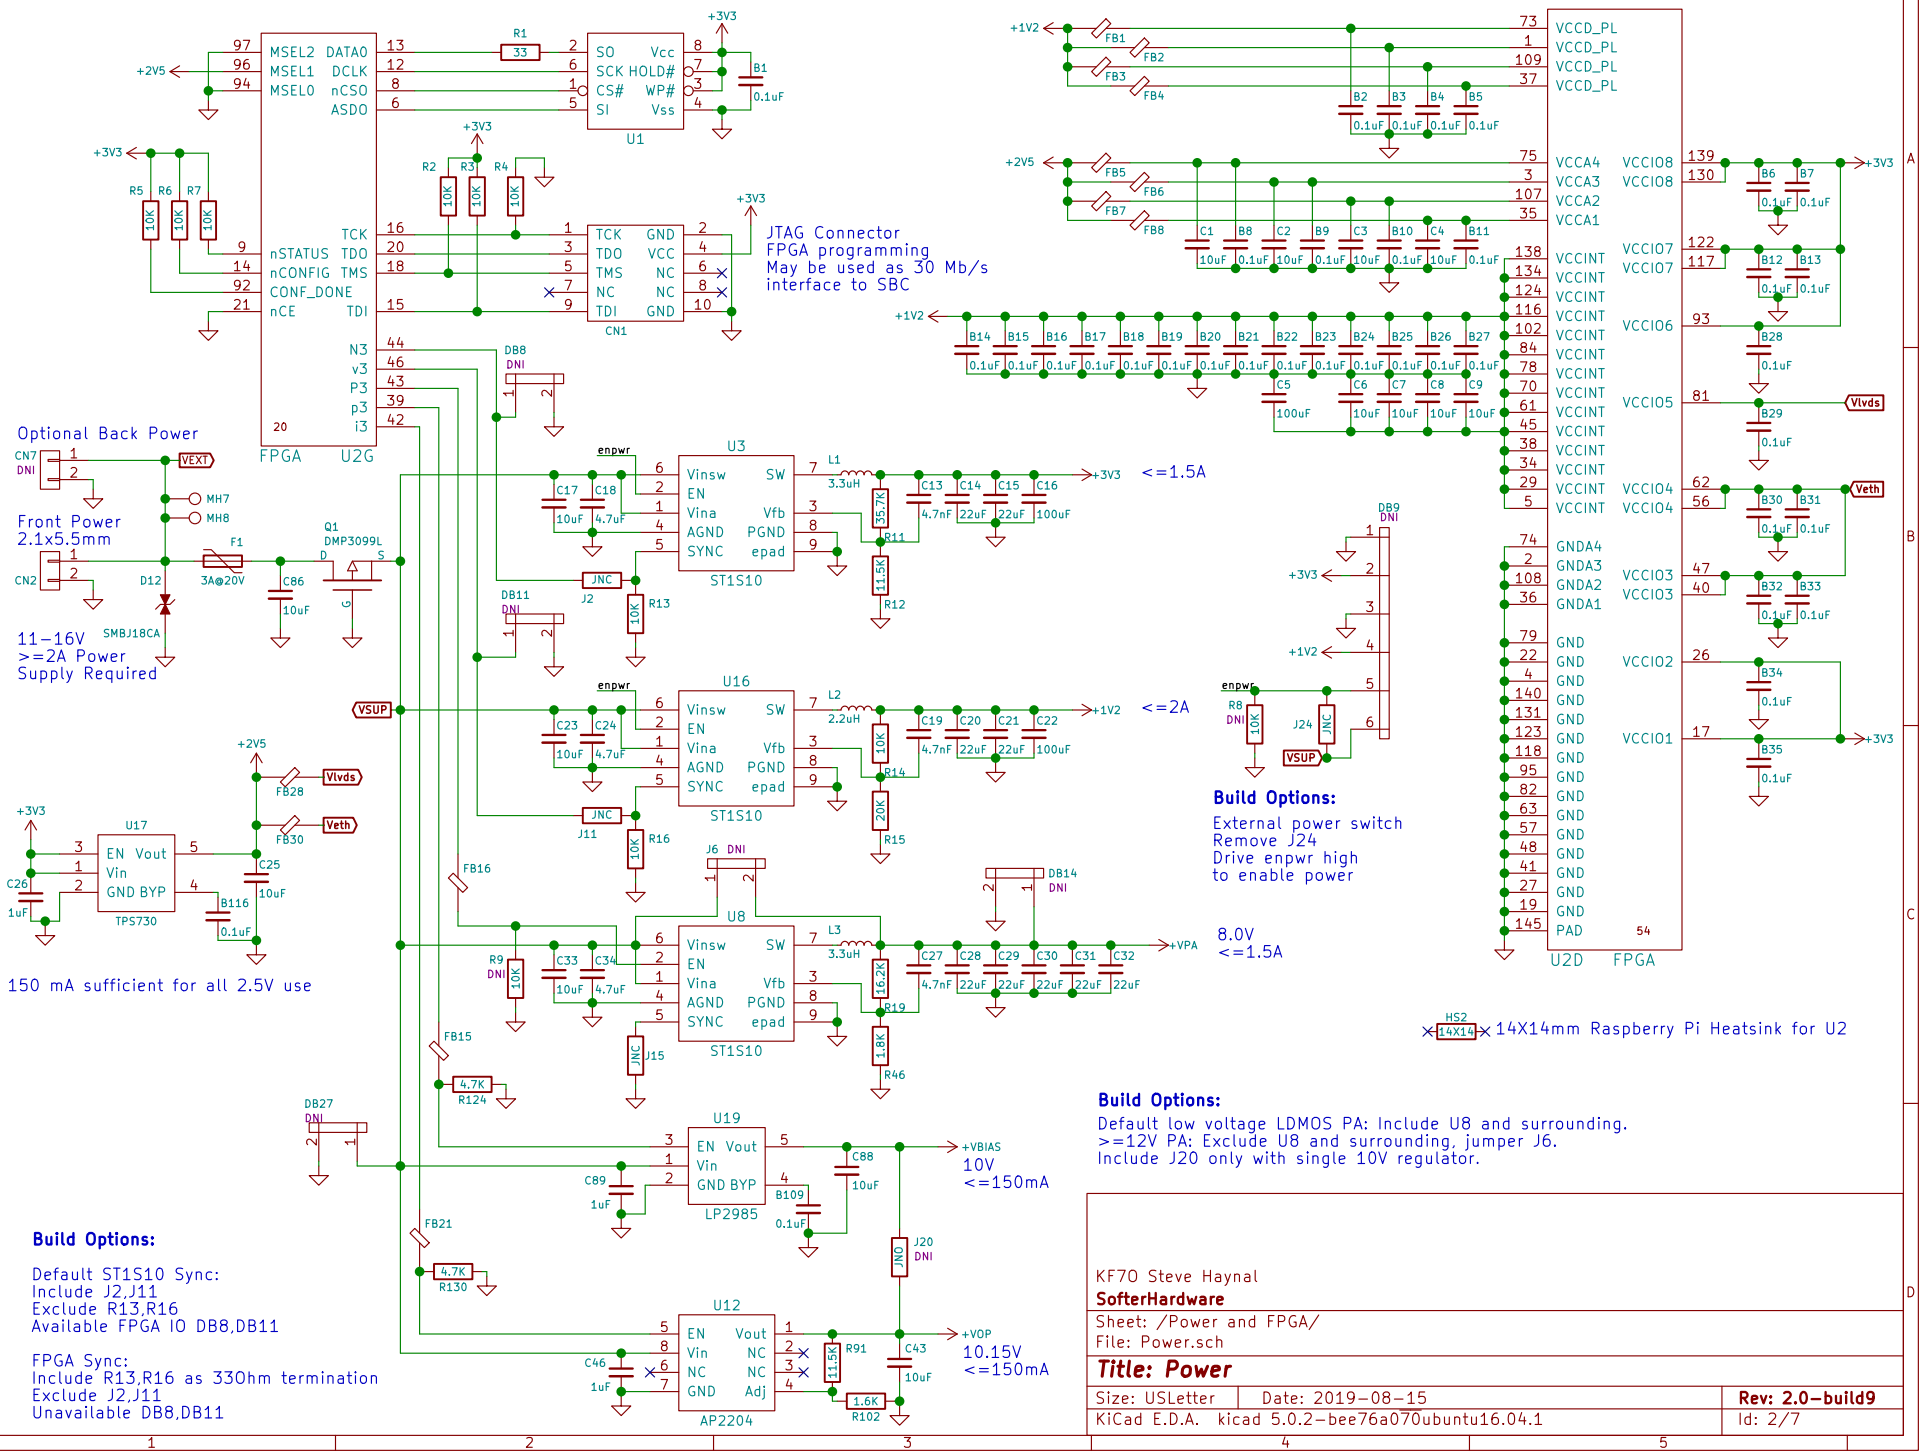
JTAG Connector
FPGA programming
May be used as 30 Mb/s
interface to SBC
Optional Back Power
Front Power
2.1x5.5mm
11–16V
>=2A Power
Supply Required
<=1.5A
<=2A
Build Options:
External power switch
Remove J24
Drive enpwr high
to enable power
8.0V
<=1.5A
150 mA sufficient for all 2.5V use
14X14mm Raspberry Pi Heatsink for U2
Build Options:
Default low voltage LDMOS PA: Include U8 and surrounding.
>=12V PA: Exclude U8 and surrounding, jumper J6.
Include J20 only with single 10V regulator.
Build Options:
Default ST1S10 Sync:
Include J2,J11
Exclude R13,R16
Available FPGA IO DB8,DB11
FPGA Sync:
Include R13,R16 as 330hm termination
Exclude J2,J11
Unavailable DB8,DB11
10V
<=150mA
10.15V
<=150mA
KF7O Steve Haynal
SofterHardware
Sheet: /Power and FPGA/
File: Power.sch
Title: Power
Size: USLetter
Date: 2019–08–15
Rev: 2.0–build9
KiCad E.D.A. kicad 5.0.2–bee76a070ubuntu16.04.1
Id: 2/7

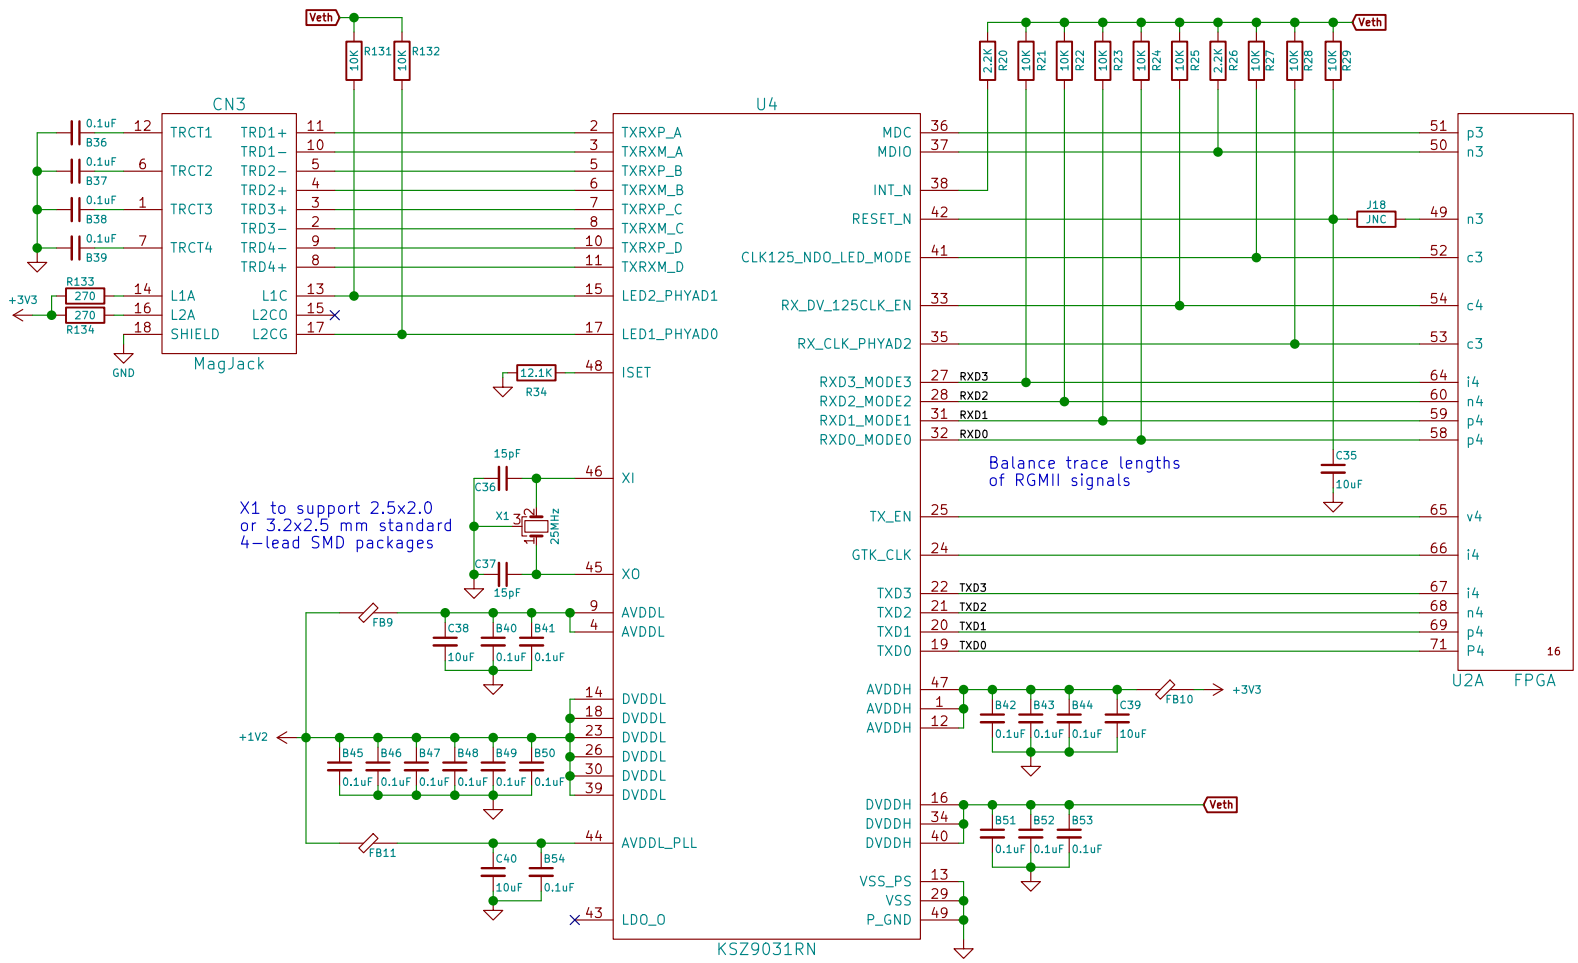

KF7O Steve Haynal	
SofterHardware	
Sheet: /Ethernet/	
File: Ethernet.sch	
Title: Ethernet	
Size: USLetter | Date: 2019-08-15	**Rev: 2.0-build9**
KiCad E.D.A. kicad 5.0.2-bee76a070ubuntu16.04.1	Id: 3/7

Build Options:

Default Versa with oscillator: Include FB12,C41,B56,B57,X2. Include R36,R38 if required by oscillator. Exclude J3,J4,C42.
Versa with crystal: Include X2 as crystal, B57,J4,J3 as jumper, C42,R38 as 15pF. Exclude FB12,C41,B56,R36.
External clock: Configure U6 for CLKIN input and correct ratio, drive CL1 or CL5 with external clock.
Other experimental options possible with uFL connectors. See RF Frontend sheet for additional AD9866 clock options.

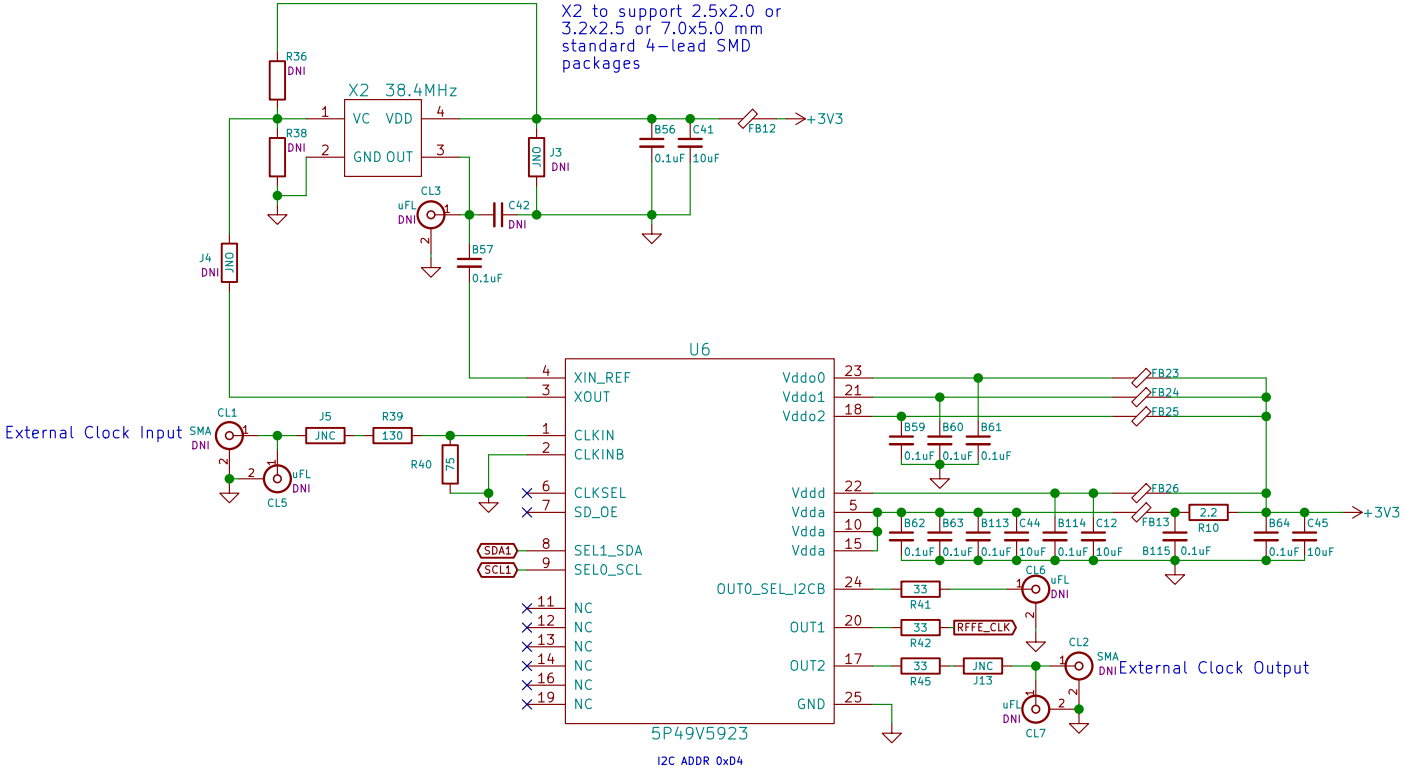

KF7O Steve Haynal		
SofterHardware		
Sheet: /Clock/		
File: Clock.sch		
Title: Clock		
Size: USLetter	Date: 2019-08-15	**Rev: 2.0-build9**
KiCad E.D.A. kicad 5.0.2-bee76a070ubuntu16.04.1		Id: 4/7

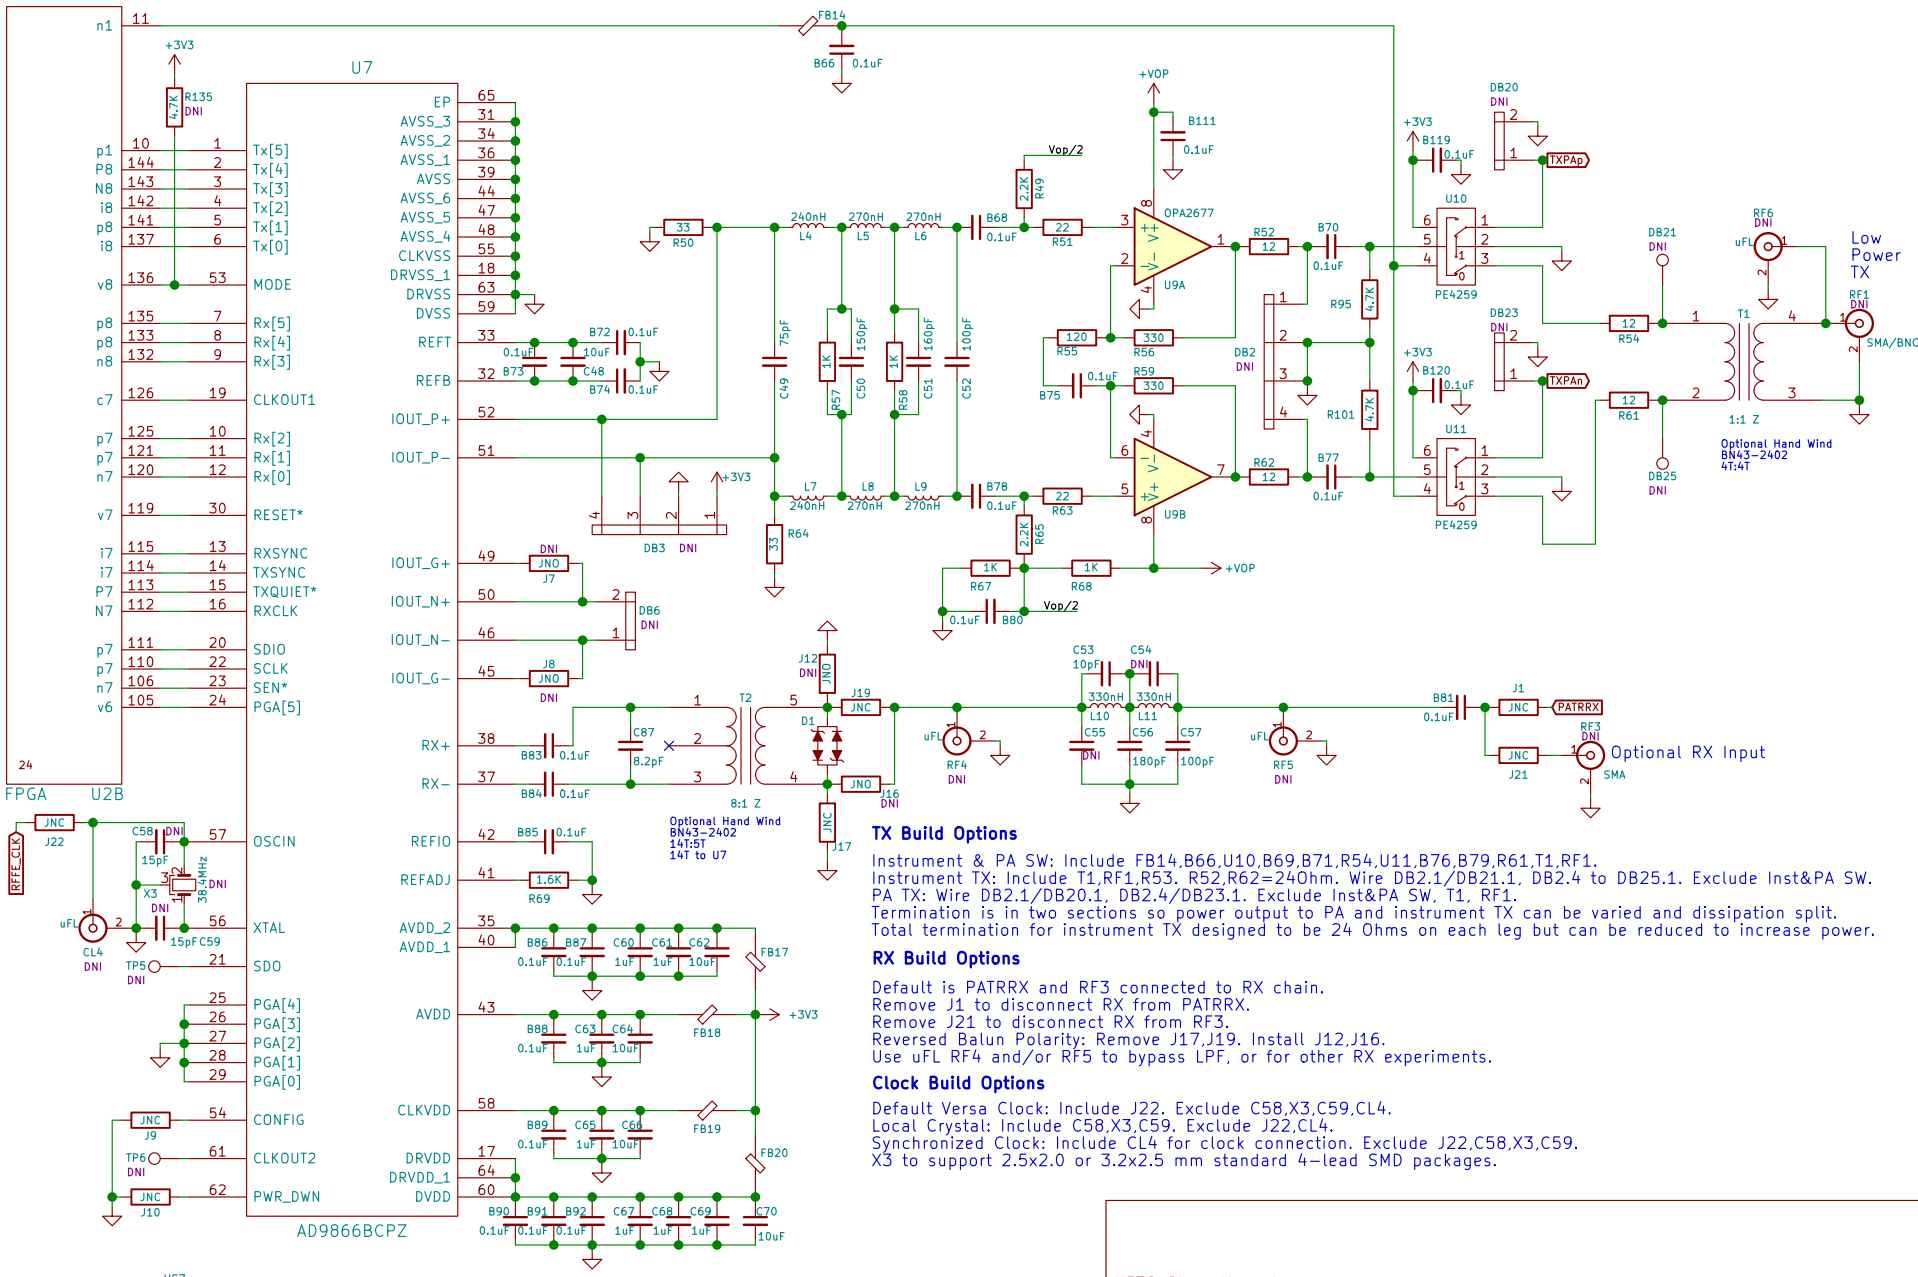

TX Build Options

Instrument & PA SW: Include FB14,B66,U10,B69,B71,R54,U11,B76,B79,R61,T1,RF1.
Instrument TX: Include T1,RF1,R53. R52,R62=240hm. Wire DB2.1/DB21.1, DB2.4 to DB25.1. Exclude Inst&PA SW.
PA TX: Wire DB2.1/DB20.1, DB2.4/DB23.1. Exclude Inst&PA SW, T1, RF1.
Termination is in two sections so power output to PA and instrument TX can be varied and dissipation split.
Total termination for instrument TX designed to be 24 Ohms on each leg but can be reduced to increase power.

RX Build Options

Default is PATRRX and RF3 connected to RX chain.
Remove J1 to disconnect RX from PATRRX.
Remove J21 to disconnect RX from RF3.
Reversed Balun Polarity: Remove J17,J19. Install J12,J16.
Use uFL RF4 and/or RF5 to bypass LPF, or for other RX experiments.

Clock Build Options

Default Versa Clock: Include J22. Exclude C58,X3,C59,CL4.
Local Crystal: Include C58,X3,C59. Exclude J22,CL4.
Synchronized Clock: Include CL4 for clock connection. Exclude J22,C58,X3,C59.
X3 to support 2.5x2.0 or 3.2x2.5 mm standard 4-lead SMD packages.

Op Amp Design by Jim N2ADR
TX Filter Design by Claudio IN3OTD/DK1CG
RX Filter Design by Andrew G4XZL

Expected User Install for Standard Build

Only if no companion card and desired by user:
RF1 RF3

KF7O Steve Haynal
SofterHardware
Sheet: /RF Frontend/
File: RFFrontend.sch

Title: RF Frontend

Size: USLetter	Date: 2019-08-15	**Rev: 2.0-build9**
KiCad E.D.A. kicad 5.0.2-bee76a070ubuntu16.04.1		Id: 5/7

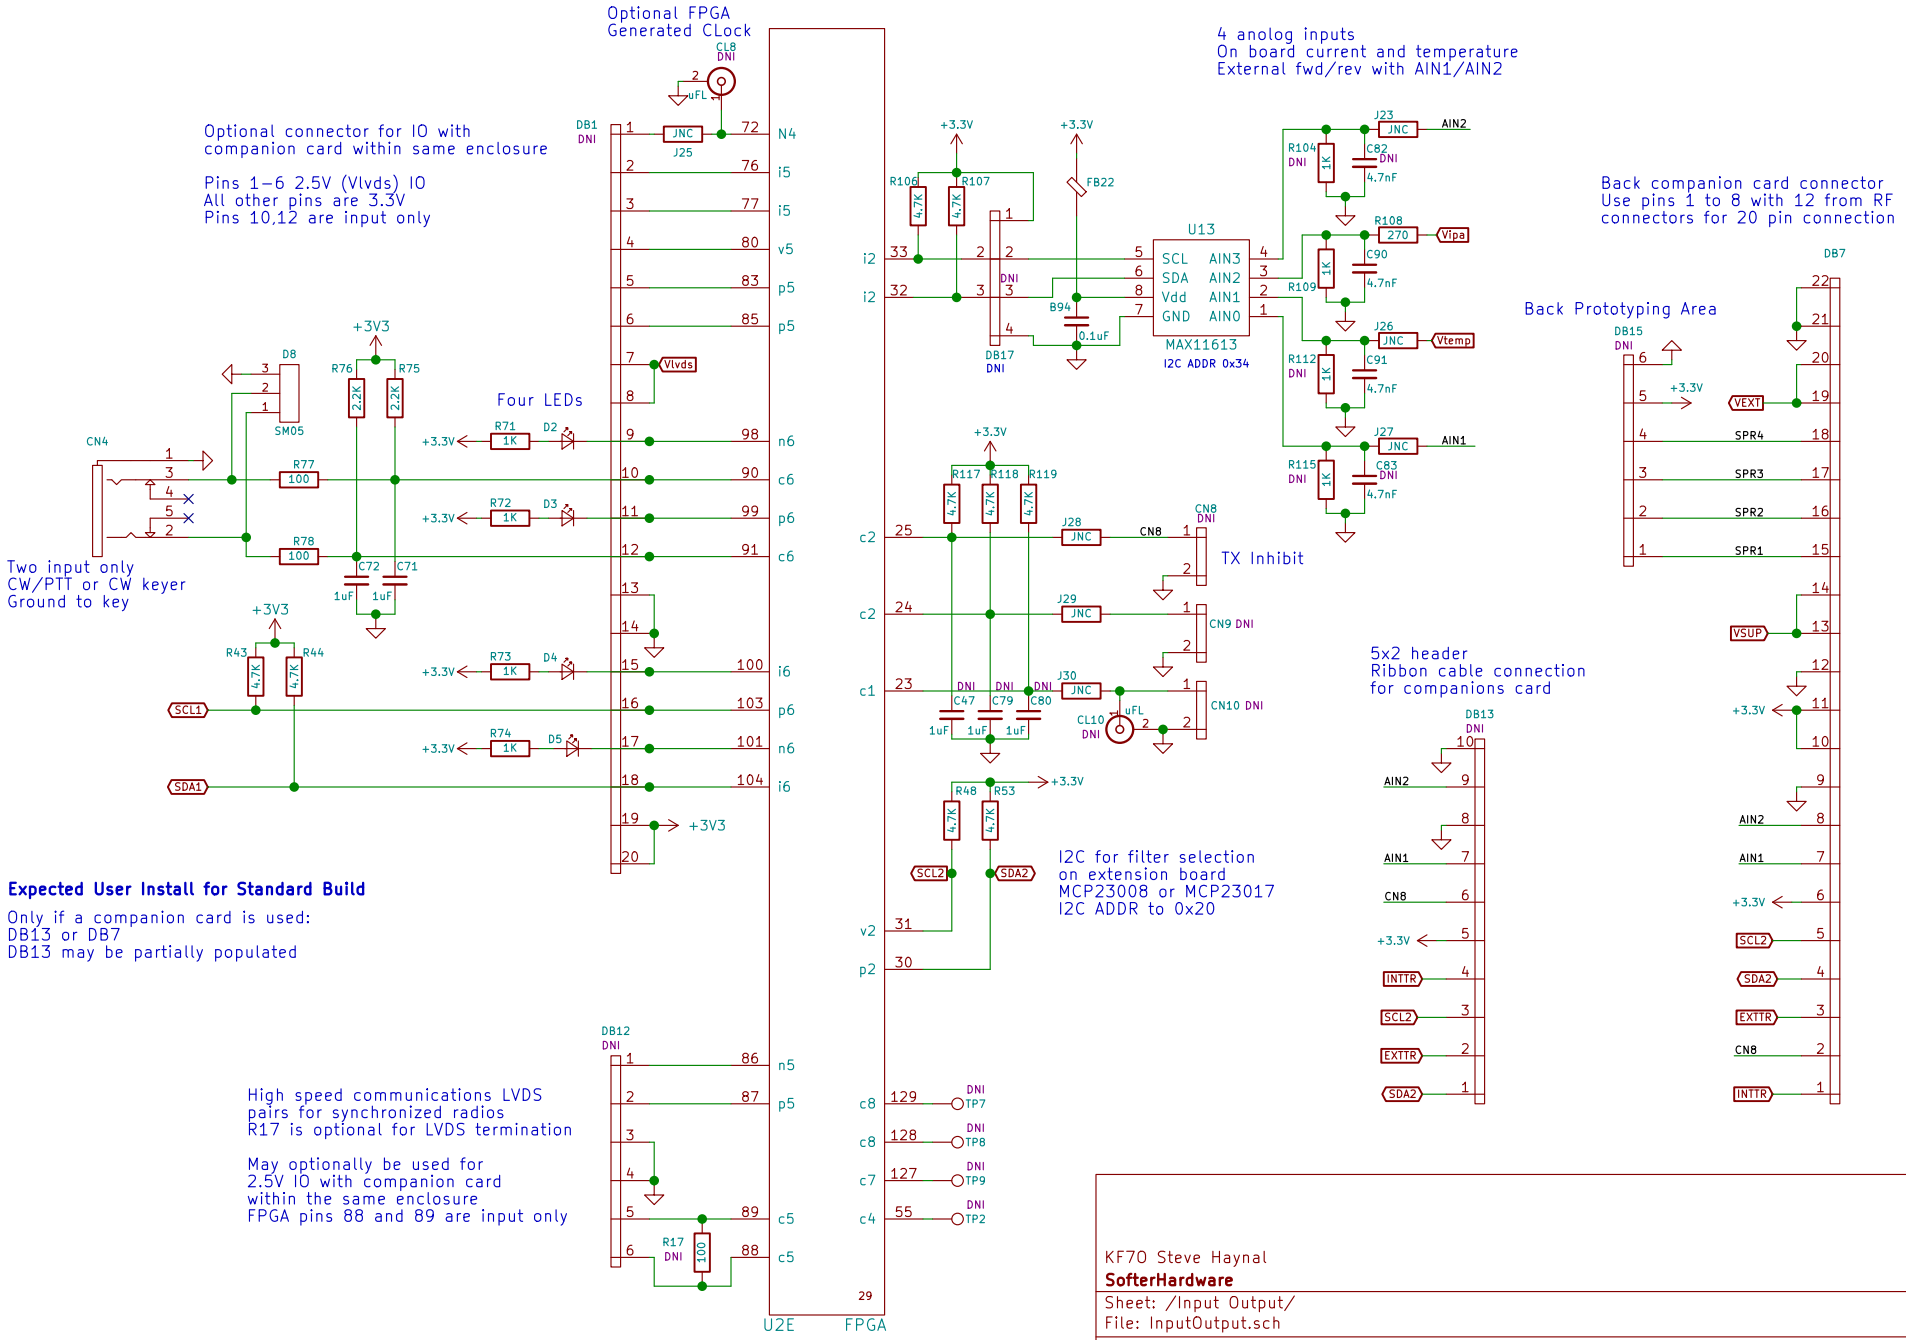

Expected User Install for Standard Build

Only if a companion card is used:
DB13 or DB7
DB13 may be partially populated

KF7O Steve Haynal
SofterHardware
Sheet: /Input Output/
File: InputOutput.sch

Title: Hermes-Lite Input Output

Size: USLetter	Date: 2019-08-15	**Rev: 2.0-build9**
KiCad E.D.A. kicad 5.0.2-bee76a070ubuntu16.04.1		Id: 6/7

Build Optons

Any or all components may be excluded if PA is unused.

SOT-89 or TO-220 LDMOS supported on main circuit board
TO-220 mounts to side of enclosure
SOT-89 dissipates heat to PCB and side of enclosure

Deafult build uses 2 AFT05MS003 mounted on main board, 110mA bias

PLD-1.5 and alternate SOT-89 supported by adapter board
Adapter board dissipates heat to side of enclosure

RD15HVF1 Build Option

L33,L34 = 4.7 Ohm
R92,R99 = 500 Ohm
T3 = BN61-202 4T Pri, 2+2T Sec
200 mA bias

Build Options

No onboard TR relay installed by assembly house
On board TR: Hand install K2
External TR: Install J14 or wire from K2 pin 8 to pin 9

Add attenuation with R97,R98,R94,R100
if PA is overdriven

Hand Wind
B62152A4X30 or BN43-202
4T Secondary, 1+1T Primary
BN43-1502
8T Secondary, 2+2T Primary
B62152A4X30 runs hot, use 24AWG PTFE/FEP Wire

21 cm wire required

Expected User Install for Standard Build

T3
Either K2 or J14/equivalent wire
RF2 if no companion card

Internal PTT
May ground pin 1 during TX
depending on firmware setting
Pullup to 3.3V by K2
May pullup to 28V if K2 absent

External PTT
Will ground pin 1 during TX
External PA to supply pullup
voltage up to 28V

LDMOS Temperature Sensor

R127,R70,R47,R66 set for AFT05MS003. Bias voltage ranges from 2.5 to 3.5V
Set R127,R70 to 7.5K, R47,R66 to 3.3K for bias voltage range from 3.1 to 5.3V

Design based on work by Claudio IN3OTD/DK1CG, John W9JSW, and other LDMOS/MOSFET QRP PA designs

KF7O Steve Haynal
SofterHardware

Sheet: /PA/
File: PA.sch

Title: Hermes-Lite V2 5W Power Amplifier

Size: USLetter	Date: 2019-08-15	**Rev: 2.0-build9**
KiCad E.D.A. kicad 5.0.2-bee76a070ubuntu16.04.1		Id: 7/7