RTLSDR Scanner

Wideband RF Spectrum Scanning

Contents

Copyright

This document is Copyright © 2014 Al Brown

The RTLSDR Scanner software is Copyright © 2012 – 2014 Al Brown

License

Both this document and the RLTSDR Scanner is licensed under the GNU General Public License version 3 (http://www.gnu.org/licenses/gpl.html).

Contributors

Contributors to this document and the RTLSDR Scanner can be found at the GitHub page: https://github.com/EarToEarOak/RTLSDR-Scanner/graphs/contributors

Further Information

General information: http://eartoearoak.com/software/rtlsdr-scanner

Installation instructions: http://eartoearoak.com/software/rtlsdr-scanner/rtlsdr-scanner-installation

Code repository: https://github.com/EarToEarOak/RTLSDR-Scanner

Introduction

What is RTLSDR Scanner?

RTLSDR Scanner is a wideband spectrum analyser for RTLSDR dongles which allows the visualisation of radio frequency signals.

The software is cross-platform and runs under Linux, Windows and OS X.

RTLSDR Scanner provides both GUI and command line interfaces.

Required Hardware

- A PC, Mac or an embedded Linux platform such as the Raspberry Pi.

- A compatible RTLSDR dongle, see the OsmoSDR page for more details at http://sdr.osmocom.org/trac/wiki/rtl-sdr

Installation

Installation of the RTLSDR driver and library dependencies are beyond the scope of this document, further details can be found at: http://eartoearoak.com/software/rtlsdr-scanner/rtlsdr-scanner-installation

Common Terms

Band Offset

The frequency offset where data is taken from to give a smooth scan and overcome the non-linear frequency response of the dongle.

Calibration

The frequency compensation to apply to scanning to overcome errors in the dongle, specified in parts per million (ppm).

Dongle

The RTLSDR USB device to use to sample the radio data.

Dwell

The time spent sampling at each frequency step, longer dwell times will slow the scanning speed but potentially reduce noise. For short-lived signals a fast dwell time should be used otherwise it's amplitude may be significantly reduced.

FFT Size

The number of bins used for Fast Fourier Transform analysis, larger values give an increased frequency resolution but require more computational power and higher memory usage.

Gain

The gain (amplification) specified in Decibels (dB) to set the dongle to during a scan.

Geometric Mean

A type of mean (average) which indicates the typical value rather than the average value.

Local Oscillator (LO)

The frequency offset to apply to scans if an external frequency converter (mixer) is used. Up and down converters are used to extend the tuning range to the dongle. For up-converters the offset is positive and negative for down-converters.

Mean

The average.

Resolution Bandwidth (RBW)

The minimum frequency between two separate peaks.

Scan

One or more sweeps of the frequency range.

Server

A dongle connected to a network which provides data via the *rtl_tcp* utility.

Spectral Flatness

A measure of how flat the spectrum is. Pure white noise has a flatness of 1, this will decrease towards zero as more distinct signals appear above the noise floor

Sweep

A single pass of the frequency range.

Power Spectral Density

The method for converting the radio data into a frequency spectrum.

Window Function

A mathematical function used to reduce the effects of spectral leakage and noise when analysing data. Most users will probably want to leave this at it's default (Hamming window).
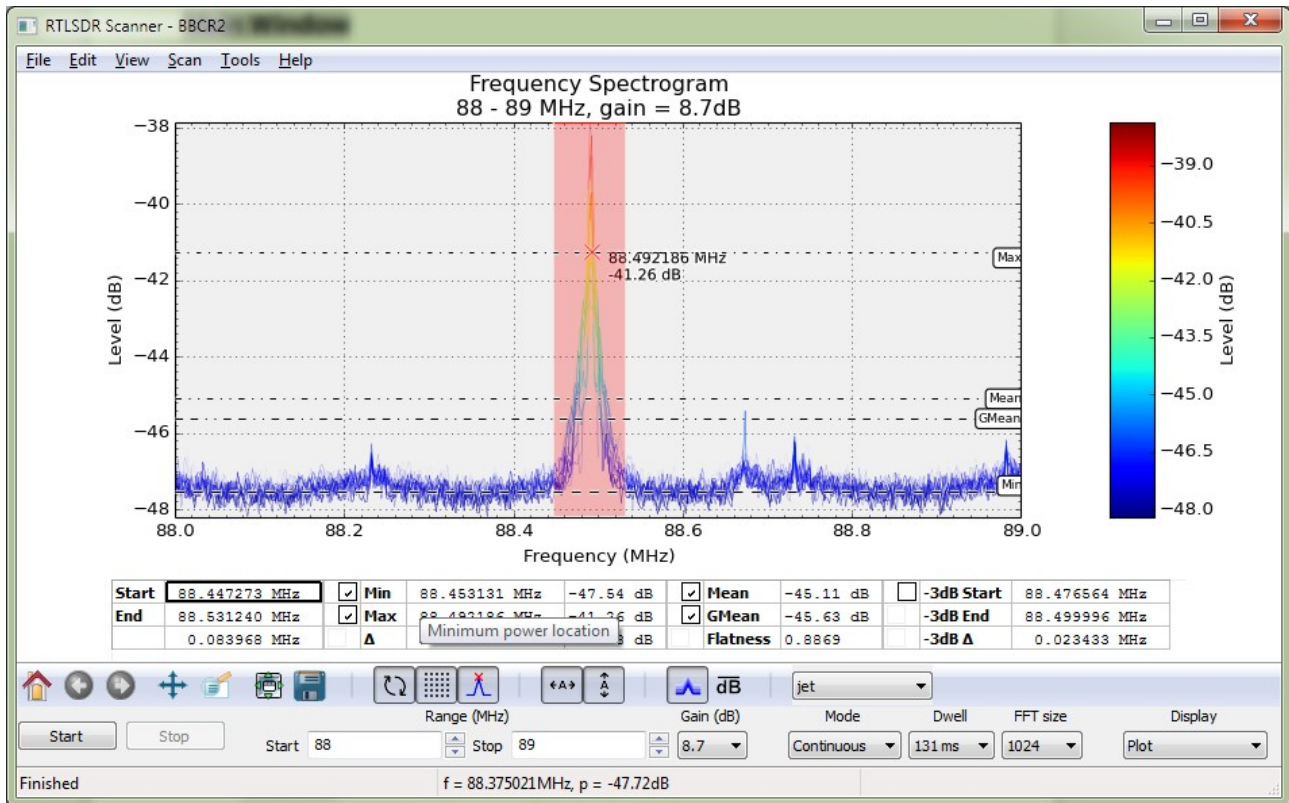
Graphical User Interface

Main Window

Image 1: Main Window

The main window is split into 4 main areas; the Menu Bar, the Graph, the Measurement Table and Tool Bar.

Menu Bar

File

- Open...   Open a scan.

- Merge...   Merge a scan with the current one.

- Backups...   Restore a backup (enabled in the preferences window)/

- Recent Files...   A list of recently used files.

- Save As...   Save a scan.

- Export scan...   Export a scan

- Export image...   Export an image

- Export image sequence...

  Export sweeps as multiple images.

- Export map...   Export a signal map
- Export GPS track   Export a GPX track log.
- Properties...   Properties of the current scan.
- Exit   Exit the program.

Edit

- Preferences...   Show the preferences page.
- Advanced prefs...   Advanced software settings
- Number formatting...   Adjust the precisionof displayed numbers.
- Radio Devices...   Radio settings.
- GPS...   GPS settings.

View

- Clear selection   Clear a selection made by dragging with the middle mouse button.
- Show measurements   Display the measurements table below the plot.
- Full screen   Toggle full screen mode (F11).

Scan

- Start   Start a scan.
- Continue   Start and append sweeps to the current scan.
- Stop   Immediately stop the scan.
- Stop at end   Stop scanning at the end of the current sweep.
- Delay...   Add a delay between sweeps.

Tools

- Compare...   Compare two scans.
- Smooth...   Smooth the spectrum.
- Auto Calibration...   Attempt to calibrate the dongle with a known frequency.
- Track in Google Earth

  Show scan locations in Google Earth.

- Track in Google Maps

    Display a heatmap of loactions in a browser.

- GPS Satellites...   Show the GPS signal strength if it's available.

Help

- Help...   Open up further information from the RTLSDR Scanner page.

- Check for updates...   Check if an update is availaible.

- System information... Display details about the installation.

- About...   Basic information about the program

Graph

A plot of the scanned spectrum, three modes are currently available; Plot, Spectrogram and 3D Spectrogram.

A toolbar is available under the graph which allows panning and zooming in addition to plot specific commands.

The mouse wheel can be used to zoom 2 dimensional plots by first clicking the graph.

Further options are available by right-clicking the graph.

Standard Controls

- 🏠 Home   Zoom to the default limits of the plot.

- 🔵 Back   Zoom to the previous view of the plot.

- 🔵 Forward   Zoom to the next plot view.

- ✛ Pan   Pan the plot.

- Zoom   Zoom to an area of the plot.

- Subplots   Change the margins of the plot.

- 💾 Save   Save the current plot as an image.

- 🔄 Live update   Update the plot as new data is processed (can be slow).

- ⠿ Grid   Display a grid on the plot.

- ↔A↔ Auto frequency   Auto range the frequency axis to display all data.

- ↕ Auto level   Auto range the level axis to display all data.

- ⋏ Label peak   Display a marker and label at the most recent peak.

- ⌃ Smooth   Smooth data display (right-click to change).

- f' Differentiate   Display the differentiated spectrum.

- Colour map   The mapping of levels to colour.

Plot

A plot of the level versus frequency.

Additional Controls

- ⋀ Multiple peaks   Mark peaks above a threshold (right-click to change).

- ⋀ Fade plots   Fade previous sweeps

- $\overline{dB}$ Average plots   Average all the sweeps.

- Min Minimum   Plot the minimum of all sweeps

- Max Maximum   Plot the maximum of all sweeps

- Var Variance   Plot the variance of all sweeps

- Δ Delta   Plot the delta from the first sweep

Spectrogram

A plot of time versus frequency, level is displayed as colour. Often called a waterfall plot.

Additional Controls

- ⤢ Auto time   Auto range the time axis to display all data.

- ⋀ Multiple peaks   Mark peaks above a threshold (right-click to change).

3D Spectrogram

A three dimensional plot of frequency versus time versus level.

Additional Controls

- ⤢ Auto time   Auto range the time axis to display all data.

- ⋀ Multiple peaks   Mark peaks above a threshold (right-click to change).

- ◇ Wireframe   Plot the spectrum as a wireframe instead of colouring the faces.

Status

Displays the status of the current scan, often faster than the other plot types.

Time Line

Displays when sweeps occurred in time.

Preview

A fast preview plot (needs <u>visvis</u>).

Measurement Table

To perform measurements of the spectrum use the middle mouse button to drag a selection box over the area of interest (in Plot or Spectrogram displays). Measurements are taken from the last sweep.

Tool Bar

The tool bar is used to control the main functions of the scanner.

- Start   Start a scan.

- Stop   Immediately stop the scan.

- Range   The frequency range.

  - Start   The start frequency in megahertz.

  - Stop   The end frequency in megahertz.

- Gain   The dongle gain in Decibels.

- Mode   Perform a single or multiple sweeps.

  - Single   Only run a single sweep

  - Continuous   Run multiple sweeps until the scan is stopped

  - Maximum   Run until the maximum scans as defined in the preferences

- Dwell   The dwell time for each scanning step.

- FFT Size   The number of FFT bins to calculate.

- Display   The type of plot to display.

Properties Window

Image 2: Properties Window

Displays the known properties of the scan. Latitude and longitude information may be edited here.
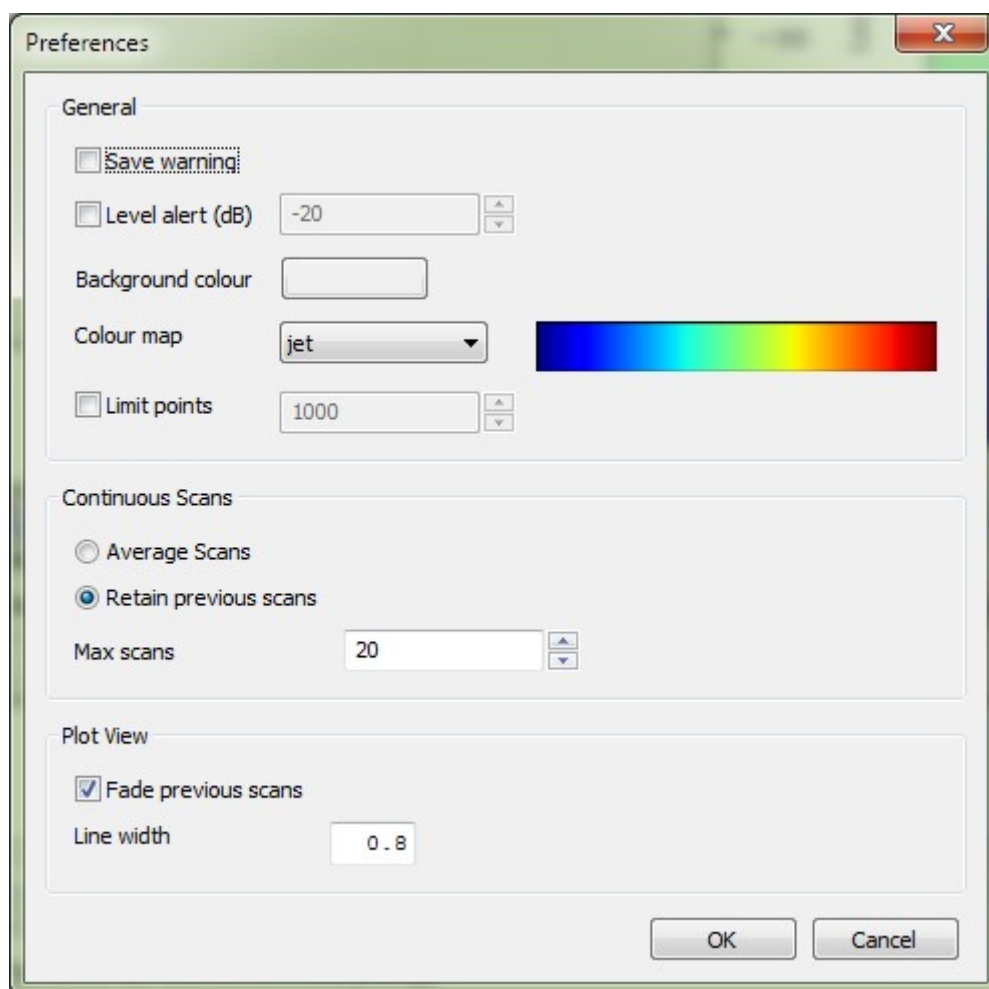
Preferences Window

Image 3: Preferences Window

Allows generalised customisation of the software.

General

- Save warning   Warn if a scan has not been saved before overwriting or exiting.

- Level alert   Beep if the scan level is equal or greater than this level.

- Background colour   The background colour of graph planes.

- Colour map   The mapping to convert a level to colour in the view.

- Limit points   The maximum number of points to plot.

Continuous Scans

Options pertaining to the continuous scan mode.

- Average scans   Average the current sweep with the previous one.

- Retain previous scans Keep previous sweeps.

- Max scans   Maximum number of sweeps to keep

Plot View

Settings related to the plot display

- Fade previous scans   Fade out older scans in the view.

- Line width   Line width to use when plotting

Advanced Preferences Window
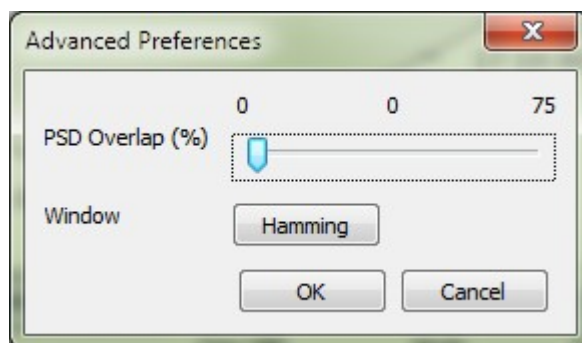

Image 4: Advanced Preferences Window

Advanced settings.

- PSD overlap   Overlap percentage for power spectral density calculations.

- Window   Change the window function used while scanning.
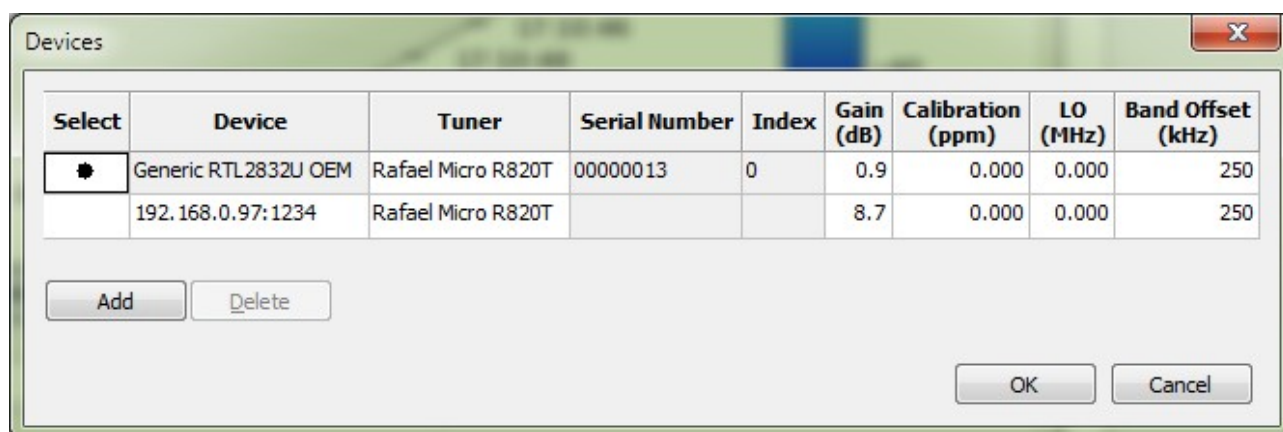
Radio Devices Window

Image 5: Devices Window

A list of currently detected dongles and server settings.

- Select   Use this column to select a device to scan with.

- Device   Displays the name of the dongle or the host and port of a server.

- Tuner   The tuner type in the dongle.

- Serial Number   The serial number of the dongle (not supported for servers)

- Index   The USB index of the dongle.

- Gain   The gain to set the dongle to in Decibels.

- Calibration   The frequency calibration to apply to the dongle in parts per million.

- LO   Local oscillator offset – used with frequency converters.

- Band offset...   Click to open the band offset window.

- Add   Add a server

- Delete   Delete the currently select server
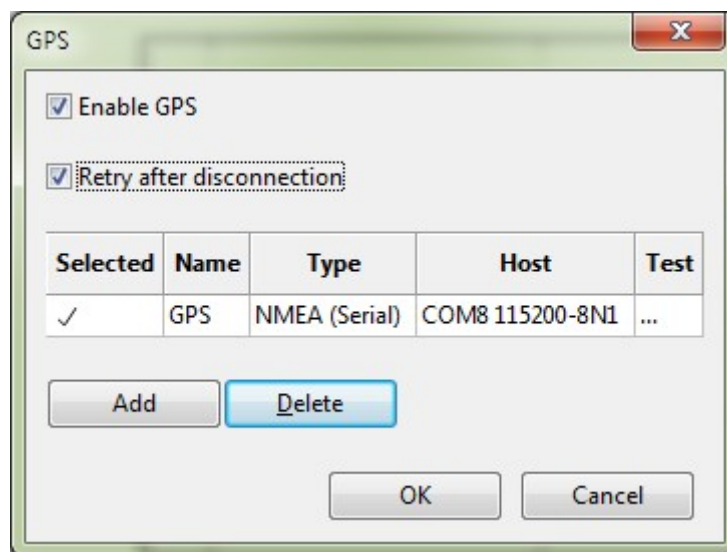
GPS Window

Image 6: GPS Window

Enabling GPS allows maps of signals to be built up, either NMEA or <u>GPSd</u> is supported.

The type can be set to:

- GPSd   A GPSd daemon.

- GPSd (Legacy)   Older GPSd daemons.

- NMEA (Serial)   NMEA serial connection.

- NMEA (Server)   NMEA of TCP/IP.

The host is a standard host name and option port for NMEA (Server) and both GPSd options. For NMEA (Serial), clicking the host allows the communication port settings to be changed.

Click the 'Test' entry to try the current settings.
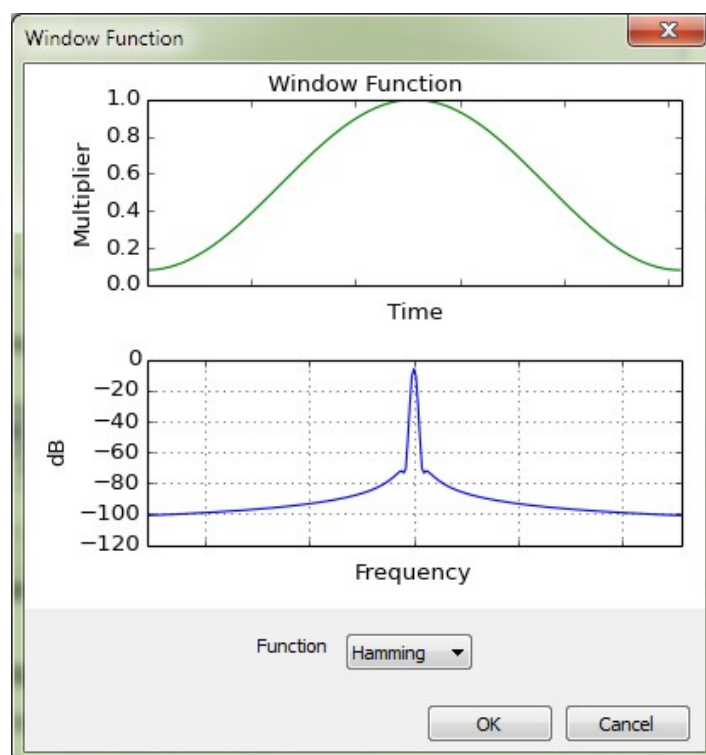
Window Function Window

Image 7: Window Function

Allows the setting of the window function that the scanner applies to incoming samples. This window is meant primarily for educational purposes as the default Hamming window gives the best results.

The first graph (green) displays how the window function tapers off data at the beginning and end of the sample to reduce leakage and noise when the sample is converted into frequency data.

The bottom graph (blue) displays the frequency response of the window function. The software takes data from the flattest sections of the graph ignoring the large peak which corresponds to 0Hz.

Compare Window

Allows you to load two different scans and display the difference between them if their frequency bins coincide.

The first plot is shown in blue, the second in green and the difference in red.

Auto Calibration Window

Basic calibration to a **known** signal.

Set the frequency and press calibrate, if you are happy with the result click OK.

Suitable signals are constant, unwavering signals such as that from a signal generator.

Real world sources such as FM radio transmissions can be used although the precision is reduced. In these cases it is recommended to set the dwell time to 1000ms to reduce errors.
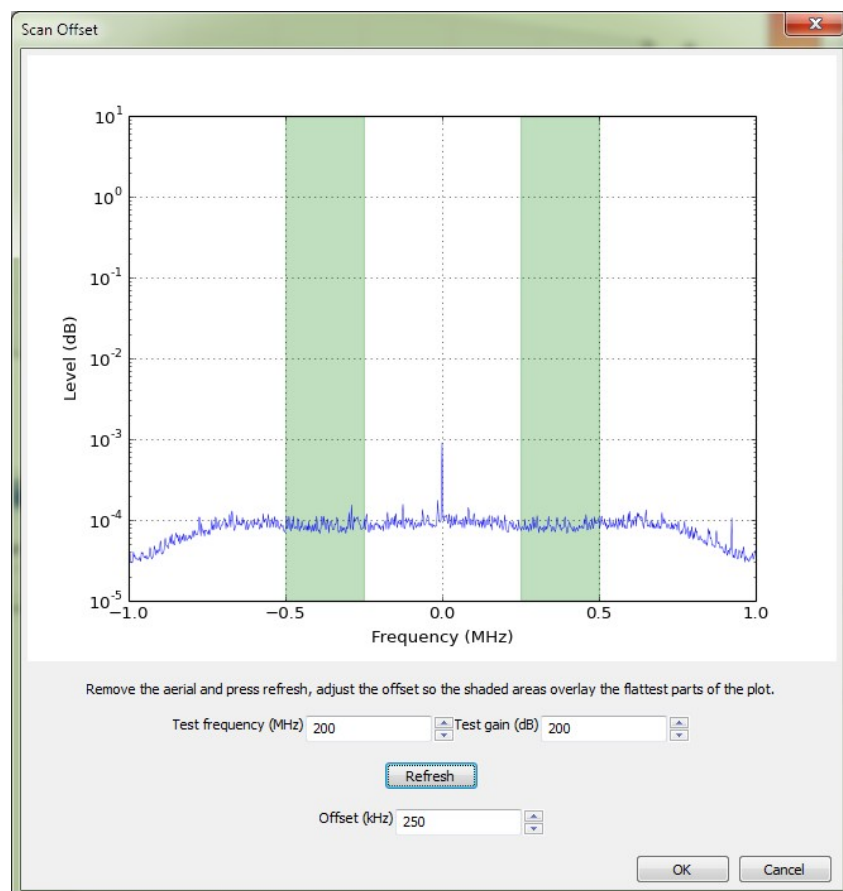
Band Offset Window

Image 8: Band Offset Window

This window allows you to select the flattest part of the spectrum returned by the dongle, to improve the quality of the scan.

- Disconnect the antenna from the dongle and ideally replace it with a 50 ohm load.

- Press refresh and wait for the spectrum to be displayed.

- Adjust the offset so the green bars cover the flattest section.

Command Line Interface

Scanning can be initiated from the command line.

Format

```
rtlsdr_scan.py    [-h]

                  [-s START] [-e END]

                  [-g GAIN] [-d DWELL] [-f FFT] [-l LO]

                  [-i INDEX | -r REMOTE]

                  [file]
```

Switches

File

The file name to save the scan to, either ending in '.rfs' for native file or '.csv' to export to a comma separated values file.

Start

-s, --start   Start of the frequency range in megahertz.

End

-e, --end   End of the frequency range in megahertz.

Sweeps

-w, --sweeps   Number of sweeps in a scan.

Delay

-d, --delay   Delay between sweeps in seconds.

Gain

-g, --gain   Scan gain in Decibels (optional, default – 0dB).

Dwell

-d, --dwell   Dwell time in seconds (optional, default – 131ms).

FFT

-f, --fft   The number of FFT bins (optional, default – 1024).

LO

-l, --lo   The local oscillator offset in megahertz (optional, default – 0MHz).

Index

-i, --index   The zero-based index of the dongle (optional, cannot be used with -r).

Remote

-r, --remote   The server host and port (optional, cannot be used with -i).

Config

-c, --config   Path to a configuration file.

Help

-h, --help   Display help information (optional).

Examples

Scan from 88 to 108 MHz, saving to 'scan.rfs'

```
rtlsdr_scan.py -s 88 -e 108 scan.rfs
```

Scan from 430 to 436MHz, with a gain of 8.7dB and a dwell of 16ms, saving to 'test.rfs.:

```
rtlsdr_scan.py -s 430 -e 436 -g 8.7 -d 0.016 test.rfs
```

Scanning using a second dongle:

```
rtlsdr_scan.py -s 88 -e 108 -d 1 scan.rfs
```

Scan using a server by name:

```
rtlsdr_scan.py -s 88 -e 108 -r rtlserver:1234 scan.rfs
```

Scan using a server by address:

```
rtlsdr_scan.py -s 88 -e 108 -r 192.168.0.22:1234 scan.rfs
```

Configuration File

When using the command line a configuration file can be loaded which specifies extra parameters.

An example 'gps.conf' is included with the source.

Format

The file consists of sections and options for that section.

Sections are enclosed in square brackets:

`[section]`

Options take the form:

`option = value`

Sections

GPS

Port

The serial port to use (required).

Baud

The baud rate, defaults to 115200 (optional).

Bits

The number of data bits, defaults to 8 (optional).

Parity

The parity. N, E, O, M and S correspond to None, Even, Odd, Mark, Space respectively.

Defaults to N (optional).

Stops

The number of stop bits, defaults to 1 (optional).

Soft

Enable software flow control, defaults to false (optional)

Illustration Index

Alphabetical Index