x86-64 assembly

x86 history

seven 8-bit registers

- 1971: Intel 8008

eight 16-bit registers:

- 1978: Intel 8086
- 1982: Intel 80286

eight 32-bit registers:

- 1985: Intel 80386
- 1989: Intel 80486
- 1993: Intel Pentium
- 1997: Intel Pentium II
- 1998: Intel Pentium III
- 2000: Intel Pentium IV/Xeon

sixteen 64-bit registers:

- 2003: AMD64 Opteron
- 2004: Intel Pentium IV/Xeon (and most more recent AMD/Intel/Via chips)

two syntaxes

there are two ways of writing x86 assembly

- AT&T syntax (default on Linux, OS X)
- Intel syntax (default on Windows)

different operand order, way of writing addresses, punctuation, etc.

we mostly show Intel syntax

different directives

non-instruction parts of assembly are called *directives*

IBCM example: `one dw 1`

- there is no IBCM instruction called "dw"

these differ *a lot* between assemblers

our main assember: NASM

our compiler's assembler: GAS

x86 registers

1978 – Intel 8086 — 8 16-bit registers



← AX, etc. — "general purpose"

(but some instructions use AX or BX only)

← "base pointer"

← "source index"

← "destination index"

} special for *some* instrs.

← "stack pointer" — push/pop instrs.

x86 registers

1988 – Intel 386 — 8 32-bit registers

"**E**xtended" versions of each register

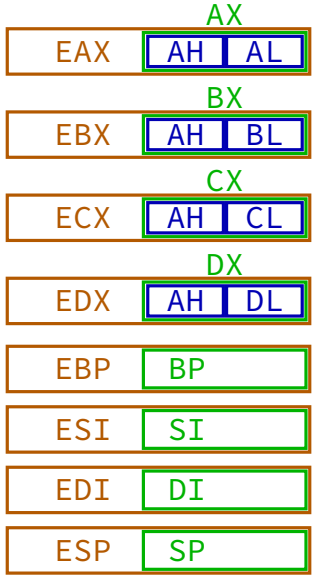

x86 registers

2003 – AMD64 — 16 64-bit registers

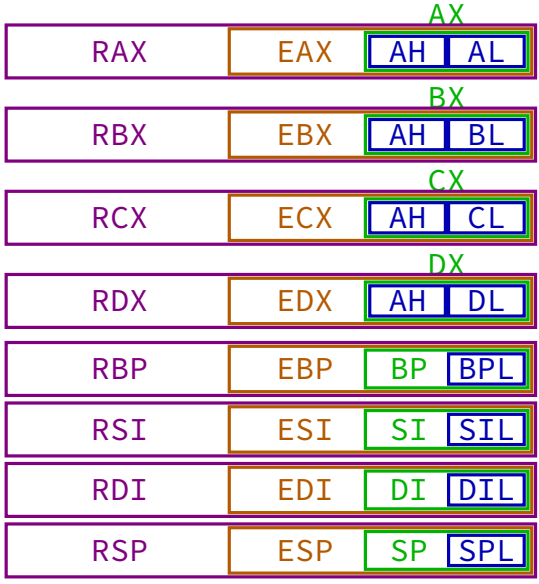

new registers just numbered

name for bottom byte of each register

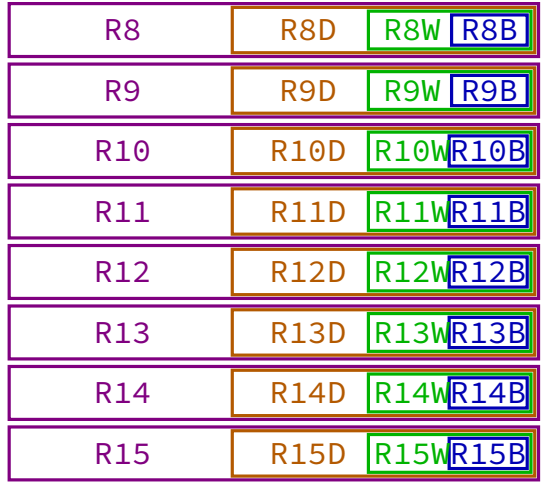

some registers not shown

floating point/"vector" registers (`ST(0)`, `XMM0`, `YMM0`, `ZMM0`, ...)

the program counter (`RIP`/`EIP`/`IP` — "instruction pointer")

"flags" (used by conditional jumps)

registers for the operating system

...

x86 fetch/execute cycle

```
while (true) {
    IR <- memory[PC]
    execute(IR)
    if (instruction didn't change PC)
        PC <- PC + length-of-instruction(IR)
}
```

same as IBCM

(execpt instructions are variable-length)

declaring variables/constants

(*NASM*-only syntax)

```
section .data
a       DB          23
b       DW          ?
c       DD          3000
d       DQ          -800
x       DD          1, 2, 3
y       TIMES 8 DB  0
```

".data" — data (not code) part of memory

DB: declare byte

DW: word (2 byte)

DD: doubleword (4 bytes)

DQ: quadword (8 byte)

? — don't care about value

eight 0 bytes (e.g. 8-byte array)

a note on labels

NASM allows labels like:

```
LABEL add RAX, RBX
```

or like:

```
LABEL: add RAX, RBX
```

other assemblers: require `:` always

I recommend `:`

- what if label name = instruction name?

declaring variables/constants (GAS)

(*GAS*-only syntax)

```
.data                                  ".data" — data (not code) part of memory
a:      .byte     23
b:      .short    0                    short — 2 bytes
c:      .long     3000                 long — 4 bytes
d:      .quad     -800                 quad — 8 bytes
x:      .long     1, 2, 3
y       .fill 8, 1, 0                  eight 0 bytes (e.g. 8-byte array)
                                       (1 is length of value to repeat)
```

mov

`mov DEST, SRC`

possible DEST and SRC:

- register: `RAX`, `EAX`, ...
- constant: `0x1234`, `42`, ...
- label name: `someLabel`, ...
- memory address: `[0x1234]`, `[RAX]`, `someLabel`...

special rule: no moving from memory to memory

instruction operands generally

if we don't specify otherwise...

same as mov:

destination: register or memory location
source: register or constant or memory location

and same special rule: both can't be memory location

specifying pointers

```
[RAX + 2 * RBX + 0x1234]
```

optional 64-bit base register *plus*

example: RAX

optional 64-bit index register times 1 (default), 2, 4, or 8 *plus*

example: RBX times 2

optional 32-bit signed constant

example valid movs

```
mov rax, rbx
mov rax, [rbx]
mov [var], rbx
mov rax, [r13 - 4]
mov [rsi + rax], cl
mov rdx, [rsi + 4*rbx]
```

INVALID movs

```
mov rax, [r11 - rcx]
```

can't subtract register

```
mov [rax + r5 + rdi], rbx
```

```
mov [4*rax + 2*rbx], rcx
```

only multiply one register

memory access lengths

move one byte:

```
mov bl, [rax]
mov [rax], bl
mov BYTE PTR [rax], bl
mov BYTE PTR [bl], 42
```

move four bytes:

```
mov ebx, [rax]
mov [rax], ebx
mov DWORD PTR [rax], ebx
mov DWORD PTR [bl], 10
```

(BYTE, WORD, DWORD, QWORD)

mov example

```
mov rcx, rax
mov rdx, [rbx]
mov rsi, [rdx+rax+16]
mov [rsi], 45
mov [a], 15
```

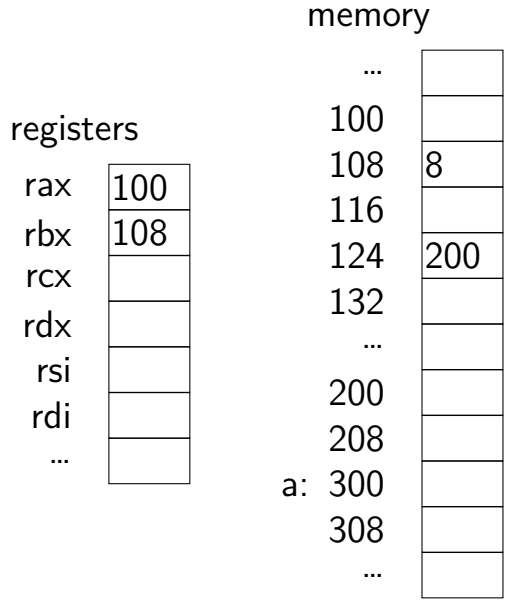

mov example

```
mov rcx, rax
mov rdx, [rbx]
mov rsi, [rdx+rax+16]
mov [rsi], 45
mov [a], 15
```

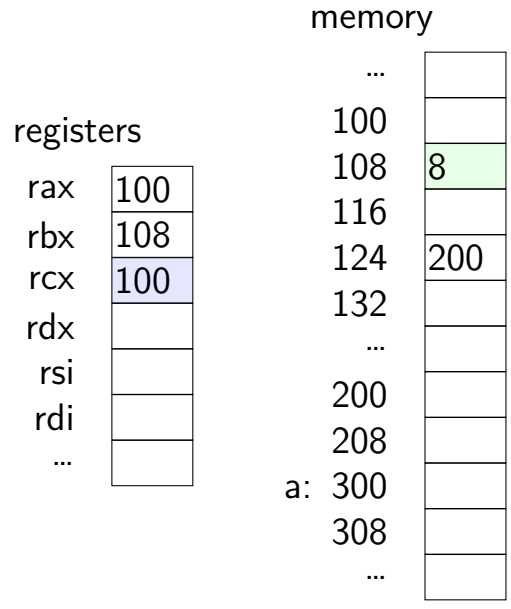

mov example

```
mov rcx, rax
mov rdx, [rbx]
mov rsi, [rdx+rax+16]
mov [rsi], 45
mov [a], 15
```



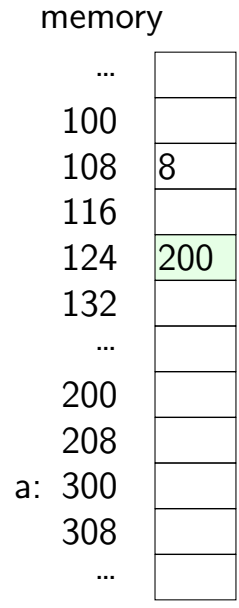

mov example

```
mov rcx, rax
mov rdx, [rbx]
mov rsi, [rdx+rax+16]
mov [rsi], 45
mov [a], 15
```

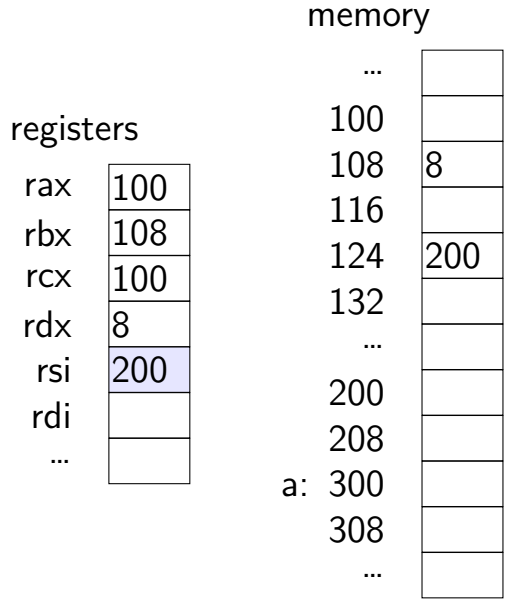

mov example

```
mov rcx, rax
mov rdx, [rbx]
mov rsi, [rdx+rax+16]
mov [rsi], 45
mov [a], 15
```

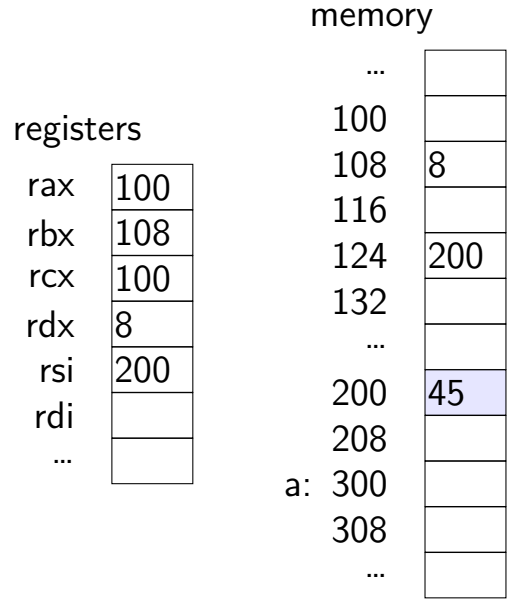

mov example

```
mov rcx, rax
mov rdx, [rbx]
mov rsi, [rdx+rax+16]
mov [rsi], 45
mov [a], 15
```

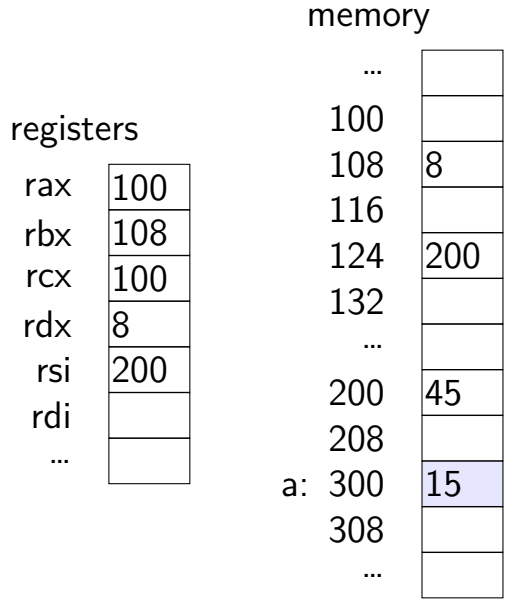

push/pop

RSP — "top" of stack which grows down

`push RBX`

RSP $\leftarrow$ RSP $- 8$
memory[RSP] $\leftarrow$ RBX

`pop RBX`

RBX $\leftarrow$ memory[RSP]
RSP $\leftarrow$ RSP $+ 8$

also okay:
`push [RAX + RBX]`, etc.
`push 42`, etc.

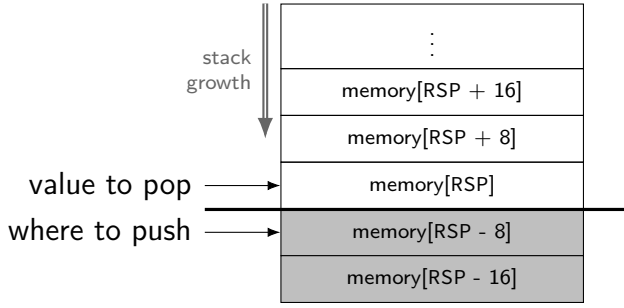

push/pop replacement

instead of:

```
push RAX
```

could write:

```
sub RSP, 8
mov [RSP], RAX
```

push/pop instructions are for convenience

add/sub

```
add first, second
add RAX, RBX
add QWORD PTR [RDX], 8
...
sub first, second
sub RSP, 16
...
```

first $\leftarrow$ first $+$ second (add), or first $\leftarrow$ first $-$ second

support same operands as mov:

- can use registers, constants, locations in memory
- can't use two memory locations (mov to a register instead)
- destination can't be constant

inc/dec

```
dec RAX
inc QWORD PTR [RBX + RCX]
```

increment or **dec**rement

register or memory operand

(same effect as add/sub 1)

multiply

```
imul <first>, <second>
imul RAX, RBX
imul RAX, [RCX + RDX]
```

first $\leftarrow$ first $\times$ second

first operand must be register

```
imul first, second, third
imul RAX, RBX, 42
imul RAX, [RCX + RDX], 42
```

first $\leftarrow$ second $\times$ third

first operand must be register

multiply (with big result)

```
imul <first>
imul RBX
imul QWORD PTR [RCX + RDX]
```

$\{\text{RDX, RAX}\} \leftarrow \text{RAX} \times \text{first}$

RDX gets most significant 64 bits
RAX gets least signiciant 64 bits

```
imul EBX
imul DWORD PTR [RCX + RDX]
```

$\{\text{EDX, EAX}\} \leftarrow \text{EAX} \times \text{first}$

EDX gets most significant 32 bits
EAX gets least signiciant 32 bits

multiply — signed/unsigned

with result size = source size:
signed and unsigned multiply is the same

with bigger results:
`imul` — signed multiply
`mul` — unsigned multiply

divide

```
idiv <first>
idiv RBX
idiv QWORD PTR [RCX + RDX]
```

RAX $\leftarrow$ {RDX,RAX} $\div$ first

RDX $\leftarrow$ {RDX,RAX} $\mod$ first

128-bit divided by 64-bit

or 64-bit by 32-bit with 32-bit first operand, etc.

also `div <first>` — same, but unsigned division

on LEA

LEA = **L**oad **E**ffective **A**ddress

effective address = computed address for memory access

syntax looks like a **mov** from memory, but...

skips the memory access — just uses the address

(sort of like & operator in C?)

`lea RAX, [RAX + 4]` ≈ `add RAX, 4`

on LEA

LEA = **L**oad **E**ffective **A**ddress

effective address = computed address for memory access

syntax looks like a **mov** from memory, but...

skips the memory access — just uses the address

(sort of like & operator in C?)

`lea RAX, [RAX + 4]` ≈ `add RAX, 4`

"address of memory[rax + 4]" = rax + 4

LEA tricks

```
lea RAX, [RAX + RAX * 4]
```

rax $\leftarrow$ rax $\times$ 5

rax $\leftarrow$ address-of(memory[rax + rax * 4])

```
lead RDX, [RBX + RCX]
```

rdx $\leftarrow$ rbx $+$ rcx

rdx $\leftarrow$address-of(memory[rbx + rcx])

and/or/xor

```
and <first>, <second>
xor <first>, <second>
or <first>, <second>
```

bit-by-bit and, or, xor

e.g. if RAX $= 1110_{\text{TWO}}$ and RBX $= 0101_{\text{TWO}}$)

`and RAX, RBX` $\rightarrow$ RAX becomes 0100_{TWO}

`xor RAX, RBX` $\rightarrow$ RAX becomes 1011_{TWO}

`or RAX, RBX` $\rightarrow$ RAX becomes 1111_{TWO}

jmp

```
    jmp foo

foo: ...
```

jmp — go to instruction at label

conditon testing

`cmp <first>, <second>`

compare first and second

(compute first - second, compare to `0`)

set *flags* AKA *machine status word* based on result

`je label`

if (compare result was equal) go to label

conditional jmp example

```
if (RAX > 4)
    stuff();
```

```
            cmp RAX, 4
            jle skip_call
            call stuff
skip_call:  ...
```

jump conditions and cmp

```
cmp A, B
jXX label
```

$R = A - B$

`je`	equal	$R = 0$ or $A = B$
`jz`	zero	$R = 0$ or $A = B$
`jne`	not equal	$R \neq 0$ or $A \neq B$
`jl`	less than	$A < B$ (signed)
`jle`	less than or equal	$A \leq B$ (signed)
`jg`	greater than	$A > B$ (signed)
`jb`	less than (unsigned)	$A < B$ (unsigned)
`ja`	greater than (unsigned)	$A > B$ (unsigned)
`js`	sign bit set	$R < 0$
`jns`	sign bit unset	$R \geq 0$
...	...	...

other flag setting instructions

but...most arithmetic instructions set flags used by conditional jump

- basically based on comparing result to 0

e.g.:

```
loop:   add RBX, RBX
        sub RAX, 1
        jne loop
```

is the same as

```
loop:   add RBX, RBX
        sub RAX, 1
        cmp RAX, 0
        jne loop
```

call

```
        call LABEL
        ...
```

is about the same as:

```
        push after_this_call
        jmp LABEL
after_this_call:
        ...
```

---

pushed address called the “return address”

call/ret

`call LABEL`

push next instruction address ("return address") to stack
jump to LABEL

`ret` — opposite of call

pop address from the stack
jump to that address

C to assembly example

```
int n = 5;
int i = 1;
int sum = 0;
while (i <= n) {
    sum += i;
    i++;
}
```

```
section .data
n       DQ  5
i       DQ  1
sum     DQ  0
loop:   mov RCX, [i]
        cmp RCX, [n]
        jg endOfLoop
        add [sum], RCX
        inc QWORD [i]
        jmp loop
endOfLoop:
```

C to assembly example

```
int n = 5;
int i = 1;
int sum = 0;
while (i <= n) {
    sum += i;
    i++;
}
```

```
section .data
n       DQ  5
i       DQ  1
sum     DQ  0
loop:   mov RCX, [i]
        cmp RCX, [n]
        jg endOfLoop
        add [sum], RCX
        inc QWORD [i]
        jmp loop
endOfLoop:
```

C to assembly example

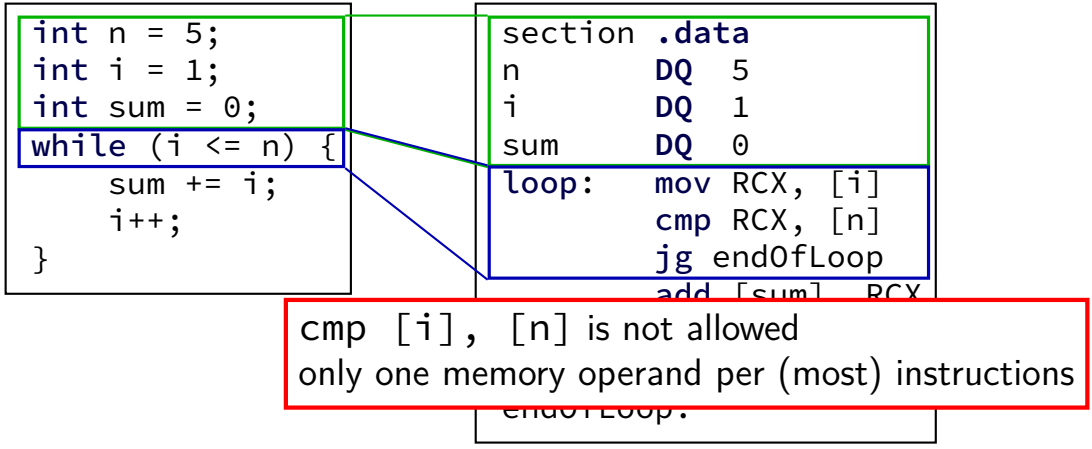

C to assembly example

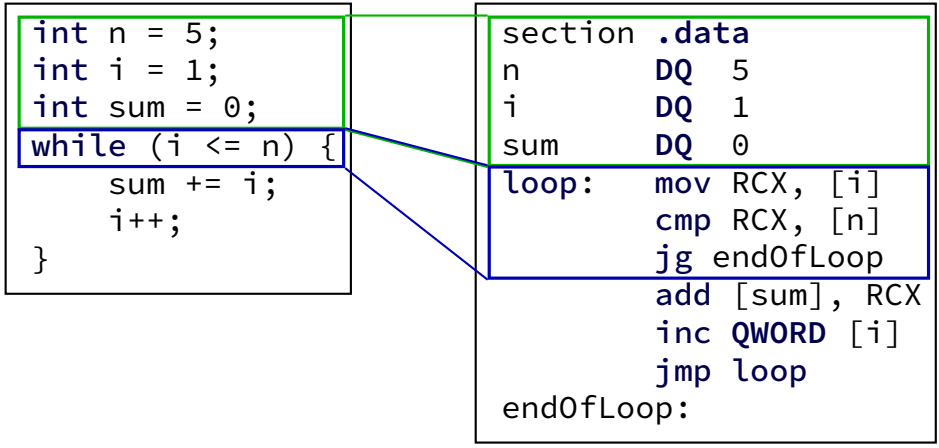

C to assembly example

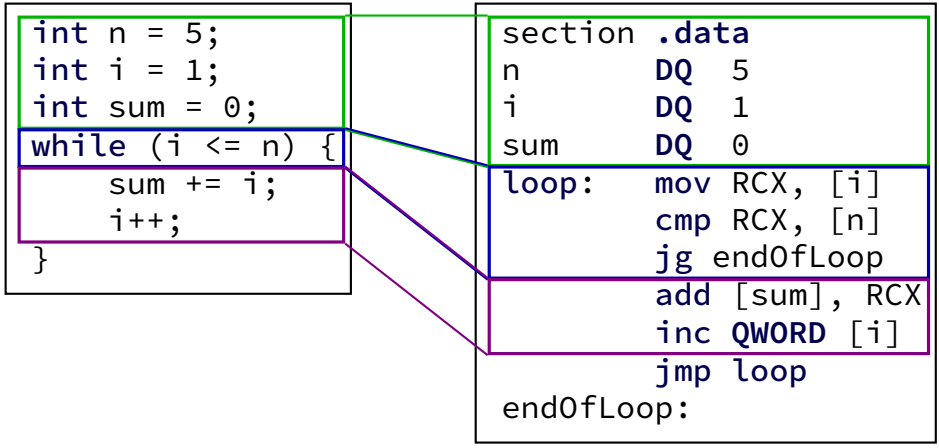

C to assembly example

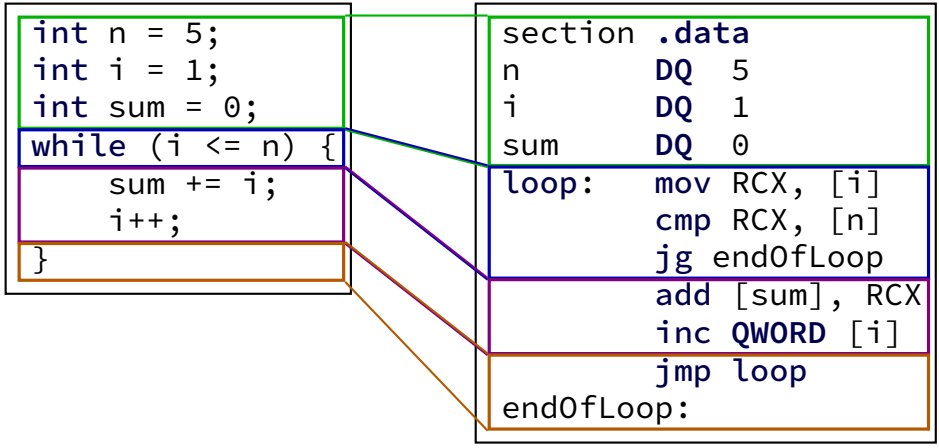

call example

```
int max(int x, int y) {
    int theMax;
    if (x > y)
        theMax = x;
    else
        theMax = y;
    return theMax;
}

int main() {
    int maxVal, a = 5, b = 6;
    maxVal = max(a, b);
    cout << "max value: " << maxVal << endl;
    return 0;
}
```

call example

```
int max(int x, int y) {
    int theMax;
    if (x > y)
        theMax = x;
    else
        theMax = y;
    return theMax;
}

int main() {
    int maxVal, a = 5, b = 6;
    maxVal = max(a, b);
    cout << "max value: " << maxVal << endl;
    return 0;
}
```

where do arguments go?

where do local variables go?

where does the return value go?

how does return know where to go?

return addresses using a stack

```
max:    ...
        ...
        ret

main:   ...
        ...
        call max
after:  ...
        ret
```

return addresses using a stack

```
max:    ...
        ...
        ret

main:   ...
        ...
        call max
after:  ...
        ret
```

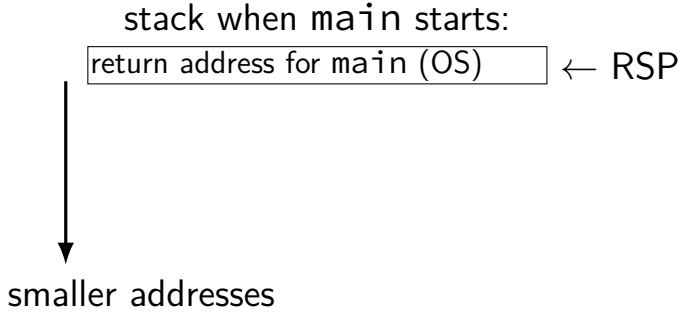

return addresses using a stack

```
max:    ...
        ...
        ret

main:   ...
        ...
        call max
after:  ...
        ret
```

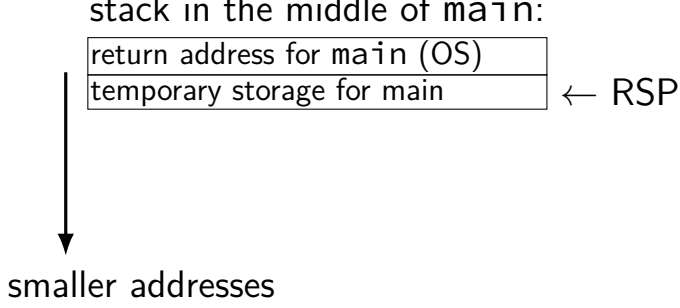

return addresses using a stack

```
max:    ...
        ...
        ret

main:   ...
        ...
        call max
after:  ...
        ret
```

stack just before `call max`:

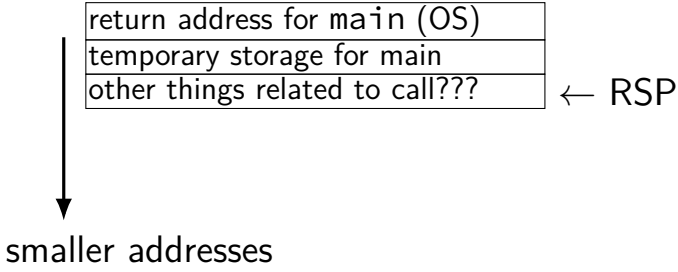

return addresses using a stack

```
max:    ...
        ...
        ret

main:   ...
        ...
        call max
after:  ...
        ret
```

stack just after `call max`:

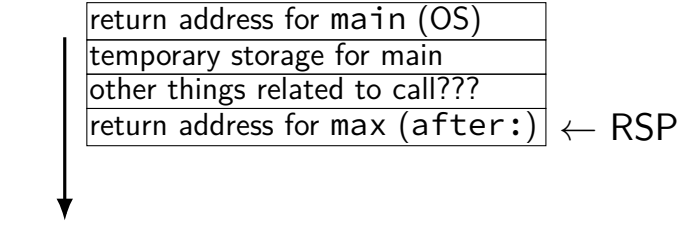

return addresses using a stack

```
max:    ...
        ...
        ret

main:   ...
        ...
        call max
after:  ...
        ret
```

stack in the middle of `max`:

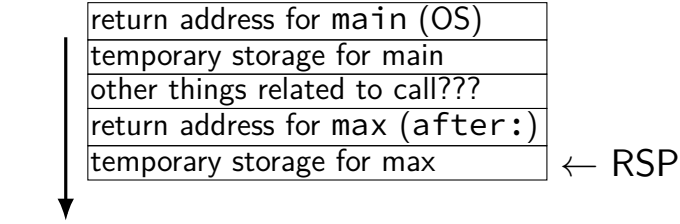

return addresses using a stack

```
max:    ...
        ...
        ret

main:   ...
        ...
        call max
after:  ...
        ret
```

stack just before `max`'s `ret`:

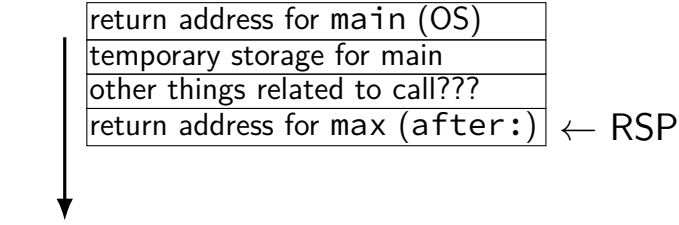

return addresses using a stack

```
max:    ...
        ...
        ret

main:   ...
        ...
        call max
after:  ...
        ret
```

stack just after `max`'s `ret`:

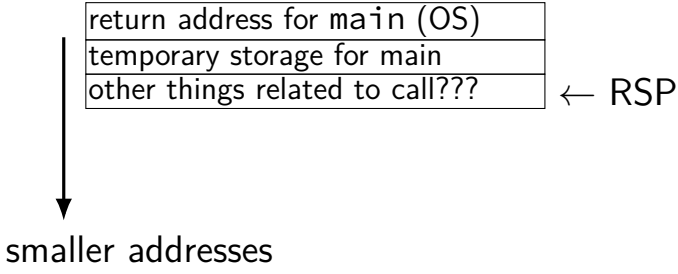

return addresses using a stack

```
max:    ...
        ...
        ret

main:   ...
        ...
        call max
after:  ...
        ret
```

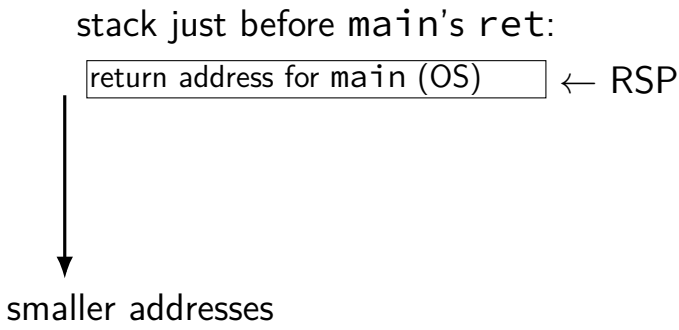

function calls use the stack

"the" stack

- convention: RSP points to top
- grows 'down' (towards address 0)
- used by `pop`, `push`, `call`, `ret`

used to implement function calls

main reason: support recursive calls

where do (place to return/arguments/local variables/etc.) go?

- when in doubt — use the stack
- optimization: sometimes use registers

calling conventions

calling convention: rules about how function calls work

choice of compiler and OS NOT the processor itself

...but processor might make instructions to help

- x86-64: `call`, `ret`, `push`, `pop`

basic calling convention questions (1)

how does return know where to go?

where do arguments go?

basic calling convention questions (1)

how does return know where to go?

- x86-64: on the stack (otherwise can't use `call`/`ret`)

where do arguments go?

basic calling convention questions (1)

how does return know where to go?

- x86-64: on the stack (otherwise can't use `call`/`ret`)

where do arguments go?

- Linux+x86-64: arguments 1-6: `RDI`, `RSI`, `RDX`, `RCX`, `R8`, `R9`
- Linux+x86-64: arguments 7-: push on the stack (*last* argument first)
- (exceptions: objects that don't fit in a register, floating point, ...)

basic calling convention questions (2)

where do local variables go?

where does the return value go?

basic calling convention questions (2)

where do local variables go?

- Linux+x86-64: in registers (if room) or on the stack
- caveat: what registers can function calls change?

where does the return value go?

basic calling convention questions (2)

where do local variables go?

- Linux+x86-64: in registers (if room) or on the stack
  caveat: what registers can function calls change?

where does the return value go?

- Linux+x86-64: RAX

basic calling convention questions (2)

where do local variables go?

- Linux+x86-64: in registers (if room) or on the stack
- caveat: what registers can function calls change?

where does the return value go?

- Linux+x86-64: RAX

saved registers

what registers can function calls change?

- Linux+x86-64: `RAX`, `RCX`, `RDX`, `RSI`, `RDI`, `R8`, `R9`, `R10`, `R11`, floating point registers
- if using for local variables — be careful about function calls

other registers: must have same value when function returns

- if using for local variables — save old value and restore before returning

caller versus callee

```
void foo() {
    ...
}

int main() {
    foo();
    return 0;
}
```

`main` is *caller*

`foo` is *callee*

a function call

```
...
globalVar =
    foo(1, 2, 3, 4,
        5, 6, 7, 8);
...
```

```
// assuming R11
// used for
// local var
// in caller
push R11
mov RDI, 1
mov RSI, 2
mov RDX, 3
mov RCX, 4
mov R8, 5
mov R9, 6
push 8
push 7
call foo
add RSP, 16
pop R11
mov [globalVar], RAX
```

a function call

```
...
globalVar =
    foo(1, 2, 3, 4,
        5, 6, 7, 8);
...
```

```
// assuming R11
// used for
// local var
// in caller
push R11
mov RDI, 1
mov RSI, 2
mov RDX, 3
mov RCX, 4
mov R8, 5
mov R9, 6
push 8
push 7
call foo
add RSP, 16
pop R11
mov [globalVar], RAX
```

save important registers
foo *might* change

…and restore saved regs

a function call

```
...
globalVar =
    foo(1, 2, 3, 4,
        5, 6, 7, 8);
...
```

```
// assuming R11
// used for
// local var
// in caller
push R11
mov RDI, 1
mov RSI, 2
mov RDX, 3
mov RCX, 4
mov R8, 5
mov R9, 6
push 8
push 7
call foo
add RSP, 16
pop R11
mov [globalVar], RAX
```

save important registers foo *might* change

place arguments in registers and (if necessary) on stack

…and restore saved regs

a function call

```
...
globalVar =
    foo(1, 2, 3, 4,
        5, 6, 7, 8);
...
```

```
// assuming R11
// used for
// local var
// in caller
push R11
mov RDI, 1
mov RSI, 2
mov RDX, 3
mov RCX, 4
mov R8, 5
mov R9, 6
push 8
push 7
call foo
add RSP, 16
pop R11
mov [globalVar], RAX
```

save important registers foo *might* change

place arguments in registers and (if necessary) on stack

← and actually call function

…and restore saved regs

a function call

```
...
globalVar =
    foo(1, 2, 3, 4,
        5, 6, 7, 8);
...
```

```
// assuming R11
// used for
// local var
// in caller
push R11
mov RDI, 1
mov RSI, 2
mov RDX, 3
mov RCX, 4
mov R8, 5
mov R9, 6
push 8
push 7
call foo
add RSP, 16
pop R11
mov [globalVar], RAX
```

save important registers foo *might* change

place arguments in registers and (if necessary) on stack

← and actually call function

← and pop args from stack (if any)

…and restore saved regs

a function call

```
...
globalVar =
    foo(1, 2, 3, 4,
        5, 6, 7, 8);
...
```

```
// assuming R11
// used for
// local var
// in caller
push R11
mov RDI, 1
mov RSI, 2
mov RDX, 3
mov RCX, 4
mov R8, 5
mov R9, 6
push 8
push 7
call foo
add RSP, 16
pop R11
mov [globalVar], RAX
```

save important registers foo *might* change

place arguments in registers and (if necessary) on stack

← and actually call function

← and pop args from stack (if any)

…and restore saved regs

…and use return value

caller task summarized

save registers that the function might change (consult list)

place parameters in registers, stack

call

remove any parameters from stack

restore registers that the function might change

use return value in RAX

callee code example (naive version)

```
long myFunc(long a, long b, long c) {
    long result = 0;
    result += a;
    result += b;
    result += c;
    return result;
}
```

address	value
…	
0xF0000000	(caller's stuff)
0xEFFFFFF8	return address for myFunc
0xEFFFFFF0	value of result
0xEFFFFFE8	(next stack allocation)
…	

```
myFunc:
    // allocate space for result
    sub RSP, 8
    mov QWORD PTR [RSP], 0   // result = 0
    add QWORD PTR [RSP], RDI // result += a
    add QWORD PTR [RSP], RSI // result += b
    add QWORD PTR [RSP], RDX // result += c
    mov RAX, QWORD PTR [RSP] // ret val = result
    // deallocate space
    sub RSP, 8
    ret
```

callee code example (naive version)

```
long myFunc(long a, long b, long c) {
    long result = 0;
    result += a;
    result += b;
    result += c;
    return result;
}
```

address	value
…	
0xF0000000	(caller's stuff)
0xEFFFFFF8	return address for myFunc
0xEFFFFFF0	value of result
0xEFFFFFE8	(next stack allocation)
…	

```
myFunc:
    // allocate space for result
    sub RSP, 8
    mov QWORD PTR [RSP], 0   // result = 0
    add QWORD PTR [RSP], RDI // result += a
    add QWORD PTR [RSP], RSI // 
    add QWORD PTR [RSP], RDX // 
    mov RAX, QWORD PTR [RSP] // 
    // deallocate space
    sub RSP, 8
    ret
```

one policy:
local vars (`result`) lives on stack
accesses arguments directly

callee code example (animated)

```
myFunc:
    // allocate space for result
    sub RSP, 8
    mov QWORD PTR [RSP], 0   // result = 0
    add QWORD PTR [RSP], RDI // result += a
    add QWORD PTR [RSP], RSI // result += b
    add QWORD PTR [RSP], RDX // result += c
    mov RAX, QWORD PTR [RSP] // ret val = result
    // deallocate space
    sub RSP, 8
    ret
```

RSP	0x7FFF8
RDI	2
RSI	3
RDX	4
RAX	
…	

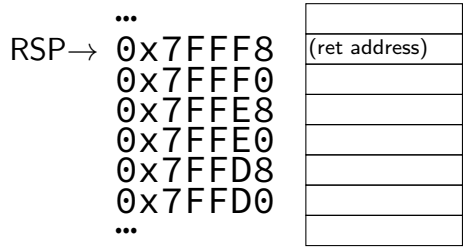

callee code example (animated)

```
myFunc:
    // allocate space for result
    sub RSP, 8
    mov QWORD PTR [RSP], 0   // result = 0
    add QWORD PTR [RSP], RDI // result += a
    add QWORD PTR [RSP], RSI // result += b
    add QWORD PTR [RSP], RDX // result += c
    mov RAX, QWORD PTR [RSP] // ret val = result
    // deallocate space
    sub RSP, 8
    ret
```



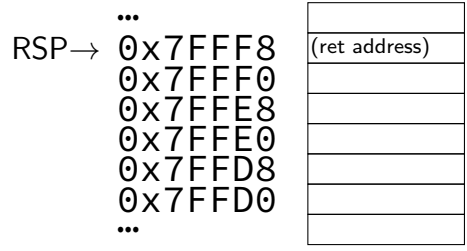

callee code example (animated)

```
myFunc:
    // allocate space for result
    sub RSP, 8
    mov QWORD PTR [RSP], 0   // result = 0
    add QWORD PTR [RSP], RDI // result += a
    add QWORD PTR [RSP], RSI // result += b
    add QWORD PTR [RSP], RDX // result += c
    mov RAX, QWORD PTR [RSP] // ret val = result
    // deallocate space
    sub RSP, 8
    ret
```

RSP	0x7FFF0
RDI	2
RSI	3
RDX	4
RAX	
…	

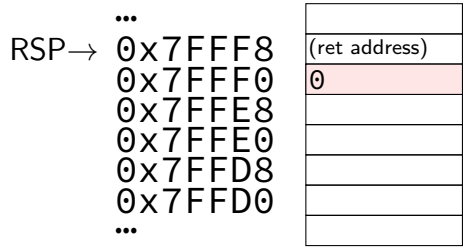

callee code example (animated)

```
myFunc:
    // allocate space for result
    sub RSP, 8
    mov QWORD PTR [RSP], 0   // result = 0
    add QWORD PTR [RSP], RDI // result += a
    add QWORD PTR [RSP], RSI // result += b
    add QWORD PTR [RSP], RDX // result += c
    mov RAX, QWORD PTR [RSP] // ret val = result
    // deallocate space
    sub RSP, 8
    ret
```



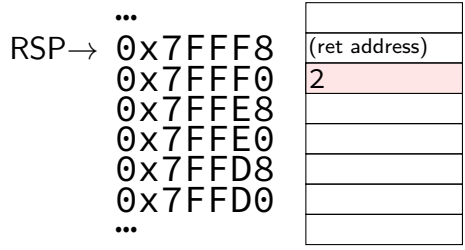

callee code example (animated)

```
myFunc:
    // allocate space for result
    sub RSP, 8
    mov QWORD PTR [RSP], 0   // result = 0
    add QWORD PTR [RSP], RDI // result += a
    add QWORD PTR [RSP], RSI // result += b
    add QWORD PTR [RSP], RDX // result += c
    mov RAX, QWORD PTR [RSP] // ret val = result
    // deallocate space
    sub RSP, 8
    ret
```



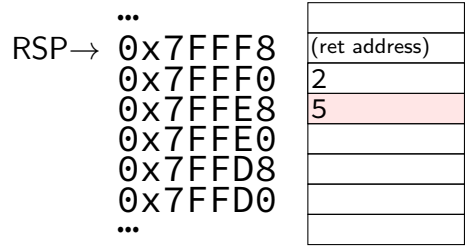

callee code example (animated)

```
myFunc:
    // allocate space for result
    sub RSP, 8
    mov QWORD PTR [RSP], 0   // result = 0
    add QWORD PTR [RSP], RDI // result += a
    add QWORD PTR [RSP], RSI // result += b
    add QWORD PTR [RSP], RDX // result += c
    mov RAX, QWORD PTR [RSP] // ret val = result
    // deallocate space
    sub RSP, 8
    ret
```



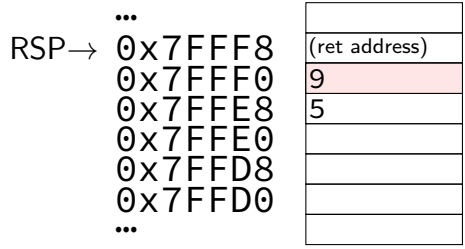

callee code example (animated)

```
myFunc:
    // allocate space for result
    sub RSP, 8
    mov QWORD PTR [RSP], 0   // result = 0
    add QWORD PTR [RSP], RDI // result += a
    add QWORD PTR [RSP], RSI // result += b
    add QWORD PTR [RSP], RDX // result += c
    mov RAX, QWORD PTR [RSP] // ret val = result
    // deallocate space
    sub RSP, 8
    ret
```



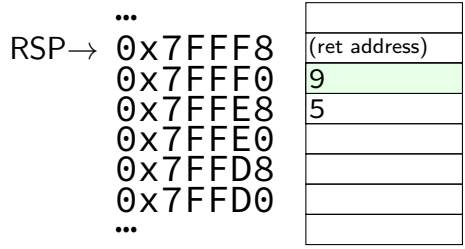

callee code example (animated)

```
myFunc:
    // allocate space for result
    sub RSP, 8
    mov QWORD PTR [RSP], 0   // result = 0
    add QWORD PTR [RSP], RDI // result += a
    add QWORD PTR [RSP], RSI // result += b
    add QWORD PTR [RSP], RDX // result += c
    mov RAX, QWORD PTR [RSP] // ret val = result
    // deallocate space
    sub RSP, 8
    ret
```

RSP	0x7FFF8
RDI	2
RSI	3
RDX	4
RAX	9
…	

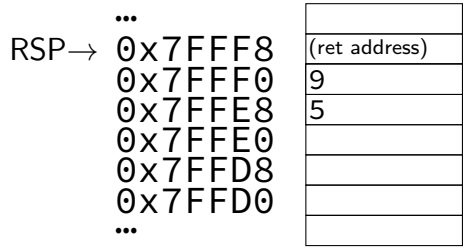

callee code example (animated)

```
myFunc:
    // allocate space for result
    sub RSP, 8
    mov QWORD PTR [RSP], 0   // result = 0
    add QWORD PTR [RSP], RDI // result += a
    add QWORD PTR [RSP], RSI // result += b
    add QWORD PTR [RSP], RDX // result += c
    mov RAX, QWORD PTR [RSP] // ret val = result
    // deallocate space
    sub RSP, 8
    ret
```

RSP	0x80000
RDI	2
RSI	3
RDX	4
RAX	9
…	

RSP→	…	
	0x7FFF8	(ret address)
	0x7FFF0	9
	0x7FFE8	5
	0x7FFE0	
	0x7FFD8	
	0x7FFD0	
	…	

callee code example (allocate registers)

```
long myFunc(long a, long b
    long result = 0;
    result += a; result +=
    return result;
}
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    @2pop RBX3@
    ret
```

address	value
…	
0xFF000	(caller's stuff)
0xEFFF8	return address …
0xEFFF0	saved RBX
0xEFFE8	saved R12
…	

callee code example (allocate registers)

```
long myFunc(long a, long b
    long result = 0;
    result += a; result +=
    return result;
}
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    @2pop RBX3@
    ret
```

address	value
…	
0xFF000	(caller's stuff)
0xEFFF8	return address …
0xEFFF0	saved RBX
0xEFFE8	saved R12
…	

callee code example (allocate registers)

```
long myFunc(long a, long b
    long result = 0;
    result += a; result +=
    return result;
}
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R1
    pop R12   /
    @2pop RBX3@
    ret
```

address	value
…	
0xFF000	(caller's stuff)
0xEFFF8	return address …
0xEFFF0	saved RBX
0xEFFE8	saved R12
…	

another policy:
allocate new registers for local vars
…and aren't a, b, c local vars?

callee code example (allocate registers)

```
long myFunc(long a, long b
    long result = 0;
    result += a; result +=
    return result;
}
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R1
    pop R12
    @2pop RBX3@
    ret
```

address	value
…	
0xFF000	(caller's stuff)
0xEFFF8	return address …
0xEFFF0	saved RBX
0xEFFE8	saved R12
…	

using registers for variables?
if callee-saved, save and restore old

callee code example (allocate registers)

```
long myFunc(long a, long b
    long result = 0;
    result += a; result +=
    return result;
}
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov R
    pop R
    @2pop
    ret
```

address	value
…	
0xFF000	(caller's stuff)
0xEFFF8	return address …
0xEFFF0	saved RBX
0xEFFE8	saved R12
…	

using registers for variables?
if caller-saved, it's okay to overwrite w/o saving

callee code example (animated)

```
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    pop RBX
    ret
```

RSP	0x7FFF8
RDI	2
RSI	3
RDX	4
R8	4
R9	4
R12	0x5678
RAX	
RBX	0x1234
…	

	…	
RSP→	0x7FFF8	(ret address)
	0x7FFF0	
	0x7FFE8	
	0x7FFE0	
	0x7FFD8	
	0x7FFD0	

callee code example (animated)

```
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    pop RBX
    ret
```

RSP	0x7FFF0
RDI	2
RSI	3
RDX	4
R8	4
R9	4
R12	0x5678
RAX	
RBX	0x1234
…	

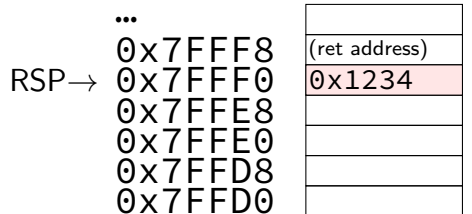

callee code example (animated)

```
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    pop RBX
    ret
```

RSP	0x7FFE8
RDI	2
RSI	3
RDX	4
R8	4
R9	4
R12	0x5678
RAX	
RBX	0x1234
…	



callee code example (animated)

```
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    pop RBX
    ret
```

RSP	0x7FFE8
RDI	2
RSI	3
RDX	4
R8	2
R9	4
R12	0x5678
RAX	
RBX	0x1234
…	



callee code example (animated)

```
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    pop RBX
    ret
```

RSP	0x7FFE8
RDI	2
RSI	3
RDX	4
R8	2
R9	3
R12	0x5678
RAX	
RBX	0x1234
…	



callee code example (animated)

```
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    pop RBX
    ret
```

RSP	0x7FFE8
RDI	2
RSI	3
RDX	4
R8	2
R9	3
R12	0x5678
RAX	
RBX	4
…	



callee code example (animated)

```
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    pop RBX
    ret
```

RSP	0x7FFE8
RDI	2
RSI	3
RDX	4
R8	2
R9	3
R12	0
RAX	
RBX	4
…	



callee code example (animated)

```
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    pop RBX
    ret
```

RSP	0x7FFE8
RDI	2
RSI	3
RDX	4
R8	4
R9	3
R12	4
RAX	
RBX	4
…	



callee code example (animated)

```
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    pop RBX
    ret
```

RSP	0x7FFE8
RDI	2
RSI	3
RDX	4
R8	4
R9	3
R12	7
RAX	
RBX	4
…	



callee code example (animated)

```
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    pop RBX
    ret
```

RSP	0x7FFE8
RDI	2
RSI	3
RDX	4
R8	4
R9	3
R12	9
RAX	
RBX	2
…	



callee code example (animated)

```
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    pop RBX
    ret
```

RSP	0x7FFE8
RDI	2
RSI	3
RDX	4
R8	4
R9	3
R12	9
RAX	9
RBX	2
…	



callee code example (animated)

```
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    pop RBX
    ret
```

RSP	0x7FFF0
RDI	2
RSI	3
RDX	4
R8	4
R9	3
R12	0x5678
RAX	9
RBX	2
…	

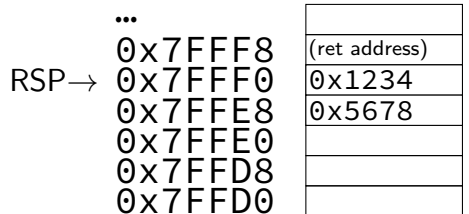

callee code example (animated)

```
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    pop RBX
    ret
```

RSP	0x7FFE8
RDI	2
RSI	3
RDX	4
R8	4
R9	3
R12	0x5678
RAX	9
RBX	0x1234
…	

	…	
RSP→	0x7FFF8	(ret address)
	0x7FFF0	0x1234
	0x7FFE8	0x5678
	0x7FFE0	
	0x7FFD8	
	0x7FFD0	

callee code example (animated)

```
myFunc:
    push RBX  // save old RBX, which we've decided to use for c
    push R12  // save old R12, to be used for result
    mov R8, RDI   // store a in R8 (not callee-saved)
    mov R9, RSI   // store b in RBP
    mov RBX, RDX  // store c in RBX
    mov R12, 0    // result = 0
    add R12, R8   // result += a
    add R12, R9   // result += b
    add R12, RBX  // result += c
    mov RAX, R12  // ret val = result
    pop R12   // restore old R12
    pop RBX
    ret
```

RSP	0x7FFE8
RDI	2
RSI	3
RDX	4
R8	4
R9	3
R12	0x5678
RAX	9
RBX	0x1234
…	

RSP→	…	
	0x7FFF8	(ret address)
	0x7FFF0	0x1234
	0x7FFE8	0x5678
	0x7FFE0	
	0x7FFD8	
	0x7FFD0	

what do compilers do?

must:

- deallocate any allocated stack space
- save/restore certain registers
- look for arguments in certain places
- put return value in certain place

but lots of policies for where to put locals...

what do compilers actually do?

it depends...

callee code example (no optimizations)

```
myFunc:
  // allocate memory for a, b, c, result
  sub     rsp, 32
  mov     qword ptr [rsp + 24], rdi // copy a from arg
  mov     qword ptr [rsp + 16], rsi // copy b from arg
  mov     qword ptr [rsp + 8], rdx  // copy c from arg
  mov     qword ptr [rsp], 0        // result = 0
  mov     rdx, qword ptr [rsp + 24] // rdx = a
  add     rdx, qword ptr [rsp]      // rdx += result
  mov     qword ptr [rsp], rdx      // result = rdx
  mov     rdx, qword ptr [rsp + 16] // rdx = b
  add     rdx, qword ptr [rsp]      // rdx += result
  mov     qword ptr [rsp], rdx      // result = rdx
  mov     rdx, qword ptr [rsp + 8]  // rdx = c
  add     rdx, qword ptr [rsp]      // ...
  mov     qword ptr [rsp], rdx
  mov     rax, qword ptr [rsp]      // ret val = result
  // dealocate memory for a, b, c, result
  add     rsp, 32
  ret
```

callee code example (no optimizations)

```
myFunc:
  // allocate memory for a, b, c, result
  sub     rsp, 32
  mov     qword ptr [rsp + 24], rdi // copy a from arg
  mov     qword ptr [rsp + 16], rsi // copy b from arg
  mov     qword ptr [rsp + 8], rdx  // copy c from arg
  mov     qword ptr [rsp], 0        // result = 0
  mov     rdx, qword ptr [rsp + 24] // rdx = a
  add     rdx, qword ptr [rsp]      // rdx += result
  mov     qword ptr [rsp], rdx
  mov     rdx, qword ptr [rsp + 16]
  add     rdx, qword ptr [rsp]
  mov     qword ptr [rsp], rdx
  mov     rdx, qword ptr [rsp + 8]
  add     rdx, qword ptr [rsp]
  mov     qword ptr [rsp], rdx
  mov     rax, qword ptr [rsp]
  // dealocate memory for a, b, c,
  add     rsp, 32
  ret
```

address	value
…	
0xF000	(caller's stuff)
0xEFF8	return address …
0xEFF0	value of a
0xEFE8	value of b
0xEFE0	value of c
0xEFD8	value of result
…	

callee code example (no optimizations)

```
myFunc:
  // allocate memory for a, b, c, result
  sub     rsp, 32
  mov     qword ptr [rsp + 24], rdi // copy a from arg
  mov     qword ptr [rsp + 16], rsi // copy b from arg
  mov     qword ptr [rsp + 8], rdx  // copy c from arg
  mov     qword ptr [rsp], 0        // result = 0
  mov     rdx, qword ptr [rsp + 24] // rdx = a
  add     rdx, qword ptr [rsp]      // rdx += result
  mov     qword ptr [rsp], rdx
  mov     rdx, qword ptr [rsp + 16]
  add     rdx, qword ptr [rsp]
  mov     qword ptr [rsp], rdx
  mov     rdx, qword ptr [rsp + 8]
  add     rdx, qword ptr [rsp]
  mov     qword ptr [rsp], rdx
  ret
```

address	value
…	
0xF000	(caller's stuff)
0xEFF8	return address …
0xEFF0	value of a
0xEFE8	value of b
	value of c
	value of result

pretty inefficient — but obeys calling convention

one thing `clang` can generate without optimizations

optimizations versus no

things that always work:

- allocate stack space for local variables
- always put values in their variable right away
- don't reuse argument/return value registers

things clever compilers can do

- place some local variables in registers
- skip storing values that aren't used
- reuse argument/return value registers when not calling/returning

callee code example (better version)

```
long myFunc(long a, long b, long c) {
    long result = 0;
```

address	value
…	
0xF0000000	(caller's stuff)
0xEFFFFFF8	return address for myFunc
0xEFFFFFE8	(next stack allocation)
…	

```
myFunc:
  mov RAX, 0
  add RAX, RSI
  add RAX, RDI
  add RAX, RDX
  ret
```

callee code example (better version)

```
long myFunc(long a, long b, long c) {
    long result = 0;
```

address	value
…	
0xF0000000	(caller's stuff)
0xEFFFFFF8	return address for myFunc
0xEFFFFFE8	(next stack allocation)
…	

```
myFunc:
  mov RAX, 0
  add RAX, RSI
  add RAX, RDI
  add RAX, RDX
  ret
```

callee code example (better version)

```
long myFunc(long a, long b, long c) {
    long result = 0;
```

address	value
…	
0xF0000000	(caller's stuff)
0xEFFFFFF8	return address for myFunc
0xEFFFFFE8	(next stack allocation)
…	

```
myFunc:
  mov RAX, 0
  add RAX, RSI
  add RAX, RDI
  add RAX, RDX
  ret
```

optimization: place result in RAX — avoid copy at end
caller can't tell — RAX will be overwritten anyways

callee code example (better version)

```
long myFunc(long a, long b, long c) {
    long result = 0;
```

address	value
…	
0xF0000000	(caller's stuff)
0xEFFFFFF8	return address for myFunc
0xEFFFFFE8	(next stack allocation)
…	

```
myFunc:
  mov RAX, 0
  add RAX, RSI
  add RAX, RDI
  add RAX, RDX
  ret
```

optimization: use argument registers directly — avoid copy at beginning
caller can't tell
note: allowed to change argument registers (not callee-saved)

callee code example (good version)

```
long myFunc(long a, long b, long c) {
    long result = 0;
    result += a;
    result += b;
    result += c;
    return result;
}
```

address	value
…	
0xF0000000	(caller's stuff)
0xEFFFFFF8	return address for myFunc
0xEFFFFFE8	(next stack allocation)
…	

```
myFunc:
  lea rax, [rdi + rsi]  // return value = a + b
  add rax, rdx          // return value += c
  ret
```

callee code example (good version)

```
long myFunc(long a, long b, long c) {
    long result = 0;
    result += a;
    result += b;
    result += c;
    return result;
}
```

address	value
…	
0xF0000000	(caller's stuff)
0xEFFFFFF8	return address for myFunc
0xEFFFFFE8	(next stack allocation)
…	

```
myFunc:
  lea rax, [rdi + rsi]  // return value = a + b
  add rax, rdx          // return value += c
  ret
```

callee code example (good version)

```
long myFunc(long a, long b, long c) {
    long result = 0;
    result += a;
    result += b;
    result += c;
    return result;
}
```

address	value
…	
0xF0000000	(caller's stuff)
0xEFFFFFF8	return address for myFunc
0xEFFFFFE8	(next stack allocation)
…	

```
myFunc:
  lea rax, [rdi + rsi]  // return value = a + b
  add rax, rdx          // return value += c
  ret
```

what `clang` generates with optimizations

writing called functions (reprise)

save any callee-saved registers function uses
    RBP, RBX, R12-R15,

allocate stack space for local variables or temporary storage

(actual function body)

place return address in RAX

deallocate stack space

restore any saved registers

callee code example (save registers weirdly)

```
long myFunc(long a, long b, long c) {
    long result = 0;
    result += a;
    result += b;
    result += c;
    return result;
}
```

address	value
…	
0xF0000000	(caller's
0xEFFFFFF8	return
0xEFFFFFF0	(next s
…	

```
myFunc:
    mov R8, RBX // save old RBX, but to R8
    mov R9, RBP // save old RBP, but to R9
    push R12  // save old R12, which we've decided to use for resu
    mov RAX, RDI              // store a in RAX
    mov RBP, RSI              // store b in RBP
    mov RBX, RDX              // store c in RBX
    mov R12, 0                // result = 0
    add R12, RAX    // result += a
    add R12, RBP    // result += b
```

callee code example (save registers weirdly)

```
long myFunc(long a, long b, long c) {
    long result = 0;
    result += a;
    result += b;
    result += c;
    return result;
}
```

address	value
…	
0xF0000000	(caller's
0xEFFFFFF8	return
0xEFFFFFF0	(next s
…	

```
myFunc:
    mov R8, RBX // save old RBX, but to R8
    mov R9, RBP // save old RBP, but to R9
    push R12  // save old R12, which we've decided to use for resu
    mov RAX, RDI              // store a in RAX
    mov RBP, RSI              // store b in RBP
    mov RBX, RDX              // store c in RBX
    mov R12, 0                // result = 0
    add R12, RAX    // result += a
    add R12, RBP    // result += b
```

callee code example (save registers weirdly)

```
long myFunc(long a, long b, long c) {
    long result = 0;
    result += a;
    result += b;
    result += c;
    return result;
}
```

address	value
…	
0xF0000000	(caller's
0xEFFFFFF8	return
0xEFFFFFF0	(next s
…	

```
myFunc:
    mov R8, RBX // save old RBX, but to R8
    mov R9, RBP // save old RBP, but to R9
    push R12  // save old R12, which we've decided to use for resu
    mov RAX, RDI              // store a in RAX
    mov RBP, RSI              // store b in RBP
    mov RBX, RDX              // store c in RBX
    mov R12, 0                // result = 0
    add R12, RAX    // result += a
    add R12, RBP    // result += b
```

activation records

calling subroutine puts some things on stack:

- saved register values
- parameters (if not in registers)
- local variables
- return address

together called the
activation record
for the subroutine

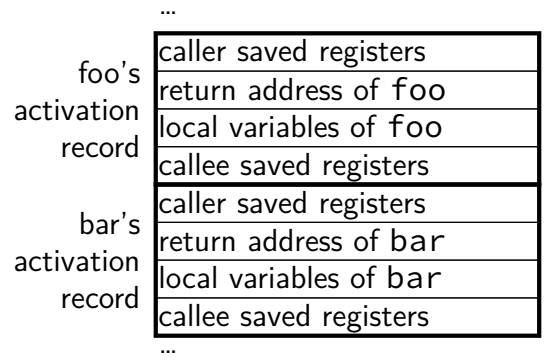

program memory (x86-64 Linux)

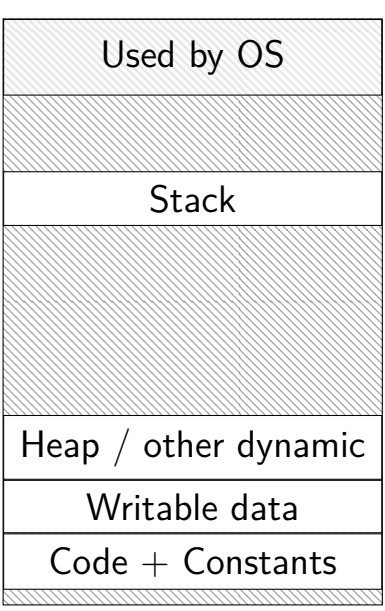

program memory (x86-64 Linux)

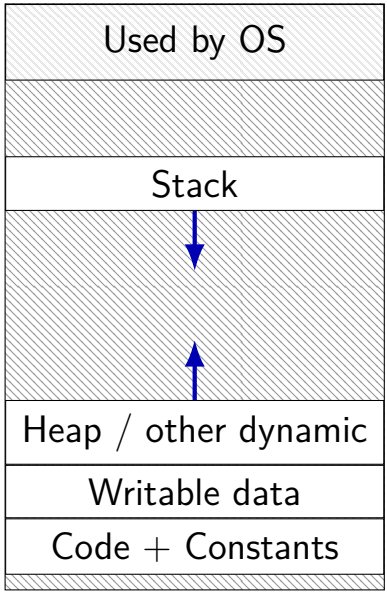

0xFFFF FFFF FFFF FFFF

0xFFFF 8000 0000 0000

0x7F…

← activation records go here

stack grows towards heap (activation records)
heap grows towards stack (allocations with new)
hopefully never meet

← new uses space here

0x0000 0000 0040 0000

a vulnerable function

```
void vulnerable() {
    char buffer[100];
    cin >> buffer;
}
```

```
  sub rsp, 120
  mov rsi, rsp
  mov edi, /* cin */
  call /* operator>>(istream,char*) */
  add rsp, 120
  ret
```

buffer overflows

highest address (stack started here)

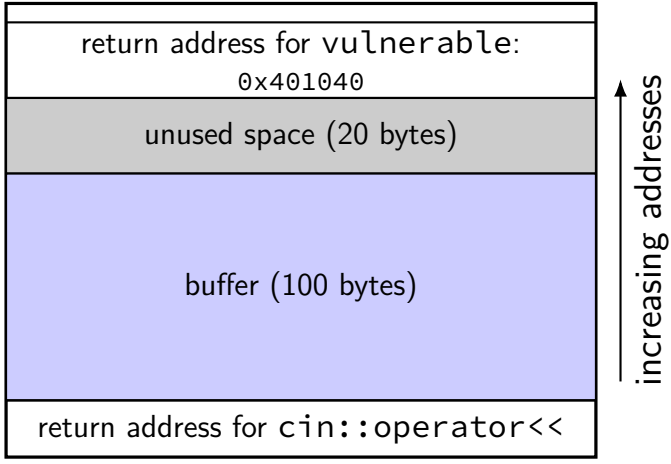

lowest address (stack grows here)

buffer overflows

highest address (stack started here)

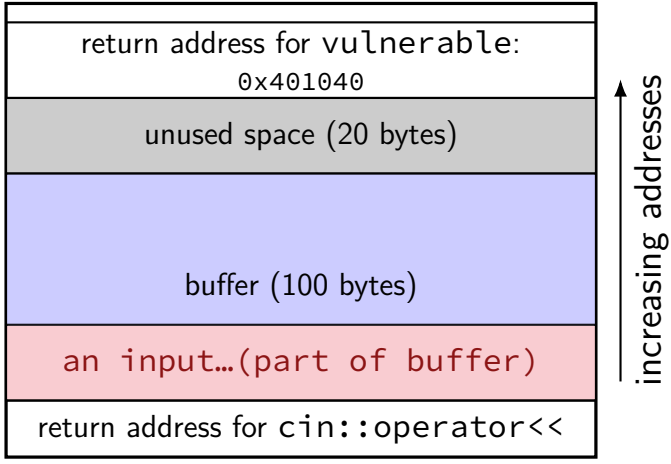

lowest address (stack grows here)

buffer overflows

highest address (stack started here)

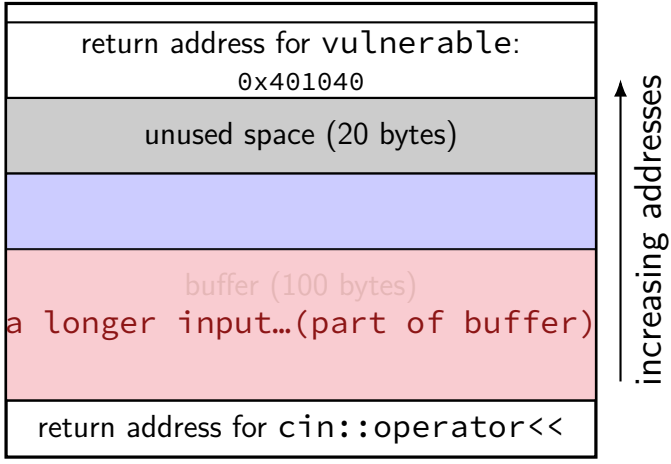

lowest address (stack grows here)

buffer overflows

highest address (stack started here)

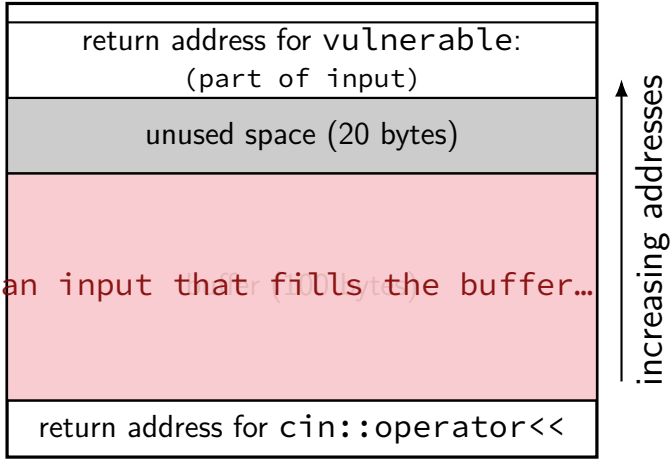

lowest address (stack grows here)

buffer overflows

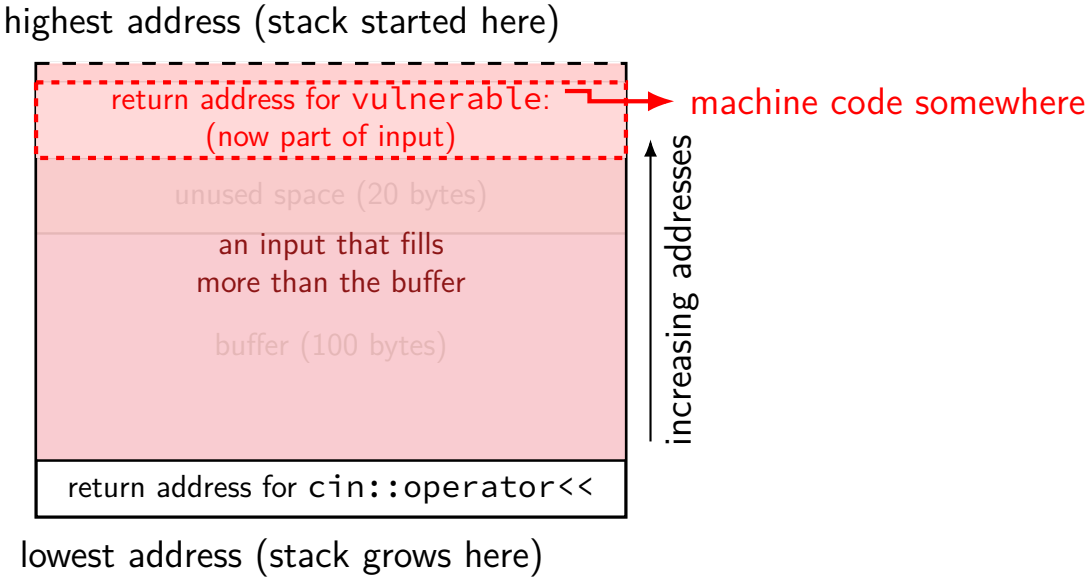

frame pointers

stack pointer: points to “top” of stack

- x86 register RSP used for this
- i.e. lowest address on stack
- i.e. location of next stack allocation

frame pointer: pointer to allocation record AKA “stack frame”

- x86 register RBP intended for this

not required by the calling convention

- function can use RSP instead

frame pointer defaults

some systems default to using frame pointers

- easier to deallocate stack space (`mov RSP, RBP`)
- can support "dynamic" stack allocations (`alloca()`)
- easier to write debuggers

our lab machines don't

clang/GCC flags:

- `-fomit-frame-pointer`/`-fno-omit-frame-pointer`
- (clang only) `-mno-omit-leaf-frame-pointer`
- ("leaf" = function that doesn't call anything)

frame pointer code

```
someFunction:
    push RBP  // save old frame pointer
    mov RBP, RSP // top of stack is frame pointer
    sub RSP, 32  // allocate 32 bytes for local vari
    ...
    add [RBP - 8], 1 // someLocalVar += 1
    ...
    mov RSP, RBP // restore old stack pointer
        // instead of: add RSP, 32
    ret
```

godbolt.org

"compiler explorer"

many, many C++ compilers

does work of extracting just the relevant assembly

also does "demangling"

- translate 'mangled' assembly names to C++ names

getting assembly output from clang

`clang++ -S ... file.cpp` — write assembly to `file.s`

- in machine's AT&T assembly syntax
- not the syntax you will be coding

`clang++ -mllvm --x86-asm-syntax=intel -S ... file.cpp` — ...in Intel-like syntax

- much closer to syntax you will be coding
- but won't work with `nasm`

test_abs.cpp

```
#include <iostream>
using namespace std;
extern "C" long absolute_value(long x);

long absolute_value(long x) {
    if (x<0)    // if x is negative
        x = -x;    // negate x
    return x;    // return x
}

int main() {
    long theValue=0;
    cout << "Enter a value: " << endl;
    cin >> theValue;
    long theResult = absolute_value(theValue);
    cout << "The result is: " << theResult << endl;
```

absolute_value

`clang++ -S`: (AT&T syntax)

…

```
absolute_value:
    movq    %rdi, -8(%rsp)
    cmpq    $0, -8(%rsp)
    jge    .LBB1_2
    xorl    %eax, %eax
    movl    %eax, %ecx
    subq    -8(%rsp), %rcx
    movq    %rcx, -8(%rsp)
.LBB1_2:
    movq    -8(%rsp), %rax
    retq
```

AT&T syntax

destination last

% = register

`disp(base)` same as
`memory[disp + base]`

`disp(base, index, scale)` same as
`memory[disp + base + index * scale]`

- omit disp (defaults to `0`)
- and/or omit base (defaults to `0`)
- and/or scale (defualts to `1`)

$ means constant/number

plain number/label means value in memory

absolute_value (unoptimized)

`clang++ -S --mllvm --x86-asm-syntax=intel -S -fomit-frame-pointer`:

```
absolute_value:
    mov     qword ptr [rsp − 8], rdi
    cmp     qword ptr [rsp − 8], 0
    jge     .LBB1_2
    xor     eax, eax
    mov     ecx, eax
    sub     rcx, qword ptr [rsp − 8]
    mov     qword ptr [rsp − 8], rcx
.LBB1_2:
    mov     rax, qword ptr [rsp − 8]
    ret
```

absolute_value_int (unoptimized)

longs replaced with ints

`clang++ -S --mllvm --x86-asm-syntax=intel -S -fomit-frame-pointer`:

```
absolute_value_int:
  mov dword ptr [rsp − 4], edi
  cmp dword ptr [rsp − 4], 0
  jge .LBB0_2
  xor eax, eax
  sub eax, dword ptr [rsp − 4]
  mov dword ptr [rsp − 4], eax
.LBB0_2:
  mov eax, dword ptr [rsp − 4]
  ret
```

absolute_value (optimized)

`clang++ -S -O2 --mllvm --x86-asm-syntax=intel -S -fomit-frame-pointer`:

```
absolute_value:
  mov rax, rdi
  neg rax
  cmovl rax, rdi
  ret
```

(`cmovl` — mov if flags say less than;
and `neg`ate sets those flags)

---

my recommendation: use some optimization option when generating assembly to look at

absolute value without cmov (1)

what if we didn't know about cmovXX...?

```
// NASM syntax:
global absolute_value
// GNU assembler syntax: .global absolute_value

absolute_value:
    mov rax, rdi    // x = return value ← arg 1
    cmp rax, 0      // x == 0?
    jge end_of_procedure
    neg rax         // NEGate
end_of_procedure:
    ret
```

absolute value without cmov (2)

what if we didn't know about cmov*XX* and neg...?

```
// NASM syntax:
global absolute_value
// GNU assembler syntax: .global absolute_value

absolute_value:
    mov rax, rdi    // x = return value ← arg 1
    cmp rax, 0      // x == 0?
    jge end_of_procedure
    mov rax, 0
    sub rax, rdi
end_of_procedure:
    ret
```

rest of the .s file

I've shown you a little bit of the .s file

there's alot of extra stuff in there...

in context (1)

“text segment” (code)
file information:

```
        .text
        .intel_syntax noprefix
        .file   "test_abs.cpp"
```

in context (2)

```
        .section        .text.startup,"ax",@progbits
        .align  16, 0x90
        .type   __cxx_global_var_init,@function
__cxx_global_var_init:                  # @__cxx_global_var_in
        .cfi_startproc
# BB#0:
        push    rax
.Ltmp0:
        .cfi_def_cfa_offset 16
        movabs  rdi, _ZStL8__ioinit
        call    _ZNSt8ios_base4InitC1Ev
        movabs  rdi, _ZNSt8ios_base4InitD1Ev
        movabs  rsi, _ZStL8__ioinit
        movabs  rdx, __dso_handle
        call    __cxa_atexit
        mov     dword ptr [rsp + 4], eax # 4-byte Spill
```

in context (2)

__cxx_global_var_init — function to call global variable constructors/etc.

```
        .s                                                    ts
        .align  16, 0x90
        .type   __cxx_global_var_init,@function
__cxx_global_var_init:                          # @__cxx_global_var_in
        .cfi_startproc
# BB#0:
        push    rax
.Ltmp0:
        .cfi_def_cfa_offset 16
        movabs  rdi, _ZStL8__ioinit
        call    _ZNSt8ios_base4InitC1Ev
        movabs  rdi, _ZNSt8ios_base4InitD1Ev
        movabs  rsi, _ZStL8__ioinit
        movabs  rdx, __dso_handle
        call    __cxa_atexit
        mov     dword ptr [rsp + 4], eax # 4-byte Spill
```

in context (2)

_ZStL8__ioinit = std::__ioinit (global var.)
_ZNSt8ios_base4InitC1Ev = ios_base::Init::Init() (constructor)

```
        .type   __cxx_global_var_init,@function
__cxx_global_var_init:                  # @__cxx_global_var_in
        .cfi_startproc
# BB#0:
        push    rax
.Ltmp0:
        .cfi_def_cfa_offset 16
        movabs  rdi, _ZStL8__ioinit
        call    _ZNSt8ios_base4InitC1Ev
        movabs  rdi, _ZNSt8ios_base4InitD1Ev
        movabs  rsi, _ZStL8__ioinit
        movabs  rdx, __dso_handle
        call    __cxa_atexit
        mov     dword ptr [rsp + 4], eax # 4-byte Spill
```

in context (2)

`.cfi_…` — for debugger/exceptions

```
        .sectic                                          ogbits
        .align  16, 0x90
        .type   __cxx_global_var_init,@function
__cxx_global_var_init:                          # @__cxx_global_var_in
        .cfi_startproc
# BB#0:
        push    rax
.Ltmp0:
        .cfi_def_cfa_offset 16
        movabs  rdi, _ZStL8__ioinit
        call    _ZNSt8ios_base4InitC1Ev
        movabs  rdi, _ZNSt8ios_base4InitD1Ev
        movabs  rsi, _ZStL8__ioinit
        movabs  rdx, __dso_handle
        call    __cxa_atexit
        mov     dword ptr [rsp + 4], eax # 4-byte Spill
```

in context (3)

```
        .text
        .globl  absolute_value
        .align  16, 0x90
        .type   absolute_value,@function
absolute_value:                         # @absolute_value
        .cfi_startproc
# BB#0:
        mov     qword ptr [rsp - 8], rdi
        cmp     qword ptr [rsp - 8], 0
        jge     .LBB1_2
# BB#1:
        xor     eax, eax
        mov     ecx, eax
        sub     rcx, qword ptr [rsp - 8]
        mov     qword ptr [rsp - 8], rcx
.LBB1_2:
```

in context (3)

```
        .text
        .globl  absolute_value
        .align  16, 0x90
        .type   absolute_value,@function
absolute_value:                         # @absolute_value
        .
# BB#0:
        mov     qword ptr [rsp - 8], rdi
        cmp     qword ptr [rsp - 8], 0
        jge     .LBB1_2
# BB#1:
        xor     eax, eax
        mov     ecx, eax
        sub     rcx, qword ptr [rsp - 8]
        mov     qword ptr [rsp - 8], rcx
.LBB1_2:
```

- `.globl` — make this label accessible in other files
- `.type` — help linker/debugger/etc.

in context (4)

```
    .globl      main
    .align      16, 0x90
    .type       main,@function
main:                                   # @main
    .cfi_startproc
# BB#0:
    sub rsp, 56
.Ltmp1:
    .cfi_def_cfa_offset 64
    movabs  rdi, _ZSt4cout
    movabs  rsi, .L.str
    mov dword ptr [rsp + 52], 0
    mov qword ptr [rsp + 40], 0
    call    _ZStlsISt11char_traitsIcEERSt13basic_ostreamIcT_ES5_PKc
    movabs  rsi, _ZSt4endlIcSt11char_traitsIcEERSt13basic_ostreamIT_
    mov rdi, ra_end1-absolute_value
    ...
```

in context (4)

```
    .globl      main
    .align      16, 0x90
    .type       main,@function
main:                                   # @main
    .cfi_startproc
# BB#0:
  _ZStlsISt11char_traitsIcEERSt13basic_ostreamIcT_ES5_PKc =
· ostream& operator<<(ostream&, char const*)
    movabs  rdi, _ZSt4cout
    movabs  rsi, .L.str
    mov dword ptr [rsp + 52], 0
    mov qword ptr [rsp + 40], 0
    call    _ZStlsISt11char_traitsIcEERSt13basic_ostreamIcT_ES5_PKc
    movabs  rsi, _ZSt4endlIcSt11char_traitsIcEERSt13basic_ostreamIT_
    mov rdi, ra_end1-absolute_value
    ...
```

extern "C"

```
#include <iostream>
using namespace std;
extern "C" long absolute_value(long x);

long absolute_value(long x) {
    if (x<0)        // if x is negative
        x = -x;     // negate x
    return x;       // return x
}

int main() {
    long theValue=0;
    cout << "Enter a value: " << endl;
    cin >> theValue;
    long theResult = absolute_value(theValue);
    cout << "The result is: " << theResult << endl;
    return 0;
}
```

extern "C" — name mangling

with `extern "C"`:

```
absolute_value:
    ...
```

---

without `extern "C"`:

```
_Z14absolute_valuel:
    ...
```

extern C — different args

This not allowed:

```
extern "C" long absolute_value(long x);
extern "C" int absolute_value(int x);
```

because C doesn't allow it, and `extern "C"` means 'C-compatible'.

This is fine:

```
long absolute_value(long x);
int absolute_value(int x);
```

because C++ allows functions with different args, but same name mangling on Linux:

`_Z14absolute_valuel`, and
`_Z14absolute_valuei`

int max(int x, int y)

```
int max(int x, int y) {
    int theMax;
    if (x > y)          // if x > y then x is max
        theMax = x;
    else                // else y is the max
        theMax = y;
    return theMax;      // return the max
}
```

max assembly (unoptimized)

```
max:
    mov     dword ptr [rsp − 4], edi
    mov     dword ptr [rsp − 8], esi
    mov     esi, dword ptr [rsp − 4]
    cmp     esi, dword ptr [rsp − 8]
    jle     .LBB1_2
    mov     eax, dword ptr [rsp − 4]
    mov     dword ptr [rsp − 12], eax
    jmp     .LBB1_3
.LBB1_2:
    mov     eax, dword ptr [rsp − 8]
    mov     dword ptr [rsp − 12], eax
.LBB1_3:
    mov     eax, dword ptr [rsp − 12]
    ret
```

max assembly (unoptimized)

```
max:
    mov     dword ptr [rsp – 4], edi
    mov     dword ptr [rsp – 8], esi
    mov     esi, dword ptr [rsp – 4]
    cmp     esi, dword ptr [rsp – 8]
    jle     .LBB1_2
    mov     eax, dword ptr [rsp – 4]
    mov     dword ptr [rsp – 12], eax
    jmp     .LBB1_3
.LBB1_2:
    mov     eax, dword ptr [rsp – 8]
    mov     dword ptr [rsp – 12], eax
.LBB1_3:
    mov     eax, dword ptr [rsp – 12]
    ret
```

max assembly (unoptimized)

```
max:
    mov     dword ptr [rsp – 4], edi
    mov     dword ptr [rsp – 8], esi
    mov     esi, dword ptr [rsp – 4]
    cmp     esi, dword ptr [rsp – 8]
    jle     .LBB1_2
    mov     eax, dword ptr [rsp – 4]
    mov     dword ptr [rsp – 12], eax
    jmp     .LBB1_3
.LBB1_2:
    mov     eax, dword ptr [rsp – 8]
    mov     dword ptr [rsp – 12], eax
.LBB1_3:
    mov     eax, dword ptr [rsp – 12]
    ret
```

max assembly (unoptimized)

```
max:
    mov     dword ptr [rsp − 4], edi
    mov     dword ptr [rsp − 8], esi
    mov     esi, dword ptr [rsp − 4]
    cmp     esi, dword ptr [rsp − 8]
    jle     .LBB1_2
    mov     eax, dword ptr [rsp − 4]
    mov     dword ptr [rsp − 12], eax
    jmp     .LBB1_3
.LBB1_2:
    mov     eax, dword ptr [rsp − 8]
    mov     dword ptr [rsp − 12], eax
.LBB1_3:
    mov     eax, dword ptr [rsp − 12]
    ret
```

max assembly (optimized)

```
max:
    cmp     edi, esi
    cmovge  esi, edi
    mov     eax, esi
    ret
```

max assembly (optimized)

```
max:
    cmp     edi, esi
    cmovge  esi, edi
    mov     eax, esi
    ret
```

compare_string

```
bool compare_string (const char *theStr1,
                     const char *theStr2) {
    // while *theStr1 is not nul terminator
    // and the current corresponding bytes are equal
    while( (*theStr1 != '\0')
            && (*theStr1 == *theStr2) ) {
        theStr1++;          // increment the pointers to
        theStr2++;          // the next char / byte
    }
    return (*theStr1==*theStr2);
}
```

compare_string (optimized; part 1)

```
compare_string:
    mov     al, byte ptr [rdi]
    test    al, al
    je      .LBB0_4
    inc     rdi
.LBB0_2:
    movzx   ecx, byte ptr [rsi]
    movzx   edx, al
    cmp     edx, ecx
    jne     .LBB0_5
    inc     rsi
    mov     al, byte ptr [rdi]
    inc     rdi
    test    al, al
    jne     .LBB0_2
    ...
```

compare_string (optimized; part 1)

```
compare_string:
    mov       al, byte ptr [rdi]
    test      al, al
    je        .LBB0_4
    inc       rdi
.LBB0_2:
    movzx     ecx, byte ptr [rsi]
    movzx     edx, al
    cmp       edx, ecx
    jne       .LBB0_5
    inc       rsi
    mov       al, byte ptr [rdi]
    inc       rdi
    test      al, al
    jne       .LBB0_2
    ...
```

compare_string (optimized; part 1)

```
compare_string:
    mov     al, byte ptr [rdi]
    test    al, al
    je      .LBB0_4
    inc     rdi
.LBB0_2:
    movzx   ecx, byte ptr [rsi]
    movzx   edx, al
    cmp     edx, ecx
    jne     .LBB0_5
    inc     rsi
    mov     al, byte ptr [rdi]
    inc     rdi
    test    al, al
    jne     .LBB0_2
    ...
```

compare_string (optimized; part 1)

```
compare_string:
    mov     al, byte ptr [rdi]
    test    al, al
    je      .LBB0_4
    inc     rdi
.LBB0_2:
    movzx   ecx, byte ptr [rsi]
    movzx   edx, al
    cmp     edx, ecx
    jne     .LBB0_5
    inc     rsi
    mov     al, byte ptr [rdi]
    inc     rdi
    test    al, al
    jne     .LBB0_2
    ...
```

compare_string (optimized; part 2)

```
.LBB0_4:
    xor     eax, eax
.LBB0_5:
    movzx   ecx, byte ptr [rsi]
    movzx   eax, al
    cmp     eax, ecx
    sete    al
    ret
```

compare_string (optimized; part 2)

```
.LBB0_4:
    xor       eax, eax
.LBB0_5:
    movzx     ecx, byte ptr [rsi]
    movzx     eax, al
    cmp       eax, ecx
    sete      al
    ret
```

fib

```
long fib(unsigned int n) {
    if ((n==0) || (n==1))
        return 1;
    return fib(n-1) + fib(n-2);
}
```

fib

```
long fib(unsigned int n) {
    if ((n==0) || (n==1))
        return 1;
    return fib(n-1) + fib(n-2);
}
```

fib (optimized; part 1)

```
fib:
    push    r14
    push    rbx
    push    rax
    mov     ebx, edi
    mov     eax, ebx
    or      eax, 1
    mov     r14d, 1
    cmp     eax, 1
    je      .LBB0_3
    ...
```

fib (optimized; part 1)

```
fib:
    push    r14
    push    rbx
    push    rax
    mov     ebx, edi
    mov     eax, ebx
    or      eax, 1
    mov     r14d, 1
    cmp     eax, 1
    je      .LBB0_3
    ...
```

fib (optimized; part 1)

```
fib:
    push    r14
    push    rbx
    push    rax
    mov     ebx, edi
    mov     eax, ebx
    or      eax, 1
    mov     r14d, 1
    cmp     eax, 1
    je      .LBB0_3
    ...
```

fib (optimized; part 1)

```
fib:
    push    r14
    push    rbx
    push    rax
    mov     ebx, edi
    mov     eax, ebx
    or      eax, 1
    mov     r14d, 1
    cmp     eax, 1
    je      .LBB0_3
    ...
```

fib (optimized; part 1)

```
fib:
    push    r14
    push    rbx
    push    rax
    mov     ebx, edi
    mov     eax, ebx
    or      eax, 1
    mov     r14d, 1
    cmp     eax, 1
    je      .LBB0_3
    ...
```

fib (optimized; part 2)

```
    add     ebx, -2
    mov     r14d, 1
.LBB0_2:
    lea     edi, [rbx + 1]
    call    fib
    add     r14, rax
    mov     eax, ebx
    or      eax, 1
    add     ebx, -2
    cmp     eax, 1
    jne     .LBB0_2
.LBB0_3:
    mov     rax, r14
    add     rsp, 8
    pop     rbx
    pop     r14
```

fib (optimized; part 2)

```
    add     ebx, -2
    mov     r14d, 1
.LBB0_2:
    lea     edi, [rbx + 1]
    call    fib
    add     r14, rax
    mov     eax, ebx
    or      eax, 1
    add     ebx, -2
    cmp     eax, 1
    jne     .LBB0_2
.LBB0_3:
    mov     rax, r14
    add     rsp, 8
    pop     rbx
    pop     r14
```

fib (optimized; part 2)

```
    add     ebx, -2
    mov     r14d, 1
.LBB0_2:
    lea     edi, [rbx + 1]
    call    fib
    add     r14, rax
    mov     eax, ebx
    or      eax, 1
    add     ebx, -2
    cmp     eax, 1
    jne     .LBB0_2
.LBB0_3:
    mov     rax, r14
    add     rsp, 8
    pop     rbx
    pop     r14
```

fib (optimized; part 2)

```
    add     ebx, -2
    mov     r14d, 1
.LBB0_2:
    lea     edi, [rbx + 1]
    call    fib
    add     r14, rax
    mov     eax, ebx
    or      eax, 1
    add     ebx, -2
    cmp     eax, 1
    jne     .LBB0_2
.LBB0_3:
    mov     rax, r14
    add     rsp, 8
    pop     rbx
    pop     r14
```

variable argument functions

C++ — multiple versions of functions — different assembly names:

`long foo(long a)` becomes `_Z3fool`
`long foo(long a, long b)` becomes `_Z3fooll`

can also have variable argument functions — more common in C
example: `void printf(const char *format, ...)` (C equiv. of cout)

```
printf("The number is %d.\n", 42);
```

```
mov edi, .L.str
mov esi, 42
xor eax, eax  // # of floating point args
call printf
...
```