Ionic® Purification System
Virtual Installation and Training

User Guide

VERSION 1.0
PART NUMBER: TBD

Purigen Biosystems, Inc.
5700 Stoneridge Drive, Suite 100
Pleasanton, CA 94588

TEL: +1 877 787-4436

EMAIL: info@purigenbio.com

PURIGEN™
BIOSYSTEMS

© **2020 Purigen Biosystems, Inc.** All rights reserved.

Table of Contents

Copyright 3
Support 3
Safety Recommendations 4
Reference Documents and Videos 5
Required Materials 5
User Provided Laptop 6
Laptop or PC for RingCentral Webconference 6
Virtual Installation and Training Overview 7
Introduction 7
Format 7
Lab Bench Setup for Installation and Training 8
Placement Recommendations 9
Web Camera and RingCentral Setup 10
Web Camera Components 10
Connecting the ELP USB camera to your Laptop 11
Adjusting the USB camera 11
Connecting to the RingCentral Meeting 11
Installation Procedure 13
Prepare the Lab Bench 13
Unpack the Leveling Plate 13
Unpack the Ionic System 15
Place the Ionic system 16
System Overview 22
Level the Ionic System 23
Ionic System Overview 29
Perform a Service Test 29
Functional Testing and Training 32
Chip Loading Simulation 32
Mock Lysate Testing 32
Purification Protocol Testing 33
Saving Installation and Training Log Files 33
Wrap-up 34

Copyright

© 2020 Purigen Biosystems, Inc. All rights reserved. Duplication and/or reproduction of all or any portion of this document without the express written consent of Purigen Biosystems, Inc. is strictly forbidden. Nothing contained herein shall constitute any warranty, express or implied, as to the performance of any products described herein. Any and all warranties applicable to any products are set forth in the applicable terms and conditions of sale accompanying the purchase of such product. Purigen Biosystems provides no warranty and hereby disclaims any and all warranties as to the use of any third-party products or protocols described herein. The use of products described herein is subject to certain restrictions as set forth in the applicable terms and conditions of sale accompanying the purchase of such product. “Ionic®” is a registered trademark of Purigen Biosystems, Inc. All other trademarks are the property of their respective owners. All products and services described herein are intended FOR RESEARCH USE ONLY and NOT FOR USE IN DIAGNOSTIC PROCEDURES.

Support

For technical information or advice, please contact Purigen Biosystems Support at any time.

- Phone: 1-877-PURIGEN (787-4436)
- Email: support@purigenbio.com

Purigen Biosystems, Inc.
5700 Stoneridge Drive, Suite 100
Pleasanton, CA 94588

Safety Recommendations

For all procedures in this document, the use of appropriate personal protective equipment (PPE) is strongly recommended. Disposable gloves should always be worn when handling samples, reagents, fluidic chips and any other materials that may come into contact with samples. Gloves should be changed immediately after any contact with the sample.

Inappropriate use of an Ionic® Purification System may cause personal injury or irreparable damage to the instrument.

- Only trained personnel should operate the Ionic system following Purigen Biosystems published methods
- All operators should review and be familiar with the *Ionic Purification System User Guide*
- Only Purigen Biosystems qualified service engineers should service the Ionic system

Damage to the Ionic system caused by inappropriate use, neglect to perform required maintenance, or performing inappropriate maintenance may void warranty or require services not covered by standard service contract terms.

- Do not move the instrument after installation while in operation or not
- Do not unplug the instrument while it is in operation
- Do not spill liquids on any area of the instrument
- Do not use with flammable materials or in the presence of toxic fumes
- Do not use excessive force to open or close the system cover
- Use only with Purigen Biosystems Ionic Fluidic Chips and associated kits and protocols

Laboratory supervisors and/or facility managers must take the necessary precautions to ensure a safe workplace and appropriate training of personnel.

- All laboratory activities should be in accordance with all national, state, and local health and safety regulations
- Follow all applicable SDS (or MSDS) recommendations for proper handling and disposal of chemicals and reagents
- Follow all safety guidelines for use of personal protective equipment, laboratory devices, and labware established for the laboratory where the instrument is used

Do not unpack the Ionic System (instrument) prior to the start of the virtual installation session or without guidance from a Purigen Biosystems representative.

Reference Documents and Videos

Table1: Contents provided in the Virtual Installation Kit

Format	Document	Link
User Guide	Ionic System User Guide	
User Guide	Ionic System Site Preparation	
User Guide	Ionic FFPE to Pure DNA Protocol	
User Guide	Ionic FFPE to Pure RNA Protocol	
User Guide	Ionic Cells to Pure DNA Protocol	
Video	Unpacking the Ionic System	
Video	Leveling the Ionic System	
Video	Overview of the Ionic System Software	
Video	Ionic FFPE to Pure DNA Protocol Demonstration	
Video	User Tips: Transferring Reference Scrolls	
Video	User Tips: Pipetting into the Ionic Fluidic Chip	
Video	User Tips: Programming a ThermoMixer	

⚠ Please review reference documents and videos prior to the scheduled virtual installation and training.

Required Materials

Table2: Contents provided in the Virtual Installation and Training Kit

Item Name	Description
Ionic System Cleaning Chip	1 plastic cleaning chip
Leveling Kit	1 Leveling tool and charging cable
Web Camera	1 Adjustable web camera on stand
USB Flash Drive	1 64 G USB flash drive

Table 3: Contents provided in the Ionic System Installation and Training Kit

Item Name	Description
System Validation Kit	2 fluidic chips, 2 reservoirs, and reagents
Reference Samples	16 cell or FFPE tissue reference samples
Reagent Reservoirs	10 reagent reservoirs
Training Purification Kit	3 fluidic chips and reagents for one of the following protocols: • Cells to Pure DNA protocol • FFPE to Pure DNA protocol • FFPE to Pure RNA protocol 3 fluidic chips for pipetting practice only 50, 1.5 mL Eppendorf LoBind DNA Tubes

Table 4: Equipment Provided by the user

User-Supplied Equipment	Installation	Training
Scissors	✓	
Box Cutter	✓	
P200 Multichannel Pipette	✓	✓
P200 Single Channel Pipette	✓	✓
P1000 Single Channel Pipette	✓	✓
P20 Single Channel Pipette	✓	✓
Pipette Tips	✓	✓
Microcentrifuge	✓	✓
Programmable Thermomixer	✓	✓
Vortex Mixer (adjustable speed)	✓	✓
15 mL centrifuge tube		✓

User Provided Laptop

Laptop or PC for RingCentral Webconference

1. Operating System
    - Windows 10
2. Connecting Port Type
    - USB2.0, or 3.0 High Speed
3. Network
    - Internet connection required
4. Audio
    - Must have functioning speakers and microphone. Use of a headset is not recommended but can be used if it provides enough flexibility to manipulate the instrument and perform basic laboratory tasks.
5. RingCentral App
    - Install RingCentral app: https://app.ringcentral.com/unified-login

> ⚠ Please **test the compatibility of your laptop or PC** with RingCentral prior to your scheduled installation and training

Virtual Installation and Training Overview

Introduction

Purigen Biosystems' virtual installation and training kit for the Ionic Purification System provides the equipment and guidance necessary to participate in a web-based virtual installation of the Ionic system with remote support from a Purigen Biosystems Field Applications Scientist (FAS), followed by a web-based training session.

Using the USB camera and accessories provided, the FAS will have the ability to view workflow steps that are critical to successful operation of the Ionic system. These steps include using a pipettor to load samples and reagents into the Ionic fluidic chip, interact with the instrument's touchscreen, and collecting purified nucleic acid from the Ionic fluidic chip.

Format

To conduct our virtual meeting, we use RingCentral. A typical training session will consist of 3 separate sessions with 3 separate RingCentral meeting invitations:

Day 1

- RingCentral Session 1
  - Technology, installation, and training presentation – 30 mins
- RingCentral Session 2
  - Webcam setup – 30 mins*
  - Ionic system un-pack and level – 30 mins*
  - Ionic system overview – 15 mins
  - Ionic system installation testing – 50 mins*
  - Chip loading practice – occurs during system installation testing*
  - Mock lysate practice runs – 3hrs *
- RingCentral Session 3
  - Lysate preparation – 30 mins*

Day 2

- RingCentral Session 5
  - Fluidic chip preparation – 30 mins*
  - Purification run– 60 mins
  - Purified sample collection and QC – 30 mins*
  - Wrap up and discussion – 30 mins

* Access to the USB camera provided with this kit and a laptop or PC connected to the internet is required for the steps noted above by an asterisk.

Lab Bench Setup for Installation and Training

Installation, maintenance, and operation of the Ionic system can require users to access all sides of the instrument for various purposes. The following diagram provides information regarding the recommended clearance that should be maintained between the instrument and any other equipment or objects on the lab bench.

For virtual installation and training the diagram below also indicates the recommended placement of a laptop and the web camera for most steps requiring visual confirmation from a remote Purigen Biosystems representative.

Figure 1. Diagram of recommended instrument and laptop placement.


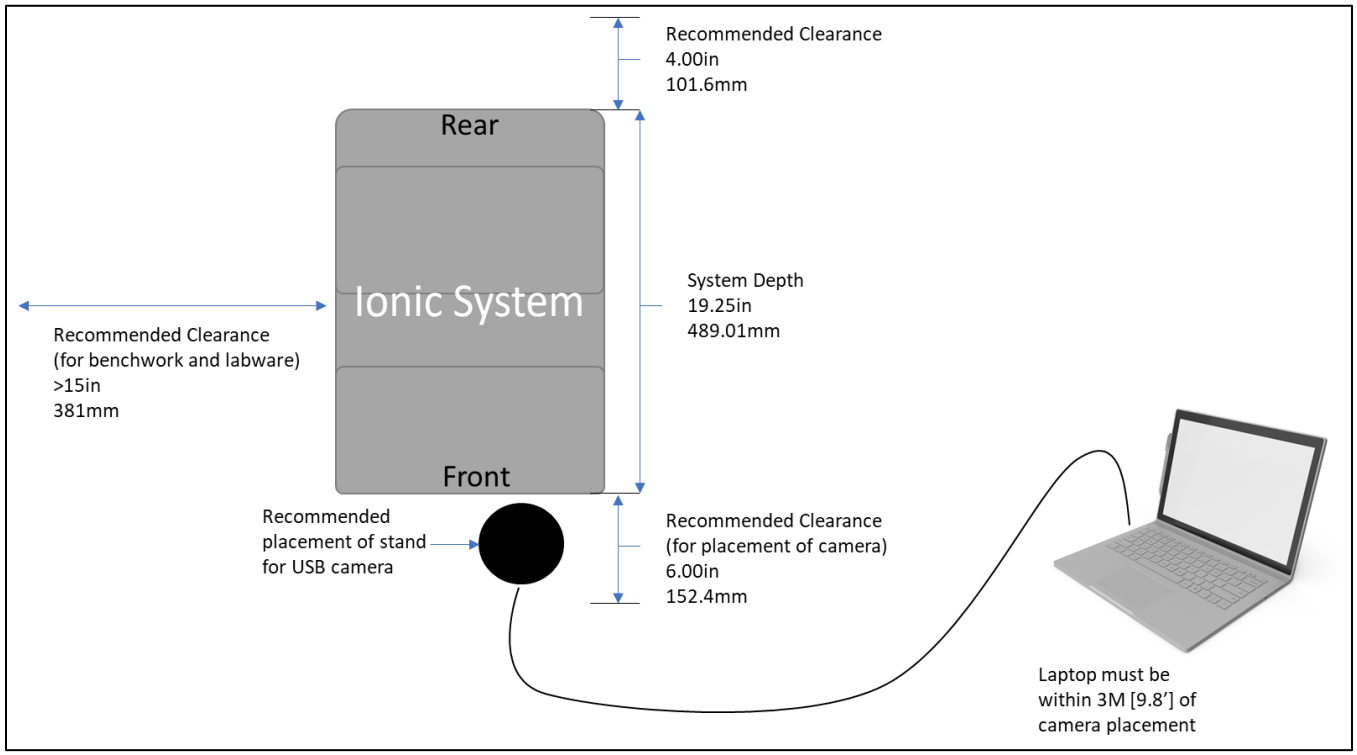


Figure 2. Example setup of a laboratory bench.

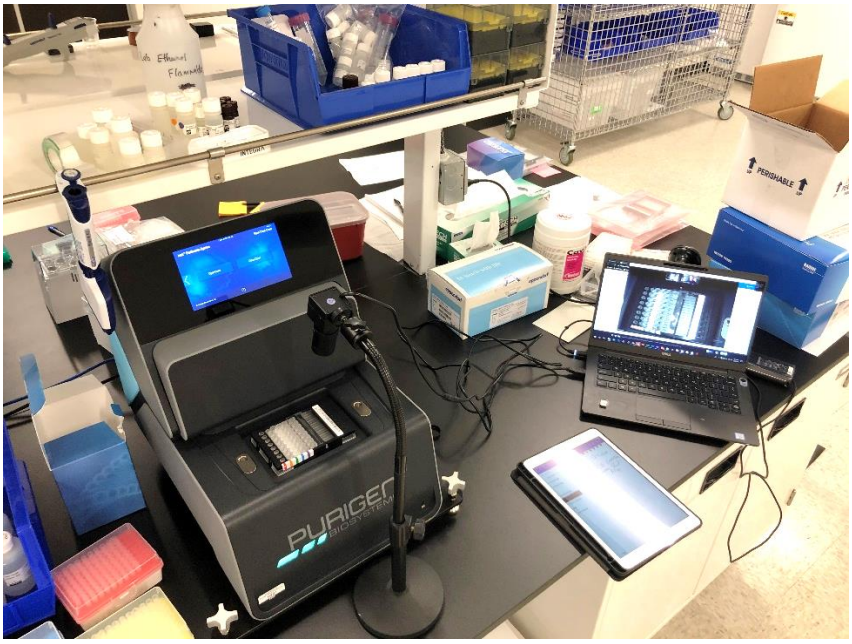

Placement Recommendations

- Place instrument within 6 feet of a power outlet
- Arrange components of the training kit to be on the left or right side of the Ionic system
- Place laptop or computer to the side of the instrument opposite of the training kit components
- Place USB camera in the front of the Ionic system
- Place RT reagents and labware required for the training on the opposite side of the system
- Use gooseneck of USB camera stand to position the camera so that it is pointing over the fluidic chip or pointing to the touch screen or pointing to the training kit components

> ⚠ Be sure to position the USB camera such that it does not interfere with the opening and closing of the cover on the Ionic system.

Web Camera and RingCentral Setup

Web Camera Components

Figure 3. ELP 5-50 Varifocal Lens 1080P USB Camera



Figure 4. InnoGear Webcam Stand



Figure 5. Pelican 1200 Case



Connecting the ELP USB camera to your Laptop

1. Remove camera and stand from the pelican case
2. Place camera and stand as described above
3. Insert USB connector at the end of the USB camera's cable into the USB port of your laptop or PC

Adjusting the USB camera

The USB camera has 3 adjustable components for Zoom, Light Capture (Aperture) and Focus. These components are adjustable by rotation and can be locked into position by a built-in set screw.


Figure 6. Overview of camera components.



Connecting to the RingCentral Meeting


1. From a browser on the laptop or PC that will be used for the training, access the link provided to you in the invitation received by email from our FAS or visit: https://app.ringcentral.com/unified-login
2. Select **Join a meeting**
3. Enter the **Meeting ID** provided in the email from your Purigen Field Applications Scientist, if asked.
4. Enter your **Name**
5. Select **Join**

Figure 7. Screenshot of RingCentral Login

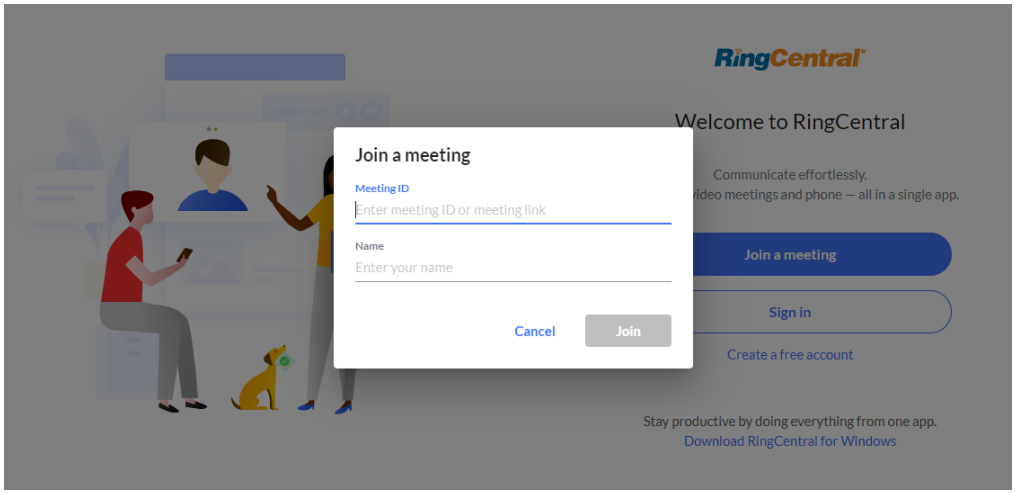


4. Once in the meeting, select the expansion arrow next to (Start Video) at the bottom of the screen to select the **USB camera**. This will start your video feed.

Figure 8. Screenshot of RingCentral Meeting Window

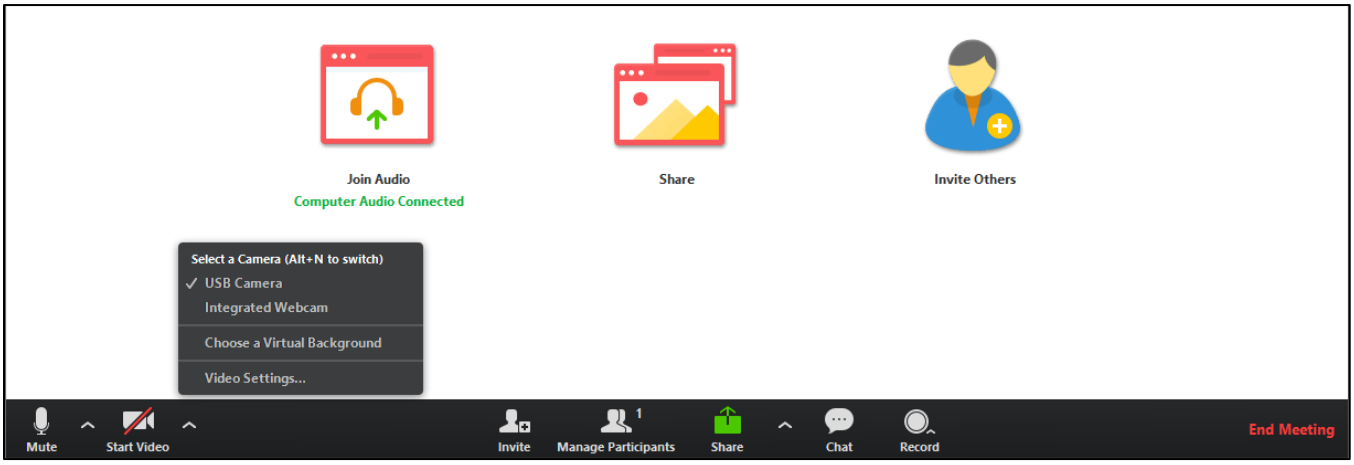

5. Click the (Mute) to enable your microphone.
6. Click the on the screen displaying your video feed and select **Pin Video**. This will keep your video feed in the center of your screen and allow you to see the same view the trainer sees.

Figure 9. Example screenshot.

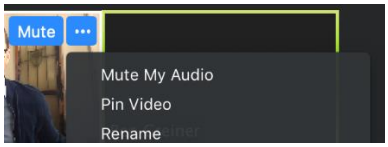

Installation Procedure

Before attempting to unpack the instrument please make sure the shipping container is placed upright according to the arrows on the outer cardboard cover and placed within a working area that permits access to all sides.

All packaging materials should be retained until installation and training are complete.

Prepare the Lab Bench

Refer to the Ionic System Site Preparation Guide available at www.purigenbio.com prior to installation. The Ionic system must be positioned to provide suitable clearance for operation, ventilation, and servicing. A minimum clearance of 35 cm is recommended at each side of the instrument and a minimum clearance of 10.16 cm is recommended at the rear. A minimum clearance of 2 cm is recommended above the top of the instrument.

The Ionic system should be placed on a bench that is fixed, level, and capable of supporting a device weighing 54 lbs. Use of a mobile bench or bench with locking casters should be avoided.

The Ionic system is sensitive to vibration. Do not place devices that emit vibration (e.g. centrifuge) next to it.

Unpack the Leveling Plate

1. Visually inspect the shipping container for damage.

> ⚠ If damage to the shipping container is apparent. Please take photographs of the damage and send them to your Purigen Representative.


2. Use a pair of scissors to cut and remove the black straps that bind the cardboard shipping containers.

Figure 10. Instrument in its original packaging.



3. Place the upper, smaller, box containing the leveling plate onto table or bench and open it.

Figure 11. Leveling plate in smaller box.

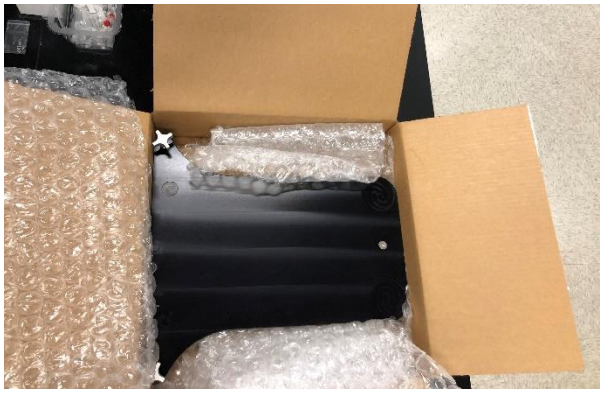


4. Place the leveling plate in the installation area with the adjustment knobs within 4-5 inches of the front of the lab bench. The instrument rests on top of the leveling plate so it must be placed in a position that provides adequate clearance around the device.

Figure 12. Placement of the leveling plate.



5. Loosen the locking nut located on the upper half of each leveling foot (top side of leveling plate) just below each adjustment knob.

Figure 13. Locking nut on leveling foot.

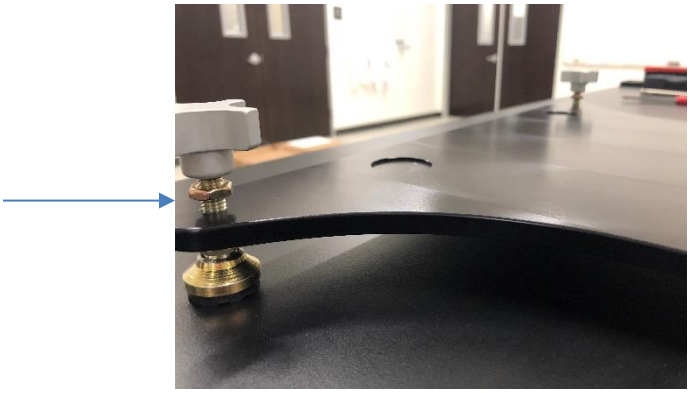

Unpack the Ionic System

1. Completely remove the plastic clamps at the bottom of the shipping container and lift the outer cover to expose the Ionic system.

Figure 14. Removal of plastic clamps on shipping container cover.



Figure 15. Removal of plastic clamps completely from shipping container cover.



Figure 16. Instrument with shipping container cover removed.



2. Visually inspect the instrument for any signs of damage (cracks or scratches in the surface).

If damage to the instrument is apparent. Please take photographs, re-package the instrument, and contact your Purigen Representative immediately.

Place the Ionic system

The weight of the Ionic system is approximately **50lbs [24.5 kg.]** and requires two people to lift.

Before lifting the instrument from the packaging container onto a laboratory bench, please review the Employee Guidelines for Safer Lifting section found withing the *NIOSH Ergonomic Guidelines for Manual Material Handling*: https://www.cdc.gov/niosh/docs/2007-131/pdfs/2007-131.pdf?id=10.26616/NIOSHPUB2007131

When lifting:

- *Get a secure grip.*
- *Use both hands whenever possible.*
- *Avoid jerking by using smooth, even motions.*
- *Keep the load as close to the body as possible.*
- *To the extent feasible use your legs to push up and lift the load, not the upper body or back.*
- *Do not twist your body. Step to one side or the other to turn.*
- *Alternate heavy lifting or forceful exertion tasks with less physically demanding tasks.*
- *Take rest breaks.*

1. With another person, lift the bottom of the container that the Ionic system rests on, with the instrument onto the laboratory bench.

Figure 17. Lift container bottom with Ionic system onto the lab bench.



2. Pull back the plastic bag to completely uncover the Ionic system.


Figure 18. Instrument with plastic bag pulled back.




3. Make sure that the instrument cover is open, exposing the chip holder and secured by blue tape as shown in the figure above.
4. With another person insert hands between the plastic bag and under the Ionic system from both sides. Lift and place the instrument onto the leveling plate so that the feet of the instrument drop into recessed locating features of the leveling plate

> ⚠ Be sure to keep your fingers away from the Ionic system's feet when placing the instrument onto the leveling plate.

Figure 19. Removal of Ionic System from container bottom.

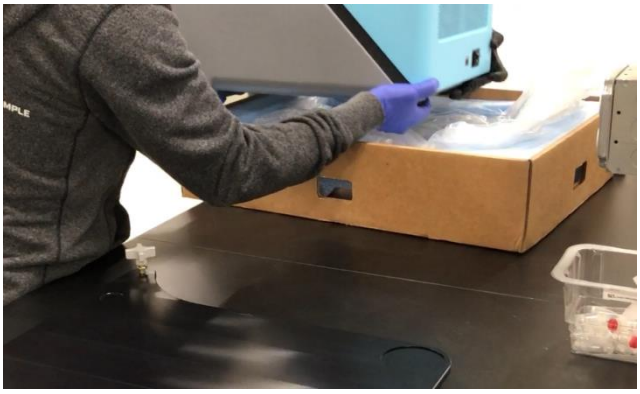

Finger 20. Placement of rear feet into the recessed locating features of the leveling plate.

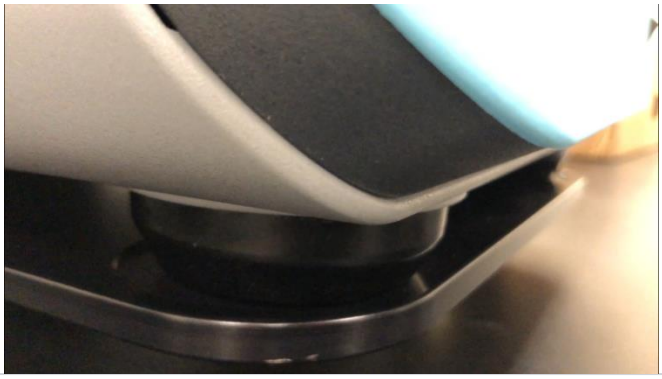


5. Apply pressure with your hands at the bottom of the Ionic system, near the feet, to align the front of the instrument with the front of the leveling plate.

Figure 21. Adjust Ionic system to align to the front edge of the leveling plate.



Figure 22. Front of Ionic system aligned with front edge of leveling plate.

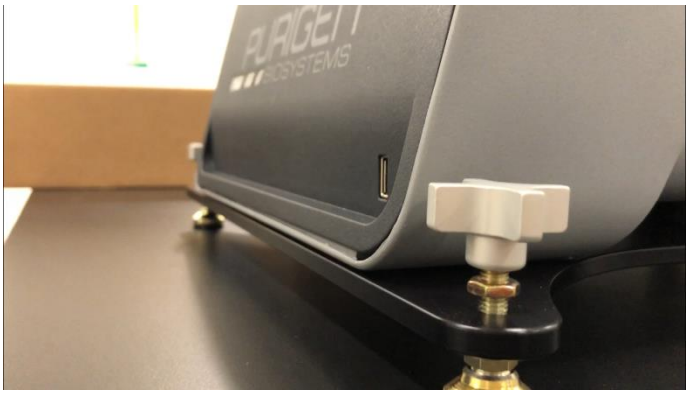


6. Remove the piece of tape holding the Ionic system's cover in place and remove the film covering the touchscreen. Do not remove black film from the instrument's cover.

Figure 23. Remove tape on instrument cover.



Figure 24. Remove film from touchscreen.

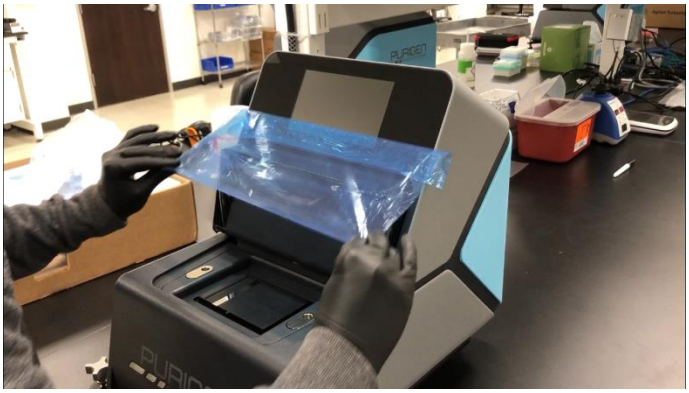

7. Apply pressure to the cover plate on either side of the chip holder and verify that the surrounding cover plate is securely in place. This will prevent any interference when the Ionic system's cover closes.

Figure 25. Verify that cover plate around chip holder is securely in place.



Figure 26. Example of raised cover plate edge.


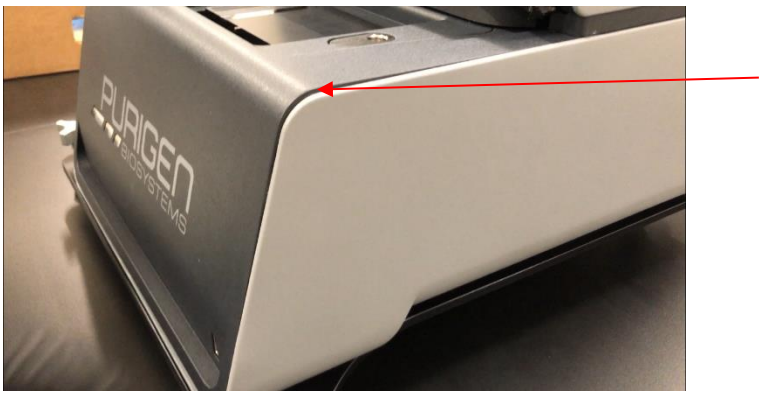


Figure 27. Example of secured cover plate.




8. Remove foam insert from the instrument's shipping container cover.

Figure 28. Removal of foam insert from shipping container cover.

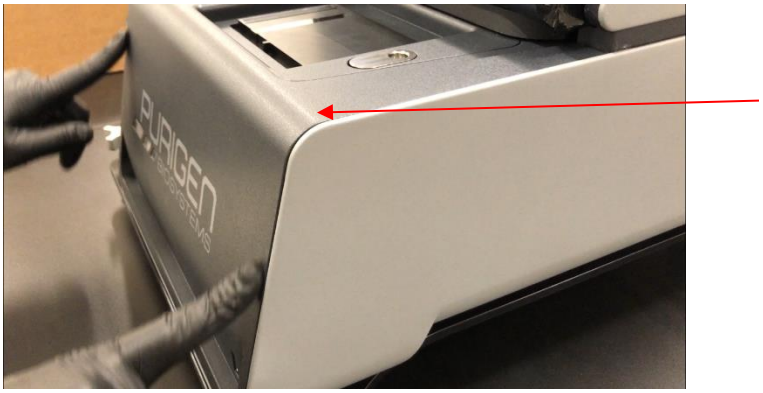

9. Remove accessory box from the foam insert and place it near the Ionic system.

Figure 29. Removal of accessory box.

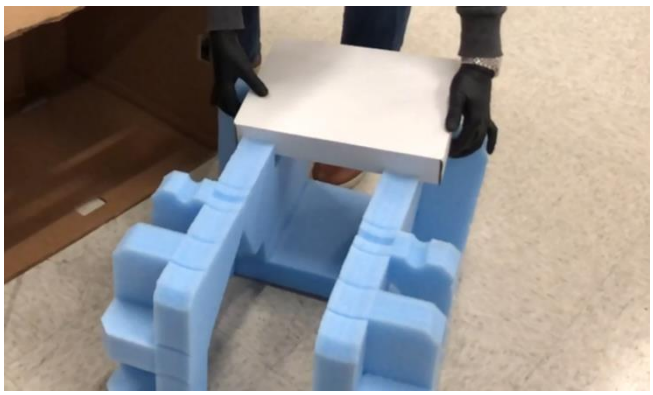


10. Make sure that the power switch at the rear of the instrument is in the off position.
11. Remove power cord from accessory box and connect to the rear socket of the Ionic system.

Figure 30. Power cord in accessory box.



Figure 31. Power socket at rear of Ionic system.

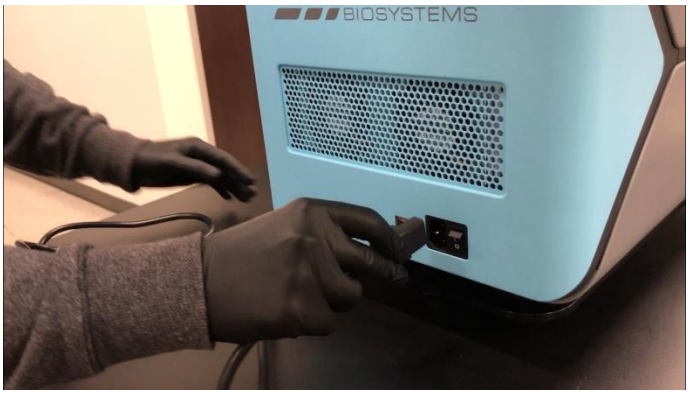


12. Plug power cord into an appropriate electrical outlet near the instrument.

> ⚠ If using a UPS device to provide back-up power to the instrument, the instrument's power cord can plug directly into the UPS device.

13. Use a lint-free cloth to wipe down the instrument surfaces and touchscreen

System Overview

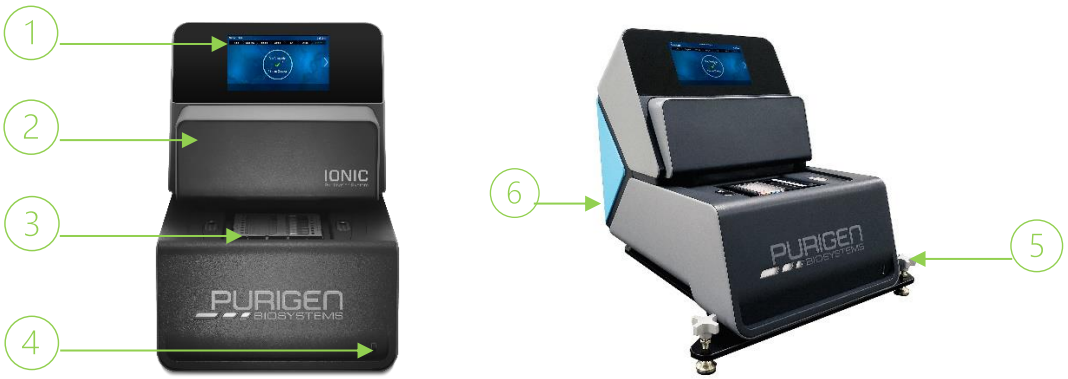

Callout	Component	Description
1	Touchscreen	Operation of the Purigen Biosystems Ionic system is conducted entirely through the integrated touchscreen. Operators can select, edit, and initiate protocols as well as import sample information and export run data from the touchscreen. All error messages, help messages, and prompting will occur on the touchscreen during normal operation. The system software also includes integrated user management to track protocols and information by user.
2	Cover	The Ionic system utilizes an actuated cover during normal operation to control the environment and processing of samples on a Purigen Biosystems fluidics chip. The cover will automatically extend and retract in response to interaction with the instrument's touchscreen while progressing through a protocol or performing maintenance operations.
3	Chip Holder	The chip holder within the instrument provides a location for the placement of a Purigen Biosystems fluidics chip. The holder is designed to prevent placement of a fluidics chip in an incorrect orientation.
4	USB Port	Operators can insert a USB flash drive into the USB port at the front of the system to export data files for off-line analysis.
5	Leveling Adjustment Knob	The integrated leveling stand is adjusted at the time of system install. Adjustment may be necessary to re-level the instrument after moving the instrument or if the position of the instrument has somehow changed after installation.
6	Main Power Switch	The power switch for the Ionic system is located at the rear side toward the bottom of the instrument.

Level the Ionic System

1. Turn the Ionic system on using the rear power switch.

> ⚠ While the instrument powers up, the cover will extend out over the chip holder. Remove any objects from the path of the cover during this process. If any loud noises come from the instrument while the cover is closing stop the installation process and contact your Purigen Biosystems representative immediately.


2. After the cover closes, remove the protective black film from the cover by starting from one side.

Figure 32. Remove protective black film from cover.



3. From the touchscreen of the instrument, navigate to the Maintenance Menu
   - → Press the **Start Button** on the startup screen
   - → Press the **Settings** icon (⚙) at the bottom of the screen
   - → Press the **Maintenance & Service** button
   - → Press the **Open/Close Cover** button

Figure 33. Press the Open/Close Cover button from the Maintenance and Service menu.

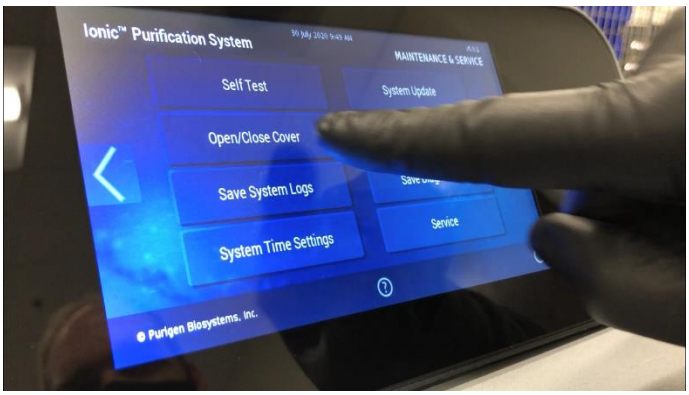

4. Remove digital level case from the Virtual Installation and Training case.

Figure 34. Digi-Pas digital level case.



5. Open the case and remove the digital level.

Figure 35. Digi-Pas level.



6. Turn the level on by pressing the power button (⏻).

> ⚠ If the level does not have sufficient battery power to turn on. You power it by connecting it to the USB port of the Ionic system using the micro USB cable supplied in the Virtual Installation and Training Kit. Leveling can be performed while connected by cable.

7. Gently place the level on the chip holder as shown in the following figure.

Figure 36. Placement of digital level on top of the chip holder.



8. Use the button with the gear icon (⚙) to change leveling mode. When the green arrow above the numbers on the readout display is lit, the level is set for the front-to-back leveling mode. When the green arrow on the right of the numbers is lit, the level is set for the left-to-right leveling mode.

Figure 37. Level indicating that it is measuring the level from front-to-back (red circle).




Figure 38. Level indicating that it is measuring the level from left-to-right (red circle).



9. Set the level to the left-to-right leveling mode.

10. While standing in front of the instrument, simultaneously adjust the right and left leveling knobs in **opposite directions** as shown in the following figure until the left-to-right measurement is within 0.01 degree.


Figure 39. Adjustment of the leveling knobs for left-to-right leveling.

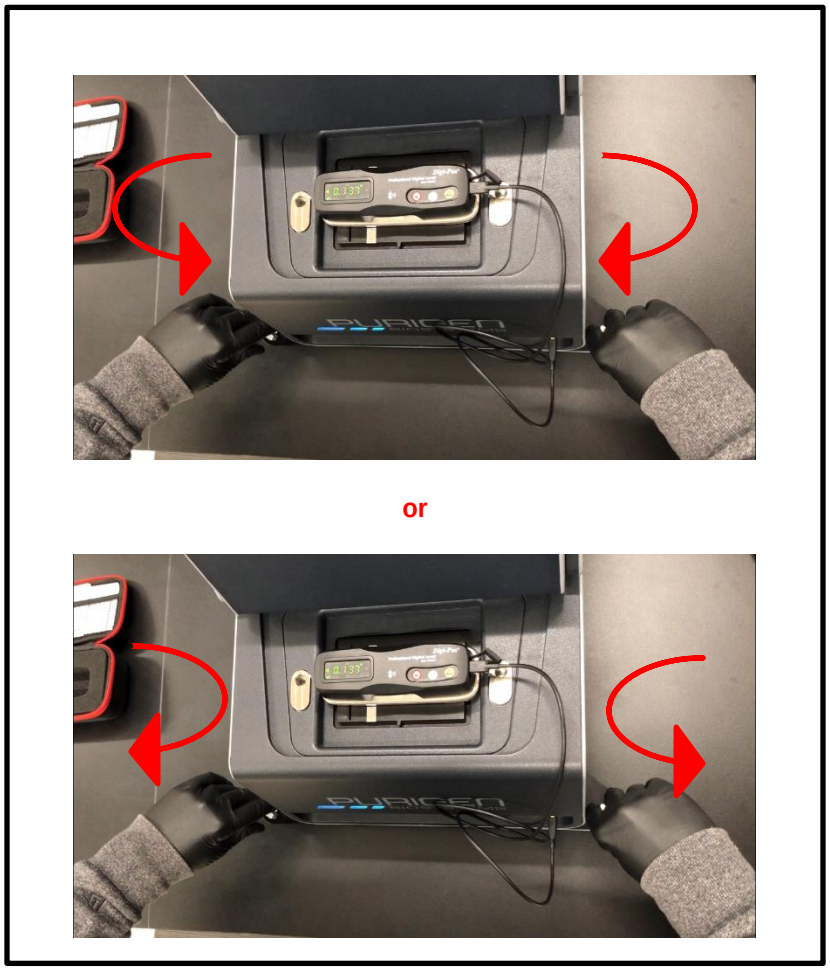

11. Set the level to the front-to-back leveling mode.

12. While standing in front of the instrument, simultaneously adjust the right and left leveling knobs in the **same direction** as shown in the following figure until the front-to-back measurement is within 0.01 degree.


Figure 40. Adjustment of the leveling knobs for front-to-back leveling.

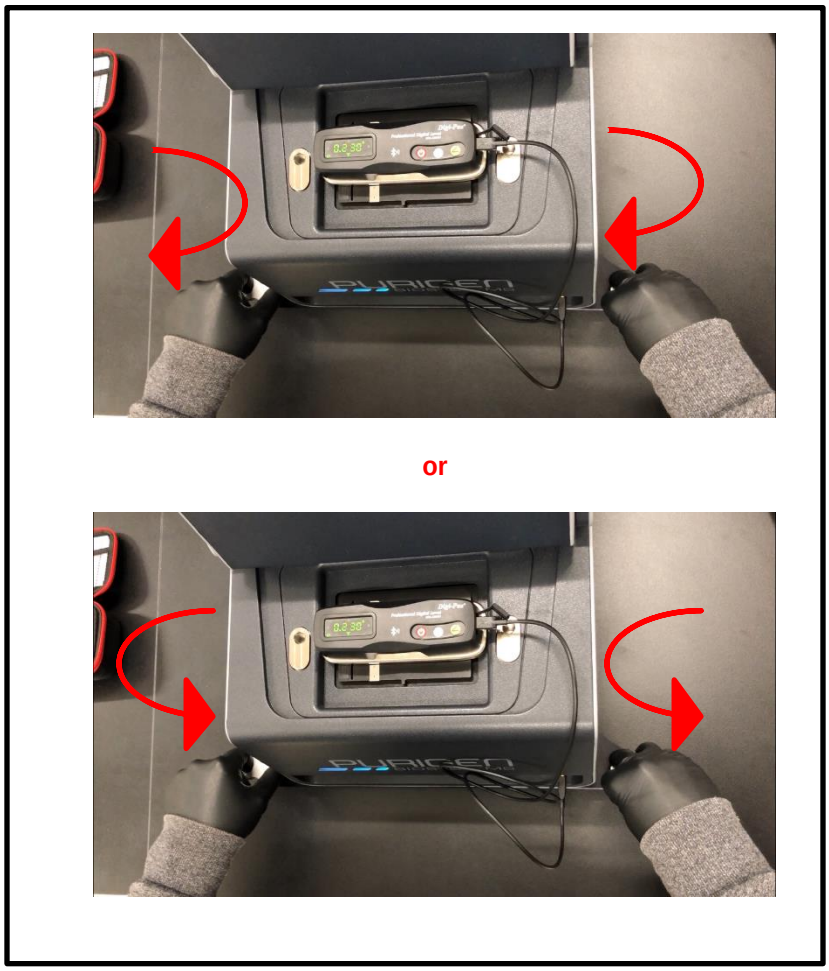

13. Repeat **Steps 9 – 12** until both measurements are with 0.01 degree.

14. Using your fingers, tighten the locking nut on each leveling foot to lock the leveling plate into position.

Figure 41. Tighten locking nut on each leveling foot using your fingers.

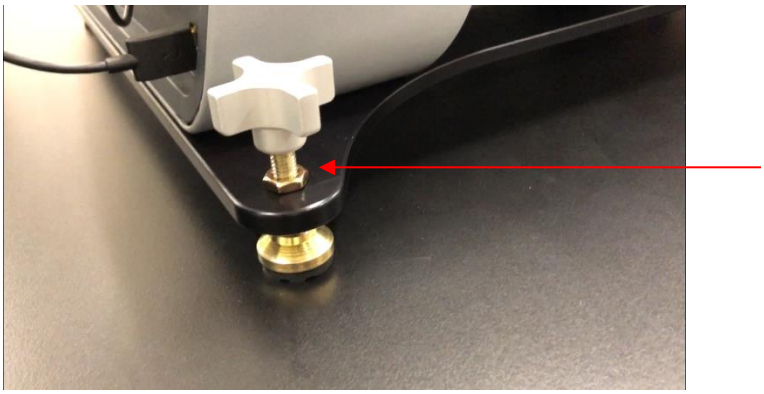

15. Press the **Open/Close Cover** button to close the instrument cover.

Ionic System Overview

Prior to performing the service tests below, a Purigen Biosystems representative will provide an overview of the Ionic Purification System over a RingCentral web-conference.

Topics covered will include:

- Purification kit contents
- Single use vs. multi-use reagents
- -20 ºC vs RT reagents
- Reagent troughs and other labware used
- Powering on the system and using the touchscreen
- Storage and handling of fluidics chips
- Routine maintenance
- Accessing protocols on the system
- Accessing and downloading run logs on the system

Perform a Service Test

1. Remove the cleaning chip from the Virtual Installation and Training Kit.
2. From the touchscreen of the instrument, navigate to the Maintenance Menu
   - → Press the **Start Button** on the startup screen
   - → Press the **Settings** icon (⚙) at the bottom of the screen
   - → Press the **Maintenance & Service** button
   - → Press the **Service** button

Figure 42. Maintenance and Service menu screen.



3. When instructed insert the cleaning chip onto the chip holder and press the right-hand arrow (›). The cover will close and the first phase of testing will begin.

Figure 43. Insert chip request from touchscreen.


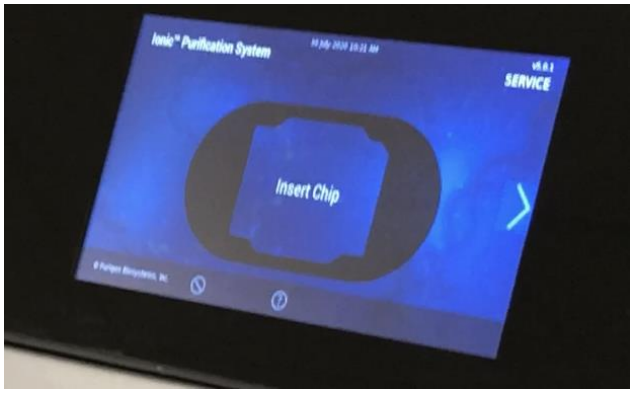


Figure 44. Placement of a cleaning chip onto the chip holder.



4. After approximately 15-20 minutes, the first phase of the testing will be complete.

Figure 45. Completion of first phase of testing.

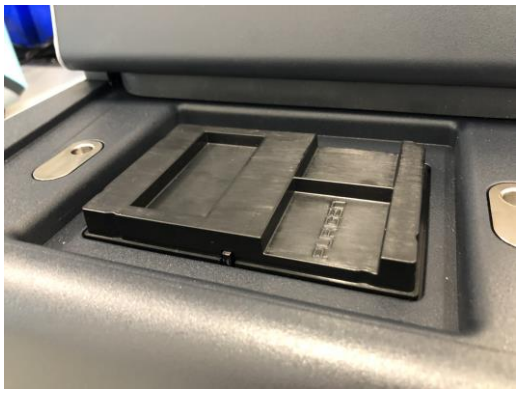

5. After pressing the right-hand arrow (›) on the touchscreen, a message will appear requesting removal of the chip.
6. Remove the cleaning chip and press the right-hand arrow (›). The cover will close, and the second phase of testing will begin.

7. Return the cleaning chip to its original packaging and place in the Virtual Installation and Training case.
8. After approximately 15-20 minutes, the second phase of service test will be complete.
9. Press the right-hand arrow (›) to view the test results.
10. Visually confirm that all service tests have passed.

Figure 46. Service test results screen.



11. Press the right-hand arrow (›) to return to the **Maintenance and Service** menu.
12. Press the left-hand arrow (‹) to return to the **Settings** menu.
13. Press the left-hand arrow (‹) to return to the **Choose a User** screen.

IMPORTANT

If the results of the Service test show a failure to pass any test, **do not continue on to the next section of this document**.

Contact a Purigen Representative immediately for guidance.

Functional Testing and Training

> ⚠ It is assumed that **standard laboratory equipment** such as disposable gloves or a refrigerator and freezer are available for use as needed.

Chip Loading Simulation

During the Service Test or prior to performing the Functional tests below, a Purigen Biosystems representative will provide instruction on proper pipetting techniques for loading buffers and samples into a fluidic chip. Each user will load sample and reagent wells of a demonstration-only fluidic chip before placing the chip on system for practice only.

- 3 demonstration-only fluidic chips will be provided
- Correct pipette orientation and dispense techniques will observed over a RingCentral web-conference

Mock Lysate Testing

To test the overall functionality of the Ionic system, complete two purification runs using mock lysate.

1. Download the Cells to Pure DNA protocol: https://www.purigenbio.com/include/download_document.php?pkid=8
2. Follow the instructions starting from page 9 of the protocol to prepare a fluidics chip for a purification run on the Ionic system using the Cells to Pure DNA protocol. Choose "**purigenservice**" as the user for the run. For step 6 on page 19, dispense **210 µL** of the Cell Sample Buffer provided with the installation kit. It is critical that the Cell Sample Buffer be vortexed after thawing to re-mix the ions in the buffer. Unmixed sample buffer can create failures in the run.

> ⚠ **IMPORTANT**
>
> If the results of the run show indicate an error has occurred with any sample, **do not continue on to the next section of this document**.
>
> Contact a Purigen Representative immediately for guidance.

3. After completion of the Cells to Pure DNA run, select "New Run Setup" from the **Run Completed** screen.
4. Download the FFPE to Pure DNA protocol: https://www.purigenbio.com/include/download_document.php?pkid=4
5. Follow the instructions starting from page 9 of the protocol to prepare a fluidics chip for a purification run on the Ionic system using the FFPE to Pure DNA protocol. Choose "**purigenservice**" as the user for the run. For step 6 on page 19, dispense **200 µL** of the FFPE Sample Buffer provided with the installation kit. It is critical that the FFPE Sample Buffer be vortexed after thawing to re-mix the ions in the buffer. Unmixed sample buffer can create failures in the run.

IMPORTANT

If the results of the run show indicate an error has occurred with any sample, **do not continue on to the next section of this document**.

Contact a Purigen Representative immediately for guidance.

Purification Protocol Testing

Over a RingCentral web-conference, a Purigen Biosystems representative will provide guidance to prepare and run samples with the Ionic Purification Kit and protocol selected. Users will take turns preparing up to 8 samples for lysis, loading reagents and samples into a fluidic chip, and completing a run on the Ionic system.

- 1 fluidic chip provided
- 8 cell or FFPE reference samples provided
- 1 purification kit provided
- Protocol sections covered: Lysis preparation, Purification

It is recommended to perform a standard QC test on the purified samples (Qubit, Tapestation, qPCR). A Purigen Biosystems representative can provide guidance on most standard QC methods.

Saving Installation and Training Log Files

1. From the **Maintenance and Service** menu, press the **Save System Logs** button.
2. Insert a USB flash drive into the USB port on the instrument.
3. Press the **Write** button to save the Service test log files to the USB flash drive.

Figure 47. Save System Log screen.



Please use the USB flash drive provided in the installation kit to collect all log files from installation and training.

Wrap-up

After completion of the Virtual Installation and Training sessions a Purigen Biosystems representative will review the results of the final purification test and answer questions pertaining to use of the Ionic system.

As a final step to prepare the system for use by new users please deactivate the purigenservice account.

1. From the **Settings** menu press the **Manage Users** button.
2. Press the **purigenservice** button.
3. Press **Deactivate User** button.
4. Press **Yes**.
5. Press **No** to retain log files.
6. Press **OK** to return to the **Manage Users** screen.