

Chips-2.0 Demo for SP605 Development Card

Author: Jonathan P Dawson
Date: 2013-10-17
email: chips@jondawson.org.uk

This project implements a TCP/IP stack. The TCP/IP stack acts as a server, and can accept a single connection to a TCP port. The connection is provided as a bidirectional stream of data to the application. The following protocols are supported:

- ARP request/response (with 16 level cache)
- ICMP echo request/response (ping)
- TCP/IP socket

Dependencies

The stack is implemented in C, and needs Chips-2.0 to compile it into a Verilog module.

Source Files

The TCP/IP stack is provided by two source files:

- source/server.h
- source/server.c

Configuration

The following parameters can be configured at compile time within source/server.h:

- Local Ethernet MAC address
- Local IP Address
- Local TCP Port number

Compile

Compile into a Verilog module (server.v) using the following command:

```
$ chip2/c2verilog source/server.v
```

Interface

Ethernet Interface

The Ethernet interface consists of two streams of data:

- An input, input_eth_rx.
- An output, output_eth_tx.

Both streams are 16 bits wide, and use the following protocol:

word	designation
------	-------------

0	length in bytes
n	data

Socket Interface

The socket interface consists of two streams of data:

- An input, input_socket.
- An output, output_socket.


Both streams are 16 bits wide, and use the following protocol:

word	designation
0	length in bytes
n	data

Stream Interconnect Conventions

The main aims of the interface are:

- To be simple to implement.
- Add little performance/logic overhead.
- Allow designs to grow without adding extra levels of asynchronous logic.
- Easy to interface with standard interconnects.

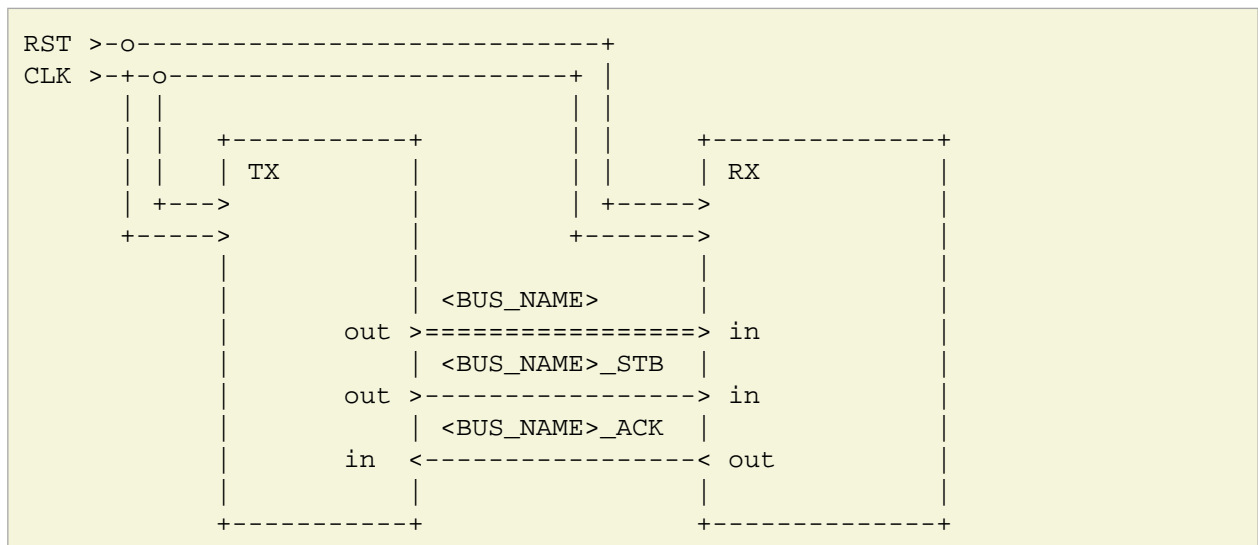

Global Signals


Name	Direction	Type	Description
CLK	input	bit	Clock
RST	input	bit	Reset


Interconnect Signals

Name	Direction	Type	Description
<BUS_NAME>	TX to RX	bus	Payload Data
<BUS_NAME>_STB	TX to RX	bit	'1' indicates that payload data is valid and TX is ready.
<BUS_NAME>_ACK	RX to TX	bit	'1' indicates that RX is ready.


Interconnect Bus Transaction

- Both transmitter and receiver shall be synchronised to the '0' -> '1' transition of CLK.
- If RST is set to '1' upon the '0' -> '1' transition of clock the transmitter shall terminate any active bus transaction and set <BUS_NAME>_STB to '0'.
- If RST is set to '1' upon the '0' -> '1' transition of clock the receiver shall terminate any active bus transaction and set <BUS_NAME>_ACK to '0'.
- If RST is set to '0', normal operation shall commence as follows:
 - The transmitter may insert wait states on the bus by setting <BUS_NAME>_STB '0'.
 - The transmitter shall set <BUS_NAME>_STB to '1' to signify that data is valid.
 - Once <BUS_NAME>_STB has been set to '1', it shall remain at '1' until the transaction completes.
 - The transmitter shall ensure that <BUS_NAME> contains valid data for the entire period that <BUS_NAME>_STB is '1'.
 - The transmitter may set <BUS_NAME> to any value when <BUS_NAME>_STB is '0'.
- The receiver may insert wait states on the bus by setting <BUS_NAME>_ACK to '0'.
- The receiver shall set <BUS_NAME>_ACK to '1' to signify that it is ready to receive data.
- Once <BUS_NAME>_ACK has been set to '1', it shall remain at '1' until the transaction completes.
- Whenever <BUS_NAME>_STB is '1' and <BUS_NAME>_ACK are '1', a bus transaction shall complete on the following '0' -> '1' transition of CLK.

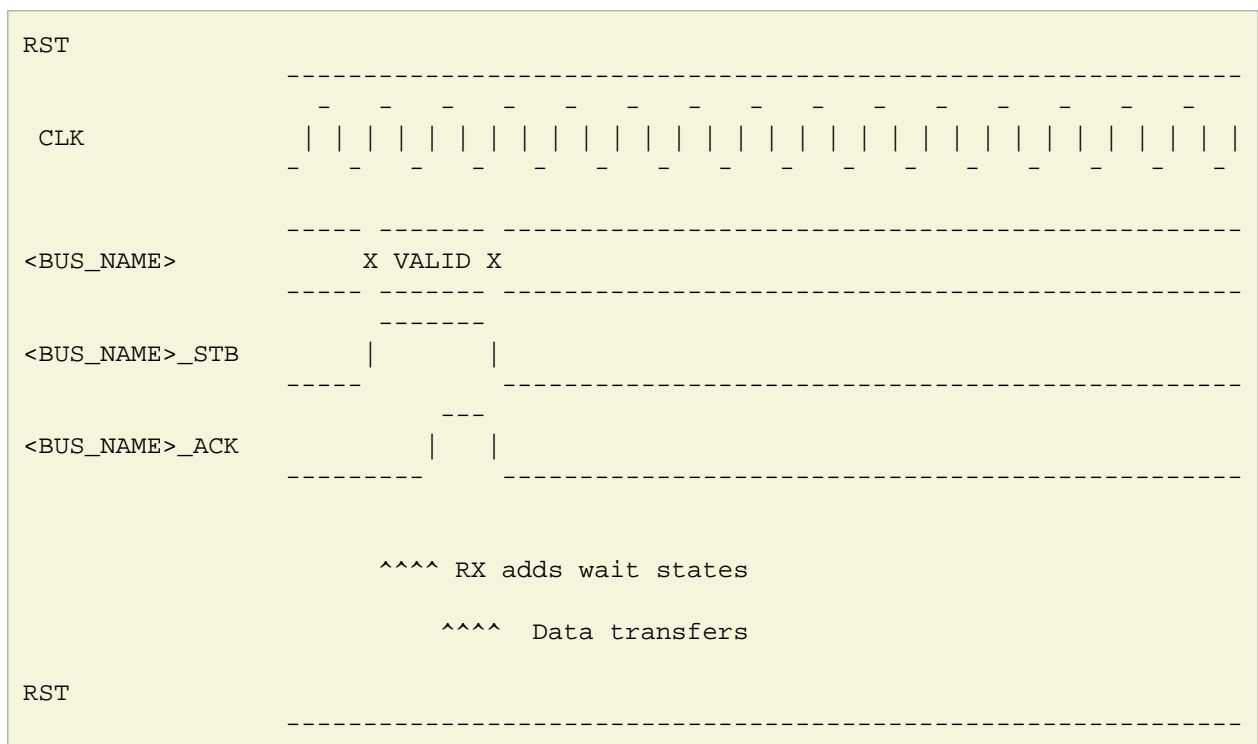

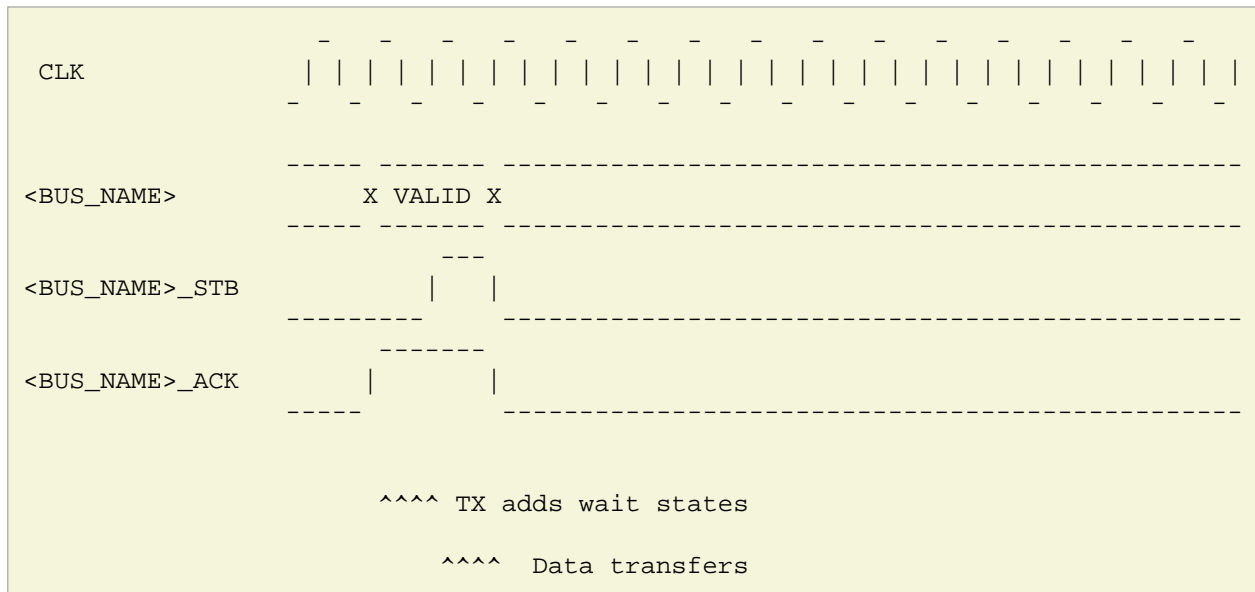

- Both the transmitter and receiver may commence a new transaction without inserting any wait states.

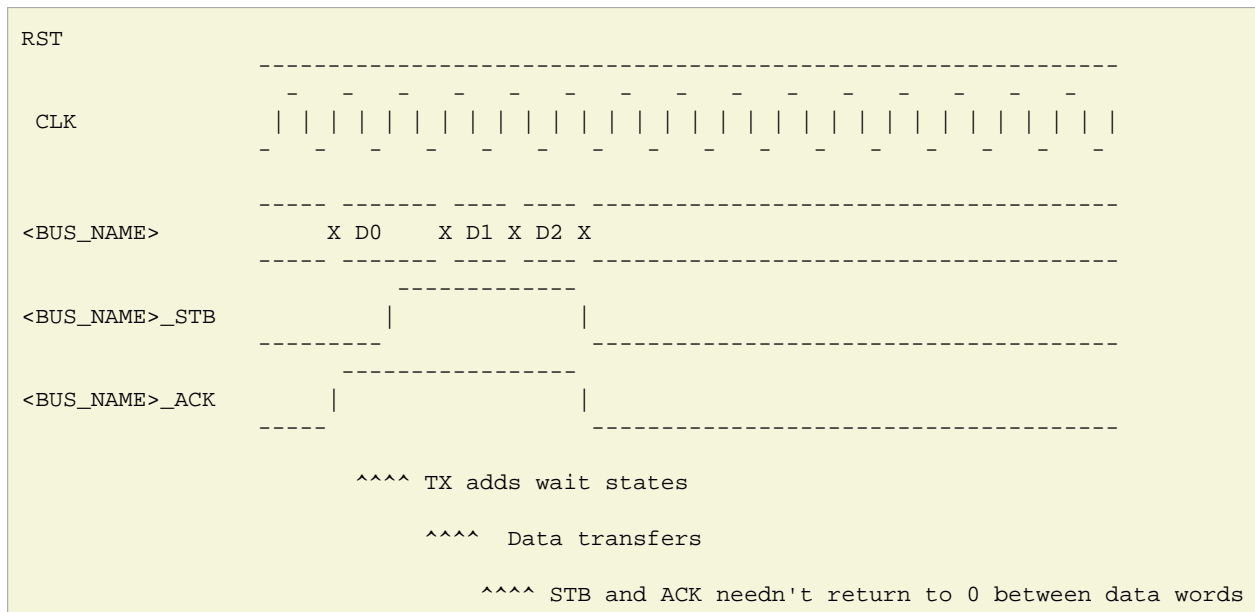

- The receiver may delay a transaction by inserting wait states until the transmitter indicates that data is available.
- The transmitter shall not delay a transaction by inserting wait states until the receiver is ready to accept data.
- Deadlock would occur if both the transmitter and receiver delayed a transaction until the other was ready.