Main Screens Commands

Preinitialize Events

```
//Hide Mode Buttons
vis bLSB,0
vis bUSB,0
vis bCWL,0
vis bCWU,0
//Hide IFS
vis hIFS,qIFS.picc //found bug by VE1BWV
//Hide Text Line for compatiable with Character LCD
vis t0,0
vis t1,0
vis nCWNum,0
vis tCWText,0
vis bAction,0
//Added Version 1.1
vis bStep1,0
vis bStep2,0
vis bStep3,0
vis bStep4,0
vis bStep5,0
pm.vv.val=-1
pm.vg.val=0
pm.sp.txt="J"
pm.sb.txt="^"
vis tDecode1,0
vDecodeVisible.val=0
if(nQuickMenu.val==1)
{
  //CW Menu
  qKey.picc=1
  vis nQWPM,1
  vis tQKeyType,1
  vis b0,1
  vis b1,1
  vis b2,1
  vis hATT,0
  vis hIFS,0
  vis nATT,0
  vis nIFS,0
```

```
}else
{
  //Normal
  qKey.picc=0
  vis nQWPM,0
  vis tQKeyType,0
  vis b0,0
  vis b1,0
  vis b2,0
  vis hATT,1
  vis hIFS,qIFS.picc
  vis nATT,1
  vis nIFS,1
}
```

TOUCH PRESS EVENTS

```
if(dim==0)
{
  dim=dims
}
```

TM1*

Events

```
if(pm.sp.txt!="J")
{
 if(qInfo.picc==0)
 {
  qInfo.picc=1
  fill 5,365,110,90,7
 }
 if(vDecodeVisible.val==1)
 {
  vis tDecode1,0
  vDecodeVisible.val=0
 }
 sNewMax.txt=""
 sys2=0
 sys1=0
 nTemp0.val=0
 for(sys0=0;sys0<62;sys0++)
 {
  substr pm.sp.txt,sTemp0.txt,sys0*2,2
  covx sTemp0.txt,sys2,2,2
  //sys2/=2
  if(sys1<sys2)
  {
   sys1=sys2
   nTemp0.val=sys0
  }
  if(sys2<0)
  {
   sys2=0
  }
  if(sys2>100)
  {
   sys2=100   //was 90
  }
  substr sMax.txt,sTemp1.txt,sys0*2,2
  covx sTemp1.txt,nTemp1.val,2,2
  if(nTemp1.val<sys2)
  {
   nTemp1.val=sys2
  }else
  {
```

```
    nTemp1.val*=9
    nTemp3.val=sys2*1
    nTemp1.val+=nTemp3.val
    nTemp1.val/=10
  }
  covx nTemp1.val,sTemp1.txt,2,2
  substr sTemp1.txt,sTemp1.txt,2,2
  sNewMax.txt+=sTemp1.txt
  if(sys0<18)
  {
    if(sys2>92) //was 82
    {
      sys2=92
    }
    if(nTemp1.val>92)  //was 82
    {
      nTemp1.val=92
    }
    fill sys0*4+5,475-nTemp1.val,4,nTemp1.val,1342 //1500+sys1*2046
    fill sys0*4+5,475-sys2,4,sys2,57343         //1500+sys1*2046
    fill sys0*4+5,383,4,92-nTemp1.val,7                //1500+sys1*2046
  }else
  {
    fill sys0*4+5,475-nTemp1.val,4,nTemp1.val,1342 //1500+sys1*2046
    fill sys0*4+5,475-sys2,4,sys2,57343         //1500+sys1*2046
    fill sys0*4+5,365,4,100-nTemp1.val,7               //1500+sys1*2046
  }
  //if(sys1>nADCDisVal.val)                                    //maximum adc dccharget
  //{
  //  sys2=sys1-nADCDisVal.val
  //}
  //sys2=sys1*90       //80%
  //sys2/=100
}
sMax.txt=sNewMax.txt
if(sys1>50)
{
  sys1=63488
}else if(sys1>40)
{
  sys1=64528
}else if(sys1>30)
{
  sys1=58584
```

```
 }else if(sys1>20)
 {
  sys1=39566
 }else if(sys1>10)
 {
  sys1=33549
 }else
 {
  sys1=31727
 }
 nTemp0.val=nTemp0.val*47
 nTemp0.val=nTemp0.val+30
 cov nTemp0.val,sTemp0.txt,0
 xstr 20,362,50,20,2,sys1,7,0,1,1,sTemp0.txt
 //xstr 5,350,90,18,0,WHITE,10565,0,1,1,sTemp0.txt
 //xstr 5,360,37,18,0,sys1,7,2,1,1,sTemp0.txt
 pm.sp.txt="J"
}
if(pm.sb.txt!="^")
{
 if(vDecodeVisible.val==0)
 {
  vis tDecode1,1
  vDecodeVisible.val=1
 }
 strlen tDecode1.txt,sys0
 if(sys0>23)
 {
  substr tDecode1.txt,tDecode1.txt,1,sys0-1
 }
 tDecode1.txt=tDecode1.txt+pm.sb.txt
 pm.sb.txt="^"
}
```

TIMER 2

```
//If Graphic mode
if(nDispStatus.val==0)
{
 add 17,0,jSMeter.val/3
}
sys2=pm.vq.val&0x07
if(sys2>0)
{
 //check Now condition
 //if(dim==0)
 if(nSaverCount.val==-10)                          //Screen Saver Mode
 {
  //Screen Saver Mode
  if(nLastFreq.val!=nSaverFreq.val)
  {
   dim=dims
   nSaverCount.val=0
  }
 }else if(nSaverCount.val!=-20)         //Screen off by remote control -> disabled screen saver,
                                        //always backlight off
 {
  //Running Mode
  if(nLastFreq.val!=nSaverFreq.val)
  {
   nSaverFreq.val=nLastFreq.val
   nSaverCount.val=0
  }else
  {
   nSaverCount.val++
   if(sys2==1)
   {
    if(nSaverCount.val>=180)//3 Min
    {
     dim=0
     nSaverCount.val=-10
    }
   }else if(sys2==2)
   {
    if(nSaverCount.val>=600)          //10 Min
    {
     dim=0
     nSaverCount.val=-10
```

```
      }
     }else if(sys2==3)
     {
      if(nSaverCount.val>=1200)                    //20 Min
      {
        dim=0
        nSaverCount.val=-10
      }
     }
    }
  }
}
if(pm.vg.val==74)                                  //Loopback Process
{
  pm.vg.val=-1
  //sys0 : Sender, sys1 : Command
  sys2=pm.vv.val                                   //Loop back Value
  pm.vv.val=0                                              //Init value for Next Receive process
  sys0=sys2&0xFF                                   //Sender
  //Loopback Signal
  if(sys0>4)                                               //Sender < 5, ignore
  {
    sys2=sys2>>8
    sys1=sys2&0xFF                         //Command
    if(sys1==10)                           //Command : Backlight Off
    {
      sys2=sys2>>8                         //
      sys1=sys2&0xFF               //Data1
      sys2=sys2>>8                         //Data2 (Checksum
      sys2=sys2&0xFF
      sys0=sys0+sys1+10            //sender + command(10) + data1
      sys0=sys0%256
      if(sys0==sys2)               //Check Checksum
      {
        //Backlight Off
        nSaverCount.val=-20        //Backlight off by Remote control
        dim=0
      }
    }else if(sys1==11)             //Command : Backlight On
    {
      sys2=sys2>>8                         //
      sys1=sys2&0xFF               //Data1
      sys2=sys2>>8                         //Data2 (Checksum
      sys2=sys2&0xFF
```

```
    sys0=sys0+sys1+11           //sender + command(10) + data1
    sys0=sys0%256
    if(sys0==sys2)              //Check Checksum
    {
     //Backlight Off
     dim=dims
     nSaverCount.val=0
    }
   }
  }
}
```

CW Decode

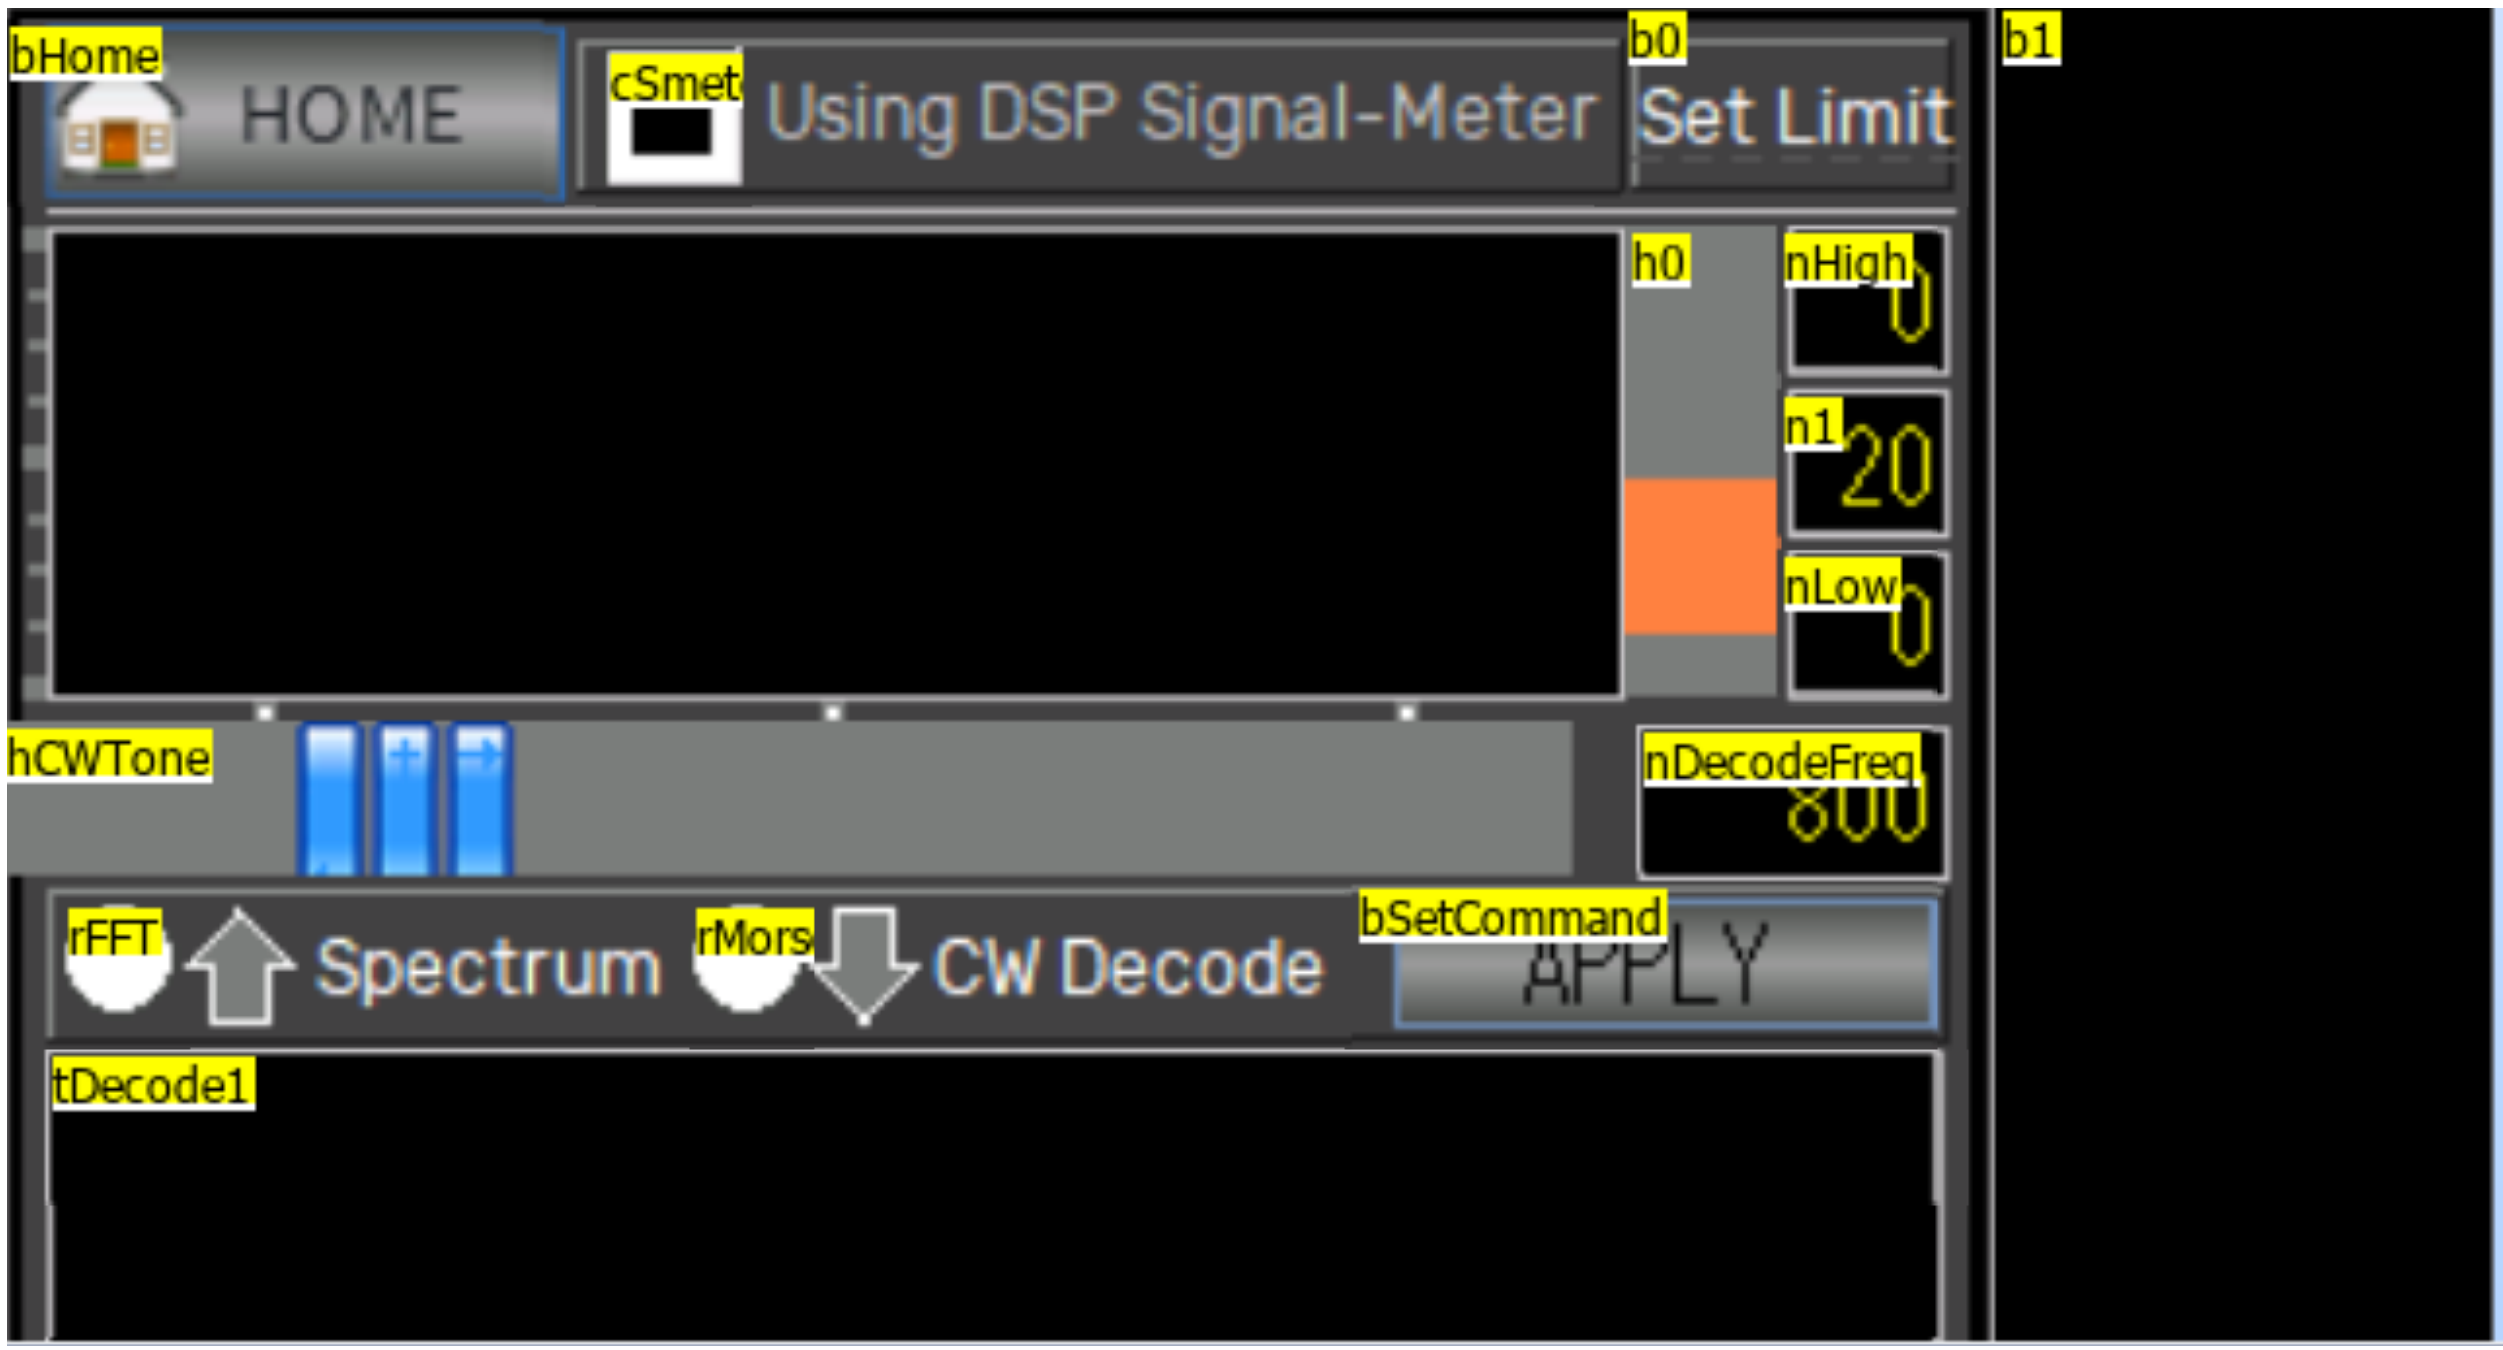

Preinitialize

pm.vv.val=-1
pm.vg.val=0
pm.sp.txt="J"
pm.sb.txt="^"

Buttons

bHome

TouchReleaseEvent
page px

cSmeterToUart (checkbox to enable remote processor)

TouchReleaseEvent
randset 5,255
nMyAddr.val=rand
//Send
pm.vn.val=-1
pm.vx.val=0

```
printh 59                                         /MAGIC
printh 58                                         //MAGIC
printh 68                                         /MAGIC
prints 74,1                                       //Command : LOOP BACK
prints nMyAddr.val,1          //Loop Sender :
sys0=50+cSmeterToUart.val     //SMeterToUart
prints sys0,1                 //Loop Command1 : Command Type / 95: Spectrum Mode
prints 0x6A,1                 //Loop Command2 : Command Value / 0x6A to DSP
sys0=nMyAddr.val+sys0+0x6A
sys0=sys0%256
prints sys0,1                 //Loop Command3 : Command Value / CheckSum
printh FF                                         //MAGIC
printh FF                                         //MAGIC
printh 73                                         //ETX
```

b0 (Set limit)

TouchReleaseEvent

```
randset 5,255
nMyAddr.val=rand
//Send
pm.vv.val=-1
pm.vg.val=0
sys1=146+h0.val
printh 59                                                   //MAGIC
printh 58                                                   //MAGIC
printh 68                                                   //MAGIC
prints 74,1                                       //Command : LOOP BACK
prints nMyAddr.val,1                    //Loop Sender :
prints sys1,1            //Loop Command1 : Command Type / 100~129: Decode Morse
prints 0x6A,1            //Loop Command2 : Command Value / 0x6A to DSP
sys0=nMyAddr.val+sys1+0x6A
sys0=sys0%256
prints sys0,1            //Loop Command3 : Command Value / CheckSum
printh FF                                                   //MAGIC
printh FF                                                   //MAGIC
printh 73                                                   //ETX
```

b1 (Perhaps no opt?)

No events. 10 char max, defaults to empty string

h0 (slider)

TouchReleaseEvent

```
randset 5,255
nMyAddr.val=rand
//Send
pm.vn.val=-1
pm.vx.val=0
printh 59                                       //MAGIC
printh 58                                       //MAGIC
printh 68                                       //MAGIC
prints 74,1                             //Command : LOOP BACK
prints nMyAddr.val,1        //Loop Sender :
sys0=146+h0.val             //CW Limit
prints sys0,1               //Loop Command1 : Command Type
prints 0x6A,1               //Loop Command2 : Command Value / 0x6A to DSP
sys0=nMyAddr.val+sys0+0x6A
sys0=sys0%256
prints sys0,1               //Loop Command3 : Command Value / CheckSum
printh FF                                       //MAGIC
printh FF                                       //MAGIC
printh 73                                       //ETX
```

TouchMoveEvent

```
n1.val=h0.val*10
```

Max= 10, Min=0, Default=2

nHigh

No events

Defined as Decimal
Default 0

n0

No events

Defined as Decimal
Default 20

nLow

No events

Defined as Decimal
Default 0

nDecodeFreq

TouchPressEvent

```
sys0=hCWTone.val*50
nDecodeFreq.val=sys0+300
```

Default 800

hCWTone (slider)

TouchMoveEvent

```
click nDecodeFreq,1
```

Default 10, min 0, max 45

rFFT (radio button 1)

TouchPressEvent

```
if(rFFT.val==1)
{
  rMorse.val=0
}
//else
//{
//  rMorse.val=1
//}
```

rMorse (radio button 2)

TouchPressEvent

```
if(rMorse.val==1)
{
  rFFT.val=0
}
//else
//{
```

```
//  rFFT.val=1
//}
```

bSetCommand (apply)

TouchPressEvent

```
randset 5,255
nMyAddr.val=rand
//Send
pm.vv.val=-1
pm.vg.val=0
if(rFFT.val==1)  //Spctrum Mode
{
 sys1=95
}else if(rMorse.val==1)
{                    //Morse Decode
sys1=nDecodeFreq.val-300
sys1/=50
sys1+=100                                            //Decode Morse 100~129
}else
{
sys1=94
}
printh 59                                                          //MAGIC
printh 58                                                          //MAGIC
printh 68                                                          //MAGIC
prints 74,1                                     //Command : LOOP BACK
prints nMyAddr.val,1                       //Loop Sender :
prints sys1,1                              //Loop Command1 : Command Type / 100~129:
Decode Morse
prints 0x6A,1                              //Loop Command2 : Command Value / 0x6A to DSP
sys0=nMyAddr.val+sys1+0x6A
sys0=sys0%256
prints sys0,1                         //Loop Command3 : Command Value / CheckSum
printh FF                                                          //MAGIC
printh FF                                                          //MAGIC
printh 73
```

tDecode1

TouchPressEvent

None

String length 30

tDecode2

TouchPressEvent
None

String length 30

tDecode3

TouchPressEvent
None

String length 30

Timer 1

```
if(pm.sp.txt!="J")
{
 //fill 0,0,240,70,BLACK
 //vMaxValue.val=0
 //vMinValue.val=30000
 //sys1=nDecodeFreq.val/48
 sys1=nDecodeFreq.val/50
 sys1=sys1+1
 vSelectMin.val=sys1-1
 vSelectMax.val=sys1+1
 sys1=sys1*4
 sys2=0
 for(sys0=0;sys0<62;sys0++)
 {
  substr pm.sp.txt,sTemp0.txt,sys0*2,2
  covx sTemp0.txt,sys2,2,2
  sys2/=2
  if(sys2<0)
  {
   sys2=0
  }
  if(sys2>70)
  {
   sys2=70
  }
  //if(vMaxValue.val<sys2)
  //{
  //  vMaxValue.val=sys2
  //}
  //if(vMinValue.val>sys2)
  //{
  //  vMinValue.val=sys2
  //}
  //sys1=sys0*2
  //sys1+=194
  //fill sys0*2,71-sys2,2,sys2,YELLOW              //1500+sys1*2046
  //fill sys0*2,0,2,71-sys2,BLACK                  //1500+sys1*2046
  //fill sys0*4,240-sys2,4,sys2,YELLOW      //1500+sys1*2046
  //fill sys0*4,170,4,70-sys2,BLACK                //1500+sys1*2046
  fill sys0*4+9,110-sys2,4,sys2,YELLOW      //1500+sys1*2046
  fill sys0*4+9,39,4,71-sys2,BLACK               //1500+sys1*2046
  if(sys0>vSelectMin.val)
```

```
  {
    if(sys0<vSelectMax.val)
    {
      line sys1,40,sys1,109,RED
      line sys1+4,40,sys1+4,109,RED
    }
  }
  //if(sys1>nADCDisVal.val)                                    //maximum adc dccharget
  //{
  //  sys2=sys1-nADCDisVal.val
  //}
  //sys2=sys1*90       //80%
  //sys2/=100
 }
 pm.sp.txt="J"
 //Draw Decode Frequency
 //sys1=nDecodeFreq.val/48
 //sys1=sys1*4
 //sys1+=4      //drop bin0 of FFT
 //fill sys1,0,2,71,RED
 //Graph LIne
 //fill 9,110-n1.val,246,1,BLUE
 //Needle
 //line sys1,40,sys1,109,RED
 //line sys1+4,40,sys1+4,109,RED
 //Display High and Low value
 //sys0=nHigh.val*7
 //sys1=vMaxValue.val*3
 //sys0+=sys1
 //sys0/=10
 //nHigh.val=sys0
 //sys0=nLow.val*7
 //sys1=vMinValue.val*3
 //sys0+=sys1
 //sys0/=10
 //nLow.val=sys0
 //fill 9,110-nHigh.val,246,1,GRAY
 //nRecvCount.val--
 //nArriveValue.val=0
 //if(nRecvCount.val<1)
 //{
 //  click b1,1
 //}
}else if(pm.sb.txt!="^")
```

```
{
  if(vLineIndex.val==0)
  {
    tDecode1.txt=tDecode1.txt+pm.sb.txt
    strlen tDecode1.txt,sys0
    if(sys0>23)
    {
      vLineIndex.val=1
    }
  }else if(vLineIndex.val==1)
  {
    tDecode2.txt=tDecode2.txt+pm.sb.txt
    strlen tDecode2.txt,sys0
    if(sys0>23)
    {
      vLineIndex.val=2
    }
  }else if(vLineIndex.val==2)
  {
    strlen tDecode3.txt,sys0
    if(sys0>23)
    {
      tDecode1.txt=tDecode2.txt
      tDecode2.txt=tDecode3.txt
      tDecode3.txt=""
    }
    tDecode3.txt=tDecode3.txt+pm.sb.txt
  }
  pm.sb.txt="^"
}else if(vReadStep.val==0)
{
  vReadStep.val=1
  pm.vv.val=-1
  pm.vg.val=0
  //Read Configuration from DSP
  randset 5,255
  nMyAddr.val=rand
  printh 59                                              //MAGIC
  printh 58                                              //MAGIC
  printh 68                                              //MAGIC
  prints 74,1                         //Command : LOOP BACK
  prints nMyAddr.val,1                //Loop Sender :
  prints 2,1                  //Loop Command1 : Command Type / 1~5: Read Configuration
  prints 0x6A,1                       //Loop Command2 : Command Value / 0x6A to DSP
```

```
 sys0=nMyAddr.val+2+0x6A                      //Byte0 + Byte1 + Byte2 % 256 = Checksum
 sys0=sys0%256
 prints sys0,1                                //Loop Command3 : Command Value / CheckSum
 printh FF                                                                          //MAGIC
 printh FF                                                                          //MAGIC
 printh 73                                                                          //ETX
}else if(vReadStep.val==1)
{
 if(pm.vg.val==0x6A)                                    //Response from DSP
 {
  vReadStep.val=2
  sys0=pm.vv.val&0xFF
  sys1=pm.vv.val>>8
  sys1=sys1&0xFF
  sys2=pm.vv.val>>16
  sys2=sys2&0xFF
  //sys0 : magLimit
  //sys1 : SMeterToUart
  //sys2 : DSPType and Morse Decode HZ
  if(sys0>100)
  {
   sys0=100
  }
  n1.val=sys0
  sys0=sys0/10
  h0.val=sys0
  if(sys1==1)
  {
   cSmeterToUart.val=1
  }else
  {
   cSmeterToUart.val=0
  }
  if(sys2==95)
  {
   rFFT.val=1
   rMorse.val=0
  }else if(sys2>=100)
  {
   if(sys2<146)
   {
    rFFT.val=0
    rMorse.val=1
    hCWTone.val=sys2-100
```

```
    //nDecodeFreq.val=sys2
    click nDecodeFreq,1
   }
  }
  pm.vv.val=-1
  pm.vg.val=0
 }
}
```

Variables

nMyAddr:	Number	0
sTemp0:	String	Max length 10
vReadStep:	Number	0
vSelectMin:	Number	0
vSelectMax:	Number	0
vLineIndex:	Number	0

Spectrum

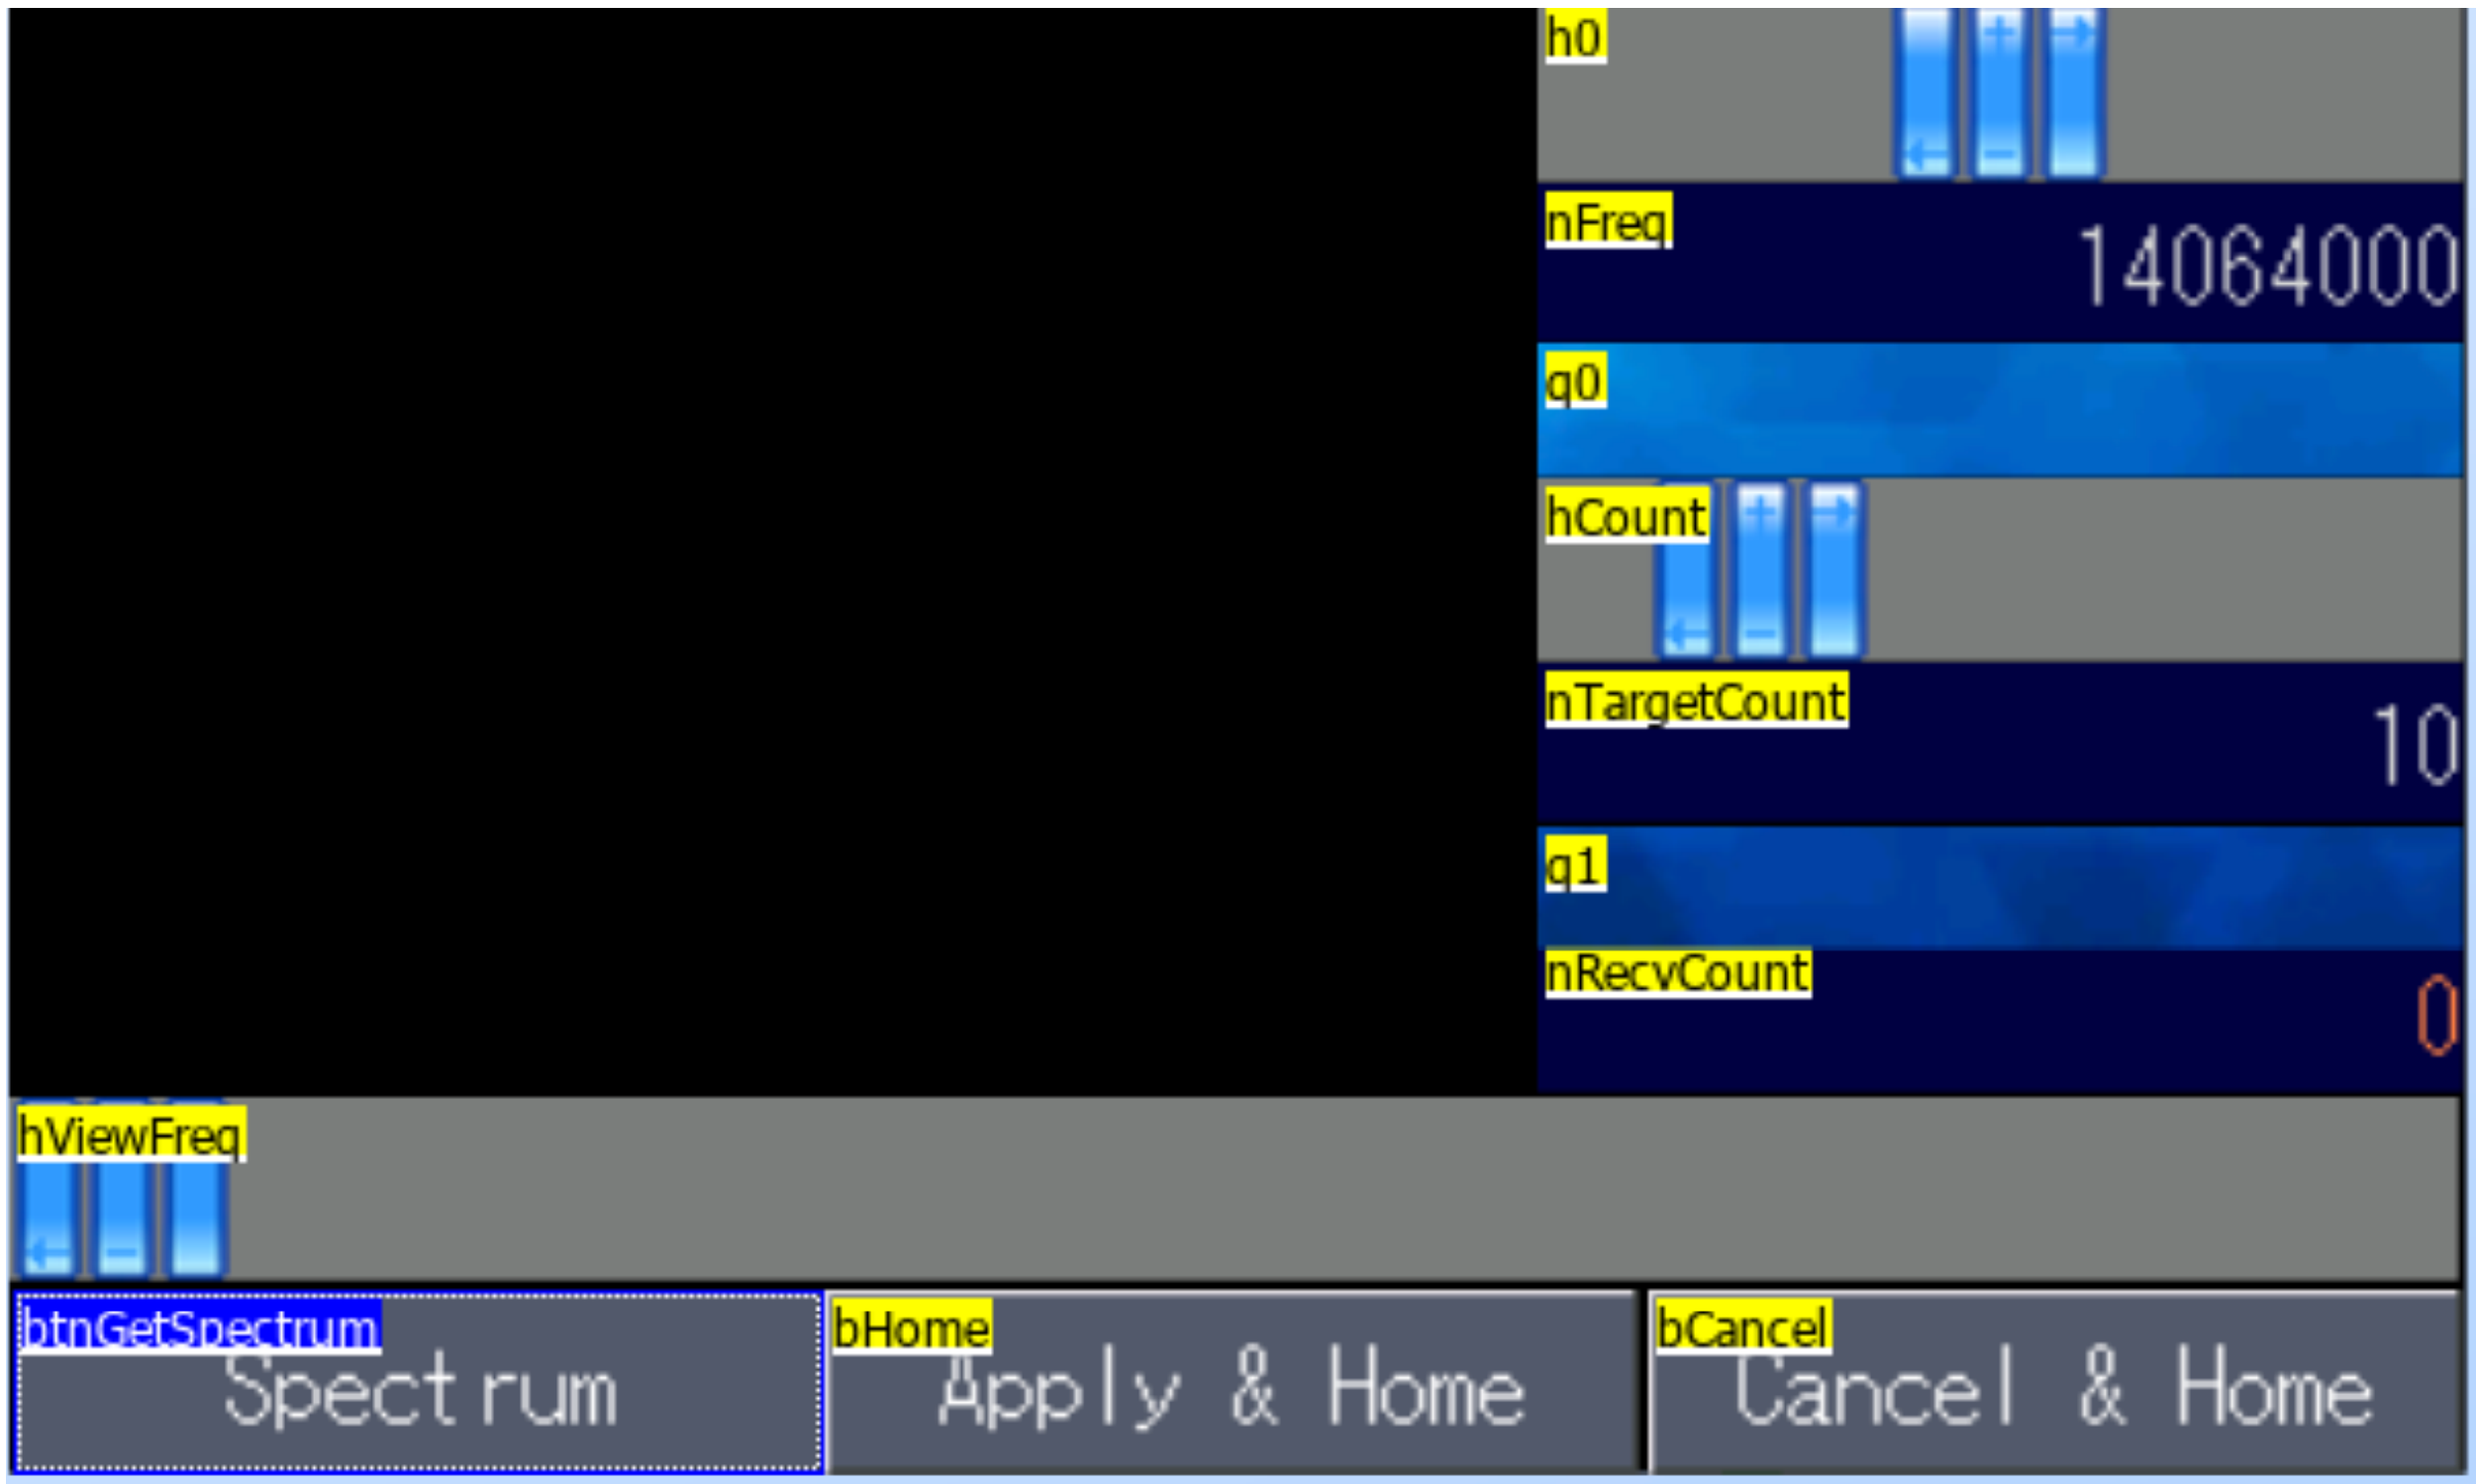

Preinitialize

```
//Send Default Value
click bOption,1
nFreq.val=px.nLastFreq.val
nBeforeFreq.val=px.nLastFreq.val
vis bOption,0
```

Buttons

btnGetSpectrum

TouchPressEvent

```
if(nRecvCount.val<1)
{
 if(nFreq.val>30000)
 {
  printh 59                                                                        //MAGIC
```

```
  printh 58                                        //MAGIC
  printh 68                                        //MAGIC
  prints 16,1                          //Command : Start Spectrum
  sys0=nFreq.val
  sys0=2000*nADCCount.val/2        //2k step
  sys0=nFreq.val-sys0
  print sys0                                  //Start Frequency
  printh FF                                        //MAGIC
  printh FF                                        //MAGIC
  printh 73                                        //ETX
  nRecvCount.val=nTargetCount.val
  nStartFreq.val=sys0
  fill 0,52,247,113,BLACK
 }
}
```

bHome

TouchReleaseEvent

```
page px
```

bCancel

TouchReleaseEvent

```
//Set Frequency
printh 59                                        //MAGIC
printh 58                                        //MAGIC
printh 68                                        //MAGIC
prints 2,1                                  //Set Frequency
print nBeforeFreq.val              //VALUE
printh FF                                        //MAGIC
printh FF                                        //MAGIC
printh 73                                        //ETX
page px
```

hViewFreq

TouchMoveEvent

```
nIsChangeFreq.val=1
Min:0, Max:245: Default=1
```

h0 (slider)

TouchPressEvent

```
nPressValue.val=nFreq.val
```

TouchReleaseEvent

```
nPressValue.val=0
h0.val=500
```

TouchRMoveEvent

```
if(nPressValue.val>10000)
{
 sys0=h0.val-500
 sys0*=50
 nFreq.val=nPressValue.val+sys0
}
```

Max:1000, Min:0 Default:500

nFreq

No events - probably current frequency

q0

No events - picc 15 -spacer from background color

hCount

Touch Release Event

```
pm.vn.val=-1
pm.vx.val=0
//nStep.val=2000              //2Kh
nADCCount.val=120    //MAX : 120
printh 59                                                         //MAGIC
printh 58                                                         //MAGIC
printh 68                                                         //MAGIC
prints 15,1                                     //Command : Spectrum Option
//printh 20                                                   //Send Count
prints hCount.val,1                        //Send Count (Scan Set Count)
printh 00                    //ADC Value Offset (Spectrum Value = ADC Value - (Offset * 3)
prints nADCCount.val,1       //ADC Scan Count (120 - MAX Value)
sys0=2000/20
prints sys0,1                          //Increase Step * 20 (ex 100 = 2Khz Step Scan)
```

```
printh FF                                    //MAGIC
printh FF                                    //MAGIC
printh 73                                    //ETX
//tm0.en=1
nTargetCount.val=hCount.val
```

Min: 2, Max:50, Default:10

nTargetCount

Look like just variable

q1

No events - picc 15 -spacer from background color

nRevCount

Look like just variable

Timer tm0

```
if(pm.sh.txt!="J")
{
  fill 0,52,247,70,BLACK
  for(sys0=0;sys0<120;sys0++)
  {
    substr pm.sh.txt,tmpS.txt,sys0*2,2
    covx tmpS.txt,sys1,2,2
    sys2=sys1-sys2
    if(sys2<0)
    {
      sys2=0
    }
    if(sys2>70)
    {
      sys2=70
    }
    //Draw
    fill sys0*2,122-sys2,2,sys2,YELLOW//1500+sys1*2046
    if(sys2>40)
    {
      sys2=40
      nTemp.val=RED
    }else if(sys2>20)
    {
      nTemp.val=63910
    }else if(sys2>15)
    {
      nTemp.val=64463
    }else if(sys2>10)
    {
      nTemp.val=64940
    }else if(sys2>8)
    {
      nTemp.val=YELLOW
    }else if(sys2>3)
    {
      nTemp.val=48608
    }else if(sys2>2)
    {
      nTemp.val=44352
    }else
    {
```

```
    nTemp.val=25376
   }
   fill sys0*2,164-sys2,2,sys2,nTemp.val//1500+sys1*2046
   //    if(sys1>nADCDisVal.val)            //maximum adc dccharget
   //    {
   //      sys2=sys1-nADCDisVal.val
   //    }
   if(sys1>7)                 //maximum adc discharge
   {
    sys2=sys1-7
   }
  }
  pm.sh.txt="J"
  nRecvCount.val--
  if(nRecvCount.val==0)
  {
   if(nSelectFreq.val>350000)
   {
    printh 59                                                        //MAGIC
    printh 58                                                        //MAGIC
    printh 68                                                        //MAGIC
    prints 2,1                              //Set Frequency
    print nSelectFreq.val                   //VALUE
    printh FF                                                        //MAGIC
    printh FF                                                        //MAGIC
    printh 73                                                        //ETX
   }
  }
}
```

Timer tmrDisplay

```
sys2=0
if(nBeforeBase.val!=nFreq.val)
{
 sys2+=1
}
if(nBeforePos.val!=hViewFreq.val)
{
 sys2+=1
}
if(sys2>0)
{
```

```
  nBeforeBase.val=nFreq.val
  nBeforePos.val=hViewFreq.val
  fill 0,0,247,52,10565
  fill 0,25,247,2,16959
  fill 120,10,2,15,16959
  cov nFreq.val,tmpS.txt,0
  xstr 126,4,90,18,0,WHITE,10565,0,1,1,tmpS.txt
  sys0=nFreq.val
  sys0=2000*nADCCount.val/2                    //2k step fixed
  sys0=nFreq.val-sys0
  nStartFreq.val=sys0
  cov nStartFreq.val,tmpS.txt,0
  xstr 2,4,90,18,0,WHITE,10565,0,1,1,tmpS.txt
  //fill 0,160,247,20,31727
  fill 0,164,247,14,10565
  fill 0,173,247,2,16959
  sys0=hViewFreq.val
  sys0=sys0*1000
  sys1=sys0+nStartFreq.val
  nSelectFreq.val=sys1
  cov nSelectFreq.val,tmpS.txt,0
  //xstr 150,26,90,24,2,64520,GRAY,2,1,1,tmpS.txt
  if(hViewFreq.val>120)
  {
    xstr hViewFreq.val-92,28,90,24,2,64520,10565,2,1,1,tmpS.txt
  }else
  {
    xstr hViewFreq.val+2,28,90,24,2,64520,10565,0,1,1,tmpS.txt
  }
  fill hViewFreq.val,0,2,50,64520
  fill hViewFreq.val,164,2,14,64520
}
```

Timer tmrSetFreq

```
if(nIsChangeFreq.val==1)
{
  if(nRecvCount.val==0)
  {
    if(nSelectFreq.val>350000)
    {
```

```
    if(nSelectFreq.val<57000000)
    {
     printh 59                                                    //MAGIC
     printh 58                                                    //MAGIC
     printh 68                                                    //MAGIC
     prints 2,1                                                   //Set Frequency
     print nSelectFreq.val                    //VALUE
     printh FF                                                    //MAGIC
     printh FF                                                    //MAGIC
     printh 73                                                    //ETX
    }
   }
  }
  nIsChangeFreq.val=0
 }
```

Misc Variables

Tmp5:	String	max 10
nPressValue:	Number	0
nADCCount:	Number	0
nStartFreq:	Number	0
nSelectFreq:	Number	0
nBeforeFreq:	Number	0
nBeforePos:	Number	0
nBeforeBase:	Number	0
nBeforeBase:	Number	0
nIsChangeFreq:	Number	0