



# **AN 806: Hierarchical Partial Reconfiguration Tutorial for Intel® Arria® 10 GX FPGA Development Board**

**AN-806**  
**2017.11.06**

Last updated for Intel® Quartus® Prime Design Suite: 17.1



**Subscribe**


**Send Feedback**



## Contents

---

<b>Hierarchical Partial Reconfiguration Tutorial for Arria® 10 GX FPGA Development Board.....</b>	<b>3</b>
Reference Design Requirements.....	3
Reference Design Overview.....	4
Reference Design Files.....	4
Reference Design Walkthrough.....	6
Step 1: Getting Started.....	7
Step 2: Creating a Child Level Sub-module.....	7
Step 3: Creating Design Partitions.....	8
Step 4: Allocating Placement and Routing Region for PR Partitions.....	9
Step 5: Adding the Arria 10 Partial Reconfiguration Controller IP Core.....	11
Step 6: Defining Personas.....	14
Step 7: Creating Revisions .....	15
Step 8: Generating the Hierarchical Partial Reconfiguration Flow Script.....	20
Step 9: Running the Hierarchical Partial Reconfiguration Flow Script.....	22
Step 10: Programming the Board.....	22
Modifying an Existing Persona.....	24
Adding a New Persona to the Design.....	25
Document Revision History.....	26



## Hierarchical Partial Reconfiguration Tutorial for Arria® 10 GX FPGA Development Board

---

This application note demonstrates transforming a simple design into a hierarchically partially reconfigurable design, and implementing the design on the Arria® 10 GX FPGA development board.

Hierarchical partial reconfiguration (HPR) is a special type of partial reconfiguration (PR), where you contain a PR region within another PR region. You can create multiple personas for both the child and parent partitions. You nest the child partitions within their parent partitions. Reconfiguring a child partition does not impact operation in the parent or static regions. Reconfiguring a parent partition does not impact the operation in the static region, but replaces the child partitions of the parent region with default child partition personas. This methodology is effective in systems where multiple functions time-share the same FPGA device resources.

Partial reconfiguration provides the following advancements to a flat design:

- Allows run-time design reconfiguration
- Increases scalability of the design
- Reduces system down-time
- Supports dynamic time-multiplexing functions in the design
- Lowers cost and power consumption through efficient use of board space

*Note:*

- Implementation of this reference design requires basic familiarity with the Intel® Quartus® Prime FPGA implementation flow and knowledge of the primary Intel Quartus Prime project files.
- This tutorial uses the Arria 10 GX FPGA development board on the bench, outside of the PCIe\* slot in your workstation.

### Related Links

- [Intel Arria 10 FPGA Development Kit User Guide](#)
- [Partial Reconfiguration Concepts](#)
- [Partial Reconfiguration Design Flow](#)
- [Partial Reconfiguration Design Recommendations](#)
- [Partial Reconfiguration Design Considerations](#)

## Reference Design Requirements

This reference design requires the following:

---

Intel Corporation. All rights reserved. Intel, the Intel logo, Altera, Arria, Cyclone, Enpirion, MAX, Nios, Quartus and Stratix words and logos are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries. Intel warrants performance of its FPGA and semiconductor products to current specifications in accordance with Intel's standard warranty, but reserves the right to make changes to any products and services at any time without notice. Intel assumes no responsibility or liability arising out of the application or use of any information, product, or service described herein except as expressly agreed to in writing by Intel. Intel customers are advised to obtain the latest version of device specifications before relying on any published information and before placing orders for products or services.

\*Other names and brands may be claimed as the property of others.

ISO  
9001:2008  
Registered




- Intel Quartus Prime Pro Edition software version 17.1 for the design implementation.
- Arria 10 GX FPGA development kit for the FPGA implementation.

## Reference Design Overview

This reference design consists of one 32-bit counter. At the board level, the design connects the clock to a 50MHz source, and connects the output to four LEDs on the FPGA. Selecting the output from the counter bits in a specific sequence causes the LEDs to blink at a specific frequency.

**Figure 1. Flat Reference Design without PR Partitioning**

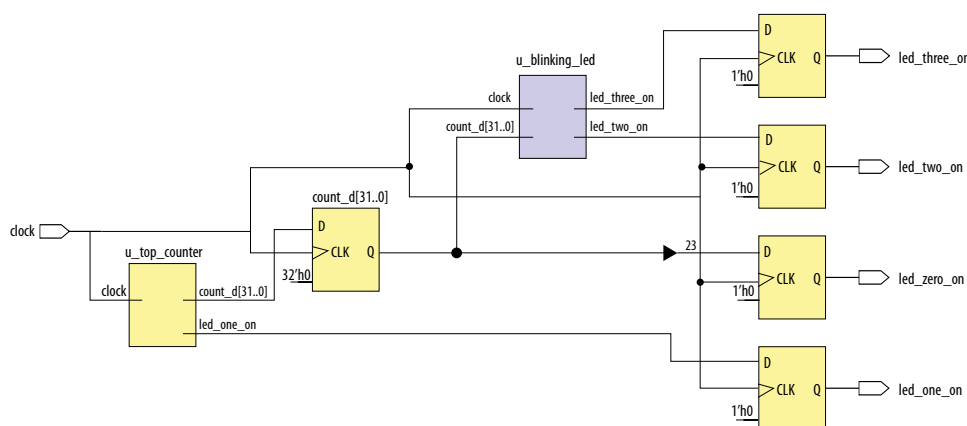

## Reference Design Files

The partial reconfiguration tutorial is available in the following location:

<https://github.com/01org/fpga-partial-reconfig>

To download the tutorial:

1. Click **Clone or download**.
2. Click **Download ZIP**. Unzip the `fpga-partial-reconfig-master.zip` file.
3. Navigate to the `tutorials/a10_pcie_devkit_blinking_led_hpr` sub-folder to access the reference design.

The `flat` folder consists of the following files:

**Table 1. Reference Design Files**


File Name	Description
<code>top.sv</code>	Top-level file containing the flat implementation of the design. This module instantiates the <code>blinking_led</code> sub-partition and the <code>top_counter</code> module.
<code>top_counter.sv</code>	Top-level 32-bit counter that controls LED[1] directly. The registered output of the counter controls LED[0], and also powers LED[2] and LED[3] via the <code>blinking_led</code> module.
<i>continued...</i>	



File Name	Description
blinking_led.sdc	Defines the timing constraints for the project.
blinking_led.sv	In this tutorial, you convert this module into a parent PR partition. The module receives the registered output of <code>top_counter</code> module, which controls <code>LED[2]</code> and <code>LED[3]</code> .
blinking_led.qpf	Intel Quartus Prime project file containing the list of all the revisions in the project.
blinking_led.qsf	Intel Quartus Prime settings file containing the assignments and settings for the project.

**Note:** The `hpr` folder contains the complete set of files you create using this application note. Reference these files at any point during the walkthrough.

**Figure 2. Reference Design Files**

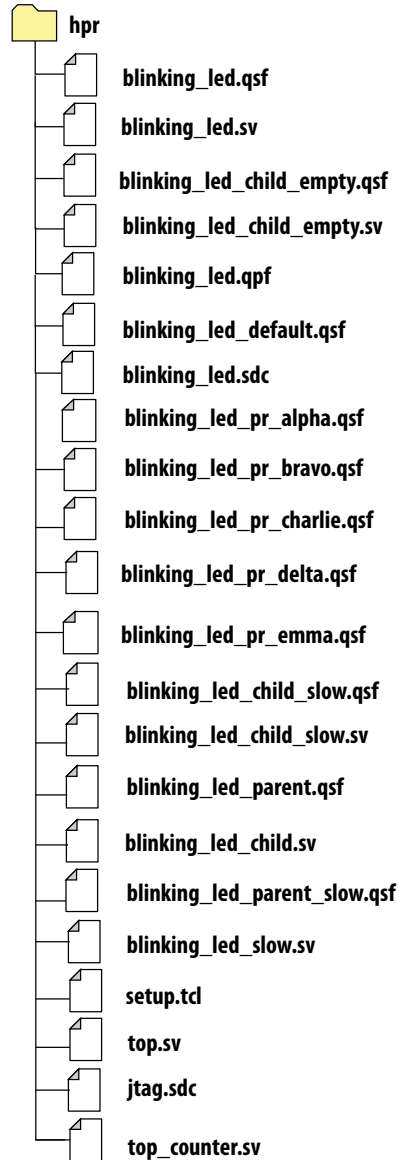

## Reference Design Walkthrough

The following steps describe the application of partial reconfiguration to a flat design. The tutorial uses the Intel Quartus Prime Pro Edition software for the Arria 10 GX FPGA development board:



- [Step 1: Getting Started](#) on page 7
- [Step 2: Creating a Child Level Sub-module](#) on page 7
- [Step 3: Creating Design Partitions](#) on page 8
- [Step 4: Allocating Placement and Routing Region for PR Partitions](#) on page 9
- [Step 5: Adding the Arria 10 Partial Reconfiguration Controller IP Core](#) on page 11
- [Step 6: Defining Personas](#) on page 14
- [Step 7: Creating Revisions](#) on page 15
- [Step 8: Generating the Hierarchical Partial Reconfiguration Flow Script](#) on page 20
- [Step 9: Running the Hierarchical Partial Reconfiguration Flow Script](#) on page 22
- [Step 10: Programming the Board](#) on page 22

## Step 1: Getting Started

To copy the reference design files to your working environment and compile the `blinking_led` flat design:

1. Create a directory in your working environment, `a10_pcie_devkit_blinking_led_hpr`.
2. Copy the downloaded `tutorials/a10_pcie_devkit_blinking_led_hpr/flat` sub-folder to the directory, `a10_pcie_devkit_blinking_led_hpr`.
3. In the Intel Quartus Prime Pro Edition software, click **File** ► **Open Project** and select `blinking_led.qpf`.
4. To compile the flat design, click **Processing** ► **Start Compilation**.

## Step 2: Creating a Child Level Sub-module

To convert this flat design into a hierarchical PR design, you must create a child sub-module (`blinking_led_child.sv`) that is nested within the parent sub-module (`blinking_led.sv`).

1. Create a new design file, `blinking_led_child.sv`, and add the following lines of code to this file:

```
`timescale 1 ps / 1 ps
`default_nettype none

module blinking_led_child (

    // clock
    input wire clock,
    input wire [31:0] counter,

    // Control signals for the LEDs
    output wire led_three_on

);
    localparam COUNTER_TAP = 23;
    reg led_three_on_r;

    assign led_three_on    = led_three_on_r;
```



```
always_ff @(posedge clock) begin
    led_three_on_r <= counter[COUNTER_TAP];
end

endmodule
```

2. Modify the `blinking_led.sv` file to connect the `led_two_on` to bit 23 of the counter from the static region, and instantiate the `blinking_led_child` module. After modifications, your `blinking_led.sv` file must appear as follows:

```
`timescale 1 ps / 1 ps
`default_nettype none

module blinking_led(
    // clock
    input wire clock,
    input wire [31:0] counter,
    // Control signals for the LEDs
    output wire led_two_on,
    output wire led_three_on
);

    localparam COUNTER_TAP = 23;

    reg led_two_on_r;
    assign led_two_on = led_two_on_r;

    // The counter:
    always_ff @(posedge clock) begin
        led_two_on_r <= counter[COUNTER_TAP];
    end

    blinking_led_child u_blinking_led_child (
        .led_three_on (led_three_on),
        .counter (counter),
        .clock (clock)
    );

endmodule
```

3. On modifying all the design files, recompile the project by clicking **Processing ► Start Compilation**

### Step 3: Creating Design Partitions

You must create design partitions for each PR region that you want to partially reconfigure. You can create any number of independent partitions or PR regions in your design. This tutorial creates two design partitions for the `u_blinking_led_child` and `u_blinking_led` instances.

To create design partitions for hierarchical partial reconfiguration:

1. Right-click the `u_blinking_led_child` instance in the **Project Navigator** and click **Design Partition ► Set as Reconfigurable Design Partition**.

The design partition appears on the **Assignments View** tab of the Design Partitions Window.





Figure 3. Design Partitions Window

Assignments View		Compilation View				
Partition Name	Hierarchy Path	Type	Preservation Level	Empty	Partition Database File	Color
<<new>>						
pr_partition	u_blinking_led u_blinking_led_child	Reconfigurable		No		
pr_parent_partition	u_blinking_led	Reconfigurable		No		

2. Edit the partition name in the Design Partitions Window by double-clicking the name. For this reference design, rename the partition name to `pr_partition`.

*Note:* When you create a partition, the Intel Quartus Prime software automatically generates a partition name, based on the instance name and hierarchy path. This default partition name can vary with each instance.

3. Repeat steps 1 and 2 to assign reconfigurable design partitions to the `u_blinking_led` instance. Rename this partition to `pr_parent_partition`.

Verify that the `blinking_led.qsf` contains the following assignments, corresponding to your reconfigurable design partitions:

```
set_instance_assignment -name PARTITION pr_partition -to \
    u_blinking_led|u_blinking_led_child
set_instance_assignment -name PARTIAL_RECONFIGURATION_PARTITION ON -to \
    u_blinking_led|u_blinking_led_child

set_instance_assignment -name PARTITION pr_parent_partition -to u_blinking_led
set_instance_assignment -name PARTIAL_RECONFIGURATION_PARTITION ON -to \
    u_blinking_led
```

### Related Links


[Create Design Partitions for Partial Reconfiguration](#)

## Step 4: Allocating Placement and Routing Region for PR Partitions

When you create the base revision, the PR design flow uses your PR partition region allocation to place the corresponding persona core in the reserved region. To locate and assign the PR region in the device floorplan for your base revision:

1. Right-click the `u_blinking_led_child` instance in the **Project Navigator** and click **Logic Lock Region > Create New Logic Lock Region**. The region appears on the Logic Lock Regions Window.
2. Your placement region must enclose the `blinking_led_child` logic. Select the placement region by locating the node in Chip Planner. Right-click the `u_blinking_led_child` region name in the **Project Navigator** and click **Locate Node > Locate in Chip Planner**.

**Figure 4. Chip Planner Node Location for `blinking_led`**

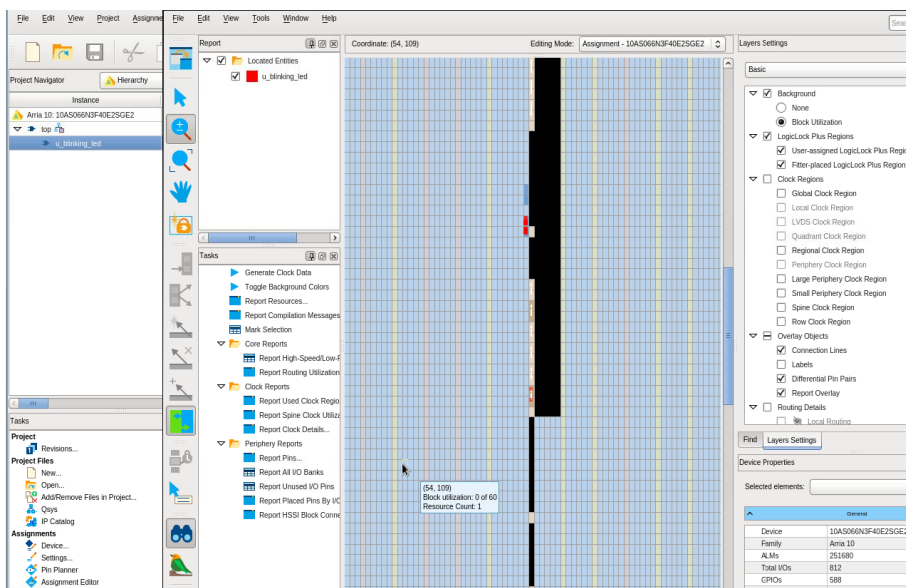

3. In the Logic Lock Regions window, specify the placement region co-ordinates in the **Origin** column. The origin corresponds to the lower-left corner of the region. For example, to set a placement region with (X1 Y1) co-ordinates as (69 10), specify the **Origin** as X69\_Y10. The Intel Quartus Prime software automatically calculates the (X2 Y2) co-ordinates (top-right) for the placement region, based on the height and width you specify.

*Note:* This tutorial uses the (X1 Y1) co-ordinates - (69 10), and a height and width of 20 for the placement region. Define any value for the placement region, provided that the region covers the `blinking_led_child` logic.

4. Enable the **Reserved** and **Core-Only** options.
5. Double-click the **Routing Region** option. The **Logic Lock Routing Region Settings** dialog box appears.
6. Select **Fixed with expansion** for the **Routing type**. Selecting this option automatically assigns an expansion length of 1.

*Note:* The routing region must be larger than the placement region, to provide extra flexibility for the Fitter when the engine routes different personas.

7. Repeat steps 1 -6 for the `u_blinking_led` instance. The parent-level placement region must fully enclose the corresponding child-level placement and routing regions, while allowing sufficient space for the parent-level logic placement. This tutorial uses the (X1 Y1) co-ordinates - (66 7), a height of 47, and width of 26 for the placement region of the `u_blinking_led` instance.



Figure 5. Logic Lock Regions Window

Region Name	Members	Width	Height	Origin	Reserved	Core-Only	Size/State	Routing Region
Logic Lock Regions								
u_blinking_led	u_blinking_led	17	20	X172_Y410	On	On	Fixed/Locked	Fixed with expansion 1
u_blinking_led u_blinking_led_child	u_blinking_led u_blinking_led_child	13	6	X174_Y415	On	On	Fixed/Locked	Fixed with expansion 1
<new>								

Verify that the `blinking_led.qsf` contains the following assignments, corresponding to your floorplanning:

```
set_instance_assignment -name PLACE_REGION "69 10 88 29" -to \
    u_blinking_led|u_blinking_led_child
set_instance_assignment -name RESERVE_PLACE_REGION ON -to \
    u_blinking_led|u_blinking_led_child
set_instance_assignment -name CORE_ONLY_PLACE_REGION ON -to \
    u_blinking_led|u_blinking_led_child
set_instance_assignment -name ROUTE_REGION "68 9 89 30" -to \
    u_blinking_led|u_blinking_led_child

set_instance_assignment -name PLACE_REGION "66 7 112 32" -to u_blinking_led
set_instance_assignment -name RESERVE_PLACE_REGION ON -to u_blinking_led
set_instance_assignment -name CORE_ONLY_PLACE_REGION ON -to u_blinking_led
set_instance_assignment -name ROUTE_REGION "65 6 113 33" -to u_blinking_led
```

### Related Links


- [Floorplan the Partial Reconfiguration Design](#)
- [Incrementally Implementing Partial Reconfiguration](#)

## Step 5: Adding the Arria 10 Partial Reconfiguration Controller IP Core

Use the Arria 10 Partial Reconfiguration Controller IP core to reconfigure the PR partition. This IP core uses JTAG to reconfigure the PR partition. To add the Arria 10 Partial Reconfiguration Controller IP core to your Intel Quartus Prime project:

1. Type `Partial Reconfiguration` in the IP catalog.
2. To launch the IP Parameter Editor Pro window, select the Arria 10 Partial Reconfiguration Controller IP core from the IP library, and click **Add**.
3. In the **New IP Variant** dialog box, type `pr_ip` as the file name and click **Create**. Use the default parameterization for `pr_ip`. Ensure that the **Enable JTAG debug mode** and **Enable freeze interface** options are turned on, and **Enable Avalon-MM slave interface** option is turned off.

**Figure 6. Arria 10 Partial Reconfiguration Controller IP Core Parameters**

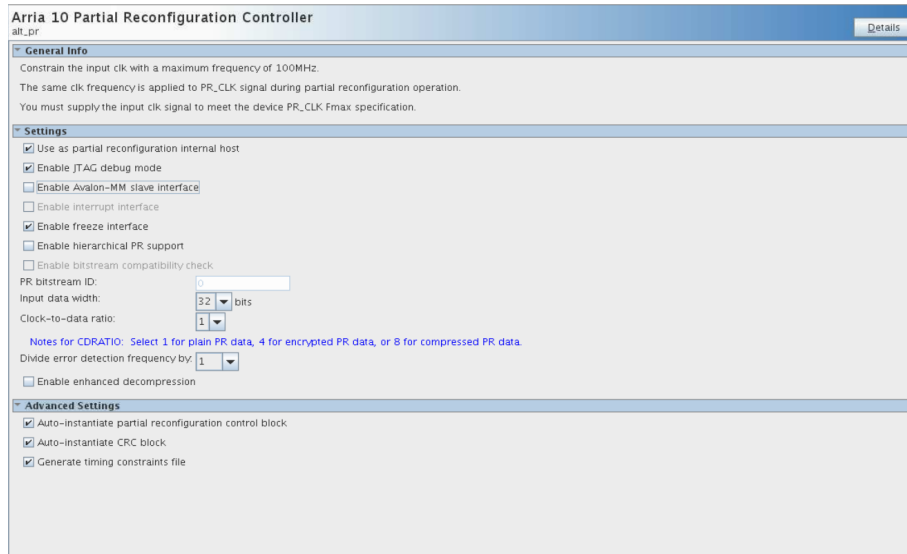

Arria 10 Partial Reconfiguration Controller  
alt\_pr

**General Info**

Constrain the input clk with a maximum frequency of 100MHz.  
The same clk frequency is applied to PR\_CLK signal during partial reconfiguration operation.  
You must supply the input clk signal to meet the device PR\_CLK Fmax specification.

**Settings**

☒ Use as partial reconfiguration internal host  
☒ Enable JTAG debug mode  
☐ Enable Avalon-MM slave interface  
☐ Enable interrupt interface  
☒ Enable freeze interface  
☐ Enable hierarchical PR support  
☐ Enable bitstream compatibility check

PR bitstream ID:   
Input data width:  bits  
Clock-to-data ratio:

Notes for CDRATIO: Select 1 for plain PR data, 4 for encrypted PR data, or 8 for compressed PR data.  
Divide error detection frequency by:

☐ Enable enhanced decompression

**Advanced Settings**

☒ Auto-instantiate partial reconfiguration control block  
☒ Auto-instantiate CRC block  
☒ Generate timing constraints file

4. Click **Finish**, and exit the parameter editor without generating the system. Intel Quartus Prime software creates the `pr_ip.ip` IP variation file, and adds the file to the `blinking_led` project.

*Note:*

1. If you are copying the `pr_ip.ip` file from the `hpr` folder, manually edit the `blinking_led.qsf` file to include the following line:

```
set_global_assignment -name IP_FILE pr_ip.ip
```

2. Place the `IP_FILE` assignment after the `SDC_FILE` assignments (`jtag.sdc` and `blinking_led.sdc`) in your `blinking_led.qsf` file. This ordering ensures appropriate constraining of the Partial Reconfiguration IP core.

*Note:* To detect the clocks, the SDC file for the PR IP must follow any SDC that creates the clocks that the IP core uses. You facilitate this order by ensuring the `.ip` file for the PR IP core comes after any `.ip` files or SDC files used to create these clocks in the QSF file for your Intel Quartus Prime project revision. For more information, refer to *Timing Constraints* section in the *Partial Reconfiguration IP Core User Guide*.

### Related Links

- [Partial Reconfiguration IP Solutions User Guide](#)  
For information on the Partial Reconfiguration Region Controller IP core.
- [Partial Reconfiguration IP Core User Guide](#)  
For information on the timing constraints.

### Updating the Top-Level Design

To update the `top.sv` file with the `PR_IP` instance:



1. To add the PR\_IP instance to the top-level design, uncomment the following code block in top.sv file:

```
pr_ip u_pr_ip
(
    .clk          (clock),
    .nreset       (1'b1),
    .freeze       (freeze),
    .pr_start     (1'b0),           // ignored for JTAG
    .status       (pr_ip_status),
    .data         (16'b0),
    .data_valid   (1'b0),
    .data_ready   ()
);
```


2. To force the output ports to logic 1 during reconfiguration, use the freeze control signal output from PR\_IP. However, to observe the LED continue blinking from the parent PR partition while PR programming the child partition, the freeze control signal does not turn off the led\_two\_on. Ensure that the pr\_led\_two\_on is directly assigned to led\_two\_on\_w. led\_three\_on\_w must choose between logic 1 and pr\_led\_three\_on, based on the freeze signal. Uncomment the following lines of code:

```
assign led_two_on_w = pr_led_two_on;
assign led_three_on_w = freeze ? 1'b1 : pr_led_three_on;
```

3. To assign an instance of the default parent persona (blinking\_led), update the top.sv file with the following block of code:

```
blinking_led u_blinking_led
(
    .clock        (clock),
    .counter       (count_d),
    .led_two_on    (pr_led_two_on),
    .led_three_on  (pr_led_three_on)
);
```

**Figure 7. Partial Reconfiguration IP Core Integration**

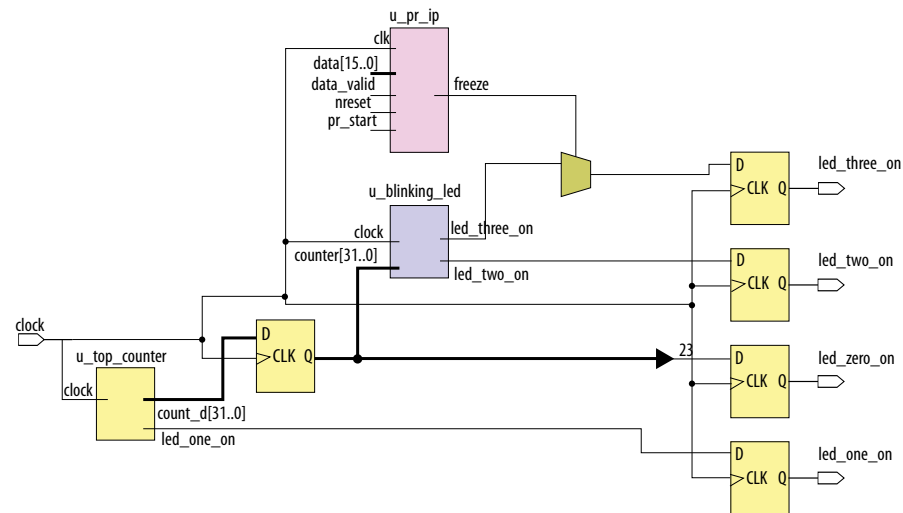



## Step 6: Defining Personas

This reference design defines five separate personas for the parent and child PR partitions. To define and include the personas in your project:

1. Create four SystemVerilog files, `blinking_led_child.sv`, `blinking_led_child_slow.sv`, `blinking_led_child_empty.sv`, and `blinking_led_slow.sv` in your working directory for the five personas.

*Note:* If you create the SystemVerilog files from the Intel Quartus Prime Text Editor, disable the **Add file to current project** option, when saving the files.

**Table 2. Reference Design Personas**

File Name	Description	Code
<code>blinking_led_child.sv</code>	Default persona for the child-level design	<pre> `timescale 1 ps / 1 ps `default_nettype none  module blinking_led_child (      // clock     input wire clock,     input wire [31:0] counter,      // Control signals for the LEDs     output wire led_three_on  );     localparam COUNTER_TAP = 23;     reg led_three_on_r;      assign led_three_on    = led_three_on_r;      always_ff @(posedge clock) begin         led_three_on_r    &lt;= counter[COUNTER_TAP];     end  endmodule </pre>
<code>blinking_led_child_slow.sv</code>	The LED_THREE blinks slower	<pre> `timescale 1 ps / 1 ps `default_nettype none  module blinking_led_child_slow (      // clock     input wire clock,     input wire [31:0] counter,      // Control signals for the LEDs     output wire led_three_on  );     localparam COUNTER_TAP = 27;     reg led_three_on_r;      assign led_three_on = led_three_on_r;      always_ff @(posedge clock) begin         led_three_on_r    &lt;= counter[COUNTER_TAP];     end  endmodule </pre>
<code>blinking_led_child_empty.sv</code>	The LED_THREE stays ON	<pre> `timescale 1 ps / 1 ps `default_nettype none  module blinking_led_child_empty (      // clock     input wire clock,     input wire [31:0] counter, </pre>

*continued...*



File Name	Description	Code
		<pre> // Control signals for the LEDs output wire led_three_on  );  // LED is active low assign led_three_on = 1'b0;  endmodule </pre>
blinking_led_slow.sv	The LED_TWO blinks slower.	<pre> `timescale 1 ps / 1 ps `default_nettype none  module blinking_led_slow(      // clock     input wire clock,     input wire [31:0] counter,      // Control signals for the LEDs     output wire led_two_on,     output wire led_three_on  );      localparam COUNTER_TAP = 27;      reg led_two_on_r;     assign led_two_on = led_two_on_r;      // The counter:     always_ff @(posedge clock) begin         led_two_on_r &lt;= counter[COUNTER_TAP];     end      blinking_led_child u_blinking_led_child(         .led_three_on      (led_three_on),         .counter           (counter),         .clock              (clock)     );  endmodule </pre>

### Related Links

[Step 3: Creating Design Partitions on page 8](#)

## Step 7: Creating Revisions

The PR design flow uses the project revisions feature in the Intel Quartus Prime software. Your initial design is the base revision, where you define the static region boundaries and reconfigurable regions on the FPGA. From the base revision, you create multiple revisions. These revisions contain the different implementations for the PR regions. However, all PR implementation revisions use the same top-level placement and routing results from the base revision.

To compile a PR design, you must create a PR implementation revision and synthesis revision for each persona. In this reference design, in addition to the base revision (blinking\_led), the three child-level personas and the two parent-level personas contain five separate synthesis revisions, and five separate implementation revisions:

**Table 3. Revisions for the Two Parent Personas and Three Child Personas**

Synthesis Revision	Implementation Revision
blinking_led_parent, blinking_led_default	blinking_led_pr_alpha
blinking_led_parent, blinking_led_child_slow	blinking_led_pr_bravo
blinking_led_parent, blinking_led_child_empty	blinking_led_pr_charlie
blinking_led_parent_slow, blinking_led_child_slow	blinking_led_pr_delta
blinking_led_parent_slow, blinking_led_child_empty	blinking_led_pr_emma


## Creating Implementation Revisions

To create the PR implementation revisions:

1. To open the **Revisions** dialog box, click **Project > Revisions**.
2. To create a new revision, double-click **<<new revision>>**.
3. Specify the **Revision name** as `blinking_led_pr_alpha` and select `blinking_led` for **Based on Revision**.
4. Disable the **Set as current revision** option and click **OK**.
5. Similarly, create `blinking_led_pr_bravo`, `blinking_led_pr_charlie`, `blinking_led_pr_delta`, and `blinking_led_pr_emma` revisions, based on the `blinking_led` revision.

*Note:* Do not set the above revisions as current revision.

**Figure 8. Creating Revisions**

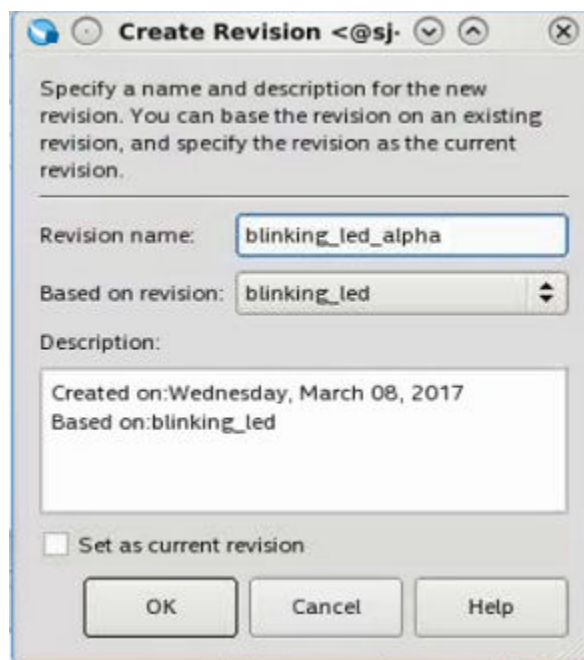





## Creating Synthesis-Only Revisions

To create synthesis-only revisions for the personas, you must assign the top-level entity and corresponding SystemVerilog file for each of the personas:

1. In the Intel Quartus Prime software, click **Project ► Revisions**.
2. Create `blinking_led_default` revision based on `blinking_led` revision. Do not set this revision as current revision.
3. Modify `blinking_led_default.qsf` file to include the following assignments:

```
set_global_assignment -name TOP_LEVEL_ENTITY blinking_led_child
set_global_assignment -name SYSTEMVERILOG_FILE
```

4. Similarly, create `blinking_led_child_slow`, `blinking_led_child_empty`, `blinking_led_parent`, and `blinking_led_parent_slow` revisions based on `blinking_led` revision. Do not set these revisions as current revision.
5. Update the `blinking_led_child_slow.qsf`, `blinking_led_child_empty.qsf`, `blinking_led_parent.qsf`, and `blinking_led_parent_slow.qsf` files with their corresponding `TOP_LEVEL_ENTITY` and `SYSTEMVERILOG_FILE` assignments:

```
##blinking_led_child_slow.qsf
set_global_assignment -name TOP_LEVEL_ENTITY blinking_led_child_slow
set_global_assignment -name SYSTEMVERILOG_FILE blinking_led_child_slow.sv
```

```
##blinking_led_child_empty.qsf
set_global_assignment -name TOP_LEVEL_ENTITY blinking_led_child_empty
set_global_assignment -name SYSTEMVERILOG_FILE blinking_led_child_empty.sv
```

```
##blinking_led_parent.qsf

set_global_assignment -name TOP_LEVEL_ENTITY blinking_led
set_global_assignment -name SYSTEMVERILOG_FILE blinking_led.sv
set_global_assignment -name SYSTEMVERILOG_FILE blinking_led_child.sv
```

```
##blinking_led_parent_slow.qsf

set_global_assignment -name TOP_LEVEL_ENTITY blinking_led_slow
set_global_assignment -name SYSTEMVERILOG_FILE blinking_led_slow.sv
set_global_assignment -name SYSTEMVERILOG_FILE blinking_led_child.sv
```

6. To avoid synthesis errors, ensure that the synthesis revision files for the child partitions do not contain any design partition, pin assignments, or Logic Lock region assignments. Also, the synthesis revision files for the parent partitions must only contain design partition assignments for the corresponding child partitions. Remove these assignments, if any, in the `blinking_led_default.qsf`, `blinking_led_child_slow.qsf`, `blinking_led_child_empty.qsf`, `blinking_led_parent.qsf`, and `blinking_led_parent_slow.qsf` files:

```
#set_instance_assignment -name PARTITION pr_partition -to \
    u_blinking_led|u_blinking_led_child
#set_instance_assignment -name PARTIAL_RECONFIGURATION_PARTITION ON -to \
    u_blinking_led|u_blinking_led_child
#set_instance_assignment -name PLACE_REGION "69 10 88 29" -to \
    u_blinking_led|u_blinking_led_child
#set_instance_assignment -name RESERVE_PLACE_REGION ON -to \
    u_blinking_led|u_blinking_led_child
#set_instance_assignment -name CORE_ONLY_PLACE_REGION ON -to \
    u_blinking_led|u_blinking_led_child
```



```
#set_instance_assignment -name ROUTE_REGION "68 9 89 30" -to \
    u_blinking_led|u_blinking_led_child
#set_instance_assignment -name PARTITION pr_parent_partition -to \
    u_blinking_led
#set_instance_assignment -name PARTIAL_RECONFIGURATION_PARTITION ON -to \
    u_blinking_led
#set_instance_assignment -name PLACE_REGION "66 7 112 32" -to \
    u_blinking_led
#set_instance_assignment -name RESERVE_PLACE_REGION ON -to \
    u_blinking_led
#set_instance_assignment -name CORE_ONLY_PLACE_REGION ON -to \
    u_blinking_led
#set_instance_assignment -name ROUTE_REGION "65 6 113 33" -to \
    u_blinking_led
```

7. Include the following assignments in `blinking_led_parent.qsf` and `blinking_led_parent_slow.qsf` files:

```
set_instance_assignment -name PARTITION pr_partition -to \
    u_blinking_led_child
set_instance_assignment -name PARTIAL_RECONFIGURATION_PARTITION ON -to \
    u_blinking_led_child
```

8. Verify that the `blinking_led.qpf` file contains the following revisions, in no particular order:

```
PROJECT_REVISION = "blinking_led"
PROJECT_REVISION = "blinking_led_pr_alpha"
PROJECT_REVISION = "blinking_led_pr_bravo"
PROJECT_REVISION = "blinking_led_pr_charlie"
PROJECT_REVISION = "blinking_led_pr_delta"
PROJECT_REVISION = "blinking_led_pr_emma"
PROJECT_REVISION = "blinking_led_default"
PROJECT_REVISION = "blinking_led_child_slow"
PROJECT_REVISION = "blinking_led_child_empty"
PROJECT_REVISION = "blinking_led"
PROJECT_REVISION = "blinking_led_slow"
```

*Note:* If you are copying the revision files from `hpr` folder, manually update the `blinking_led.qpf` file with the above lines of code.

## Specifying Revision Type

You must assign revision type for each of your revisions. There are three revision types:

- Partial Reconfiguration - Base
- Partial Reconfiguration - Persona Synthesis
- Partial Reconfiguration - Persona Implementation

The following table lists the revision type assignments for each of the revisions:

**Table 4. Revision Types**

Revision Name	Revision Type
<code>blinking_led.qsf</code>	Partial Reconfiguration - Base
<code>blinking_led_default.qsf</code>	Partial Reconfiguration - Persona Synthesis
<code>blinking_led_child_empty.qsf</code>	Partial Reconfiguration - Persona Synthesis
<code>blinking_led_child_slow.qsf</code>	Partial Reconfiguration - Persona Synthesis
<i>continued...</i>	



Revision Name	Revision Type
blinking_led_parent.qsf	Partial Reconfiguration - Persona Synthesis
blinking_led_parent_slow.qsf	Partial Reconfiguration - Persona Synthesis
blinking_led_pr_alpha.qsf	Partial Reconfiguration - Persona Implementation
blinking_led_pr_bravo.qsf	Partial Reconfiguration - Persona Implementation
blinking_led_pr_charlie.qsf	Partial Reconfiguration - Persona Implementation
blinking_led_pr_delta.qsf	Partial Reconfiguration - Persona Implementation
blinking_led_pr_emma.qsf	Partial Reconfiguration - Persona Implementation

To specify the revision type:

1. Click **Project ► Revisions**. The **Revisions** dialog box appears.
2. Select `blinking_led` in the Revision Name column, and click **Set Current**.
3. Click **Apply**. The `blinking_led` revision opens.
4. To set the revision type for `blinking_led`, click **Assignments ► Settings ► General**.
5. Select the **Revision Type** as **Partial Reconfiguration - Base**.
6. Similarly, set the revision types for the other ten revisions, as listed in the above table.

*Note:* You must set each revision as the current revision before assigning the revision type.



Verify that each .qsf file contains the following assignment:

```
##blinking_led.qsf
set_global_assignment -name REVISION_TYPE PR_BASE

##blinking_led_default.qsf
set_global_assignment -name REVISION_TYPE PR_SYN

##blinking_led_child_slow.qsf
set_global_assignment -name REVISION_TYPE PR_SYN

##blinking_led_child_empty.qsf
set_global_assignment -name REVISION_TYPE PR_SYN

##blinking_led_pr_alpha.qsf
set_global_assignment -name REVISION_TYPE PR_IMPL

##blinking_led_parent.qsf
set_global_assignment -name REVISION_TYPE PR_SYN

##blinking_led_parent_slow.qsf
set_global_assignment -name REVISION_TYPE PR_SYN

##blinking_led_pr_bravo.qsf
set_global_assignment -name REVISION_TYPE PR_IMPL

##blinking_led_pr_charlie.qsf
set_global_assignment -name REVISION_TYPE PR_IMPL

##blinking_led_pr_delta.qsf
set_global_assignment -name REVISION_TYPE PR_IMPL

##blinking_led_pr_emma.qsf
set_global_assignment -name REVISION_TYPE PR_IMPL
```

**Note:** Add any Fitter specific settings that you want to use in the PR implementation compile to the persona implementation revisions. The Fitter specific settings affect the fit of the persona, but do not affect the imported static region. You can also add any synthesis specific settings to individual persona synthesis revisions.

### **Related Links**

[Create Revisions for Personas](#)

## **Step 8: Generating the Hierarchical Partial Reconfiguration Flow Script**

To generate the hierarchical partial reconfiguration flow script:

1. From the Intel Quartus Prime command shell, create a flow template by running the following command:

```
quartus_sh --write_flow_template -flow a10_hier_partial_reconfig
```

Intel Quartus Prime generates the a10\_hier\_partial\_reconfig/flow.tcl file.

2. Rename the generated a10\_hier\_partial\_reconfig/setup.tcl.example to a10\_hier\_partial\_reconfig/setup.tcl, and modify the script to specify your partial reconfiguration project details:



- a. To define the name of the project, update the following line:

```
define_project blinking_led
```

- b. To define the base revision, update the following line:

```
define_base_revision blinking_led
```

- c. To define each of the partial reconfiguration implementation revisions, along with the PR partition names and the source revision that implements the revisions, update the following lines:

```
#####
#####
# SETUP CONFIGURATION SCRIPT
#####
# Define the name of the project.
define_project blinking_led

# Define the base revision name. This revision represents the static
# region of the design
define_base_revision blinking_led

# Define each of the partial reconfiguration implementation revisions
define_pr_impl_partition -impl_rev_name blinking_led_pr_alpha \
    -partition_name pr_partition \
    -source_rev_name blinking_led_default \
    -source_partition root_partition \
    -source_snapshot synthesized

define_pr_impl_partition -impl_rev_name blinking_led_pr_alpha \
    -partition_name pr_parent_partition \
    -source_rev_name blinking_led_parent \
    -source_partition root_partition \
    -source_snapshot synthesized

define_pr_impl_partition -impl_rev_name blinking_led_pr_bravo \
    -partition_name pr_partition \
    -source_rev_name blinking_led_child_slow \
    -source_partition root_partition \
    -source_snapshot synthesized

define_pr_impl_partition -impl_rev_name blinking_led_pr_bravo \
    -partition_name pr_parent_partition \
    -source_rev_name blinking_led_pr_alpha \
    -source_partition pr_parent_partition \
    -source_snapshot final

define_pr_impl_partition -impl_rev_name blinking_led_pr_charlie \
    -partition_name pr_partition \
    -source_rev_name blinking_led_child_empty \
    -source_partition root_partition \
    -source_snapshot synthesized

define_pr_impl_partition -impl_rev_name blinking_led_pr_charlie \
    -partition_name pr_parent_partition \
    -source_rev_name blinking_led_pr_alpha \
    -source_partition pr_parent_partition \
    -source_snapshot final

define_pr_impl_partition -impl_rev_name blinking_led_pr_delta \
    -partition_name pr_partition \
    -source_rev_name blinking_led_child_slow \
    -source_partition root_partition \
    -source_snapshot synthesized

define_pr_impl_partition -impl_rev_name blinking_led_pr_delta \
    -partition_name pr_parent_partition \
```



```
-source_rev_name blinking_led_parent_slow \  
-source_partition root_partition \  
-source_snapshot synthesized  
  
define_pr_impl_partition -impl_rev_name blinking_led_pr_emma \  
-partition_name pr_partition \  
-source_rev_name blinking_led_child_empty \  
-source_partition root_partition \  
-source_snapshot synthesized  
  
define_pr_impl_partition -impl_rev_name blinking_led_pr_emma \  
-partition_name pr_parent_partition \  
-source_rev_name blinking_led_pr_delta \  
-source_partition pr_parent_partition
```

**Note:** All the revision projects must be in the same directory as `blinking_led.qpf`. Otherwise, update the flow script accordingly.

## Step 9: Running the Hierarchical Partial Reconfiguration Flow Script

To run the hierarchical partial reconfiguration flow script:

1. Click **Tools ► Tcl Scripts**. The **Tcl Scripts** dialog box appears.
2. Click **Add to Project**, browse and select the `a10_hier_partial_reconfig/flow.tcl`.
3. Select the `a10_hier_partial_reconfig/flow.tcl` in the Libraries pane, and click **Run**.  
This script runs the synthesis for the three personas. Intel Quartus Prime generates a SRAM Object File (`.sof`), a Partial-Masked SRAM Object File (`.pmsf`), and a Raw Binary File (`.rbf`) for each of the personas.

**Note:** To run the script from the Intel Quartus Prime command shell, type the following command:

```
quartus_sh -t a10_hier_partial_reconfig/flow.tcl -setup_script \  
a10_hier_partial_reconfig/setup.tcl
```

### Related Links

- [Compile the Partial Reconfiguration Design](#)
- [Using the Partial Reconfiguration Flow Script](#)
- [Configuring the Partial Reconfiguration Flow Script](#)
- [Generate Programming Files](#)

## Step 10: Programming the Board

### Before you begin:

1. Connect the power supply to the Arria 10 GX FPGA development board.
2. Connect the USB Blaster cable between your PC USB port and the USB Blaster port on the development board.


**Note:** This tutorial utilizes the Arria 10 GX FPGA development board on the bench, outside of the PCIe slot in your host machine.



To run the design on the Arria 10 GX FPGA development board:

1. Open the Intel Quartus Prime software and click **Tools ► Programmer**.
2. In the Programmer, click **Hardware Setup** and select **USB-Blaster**.
3. Click **Auto Detect** and select the device, **10AX115S2**.
4. Click **OK**. The Intel Quartus Prime software detects and updates the Programmer with the three FPGA chips on the board.
5. Select the 10AX115S2 device, click **Change File** and load the `blinking_led_pr_alpha.sof` file.
6. Enable **Program/Configure** for `blinking_led_pr_alpha.sof` file.
7. Click **Start** and wait for the progress bar to reach 100%.
8. Observe the LEDs on the board blinking at the same frequency as the original flat design.
9. To program only the child PR region, right-click the `blinking_led_pr_alpha.sof` file in the Programmer and click **Add PR Programming File**.
10. Select the `blinking_led_pr_bravo.pr_parent_partition.pr_partition.rbf` file.
11. Disable **Program/Configure** for `blinking_led_pr_alpha.sof` file.
12. Enable **Program/Configure** for `blinking_led_pr_bravo.pr_parent_partition.pr_partition.rbf` file and click **Start**. On the board, observe LED[0] and LED[1] continuing to blink. When the progress bar reaches 100%, LED[2] blinks at the same rate, and LED[3] blinks slower.
13. To program both the parent and child PR region, right-click the `.rbf` file in the Programmer and click **Change PR Programming File**.
14. Select the `blinking_led_pr_delta.pr_parent_partition.rbf` file.
15. Click **Start**. On the board, observe that LED[0] and LED[1] continuing to blink. When the progress bar reaches 100%, both LED[2] and LED[3] blink slower.
16. Repeat the above steps to dynamically re-program just the child PR region, or both the parent and child PR regions simultaneously.

**Figure 9. Programming the Arria 10 GX FPGA Development Board**

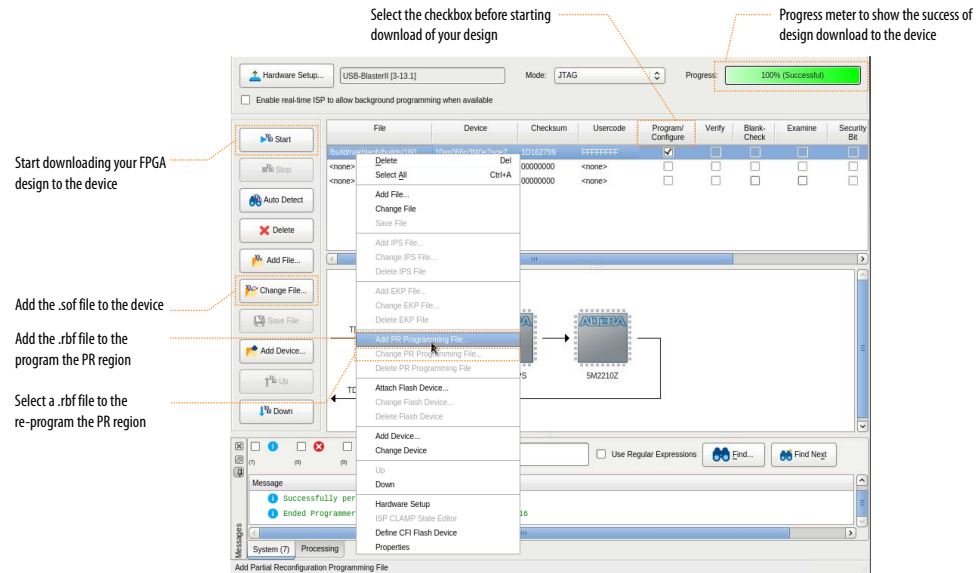

## Modifying an Existing Persona

You can change an existing persona, even after fully compiling the base revision.

For example, to cause the `blinking_led_child_slow` persona to blink even slower:

1. In the `blinking_led_child_slow.sv` file, modify the `COUNTER_TAP` parameter from 27 to 28.
2. To re-synthesize and re-implement this persona, you must recompile all the synthesis-only revisions and implementation revisions affected by the change. Modify the `setup.tcl` script to include the following lines:

```
define_project blinking_led

define_base_revision blinking_led

define_pr_impl_partition -impl_rev_name blinking_led_pr_bravo \
    -partition_name pr_partition \
    -source_rev_name blinking_led_child_slow \
    -source_partition root_partition \
    -source_snapshot synthesized

define_pr_impl_partition -impl_rev_name blinking_led_pr_bravo \
    -partition_name pr_parent_partition \
    -source_rev_name blinking_led_pr_alpha \
    -source_partition pr_parent_partition \
    -source_snapshot final

define_pr_impl_partition -impl_rev_name blinking_led_pr_delta \
    -partition_name pr_partition \
    -source_rev_name blinking_led_child_slow \
    -source_partition root_partition \
    -source_snapshot synthesized

define_pr_impl_partition -impl_rev_name blinking_led_pr_delta \
    -partition_name pr_parent_partition \
```





```
-source_rev_name blinking_led_pr_delta \  
-source_partition pr_parent_partition \  
-source_snapshot final
```

**Note:** When defining the `pr_parent_partition` for `blinking_led_pr_delta` revision, you import the final snapshot of that persona for implementation. As a result, the implementation of the parent partition logic remains the same, while modifying and implementing the corresponding child partition.

This command re-synthesizes the `blinking_led_child_slow` synthesis revision, and then runs the PR implementation compile using `blinking_led_pr_bravo`.

3. To perform compilation of the synthesis-only revisions, run the following command:

```
quartus_sh -t a10_hier_partial_reconfig/flow.tcl -setup_script \  
a10_hier_partial_reconfig/setup.tcl -all_syn
```

This command does not recompile the base revision.

4. To perform compilation of the implementation revisions, run the following command:

```
quartus_sh -t a10_hier_partial_reconfig/flow.tcl -setup_script \  
a10_hier_partial_reconfig/setup.tcl -all_impl
```

This command does not recompile the base revision.

5. Follow the steps in [Step 10: Programming the Board](#) on page 22 to program the resulting RBF file into the FPGA.

**Note:** To avoid running the entire flow for every revision, define the synthesis-only revisions and implementation revisions in the `setup.tcl` script, and run the script.

## Adding a New Persona to the Design

After fully compiling your base revisions, you can still add new personas and individually compile these personas.

For example, to define a new child persona for `blinking_led_parent_slow`, that turns `led_three` off:

1. Copy `blinking_led_child_empty.sv` to `blinking_led_chdild_off.sv`.
2. In the `blinking_led_child_off.sv` file, modify the assignment, assign `led_three_on = 1'b0;` to assign `led_three_on = 1'b1;`. Ensure you change the module name from `blinking_led_child_empty` to `blinking_led_child_off`.
3. Create a new synthesis revision, `blinking_led_child_off`, by following the steps in [Creating Synthesis-Only Revisions](#) on page 17.



*Note:* The `blinking_led_child_off` revision must use the `blinking_led_child_off.sv` file.

4. Create a new implementation revision, `blinking_led_pr_foxtrot`, by following the steps in [Creating Implementation Revisions](#) on page 16.
5. Update the `a10_hier_partial_reconfig/setup.tcl` file to define the new PR implementation:

```
define_pr_impl_partition -impl_rev_name blinking_led_pr_foxtrot \  
    -partition_name pr_partition \  
    -source_rev_name blinking_led_child_off \  
    -source_partition root_partition \  
    -source_snapshot synthesized  
  
define_pr_impl_partition -impl_rev_name blinking_led_pr_foxtrot \  
    -partition_name pr_parent_partition \  
    -source_rev_name blinking_led_pr_delta \  
    -source_partition pr_parent_partition \  
    -source_snapshot final
```

6. Compile just this new synthesis and implementation revision by running the following command:

```
quartus_sh -t a10_hier_partial_reconfig/flow.tcl -setup_script \  
    a10_hier_partial_reconfig/setup.tcl -all_syn  
  
quartus_sh -t a10_hier_partial_reconfig/flow.tcl -setup_script \  
    a10_hier_partial_reconfig/setup.tcl -all_impl
```

For complete information on hierarchical partial reconfiguration for Arria 10 devices, refer to *Creating a Partial Reconfiguration Design* in Volume 1 of the *Intel Quartus Prime Pro Edition Handbook*.

### Related Links

- [Creating a Partial Reconfiguration Design](#)
- [Partial Reconfiguration Online Training](#)

## Document Revision History

**Table 5. Document Revision History**

Document Version	Software Version	Changes
2017.11.06	17.1.0	<ul style="list-style-type: none"><li>• Updated the <i>Reference Design Requirements</i> section with software version</li><li>• Updated the <i>Flat Reference Design without PR Partitioning</i> figure with design block changes</li><li>• Updated the <i>Reference Design Files</i> table with information on the <code>Top_counter.sv</code> module</li><li>• Updated the <i>Partial Reconfiguration IP Core Integration</i> figure with design block changes</li><li>• Updated the figures - <i>Design Partitions Window</i> and <i>Logic Lock Regions Window</i> to reflect the new GUI</li><li>• File name changes</li><li>• Text edits</li></ul>
2017.05.08	17.0.0	Initial release of the document