Spring 2011

信號與系統
Signals and Systems

Chapter SS-4
The Continuous-Time Fourier Transform

Feng-Li Lian
NTU-EE
Feb11 – Jun11

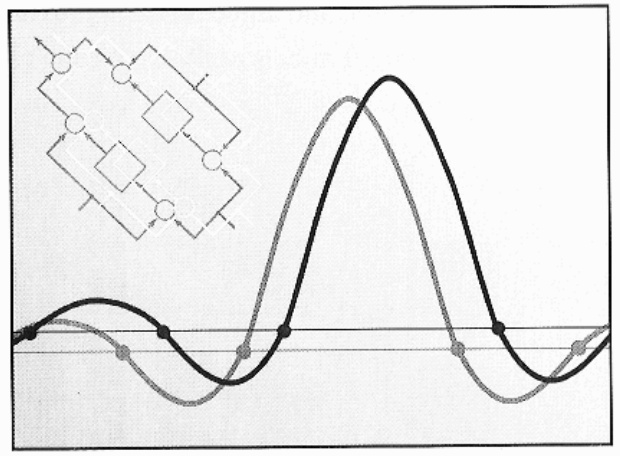

Figures and images used in these lecture notes are adopted from
"Signals & Systems" by Alan V. Oppenheim and Alan S. Willsky, 1997

Outline

- Representation of Aperiodic Signals:
  the Continuous-Time Fourier Transform
- The Fourier Transform for Periodic Signals
- Properties
  of the Continuous-Time Fourier Transform
- The Convolution Property
- The Multiplication Property
- Systems Characterized by
  Linear Constant-Coefficient Differential Equations

- Example 3.5: $a_k = \frac{1}{T}\int_T x(t)e^{-jkw_0t}dt = \frac{1}{T}\int_T x(t)e^{-jk(2\pi/T)t}dt$

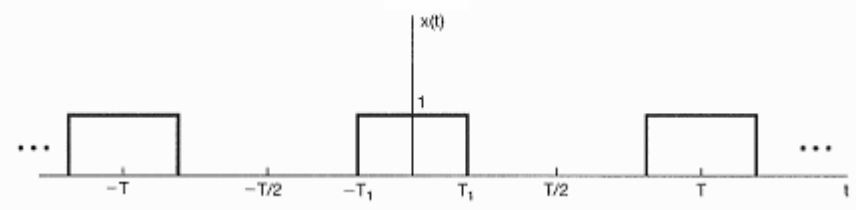

$$x(t) = \begin{cases} 1, & |t| < T_1 \\ 0, & T_1 < |t| < T/2 \end{cases}$$

$k = 0 \quad a_0 = \frac{1}{T}\int_{-T_1}^{T_1} dt = \frac{2T_1}{T}$

$k \neq 0 \quad a_k = \frac{1}{T}\int_{-T_1}^{T_1} e^{-jkw_0t}dt = \frac{1}{T}\frac{1}{(-jkw_0)}e^{-jkw_0t}\Big|_{-T_1}^{T_1}$

$$= \frac{1}{jkw_0T}\left[e^{jkw_0T_1} - e^{-jkw_0T_1}\right] /$$

$w_0 = \frac{2\pi}{T}$

$$= \frac{2\sin(kw_0T_1)}{kw_0T} = \frac{\sin(kw_0T_1)}{k\pi} = \frac{\sin(k(2\pi/T)T_1)}{k\pi}, \quad k \neq 0$$

- Example 3.5: $T\ a_k = T\ \dfrac{\sin(k2\pi\frac{T_1}{T})}{k\pi}$ $\quad Ta_k = T\ \dfrac{\sin(k\frac{\pi}{2})}{k\pi}$

$T = 4T_1$ $\quad w_0 = \dfrac{2\pi}{4T_1} = \dfrac{\pi}{2T_1}$ $\quad Ta_k$



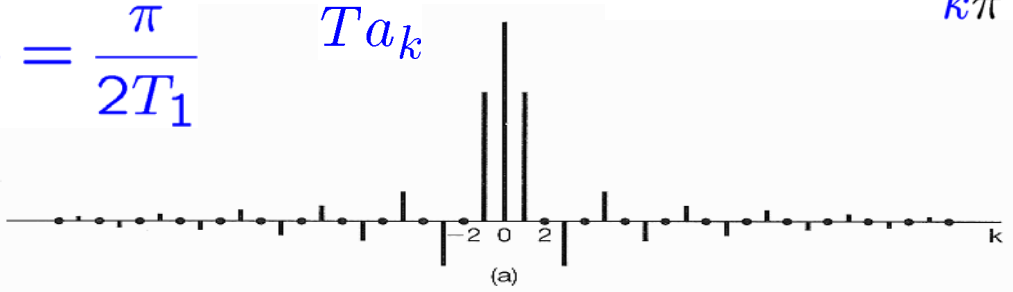

(a)

$Ta_k = T\ \dfrac{\sin(k\frac{\pi}{4})}{k\pi}$

$T = 8T_1$ $\quad w_0 = \dfrac{2\pi}{8T_1} = \dfrac{\pi}{4T_1}$ $\quad Ta_k$



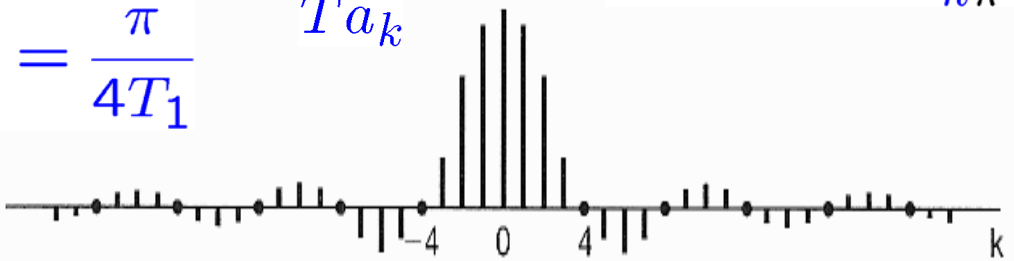

(b)

$T = 16T_1$ $\quad w_0 = \dfrac{2\pi}{16T_1} = \dfrac{\pi}{8T_1}$ $\quad Ta_k$ $\quad Ta_k = T\ \dfrac{\sin(k\frac{\pi}{8})}{k\pi}$



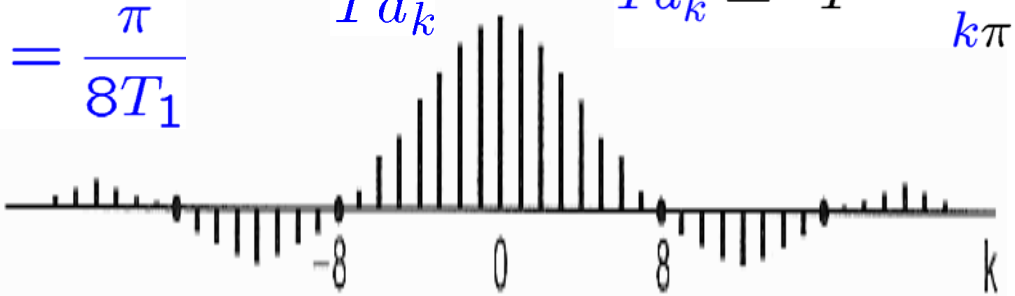

- Example 3.5:

$$Ta_k = T\,\frac{2\sin(kw_0T_1)}{kw_0T}$$

$$= T_1\,\frac{2\sin(kw_0T_1)}{kw_0T_1}$$

$$w_0 = \frac{2\pi}{T}$$

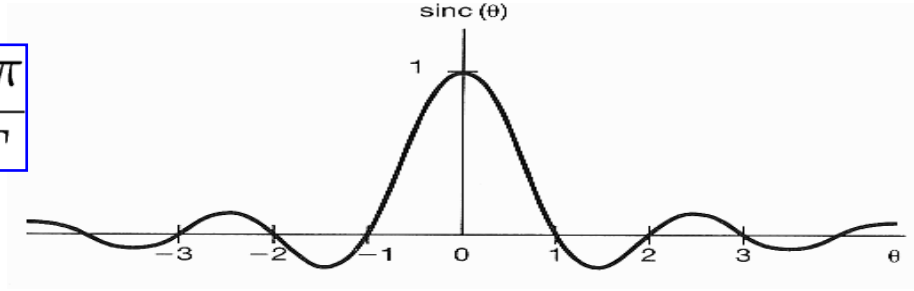

$T = 4T_1$



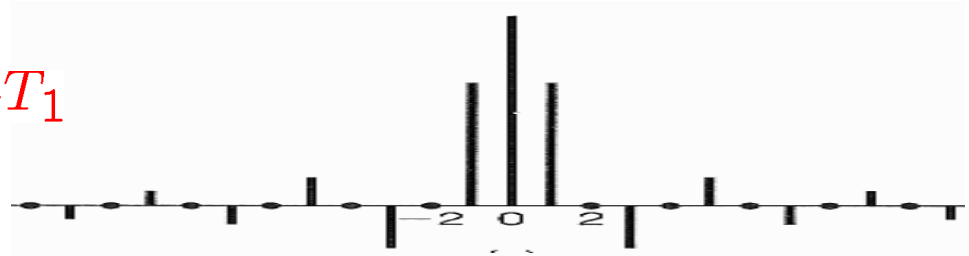

$T = 8T_1$

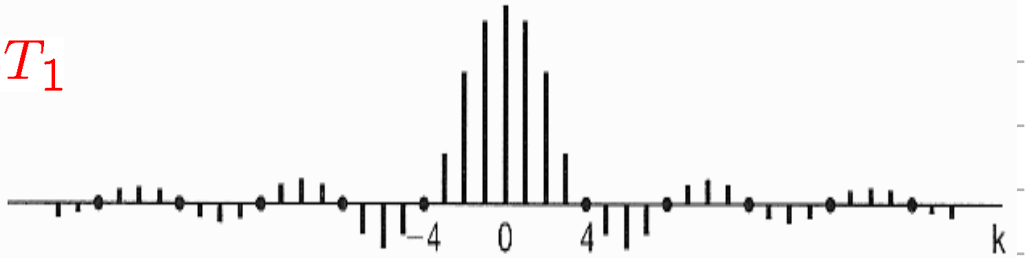

$T = 16T_1$



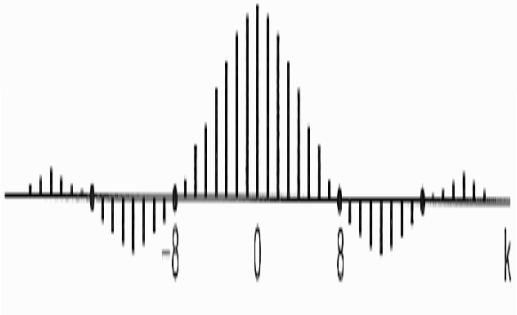

Feng-Li Lian © 2011
NTUEE-SS4-CTFT-6

Page 193, Ex 3.5

- CT Fourier Transform of an Aperiodic Signal:

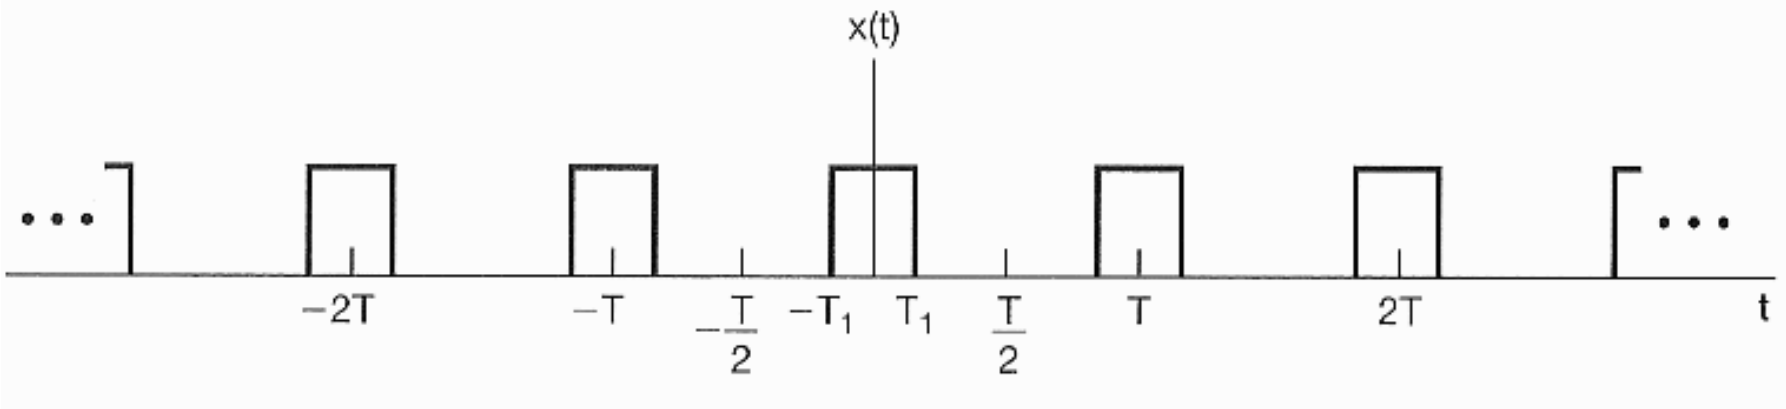

$$x(t) = \begin{cases} 1, & |t| < T_1 \\ 0, & T_1 < |t| < T/2 \end{cases}$$

$$a_k = \frac{2\sin(kw_0T_1)}{kw_0T}$$

Fourier series coefficients

$$Ta_k = \left.\frac{2\sin(wT_1)}{w}\right|_{w=kw_0}$$

w as a continuous variable

Representation of Aperiodic Signals: CT Fourier Transform

$$Ta_k = \frac{2\sin(wT_1)}{w}$$

$$w = kw_0 = k\frac{2\pi}{T}$$

$$w_0 = \frac{2\pi}{T}$$

$T = 4T_1$ Ta_k $w_0 = \frac{2\pi}{4T_1} = \frac{\pi}{2T_1}$

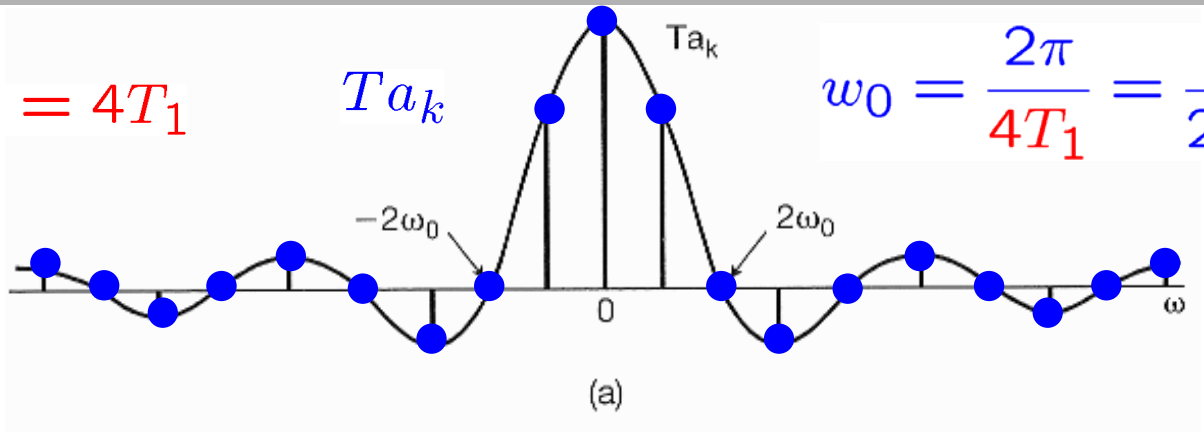

$T = 8T_1$ Ta_k $w_0 = \frac{2\pi}{8T_1} = \frac{\pi}{4T_1}$

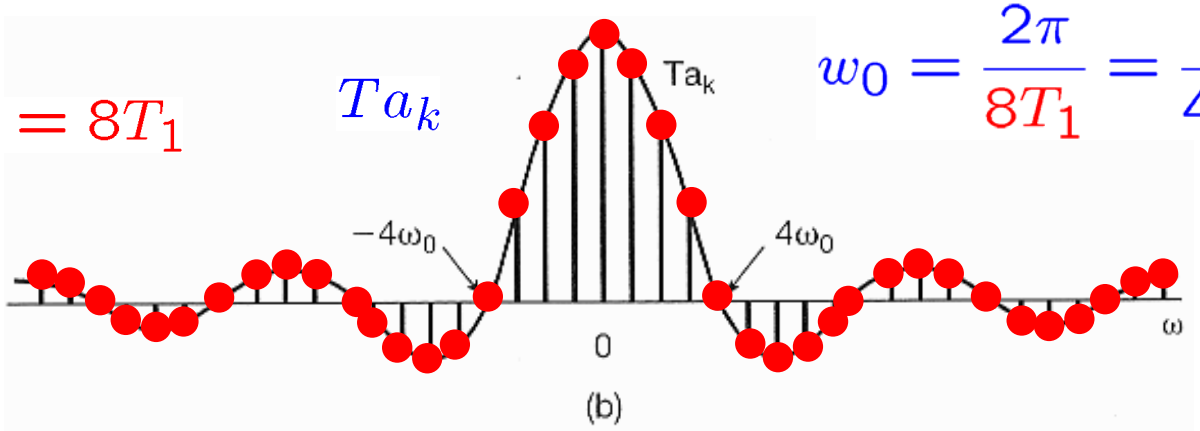

$T = 16T_1$ Ta_k $w_0 = \frac{2\pi}{16T_1} = \frac{\pi}{8T_1}$

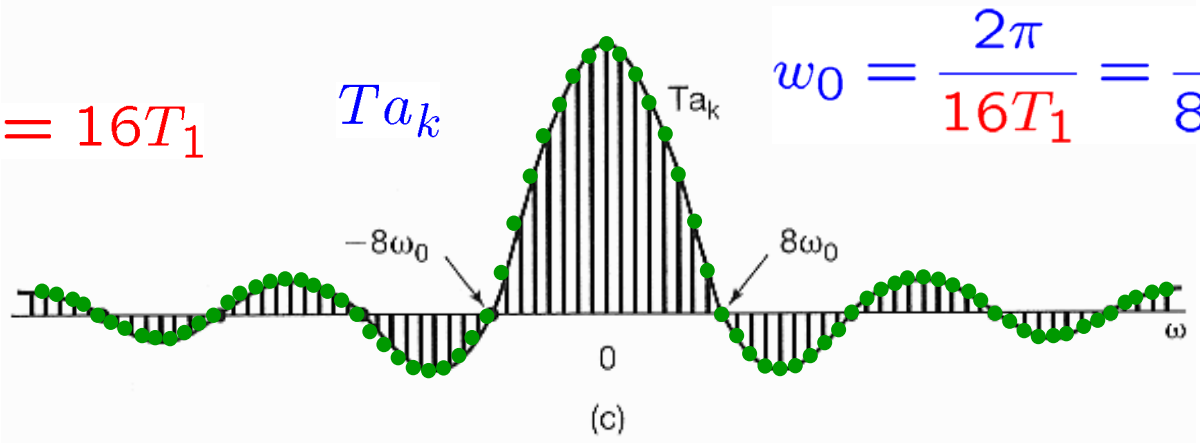

$$w = kw_0 = k\frac{2\pi}{T}$$

$$T \to \infty \Rightarrow \{Ta_k\} \to \left.\frac{2\sin(wT_1)}{w}\right|_{w=kw_0}$$

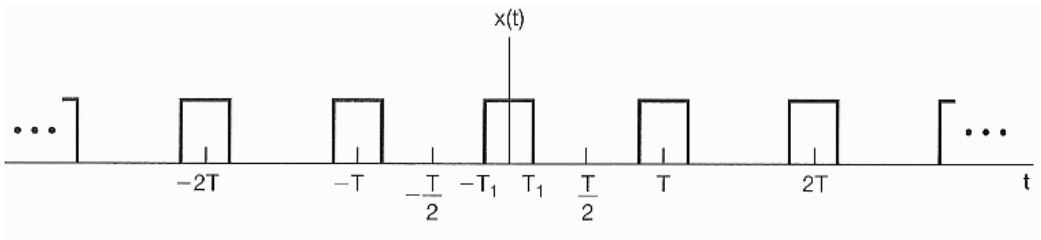

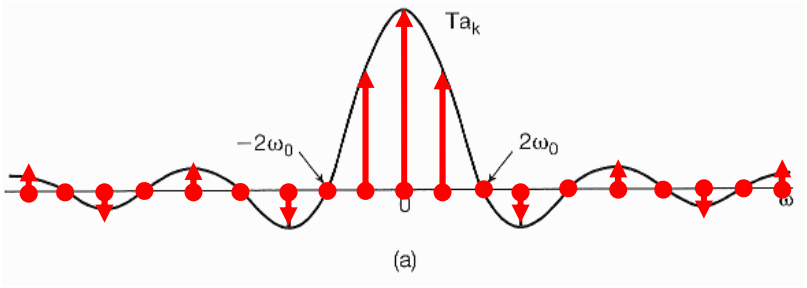

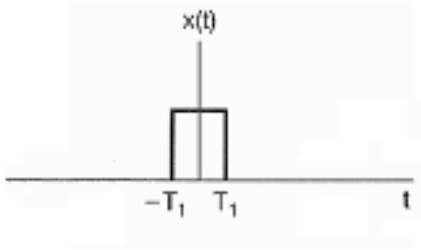

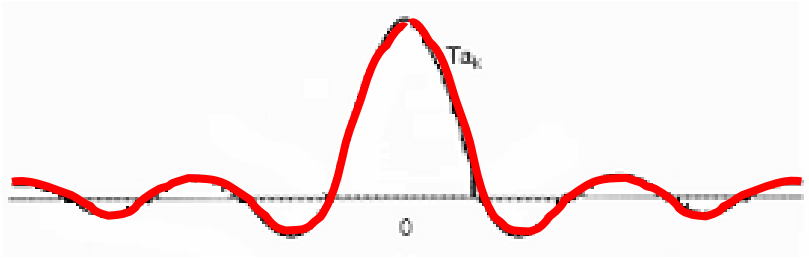

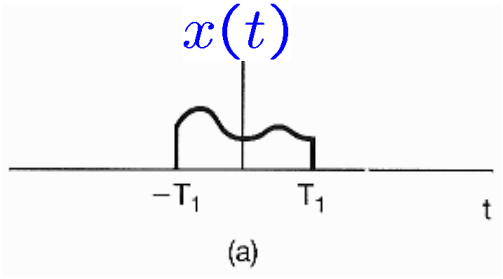

an aperiodic signal

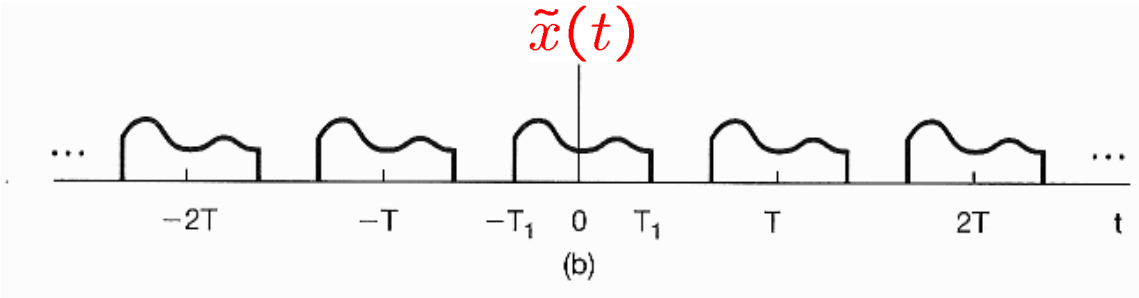

a periodic signal

$$\tilde{x}(t) = \sum_{k=-\infty}^{+\infty} a_k e^{jkw_0 t}$$

$$a_k = \frac{1}{T}\int_{-T/2}^{T/2} \tilde{x}(t) e^{-jkw_0 t} dt$$

$$\Rightarrow a_k = \frac{1}{T}\int_{-T/2}^{T/2} x(t) e^{-jkw_0 t} dt = \frac{1}{T}\int_{-\infty}^{+\infty} x(t) e^{-jkw_0 t} dt$$

- Define the envelope $X(jw)$ of Ta_k as

$$Ta_k = \frac{2\sin(wT_1)}{w}$$

$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

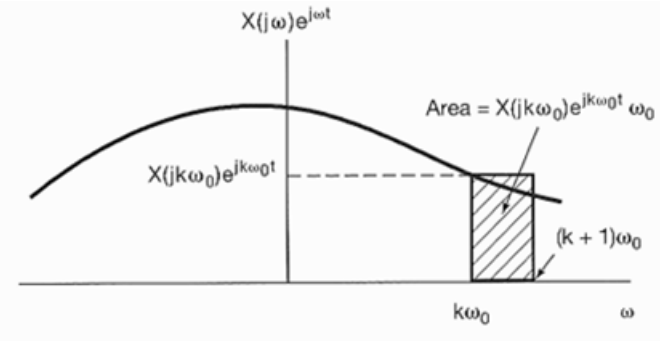

- Then,

$$a_k = \frac{1}{T}X(jkw_0)$$

- Hence,

$$\tilde{x}(t) = \sum_{k=-\infty}^{+\infty} \frac{1}{T}\, X(jkw_0)\, e^{jkw_0 t}$$

$$= \frac{1}{2\pi} \sum_{k=-\infty}^{+\infty} X(jkw_0)\, e^{jkw_0 t}\, w_0$$

$$w_0 = \frac{2\pi}{T}$$

$$\frac{1}{T} = \frac{1}{2\pi} w_0$$

- As $T \to \infty$, $\tilde{x}(t) \to x(t)$

also $w_0 \to 0$

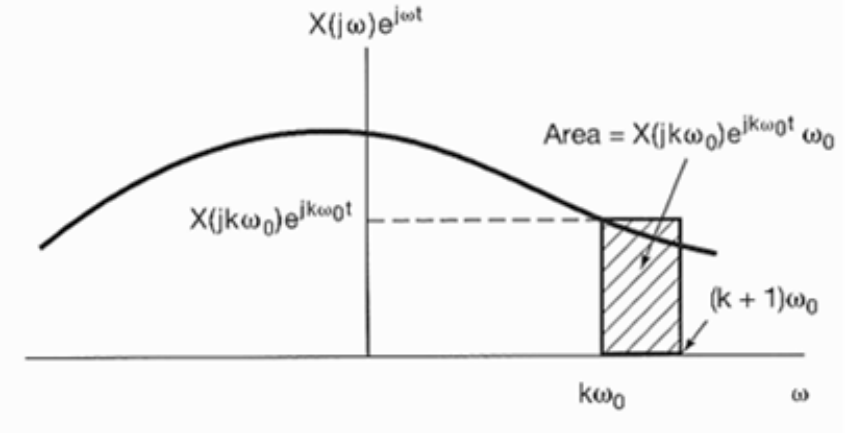

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

- inverse Fourier transform eqn

- synthesis eqn

$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

- $X(jw)$: Fourier Transform of $x(t)$ spectrum

- analysis eqn

$$a_k = \frac{1}{T}X(jw)\Big|_{w=kw_0}$$

Sufficient conditions for the convergence of FT

$$x(t) \xrightarrow{\mathcal{CTFT}} X(jw) \qquad X(jw) = \int_{-\infty}^{+\infty} x(t) e^{-jwt} dt$$

$$\hat{x}(t) \xleftarrow{\mathcal{CTIFT}} X(jw) \qquad \hat{x}(t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} X(jw) e^{jwt} dw$$

$$e(t) = \hat{x}(t) - x(t)$$

- If $x(t)$ has finite energy

  i.e., square integrable, $\int_{-\infty}^{+\infty} |x(t)|^2 dt < \infty$

  $\Rightarrow$ $X(jw)$ is finite

  $\Rightarrow$ $\int_{-\infty}^{+\infty} |e(t)|^2 dt = 0$

- Sufficient conditions for the convergence of FT
  - Dirichlet conditions:

1. x(t) be absolutely integrable; that is, $\int_{-\infty}^{+\infty} |x(t)|dt < \infty$

2. x(t) have a finite number of maxima and minima
   within any finite interval

3. x(t) have a finite number of discontinuities
   within any finite interval
   Furthermore, each of these discontinuities must be finite

- Example 4.1:

$$x(t) = e^{-at}\,u(t), \quad a > 0$$

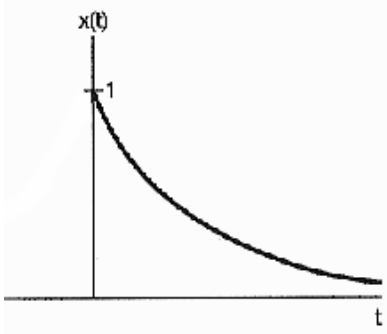

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

$$X(jw) = \int_{-\infty}^{\infty} x(t)e^{-jwt}dt$$

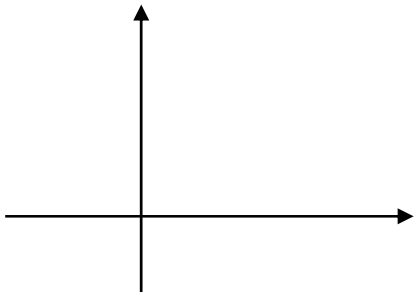

$$\Rightarrow X(jw) = \int_{-\infty}^{\infty} x(t)e^{-jwt}dt$$

$$= \int_{-\infty}^{\infty} e^{-at}\,u(t)\,e^{-jwt}dt$$

$$= \int_{0}^{\infty} e^{-at}\,e^{-jwt}dt$$

$$= \int_{0}^{\infty} e^{-(a+jw)t}\,dt$$

$$= -\frac{1}{a+jw}e^{-(a+jw)t}\Big|_0^{\infty}$$

$$= 0 - \left(-\frac{1}{a+jw}e^{-(a+jw)0}\right)$$

$$= \frac{1}{a+jw}, \quad a > 0$$

- Example 4.1:

$$\Rightarrow X(jw) = \frac{1}{a + jw}, \quad a > 0$$

$$\Rightarrow |X(jw)| = \frac{1}{\sqrt{a^2 + w^2}}$$

$$\Rightarrow \measuredangle X(jw) = -\tan^{-1}\left(\frac{w}{a}\right)$$

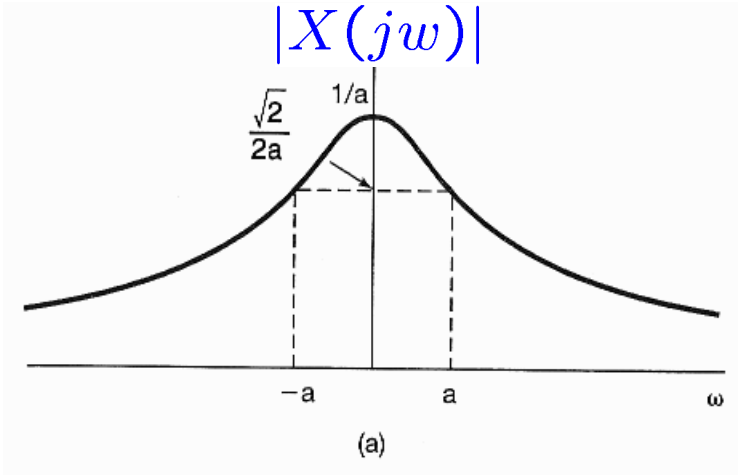

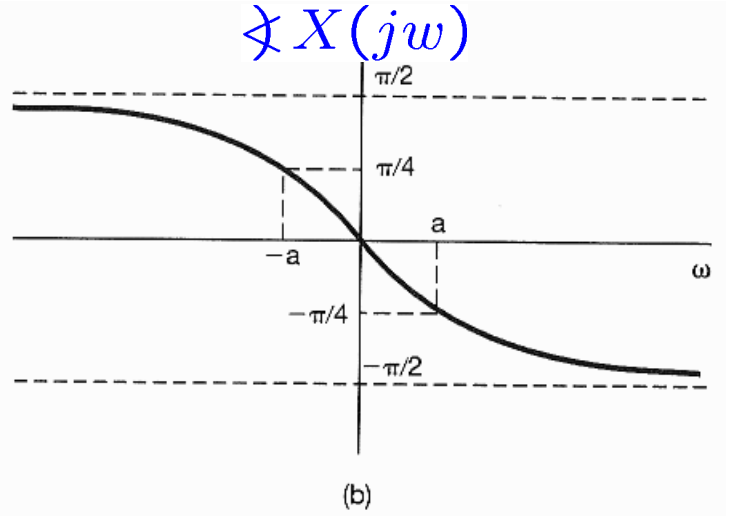

$$X(jw) = \int_{-\infty}^{\infty} x(t) e^{-jwt} dt$$

- Example 4.2:

$$x(t) = e^{-a|t|}, \quad a > 0$$

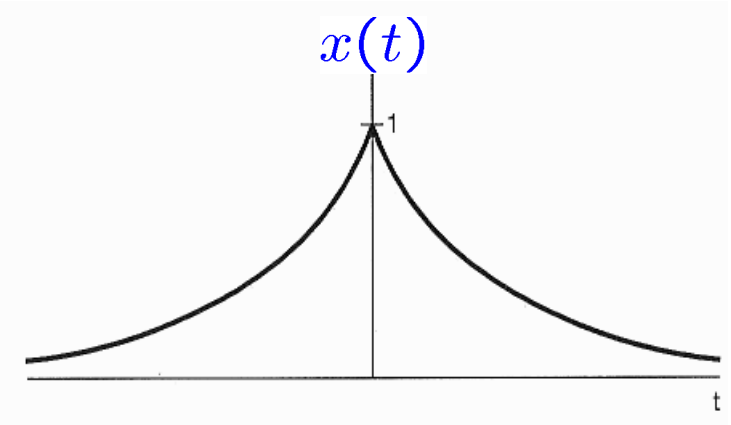

$$\Rightarrow X(jw) = \int_{-\infty}^{\infty} e^{-a|t|} e^{-jwt} dt$$

$$= \int_{-\infty}^{0} e^{at} e^{-jwt} dt + \int_{0}^{\infty} e^{-at} e^{-jwt} dt$$

$$= \frac{1}{a - jw} + \frac{1}{a + jw}$$

$$= \frac{2a}{a^2 + w^2}$$

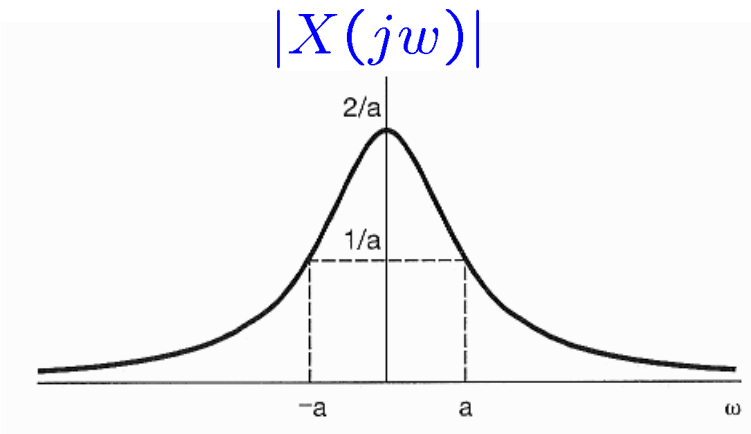

$$X(jw) = \int_{-\infty}^{\infty} x(t) e^{-jwt} dt$$

- Example 4.3:

$x(t) = \delta(t)$, i.e., unit impules

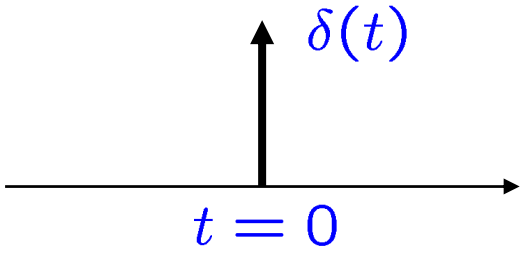

$$\Rightarrow X(jw) = \int_{-\infty}^{\infty} \delta(t)\, e^{-jwt} dt = 1$$

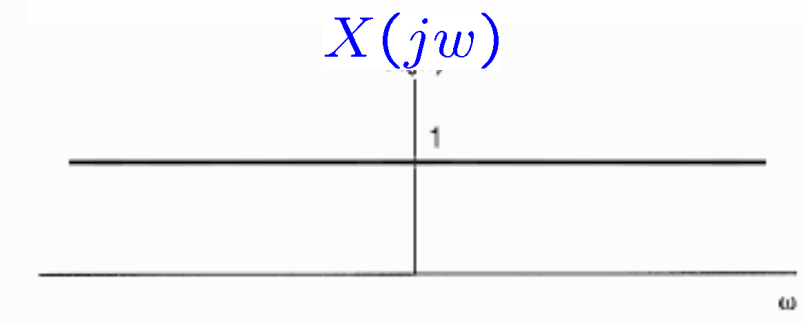

$$X(jw) = \int_{-\infty}^{\infty} x(t) e^{-jwt} dt$$

- Example 4.4:

$$x(t) = \begin{cases} 1, & |t| < T_1 \\ 0, & |t| > T_1 \end{cases}$$

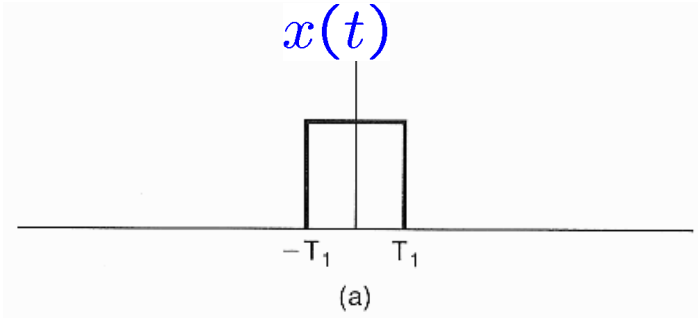

$$\Rightarrow X(jw) = \int_{-\infty}^{\infty} x(t) e^{-jwt} dt = \int_{-T_1}^{T_1} e^{-jwt} dt$$

$$= \frac{1}{-jw} e^{-jwt} \Big|_{-T_1}^{T_1}$$

$$= \frac{1}{-jw} \left(e^{-jwT_1} - e^{jwT_1} \right)$$

$$= \frac{1}{jw} \left(e^{jwT_1} - e^{-jwT_1} \right)$$

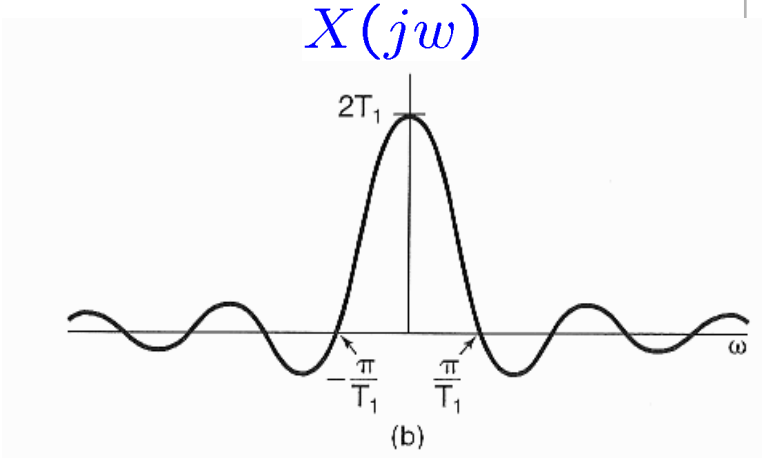

$$= 2 \frac{\sin(wT_1)}{w} = 2T_1 \frac{\sin(\pi wT_1/\pi)}{\pi wT_1/\pi)}$$

- Example 4.5:

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

$$X(jw) = \int_{-\infty}^{\infty} x(t)e^{-jwt}dt$$

$$X(jw) = \begin{cases} 1, & |w| < W \\ 0, & |w| > W \end{cases}$$

$$\Rightarrow \quad x(t) = \frac{1}{2\pi}\int_{-W}^{W} e^{jwt}dw$$

$$= \frac{\sin(Wt)}{\pi t}$$

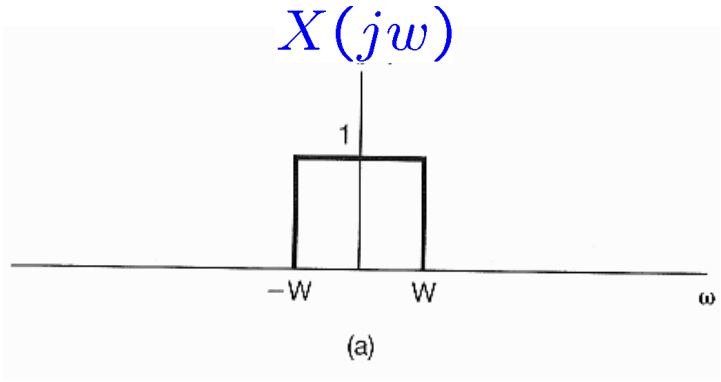

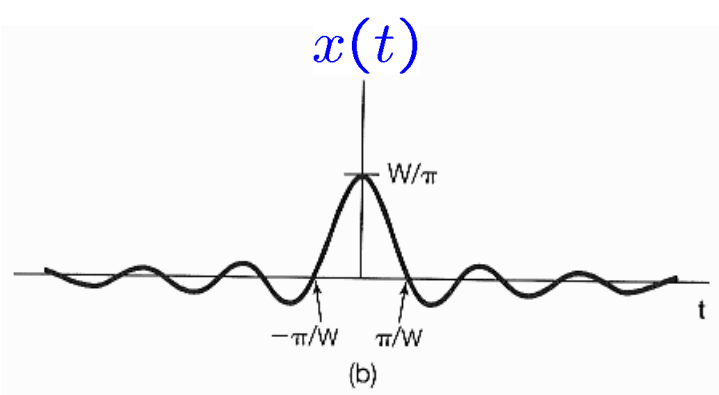

- sinc functions:

$$\text{sinc}(\theta) = \frac{\sin(\pi\theta)}{\pi\theta}$$

$$\frac{\sin(Wt)}{\pi t} = \frac{W}{\pi}\text{sinc}\left(\frac{Wt}{\pi}\right)$$

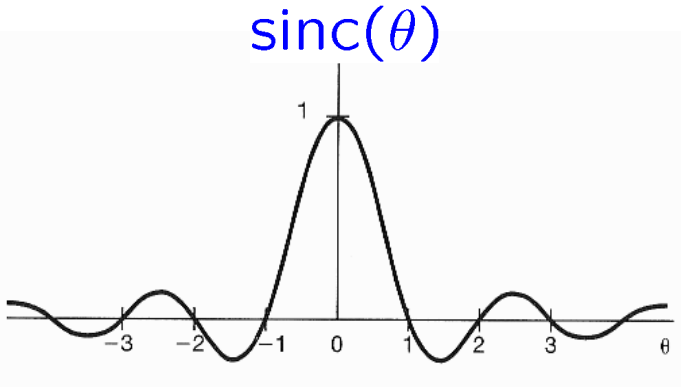

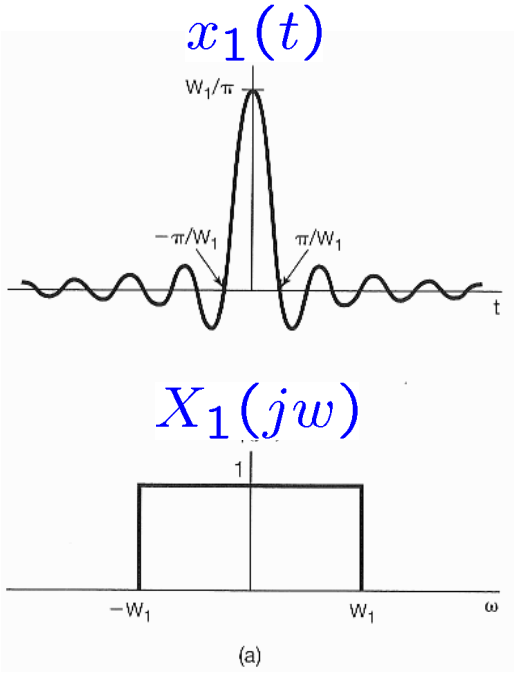

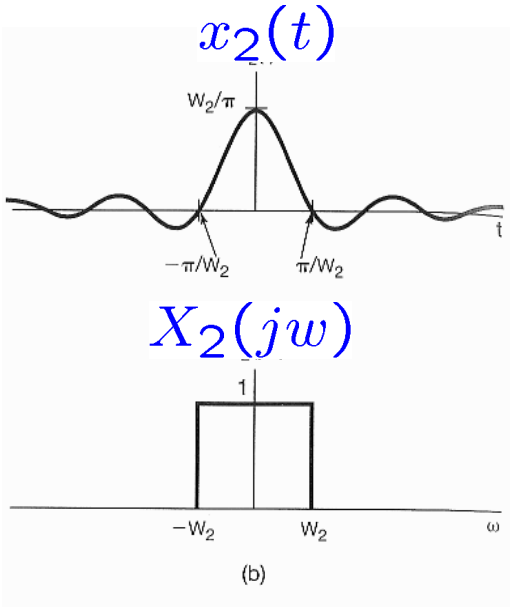

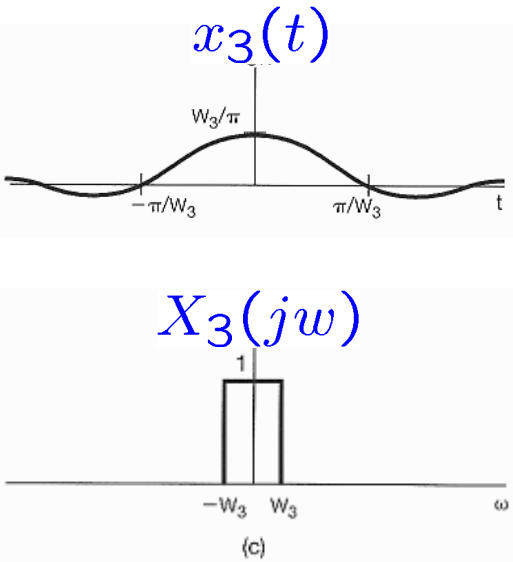

Outline

- Representation of Aperiodic Signals:
  the Continuous-Time Fourier Transform
- The Fourier Transform for Periodic Signals
- Properties
  of the Continuous-Time Fourier Transform
- The Convolution Property
- The Multiplication Property
- Systems Characterized by
  Linear Constant-Coefficient Differential Equations

Fourier Transform from Fourier Series:

$$X(jw) = 2\pi \quad \delta(w - w_0)$$

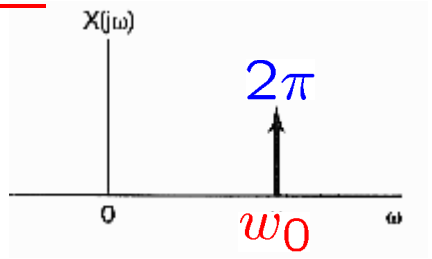

$$\Rightarrow x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} 2\pi \quad \delta(w - w_0)e^{jwt}dw$$

$$= e^{j \ w_0 t}$$

- more generally,

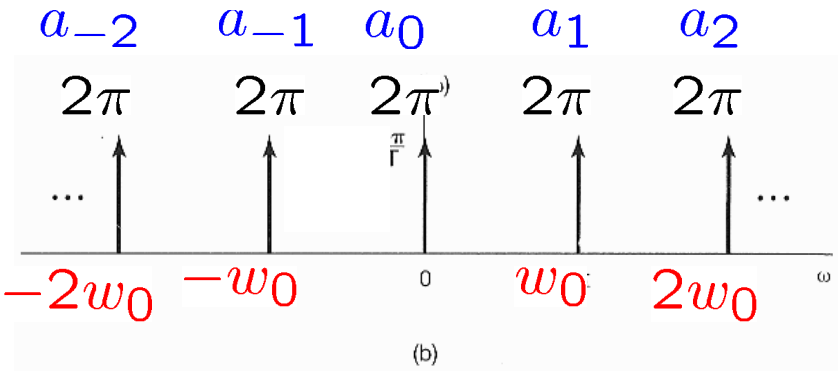

$$X(jw) = \sum_{k=-\infty}^{+\infty} 2\pi a_k \delta(w - kw_0)$$

$$\Rightarrow x(t) = \sum_{k=-\infty}^{+\infty} a_k e^{jkw_0 t}$$

Fourier series represntation of a periodic signal

- Example 4.6:

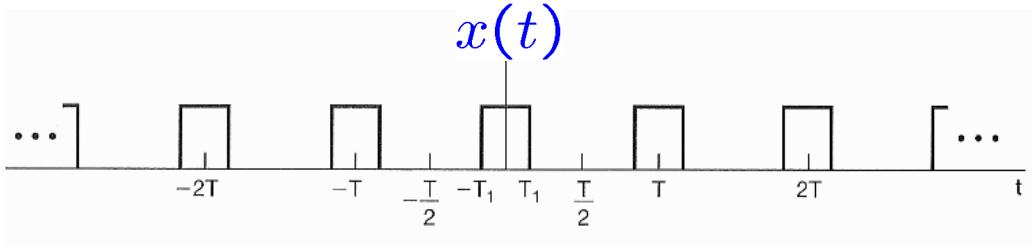

$$\Rightarrow \quad a_k = \frac{\sin(kw_0T_1)}{\pi k}$$

$$\Rightarrow \quad X(jw) = \sum_{k=-\infty}^{+\infty} 2\pi a_k \delta(w - kw_0) = \sum_{k=-\infty}^{+\infty} \frac{2\sin(kw_0T_1)}{k} \delta(w - kw_0)$$

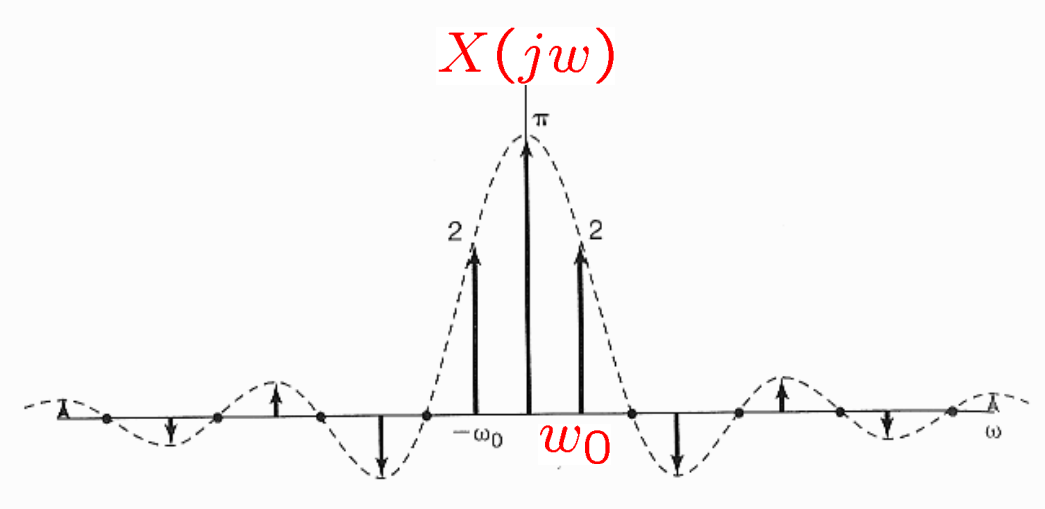

$$x(t) = \sum_{k=-\infty}^{+\infty} a_k e^{jkw_0 t}$$

- Example 4.7:

$$x(t) = \sin(w_0 t) = \frac{e^{jw_0 t} - e^{-jw_0 t}}{2j}$$

$$\Rightarrow a_1 = \frac{1}{2j} \qquad a_{-1} = -\frac{1}{2j} \qquad a_k = 0, \quad k \neq 1, -1$$

$$x(t) = \cos(w_0 t) = \frac{e^{jw_0 t} + e^{-jw_0 t}}{2}$$

$$\Rightarrow a_1 = \frac{1}{2} \qquad a_{-1} = \frac{1}{2} \qquad a_k = 0, \quad k \neq 1, -1$$

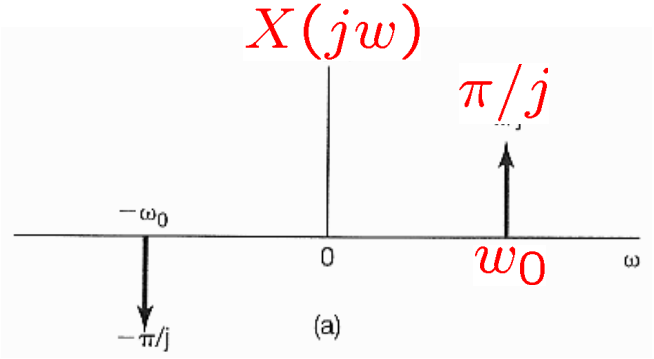

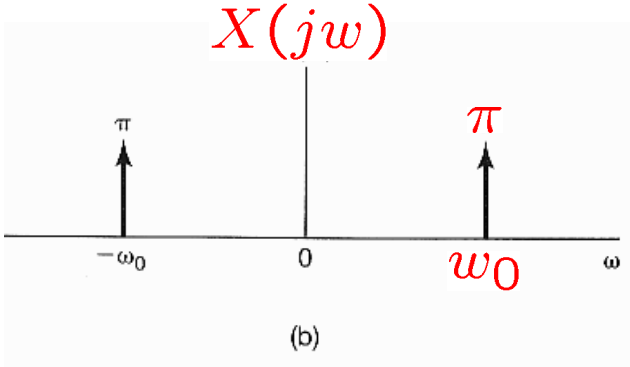

$$x(t) = \sum_{k=-\infty}^{+\infty} a_k e^{jkw_0 t}$$

$$a_k = \frac{1}{T}\int_{-T/2}^{+T/2} \tilde{x}(t) e^{-jkw_0 t} dt$$

$$X(jw) = \sum_{k=-\infty}^{+\infty} 2\pi a_k \delta(w - kw_0)$$

- Example 4.8:

$$x(t) = \sum_{k=-\infty}^{+\infty} \delta(t - kT)$$

$$\Rightarrow a_k = \frac{1}{T}\int_{-T/2}^{+T/2} \delta(t) e^{-jkw_0 t} dt = \frac{1}{T}$$

$$\Rightarrow X(jw) = \frac{2\pi}{T}\sum_{k=-\infty}^{+\infty} \delta(w - \frac{2\pi}{T}k)$$

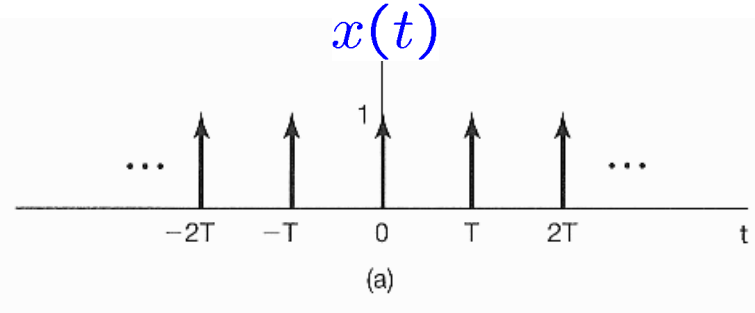

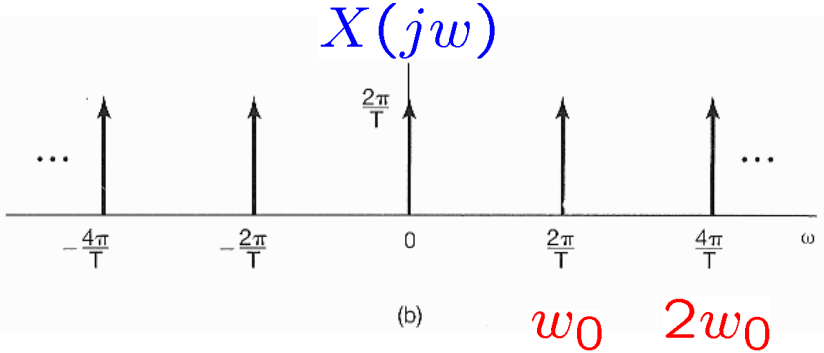

w_0 $2w_0$

Outline

- Representation of Aperiodic Signals:
  the Continuous-Time Fourier Transform
- The Fourier Transform for Periodic Signals
- Properties
  of the Continuous-Time Fourier Transform
- The Convolution Property
- The Multiplication Property
- Systems Characterized by Linear Constant-Coefficient Differential Equations

Outline

Section	Property
4.3.1	Linearity
4.3.2	Time Shifting
4.3.6	Frequency Shifting
4.3.3	Conjugation
4.3.5	Time Reversal
4.3.5	Time and Frequency Scaling
4.4	Convolution
4.5	Multiplication
4.3.4	Differentiation in Time
4.3.4	Integration
4.3.6	Differentiation in Frequency
4.3.3	Conjugate Symmetry for Real Signals
4.3.3	Symmetry for Real and Even Signals
4.3.3	Symmetry for Real and Odd Signals
4.3.3	Even-Odd Decomposition for Real Signals
4.3.7	Parseval's Relation for Aperiodic Signals

Outline

Property	CTFS	DTFS	CTFT	DTFT	LT	zT
Linearity	3.5.1		4.3.1	5.3.2	9.5.1	10.5.1
Time Shifting	3.5.2		4.3.2	5.3.3	9.5.2	10.5.2
Frequency Shifting (in s, z)			4.3.6	5.3.3	9.5.3	10.5.3
Conjugation	3.5.6		4.3.3	5.3.4	9.5.5	10.5.6
Time Reversal	3.5.3		4.3.5	5.3.6		10.5.4
Time & Frequency Scaling	3.5.4		4.3.5	5.3.7	9.5.4	10.5.5
(Periodic) Convolution			4.4	5.4	9.5.6	10.5.7
Multiplication	3.5.5	3.7.2	4.5	5.5		
Differentiation/First Difference		3.7.2	4.3.4, 4.3.6	5.3.5, 5.3.8	9.5.7, 9.5.8	10.5.7, 10.5.8
Integration/Running Sum (Accumulation)			4.3.4	5.3.5	9.5.9	10.5.7
Conjugate Symmetry for Real Signals	3.5.6		4.3.3	5.3.4		
Symmetry for Real and Even Signals	3.5.6		4.3.3	5.3.4		
Symmetry for Real and Odd Signals	3.5.6		4.3.3	5.3.4		
Even-Odd Decomposition for Real Signals			4.3.3	5.3.4		
Parseval's Relation for (A)Periodic Signals	3.5.7	3.7.3	4.3.7	5.3.9		
Initial- and Final-Value Theorems					9.5.10	10.5.9

Fourier Transform Pair:

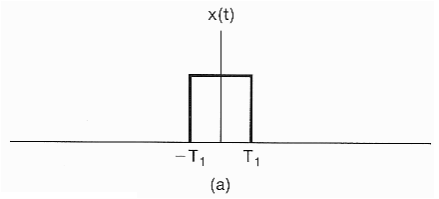

- Synthesis equation: $x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$

- Analysis equation: $X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$

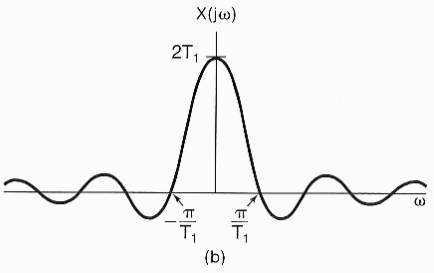

- Notations:

$$X(jw) = \mathcal{F}\{x(t)\} \qquad \frac{1}{a+jw} = \mathcal{F}\{e^{-at}u(t)\}$$

$$x(t) = \mathcal{F}^{-1}\{X(jw)\} \qquad e^{-at}u(t) = \mathcal{F}^{-1}\{\frac{1}{a+jw}\}$$

$$x(t) \overset{\mathcal{CTFT}}{\longleftrightarrow} X(jw) \qquad e^{-at}u(t) \overset{\mathcal{CTFT}}{\longleftrightarrow} \frac{1}{a+jw}$$

- Linearity:

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

$$x(t) \overset{\mathcal{F}}{\longleftrightarrow} X(jw)$$

$$y(t) \overset{\mathcal{F}}{\longleftrightarrow} Y(jw)$$

$$\Rightarrow \quad a\,x(t)+b\,y(t) \overset{\mathcal{F}}{\longleftrightarrow} a\,X(jw)+b\,Y(jw)$$

Feng-Li Lian © 2011

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$
$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

- ## Time Shifting:

$$x(t) \overset{\mathcal{F}}{\longleftrightarrow} X(jw)$$
$$\Rightarrow x(t-t_0) \overset{\mathcal{F}}{\longleftrightarrow} e^{-jwt_0}X(jw)$$

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

$$Y(jw) = \int_{-\infty}^{+\infty} x(t-t_0)e^{-jwt}dt$$

$$x(t-t_0) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jw(t-t_0)}dw$$

$$= \int_{-\infty}^{+\infty} x(\tau)e^{-jw(\tau+t_0)}d\tau$$

$$= \frac{1}{2\pi}\int_{-\infty}^{+\infty} \left(e^{-jwt_0}X(jw)\right)e^{jwt}dw$$

$$= e^{-jwt_0}\int_{-\infty}^{+\infty} x(\tau)e^{-jw\tau}d\tau$$

- Time Shift $\rightarrow$ Phase Shift:

$$\mathcal{F}\{x(t)\} = X(jw) = |X(jw)|e^{j\measuredangle X(jw)}$$

$$\mathcal{F}\{x(t-t_0)\} = e^{-jwt_0}X(jw) = |X(jw)|e^{j[\measuredangle X(jw)-wt_0]}$$

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

- Example 4.9:

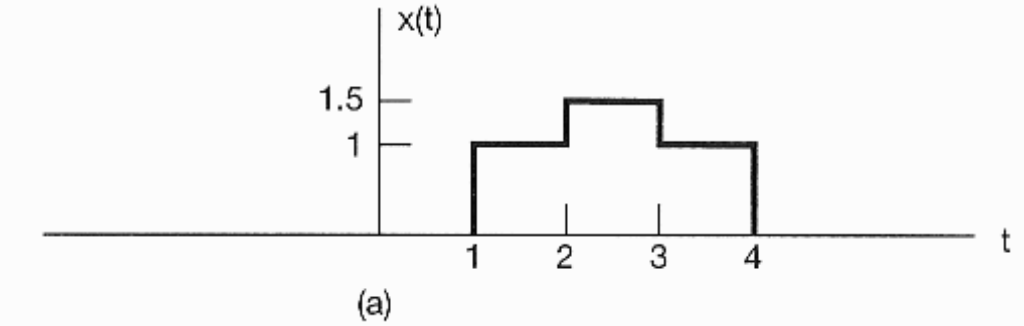



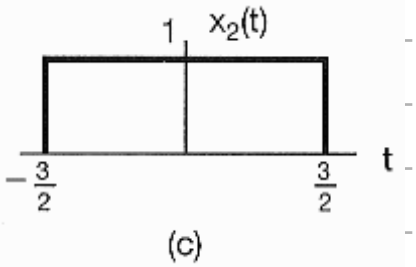

$$x(t) = \frac{1}{2}x_1(t-2.5) + x_2(t-2.5)$$

$$X_1(jw) = \frac{2\sin(w/2)}{w}$$

$$X_2(jw) = \frac{2\sin(3w/2)}{w}$$

$$\Rightarrow\ X(jw) = e^{-j5w/2}\left\{\frac{\sin(w/2)+2\sin(3w/2)}{w}\right\}$$

Feng-Li Lian © 2011

$$X(jw) = \int_{-\infty}^{+\infty} x(t) e^{-jwt} dt$$

- ## Conjugation & Conjugate Symmetry:

$$x(t) \overset{\mathcal{F}}{\longleftrightarrow} X(jw)$$

$$x(t)^* \overset{\mathcal{F}}{\longleftrightarrow} X^*(-jw)$$

$$x(t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} X(jw) e^{jwt} dw$$

$$= \frac{1}{2\pi} \int_{\infty}^{\infty} X(\ \ j\bar{w}) e^{j\bar{w}t} \ \ d\bar{w}$$

$$= \frac{1}{2\pi} \int_{-\infty}^{+\infty} X(jw) \ \ e^{jwt} \ \ dw$$

$$= \frac{1}{2\pi} \int_{-\infty}^{+\infty} X(\ \ j\bar{w}) e^{j\bar{w}t} d\bar{w}$$

$$= \frac{1}{2\pi} \int_{-\infty}^{+\infty} X(jw) \ \ e \ \ ^{jwt} dw$$

Conjugation & Conjugate Symmetry:

$$x(t) \overset{\mathcal{F}}{\longleftrightarrow} X(jw)$$

$$x(t)^* \overset{\mathcal{F}}{\longleftrightarrow} X^*(-jw)$$

- $x(t) = x^*(t) \Rightarrow X(-jw) = X^*(jw)$

  $x(t)$ is real $\Rightarrow$ $X(jw)$ is conjugate symmetric

- $x(t) = x^*(t)$ & $x(-t) = x(t)$

  $\Rightarrow X(-jw) = X^*(jw)$ & $X(-jw) = X(jw)$

  $\Rightarrow X(jw) = X^*(jw)$

  $x(t)$ is real & even $\Rightarrow$ $X(jw)$ are real & even

- $x(t)$ is real & odd $\Rightarrow$ $X(jw)$ are purely imaginary & odd

Conjugation & Conjugate Symmetry:

If $x(t)$ is a real function

$$x(t) = \mathcal{E}v\{x(t)\} + \mathcal{O}d\{x(t)\} = x_e(t) + x_o(t)$$

$$\Rightarrow \mathcal{F}\{x(t)\} = \mathcal{F}\{x_e(t)\} + \mathcal{F}\{x_o(t)\}$$

$$\Rightarrow \mathcal{F}\{x_e(t)\} : \text{ a real function}$$

$$\Rightarrow \mathcal{F}\{x_o(t)\} : \text{ a purely imaginary function}$$

$$x(t) \overset{\mathcal{F}}{\longleftrightarrow} X(jw)$$

$$\mathcal{E}v\{x(t)\} \overset{\mathcal{F}}{\longleftrightarrow} \mathcal{R}e\{X(jw)\}$$

$$\mathcal{O}d\{x(t)\} \overset{\mathcal{F}}{\longleftrightarrow} j\,\mathcal{I}m\{X(jw)\}$$

- Example 4.10:



Ex 4.1 $$e^{-at}u(t) \overset{\mathcal{F}}{\longleftrightarrow} \frac{1}{a+jw}$$

Ex 4.2 $$e^{-a|t|} \overset{\mathcal{F}}{\longleftrightarrow} ?$$

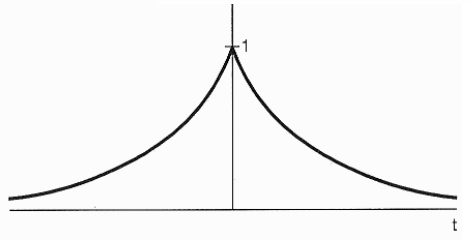

$$x(t) = e^{-a|t|} = e^{-at}u(t) + e^{at}u(-t)$$

$$= 2\left[\frac{e^{-at}u(t) + e^{at}u(-t)}{2}\right] \qquad = 2\mathcal{E}v\left\{e^{-at}u(t)\right\}$$

$$\mathcal{E}v\left\{e^{-at}u(t)\right\} \overset{\mathcal{F}}{\longleftrightarrow} \mathcal{R}e\left\{\frac{1}{a+jw}\right\}$$

$$\mathcal{O}d\left\{e^{-at}u(t)\right\} \overset{\mathcal{F}}{\longleftrightarrow} j\,\mathcal{I}m\left\{\frac{1}{a+jw}\right\}$$

$$X(jw) = 2\mathcal{R}e\left\{\frac{1}{a+jw}\right\} = \frac{2a}{a^2+w^2}$$

Feng-Li Lian © 2011

- Differentiation & Integration:

$$X(jw) = \int_{-\infty}^{+\infty} x(t) e^{-jwt} dt$$

$$x(t) \overset{\mathcal{F}}{\longleftrightarrow} X(jw) \qquad x(t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} X(jw) e^{jwt} dw$$

$$\frac{d}{dt} x(t) \overset{\mathcal{F}}{\longleftrightarrow} jwX(jw)$$

$$= \frac{1}{2\pi} \int_{-\infty}^{+\infty} X(jw) \quad e^{jwt} \quad dw$$

$$= \frac{1}{2\pi} \int_{-\infty}^{+\infty} X(jw) \quad e^{jwt} \quad dw$$

$$\int_{-\infty}^{t} x(\tau) d\tau \overset{\mathcal{F}}{\longleftrightarrow} \frac{1}{jw} X(jw) + \pi X(0) \delta(w)$$

dc or average value

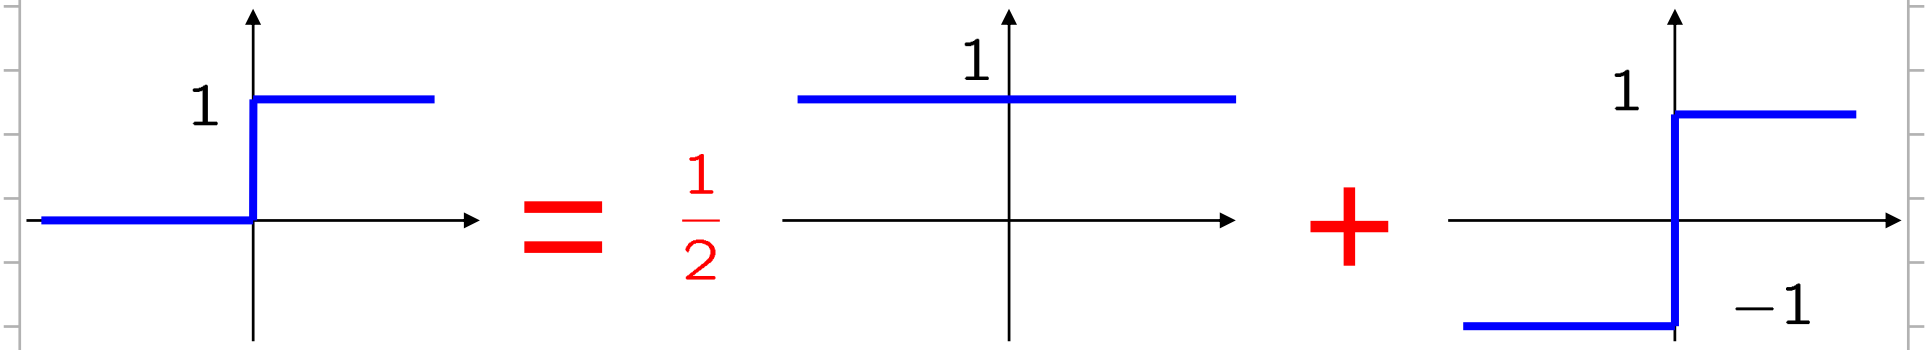

$u(t)$ $\quad \frac{1}{2} \quad 1(t)$ $\quad$ sgn(t)

$$1 \overset{\mathcal{FT}}{\longleftrightarrow} 2\pi\delta(jw) \qquad \text{sgn(t)} \overset{\mathcal{FT}}{\longleftrightarrow} S(jw)$$

$$\frac{d}{dt}\,\text{sgn(t)} \overset{\mathcal{FT}}{\longleftrightarrow} jw\,S(jw)$$

$$\Rightarrow U(jw) =$$

$$2\,\delta(t) \overset{\mathcal{FT}}{\longleftrightarrow} jw\,S(jw)$$

$$\delta(t) \overset{\mathcal{FT}}{\longleftrightarrow} 1$$

$$\Rightarrow S(jw) =$$

- Example 4.11:

$$x(t) = u(t) \overset{\mathcal{F}}{\longleftrightarrow} X(jw) = ?$$

$$g(t) = \delta(t) \overset{\mathcal{F}}{\longleftrightarrow} G(jw) = 1$$

$$x(t) = \int_{-\infty}^{t} g(\tau)d\tau$$

$$X(jw) = \frac{1}{jw}G(jw) + \pi G(0)\delta(w)$$

$$= \frac{1}{jw} + \pi\delta(w)$$

$$\delta(t) = \frac{d}{dt}u(t) \overset{\mathcal{F}}{\longleftrightarrow} jw\left[\frac{1}{jw} + \pi\delta(w)\right] = 1$$

- Example 4.12:

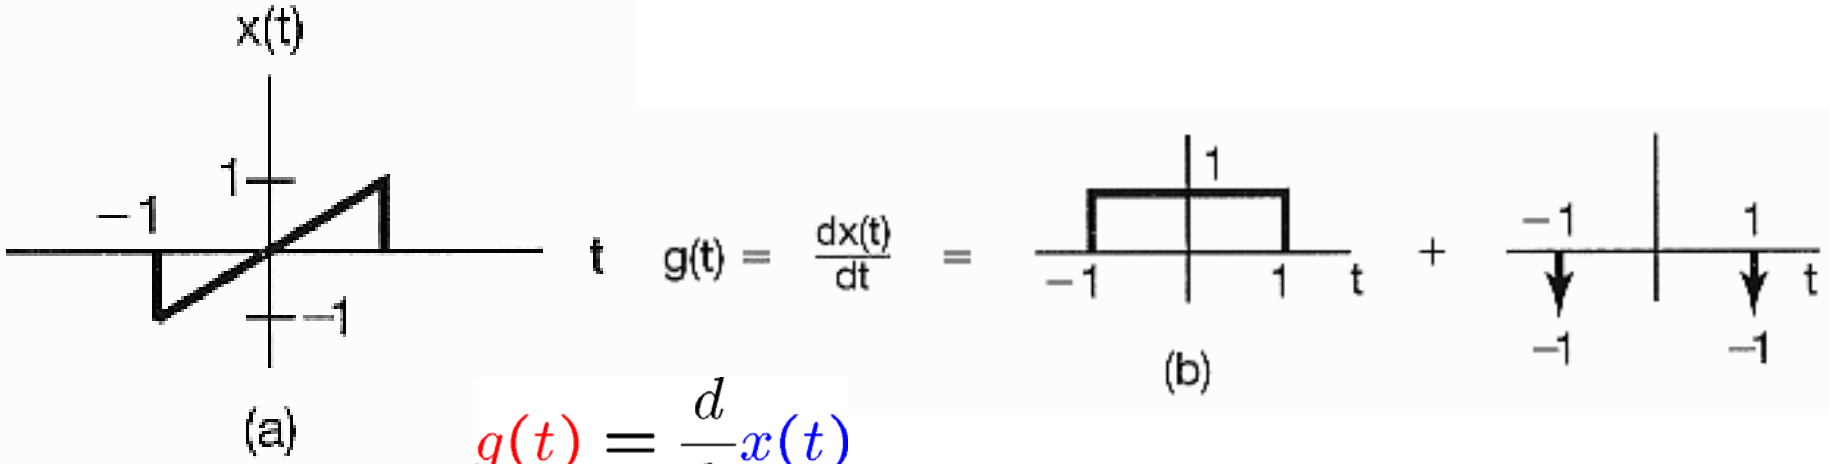

$$g(t) = \frac{d}{dt}x(t)$$

$$G(jw) = \frac{2\sin(w)}{w} - e^{jw} - e^{-jw}$$

$$\Rightarrow \; X(jw) = \frac{G(jw)}{jw} + \pi G(0)\delta(w)$$

$$= \frac{2\sin(w)}{jw^2} - \frac{2\cos(w)}{jw}$$

Feng-Li Lian © 2011

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$
$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

- ## Time & Frequency Scaling:

$$x(t) \overset{\mathcal{F}}{\longleftrightarrow} X(jw)$$

$$x(\quad t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jw\quad t}dw$$

$$x(at) \overset{\mathcal{F}}{\longleftrightarrow} \frac{1}{|a|}X\left(\frac{jw}{a}\right)$$

$$= \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(j\quad \bar{w})e^{j\,\bar{w}\,t}\quad d\bar{w}$$

$$\frac{1}{|b|}x\left(\frac{t}{b}\right) \overset{\mathcal{F}}{\longleftrightarrow} X\left(jbw\right)$$

$$= \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(j\quad \bar{w})e^{j\,\bar{w}\,t}d\bar{w}$$

$$x(-t) \overset{\mathcal{F}}{\longleftrightarrow} X\left(-jw\right)$$

$$= \frac{1}{2\pi}\int_{+\infty}^{-\infty} X(j\quad \bar{w})e^{j\,\bar{w}\,t}\quad d\bar{w}$$

$$= \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(j\quad \bar{w})e^{j\,\bar{w}\,t}d\bar{w}$$

- Duality:

$$x_1(t) = \begin{cases} 1, & |t| < T_1 \\ 0, & |t| > T_1 \end{cases} \quad \overset{\mathcal{F}}{\longleftrightarrow} \quad X_1(jw) = \frac{2\sin(wT_1)}{w}$$

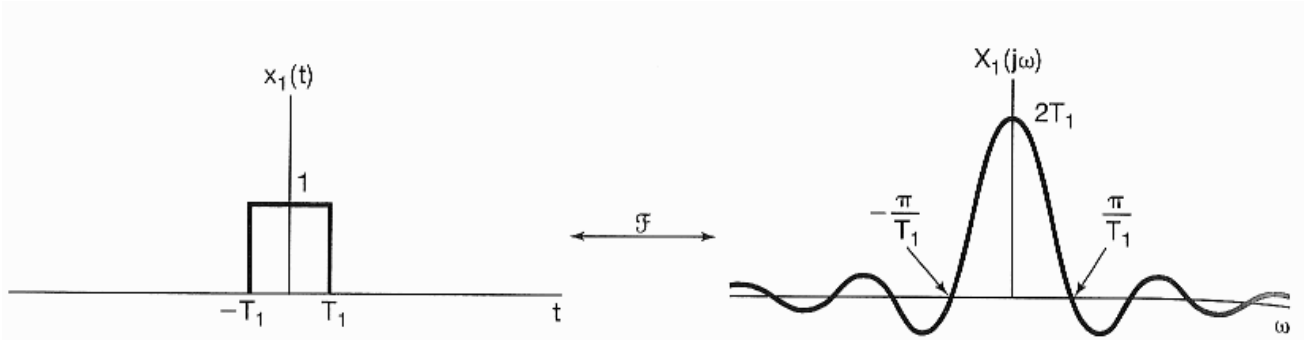

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

Example 4.4

Example 4.5

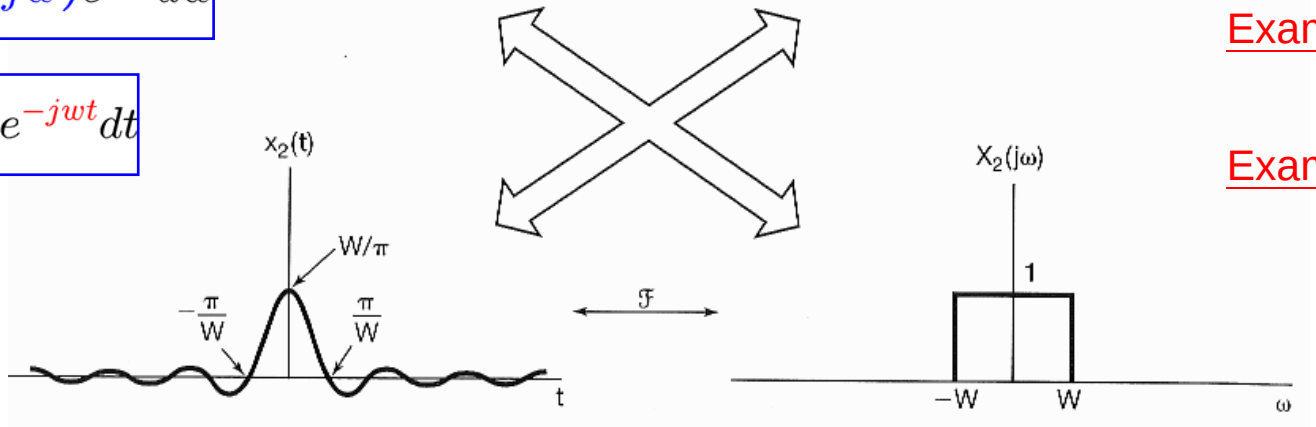

$$x_2(t) = \frac{\sin(Wt)}{\pi t} \quad \overset{\mathcal{F}}{\longleftrightarrow} \quad X_2(jw) = \begin{cases} 1, & |w| < W \\ 0, & |w| > W \end{cases}$$

- Duality:

$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

$$B(s) = \int_{-\infty}^{+\infty} A(\tau)e^{-js\tau}d\tau \qquad B(-s) = \int_{-\infty}^{+\infty} A(\tau)e^{js\tau}d\tau$$

$$A(\tau) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} B(s)e^{js\tau}ds \qquad A(s) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} B(\tau)e^{js\tau}d\tau$$

$$A(-s) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} B(\tau)e^{-js\tau}d\tau$$

- Duality:

$$x(t) \overset{\mathcal{F}}{\longleftrightarrow} X(jw)$$

$$x(t-t_0) \overset{\mathcal{F}}{\longleftrightarrow} e^{-jwt_0}X(jw)$$

$$\frac{d}{dt}x(t) \overset{\mathcal{F}}{\longleftrightarrow} jwX(jw)$$

$$\int_{-\infty}^{t} x(\tau)d\tau \overset{\mathcal{F}}{\longleftrightarrow} \frac{1}{jw}X(jw) + \pi X(0)\delta(w)$$

$$-jtx(t) \overset{\mathcal{F}}{\longleftrightarrow} \frac{d}{dw}X(jw)$$

$$e^{jw_0t}x(t) \overset{\mathcal{F}}{\longleftrightarrow} X(j(w-w_0))$$

$$-\frac{1}{jt}x(t) + \pi x(0)\delta(t) \overset{\mathcal{F}}{\longleftrightarrow} \int_{-\infty}^{w} X(\eta)d\eta$$

- Parseval's relation:

$$x(t) \overset{\mathcal{F}}{\longleftrightarrow} X(jw)$$

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

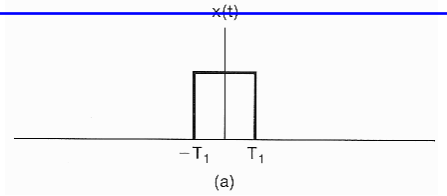

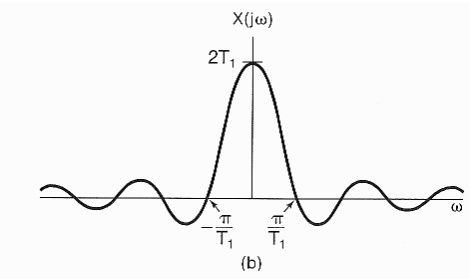

$$\Rightarrow \int_{-\infty}^{+\infty} |x(t)|^2 dt = \frac{1}{2\pi}\int_{-\infty}^{+\infty} |X(jw)|^2 dw$$

$$\int_{-\infty}^{+\infty} |x(t)|^2 dt = \int_{-\infty}^{+\infty} x(t)x^*(t)dt$$

$$= \int_{-\infty}^{+\infty} x(t)\left[\frac{1}{2\pi}\int_{-\infty}^{+\infty} X^*(jw)e^{-jwt}dw\right]dt$$

$$= \frac{1}{2\pi}\int_{-\infty}^{+\infty} X^*(jw)\left[\int_{-\infty}^{+\infty} x(t)e^{-jwt}dt\right]dw$$

$$= \frac{1}{2\pi}\int_{-\infty}^{+\infty} |X(jw)|^2 dw$$

Outline

- Representation of Aperiodic Signals:
  the Continuous-Time Fourier Transform
- The Fourier Transform for Periodic Signals
- Properties
  of the Continuous-Time Fourier Transform
- The Convolution Property
- The Multiplication Property
- Systems Characterized by
  Linear Constant-Coefficient Differential Equations

Feng-Li Lian © 2011

- Convolution Property:

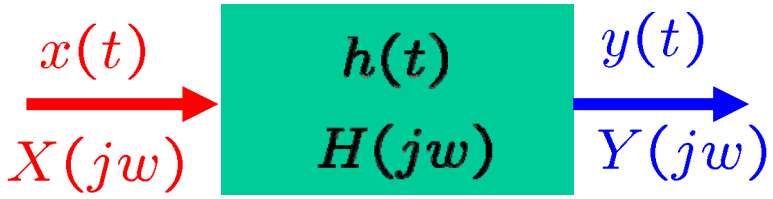

$$y(t) = x(t) * h(t) \overset{\mathcal{F}}{\longleftrightarrow} Y(jw) = X(jw)H(jw)$$

$$= \int_{-\infty}^{\infty} x(\tau)h(t-\tau)d\tau$$

- Multiplication Property:

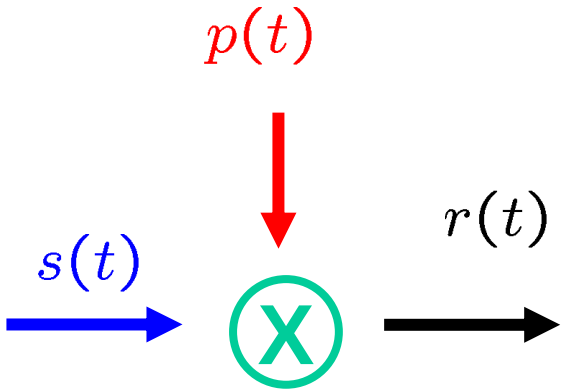

$$r(t) = s(t)p(t) \overset{\mathcal{F}}{\longleftrightarrow} R(jw) = \frac{1}{2\pi}\int_{-\infty}^{\infty} S(j\theta)P(j(w-\theta))d\theta$$

- From Superposition (or Linearity): $H(jkw_0) = \int_{-\infty}^{\infty} h(t)e^{-jkw_0 t}dt$

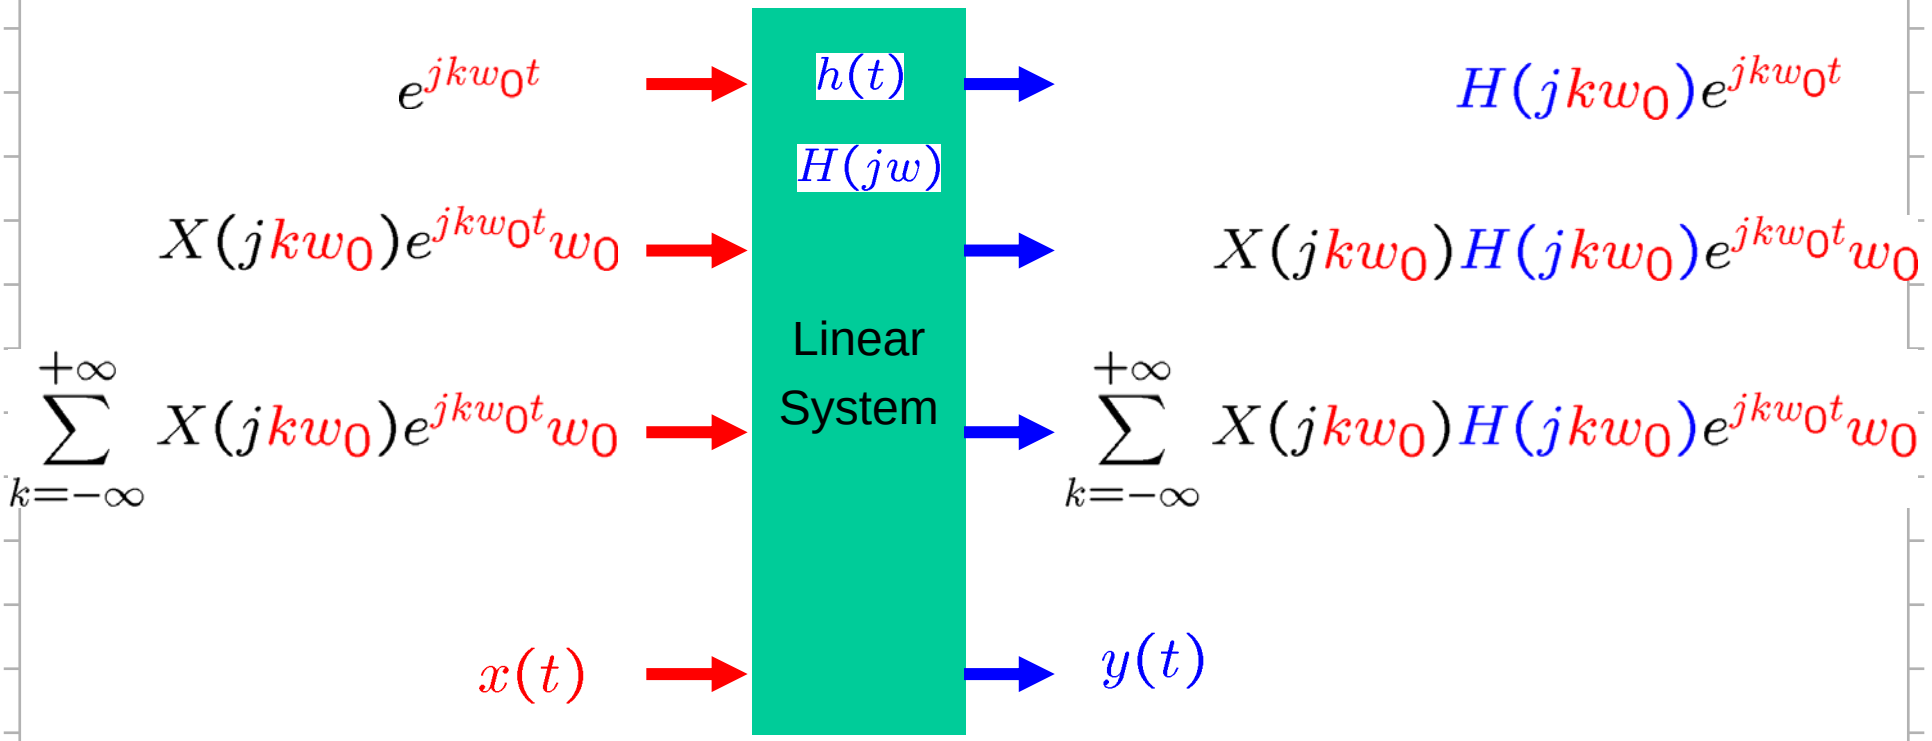

$$= \lim_{w_0 \to 0} \frac{1}{2\pi} \sum_{k=-\infty}^{+\infty} X(jkw_0)e^{jkw_0 t}w_0 \qquad = \lim_{w_0 \to 0} \frac{1}{2\pi} \sum_{k=-\infty}^{+\infty} X(jkw_0)H(jkw_0)e^{jkw_0 t}w_0$$

$$= \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw \qquad = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)H(jw)e^{jwt}dw$$

Feng-Li Lian © 2011
NTUEE-SS4-CTFT-50

- From Superposition (or Linearity):

$$\frac{1}{2\pi}\sum_{k=-\infty}^{+\infty} X(jkw_0)e^{jkw_0 t}w_0 \longrightarrow \frac{1}{2\pi}\sum_{k=-\infty}^{+\infty} X(jkw_0)H(jkw_0)e^{jkw_0 t}w_0$$

$$y(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)H(jw)e^{jwt}dw$$

$$\text{Since} \quad y(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} Y(jw)e^{jwt}dw$$

$$\Rightarrow \; Y(jw) = X(jw)H(jw)$$

$$y(t) = x(t) * h(t) \overset{\mathcal{F}}{\longleftrightarrow} Y(jw) = X(jw)H(jw)$$

Feng-Li Lian © 2011
NTUEE-SS4-CTFT-51

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

$$x(t-t_0) \overset{\mathcal{F}}{\longleftrightarrow} e^{-jwt_0}X(jw)$$

- From Convolution Integral:

$$y(t) = \int_{-\infty}^{+\infty} x(\tau)h(t-\tau)d\tau$$

$$\Rightarrow\ Y(jw) = \mathcal{F}\{y(t)\} = \int_{-\infty}^{+\infty}\left[\int_{-\infty}^{+\infty} x(\tau)h(t-\tau)d\tau\right]e^{-jwt}dt$$

$$= \int_{-\infty}^{+\infty} x(\tau)\left[\int_{-\infty}^{+\infty} h(t-\tau)e^{-jwt}dt\right]d\tau$$

$$= \int_{-\infty}^{+\infty} x(\tau)\left[e^{-jw\tau}\int_{-\infty}^{+\infty} h(\sigma)e^{-jw\sigma}d\sigma\right]d\tau$$

$$= \int_{-\infty}^{+\infty} x(\tau)\left[e^{-jw\tau}H(jw)\right]d\tau$$

$$= H(jw)\int_{-\infty}^{+\infty} x(\tau)e^{-jw\tau}d\tau$$

$$\Rightarrow\ Y(jw) = H(jw)X(jw)$$

- Equivalent LTI Systems:

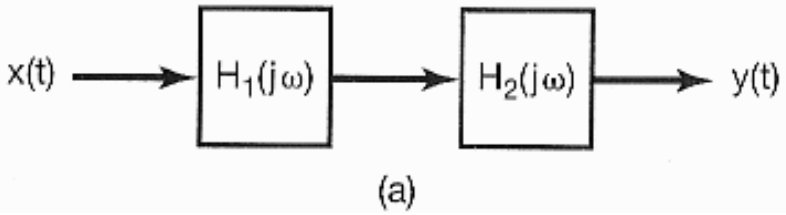

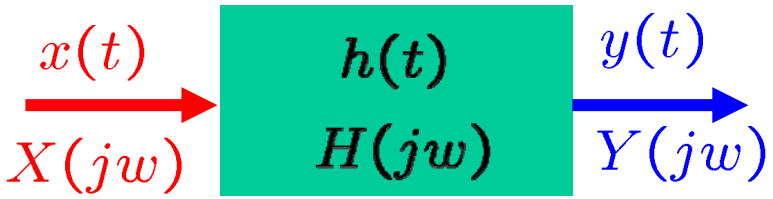

$$h(t) \overset{\mathcal{F}}{\longleftrightarrow} H(jw)$$

impulse response

frequency response

$$y(t) = x(t) * h(t)$$

$$Y(jw) = X(jw)H(jw)$$

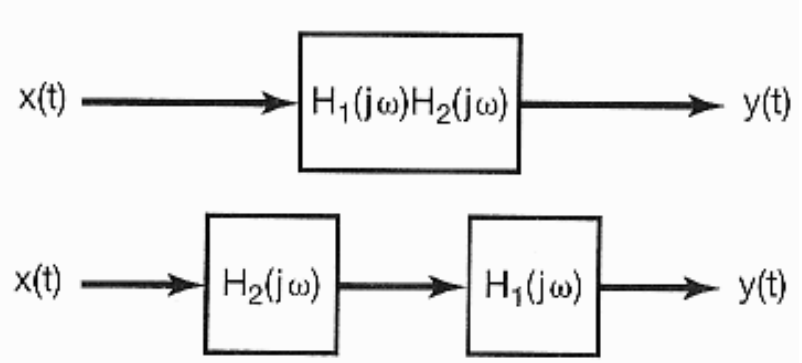

$$\Rightarrow\ Y(jw) = H_1(jw)H_2(jw)X(jw)$$

Feng-Li Lian © 2011
NTUEE-SS4-CTFT-53

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

$$x(t-t_0) \overset{\mathcal{F}}{\longleftrightarrow} e^{-jwt_0}X(jw)$$

- ## Example 4.15: Time Shift

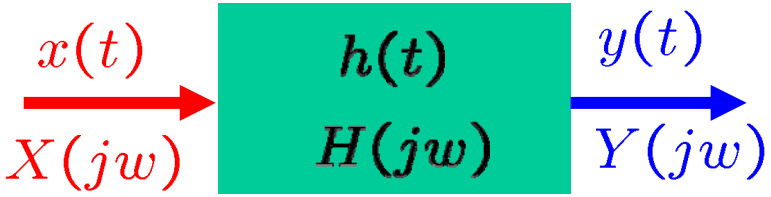

$$h(t) = \delta(t-t_0)$$

$$\Rightarrow H(jw) = e^{-jwt_0}$$

$$Y(jw) = H(jw)X(jw)$$

$$= e^{-jwt_0}X(jw)$$

$$\Rightarrow y(t) = x(t-t_0)$$

- Examples 4.16 & 17: Differentiator & Integrator

$$y(t) = \frac{d}{dt}x(t) \quad \Rightarrow \quad Y(jw) = jwX(jw)$$

$$\Rightarrow \quad H(jw) = jw$$

$$y(t) = \int_{-\infty}^{t} x(\tau)d\tau \quad \Rightarrow \quad h(t) = u(t) \qquad \text{impulse response}$$

$$\Rightarrow \quad H(jw) = \frac{1}{jw} + \pi\delta(w)$$

$$\Rightarrow \quad Y(jw) = H(jw)X(jw)$$

$$= \frac{1}{jw}X(jw) + \pi\delta(w)X(jw)$$

$$= \frac{1}{jw}X(jw) + \pi\delta(w)X(0)$$

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

- Example 4.18: Ideal Lowpass Filter

$$H(jw) = \begin{cases} 1, & |w| < w_c \\ 0, & |w| > w_c \end{cases}$$

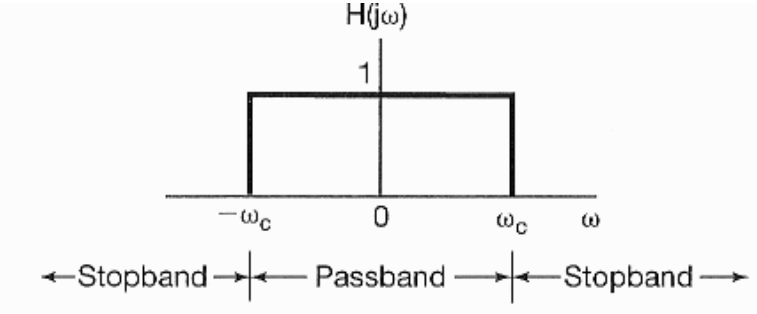

$$\Rightarrow\ h(t) = \frac{1}{2\pi}\int_{-w_c}^{+w_c} e^{jwt}dw$$

$$= \frac{\sin(w_c t)}{\pi t}$$

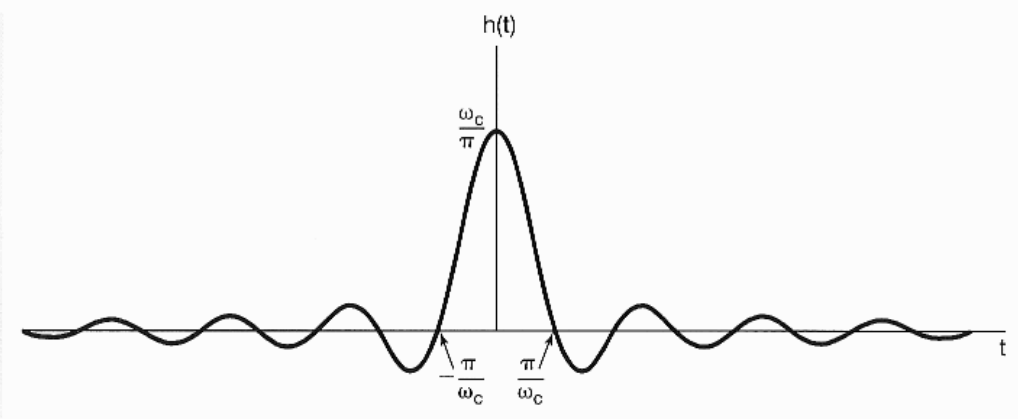

- Filter Design:

$$H(jw) = \int_{-\infty}^{\infty} h(t) e^{-jwt} dt$$

$$y(t) = h(t) * x(t)$$

$$= \int_{-\infty}^{\infty} h(t-\tau) x(\tau) d\tau$$

$$H(jw) = \int_{-\infty}^{\infty} h(t) e^{-jwt} dt$$

$$X(jw) = \int_{-\infty}^{\infty} x(t) e^{-jwt} dt$$

$$\Rightarrow \; Y(jw) = H(jw) X(jw)$$

$$\Rightarrow \; y(t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} Y(jw) e^{jwt} dw$$

Feng-Li Lian © 2011
NTUEE-SS4-CTFT-57

- Filter Design:

$$H(jw) = \int_{-\infty}^{\infty} h(t)e^{-jwt}dt$$

$\delta(t)$ → Filter LTI System → $h(t)$

$x(t)$ → Filter LTI System → $y(t) = h(t) * x(t)$

$$Y(jw) = H(jw)X(jw)$$

RC circuit $h(t) = e^{-t}u(t) \xleftrightarrow{\mathcal{F}} H(jw) = \dfrac{1}{jw+1}$

impulse response

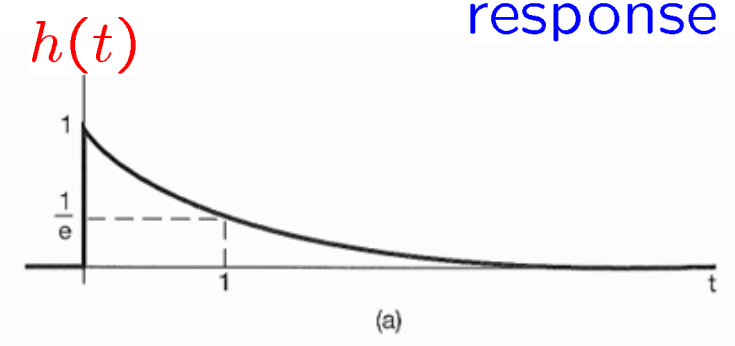

frequency response

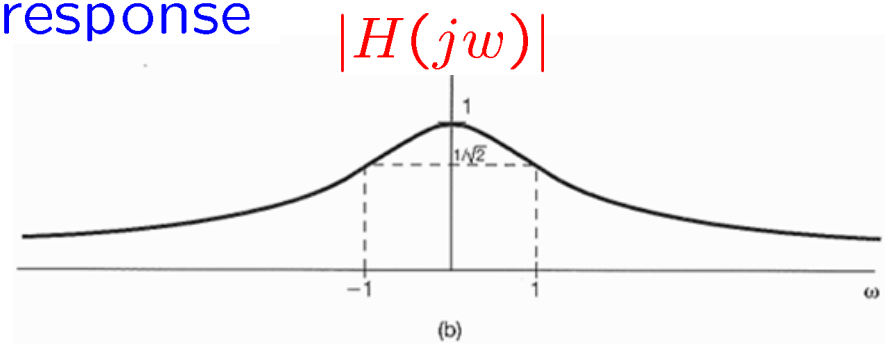

- Example 4.19:

$$h(t) = e^{-at}u(t), \quad a > 0 \qquad \Rightarrow \; H(jw) = \frac{1}{a + jw}$$

$$x(t) = e^{-bt}u(t), \quad b > 0 \qquad \Rightarrow \; X(jw) = \frac{1}{b + jw}$$

$$\Rightarrow \; Y(jw) = H(jw)X(jw) \quad = \frac{1}{a + jw}\,\frac{1}{b + jw}$$

if $a \neq b$

$$= \frac{1}{b - a}\left[\frac{1}{a + jw} - \frac{1}{b + jw}\right]$$

- Example 4.19:

if $a \neq b$ $\quad Y(jw) = \dfrac{1}{b-a}\left[\dfrac{1}{a+jw} - \dfrac{1}{b+jw}\right]$

$$\Rightarrow \; y(t) = \frac{1}{b-a}\left[e^{-at}u(t) - e^{-bt}u(t)\right]$$

if $a = b$ $\quad Y(jw) = \dfrac{1}{(a+jw)^2}$

since $\quad e^{-at}u(t) \overset{\mathcal{F}}{\longleftrightarrow} \dfrac{1}{a+jw}$

and $\quad t\,e^{-at}u(t) \overset{\mathcal{F}}{\longleftrightarrow} j\,\dfrac{d}{dw}\left[\dfrac{1}{a+jw}\right] = \dfrac{1}{(a+jw)^2}$

$$\Rightarrow \; y(t) = te^{-at}u(t)$$

Feng-Li Lian © 2011
NTUEE-SS4-CTFT-60

- Example 4.20: $h(t) = \dfrac{\sin(w_c t)}{\pi t}$ $H(jw) = \int_{-\infty}^{\infty} h(t) e^{-jwt} dt$

$x(t) = \dfrac{\sin(w_i t)}{\pi t}$ → Filter LTI System → $y(t) = ?$

$$\Rightarrow Y(jw) = H(jw)X(jw)$$

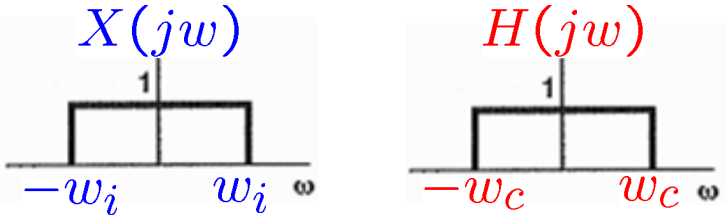

$$\Rightarrow X(jw) = \begin{cases} 1, & |w| \le w_i \\ 0, & \text{otherwise} \end{cases}$$

$$\Rightarrow H(jw) = \begin{cases} 1, & |w| \le w_c \\ 0, & \text{otherwise} \end{cases}$$



$$\Rightarrow Y(jw) = \begin{cases} 1, & |w| \le w_0 \\ 0, & \text{otherwise} \end{cases}$$

$$w_0 = \min(w_c, w_i)$$

$$\Rightarrow y(t) = \frac{\sin(w_o t)}{\pi t}$$

$$\Rightarrow y(t) = \begin{cases} \dfrac{\sin(w_c t)}{\pi t}, & w_c \le w_i \\ \dfrac{\sin(w_i t)}{\pi t}, & w_c \ge w_i \end{cases}$$

Outline

- Representation of Aperiodic Signals:
  the Continuous-Time Fourier Transform
- The Fourier Transform for Periodic Signals
- Properties of the Continuous-Time Fourier Transform
- The Convolution Property
- The Multiplication Property
- Systems Characterized by
  Linear Constant-Coefficient Differential Equations

Feng-Li Lian © 2011
NTUEE-SS4-CTFT-62

- Convolution & Multiplication:

$$y(t) = x(t) * h(t) \overset{\mathcal{F}}{\longleftrightarrow} Y(jw) = X(jw)H(jw)$$

$$= \int_{-\infty}^{\infty} x(\tau)h(t-\tau)d\tau$$

$$r(t) = s(t)p(t) \overset{\mathcal{F}}{\longleftrightarrow} R(jw) = \frac{1}{2\pi}\int_{-\infty}^{\infty} S(j\theta)P(j(w-\theta))d\theta$$

- Multiplication of One Signal by Another:
  - Scale or modulate the amplitude of the other signal
  - Modulation

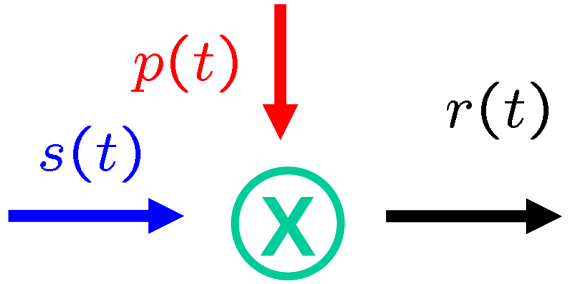

Multiplication Property

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

$$r(t) = s(t)p(t)$$

$$\Rightarrow \quad R(jw) = \int_{-\infty}^{\infty} r(t)e^{-jwt}dt$$

$$= \int_{-\infty}^{\infty} s(t)p(t)e^{-jwt}dt$$

$$= \int_{-\infty}^{\infty} s(t)\left\{\frac{1}{2\pi}\int_{-\infty}^{\infty} P(j\theta)e^{j\theta t}d\theta\right\}e^{-jwt}dt$$

$$= \frac{1}{2\pi}\int_{-\infty}^{\infty} P(j\theta)\left[\int_{-\infty}^{\infty} s(t)e^{-j(w-\theta)t}dt\right]d\theta$$

$$= \frac{1}{2\pi}\int_{-\infty}^{\infty} P(j\theta)S(j(w-\theta))d\theta \qquad = \frac{1}{2\pi}\int_{-\infty}^{\infty} P(j(w-\theta))S(j\theta)d\theta$$

- Example 4.21:

$$r(t) = s(t)p(t)$$

$$s(t) \overset{\mathcal{F}}{\longleftrightarrow} S(jw)$$

$$p(t) \overset{\mathcal{F}}{\longleftrightarrow} P(jw)$$

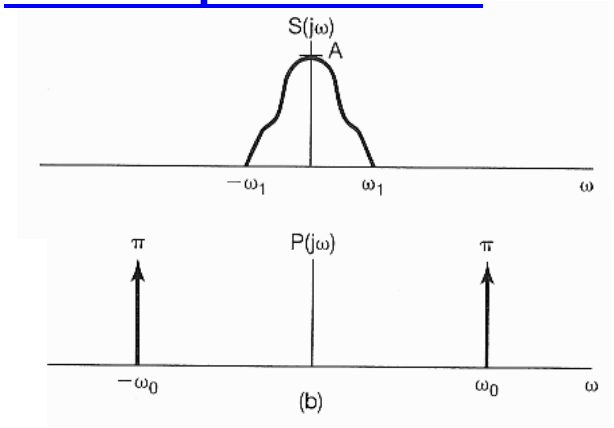

$$p(t) = \cos(w_0 t)$$

$$P(jw) = \pi\delta(w - w_0) + \pi\delta(w + w_0)$$

$$R(jw) = \frac{1}{2\pi}[S(jw) * P(jw)]$$

$$= \frac{1}{2\pi}\int_{-\infty}^{\infty} S(j\theta)P(j(w-\theta))d\theta$$

$$= \frac{1}{2}S\left(j(w-w_0)\right) + \frac{1}{2}S\left(j(w+w_0)\right)$$

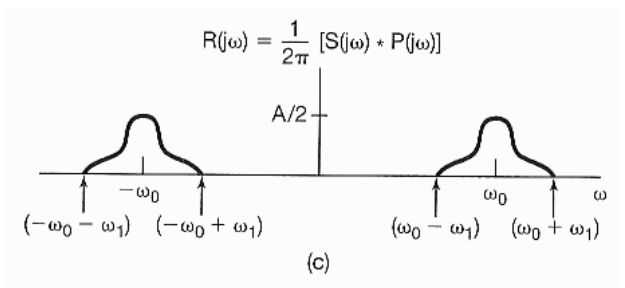

- Example 4.22:

$$g(t) = r(t)p(t)$$

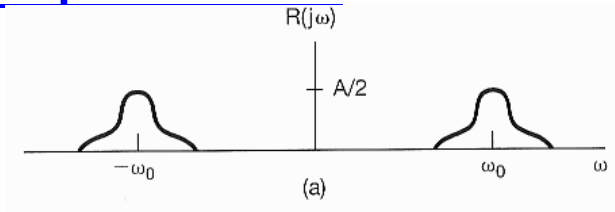

$$r(t) \overset{\mathcal{F}}{\longleftrightarrow} R(jw)$$

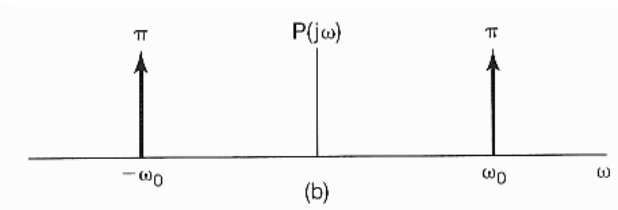

$$p(t) \overset{\mathcal{F}}{\longleftrightarrow} P(jw)$$

$$p(t) = \cos(w_0 t)$$

$$G(jw) = \frac{1}{2\pi}[R(jw) * P(jw)]$$

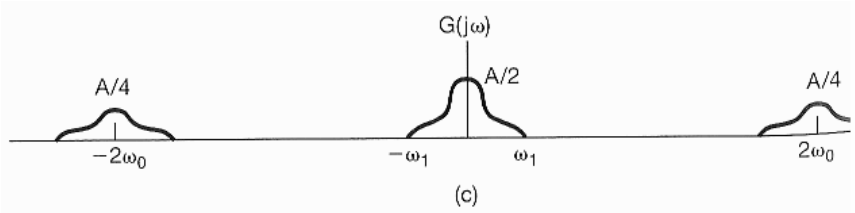

Feng-Li Lian © 2011
NTUEE-SS4-CTFT-66

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{+\infty} X(jw)e^{jwt}dw$$

$$X(jw) = \int_{-\infty}^{+\infty} x(t)e^{-jwt}dt$$

- Example 4.23:

$$x(t) = \frac{\sin(t)\sin(t/2)}{\pi t^2}$$

$$X(jw) = \int_{-\infty}^{\infty} \frac{\sin(t)\sin(t/2)}{\pi t^2} e^{-jwt}dt$$

$$= \pi\left(\frac{\sin(t)}{\pi t}\right)\left(\frac{\sin(t/2)}{\pi t}\right)$$

$$X(jw) = \frac{1}{2}\mathcal{F}\left\{\frac{\sin(t)}{\pi t}\right\} * \mathcal{F}\left\{\frac{\sin(t/2)}{\pi t}\right\}$$

$\frac{1}{2}$ 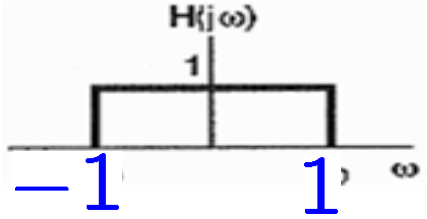

$*$ 

$=$

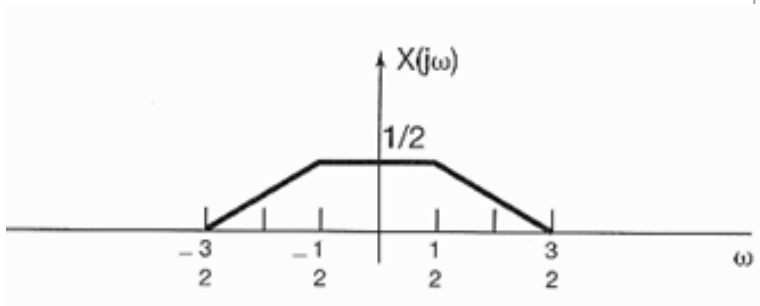

- Bandpass Filter Using Amplitude Modulation:

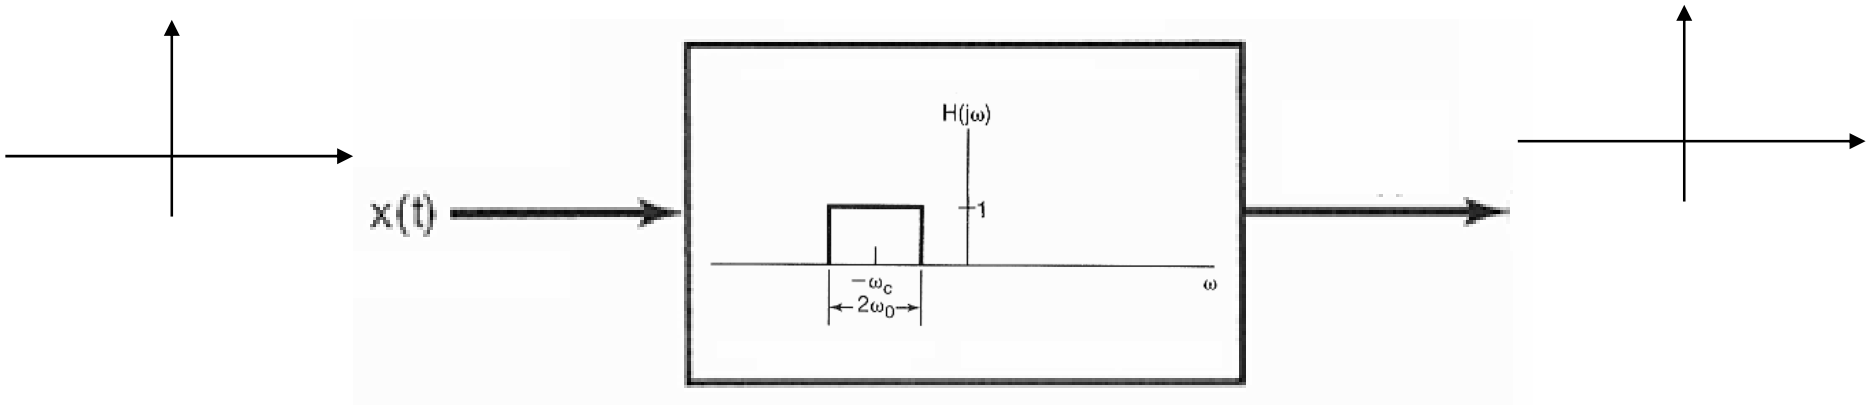

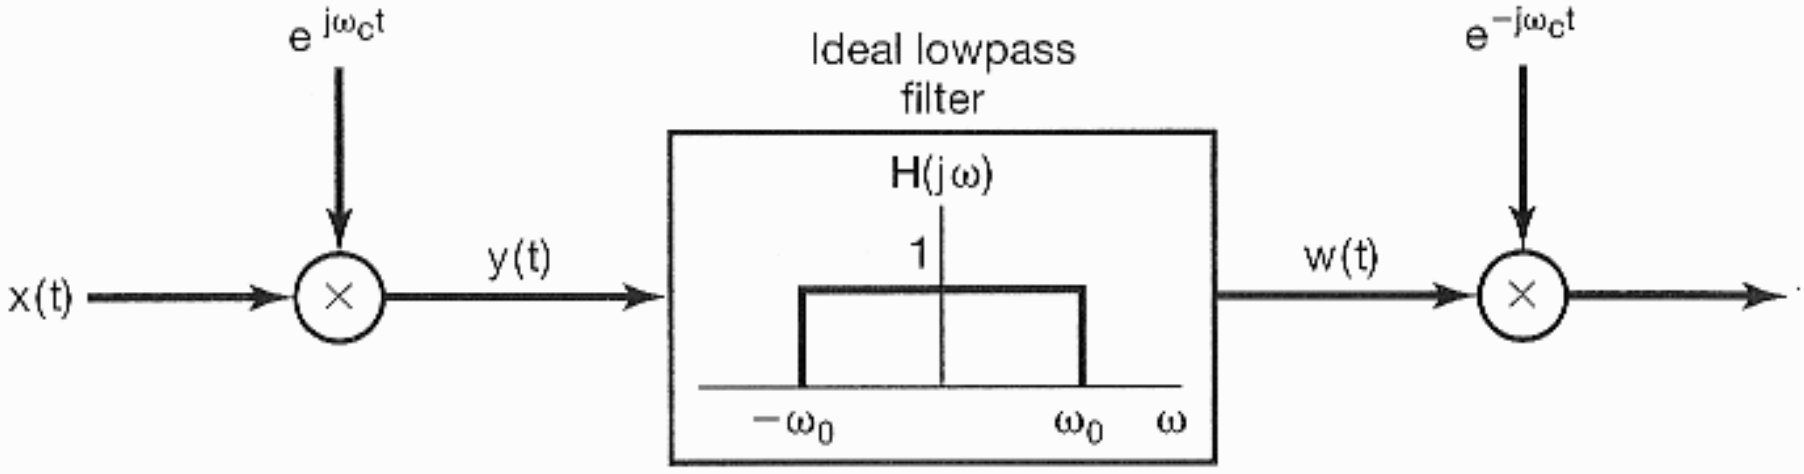

- Bandpass Filter Using Amplitude Modulation:

$$e^{jw_c t} \overset{\mathcal{F}}{\longleftrightarrow} 2\pi\delta(w - w_c)$$

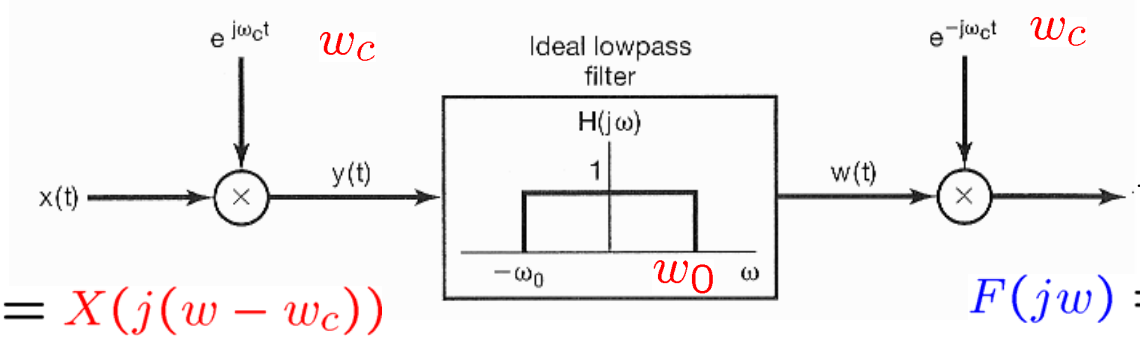

$$Y(jw) = X(j(w - w_c))$$

$$F(jw) = W(j(w + w_c))$$

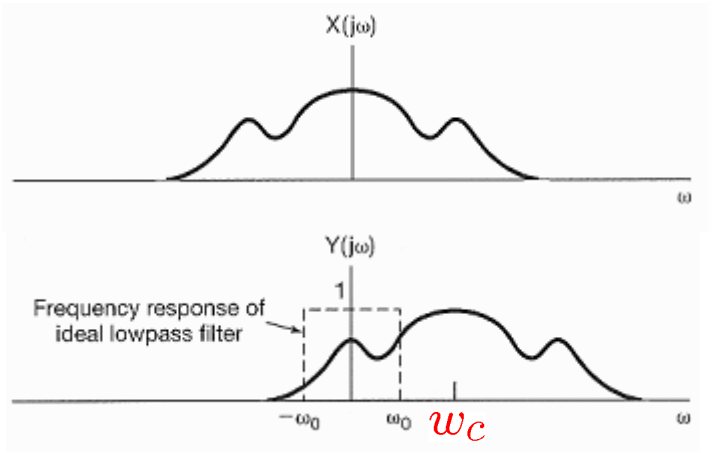

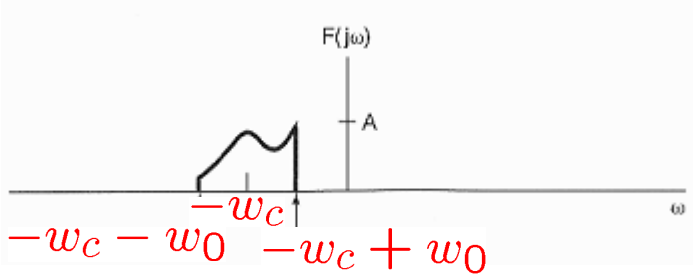

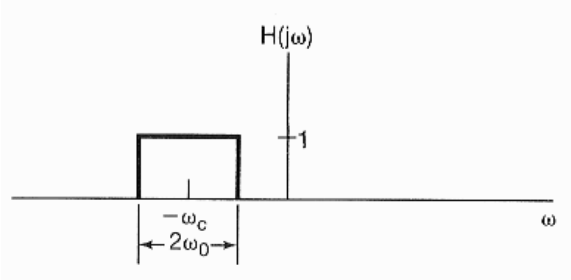

- Bandpass Filter Using Amplitude Modulation:

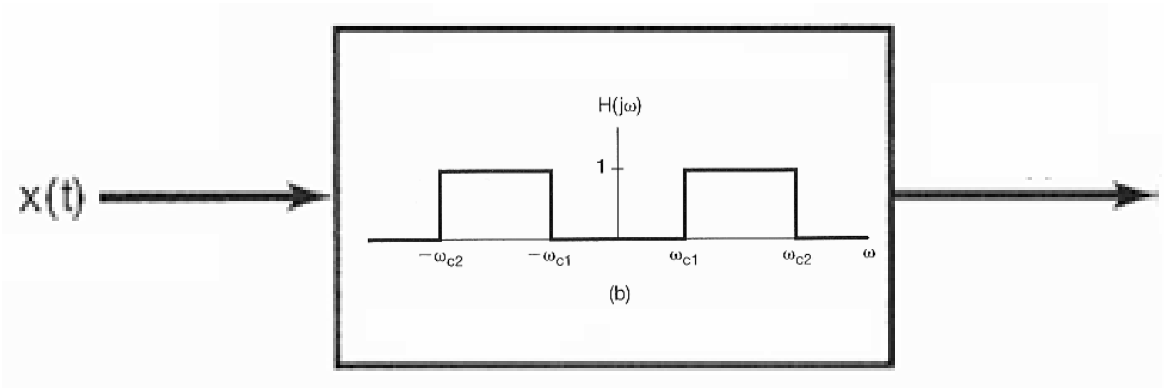

- On Page 349-350, Problem 4.46

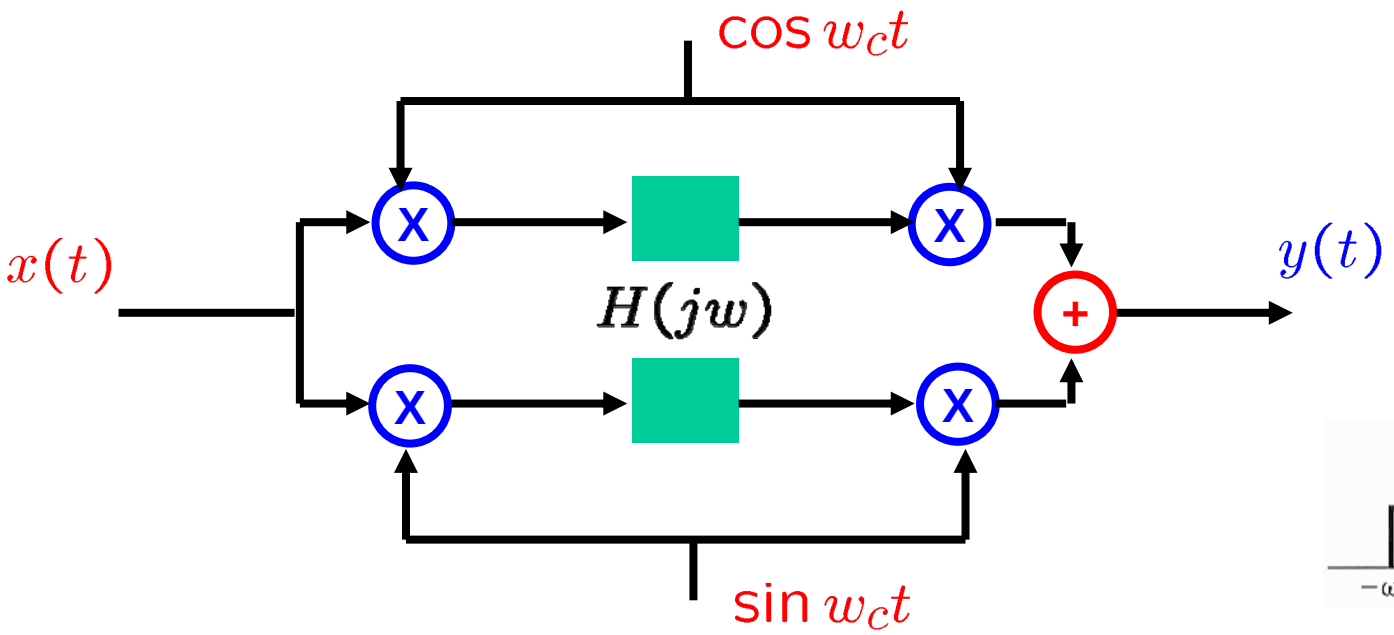



TABLE 4.1 PROPERTIES OF THE FOURIER TRANSFORM

Section	Property	Aperiodic signal	Fourier transform
		$x(t)$	$X(j\omega)$
		$y(t)$	$Y(j\omega)$
4.3.1	Linearity	$ax(t) + by(t)$	$aX(j\omega) + bY(j\omega)$
4.3.2	Time Shifting	$x(t - t_0)$	$e^{-j\omega t_0}X(j\omega)$
4.3.6	Frequency Shifting	$e^{j\omega_0 t}x(t)$	$X(j(\omega - \omega_0))$
4.3.3	Conjugation	$x^*(t)$	$X^*(-j\omega)$
4.3.5	Time Reversal	$x(-t)$	$X(-j\omega)$
4.3.5	Time and Frequency Scaling	$x(at)$	$\frac{1}{\lvert a\rvert}X\left(\frac{j\omega}{a}\right)$
4.4	Convolution	$x(t) * y(t)$	$X(j\omega)Y(j\omega)$
4.5	Multiplication	$x(t)y(t)$	$\frac{1}{2\pi}\int_{-\infty}^{+\infty} X(j\theta)Y(j(\omega - \theta))d\theta$
4.3.4	Differentiation in Time	$\frac{d}{dt}x(t)$	$j\omega X(j\omega)$
4.3.4	Integration	$\int_{-\infty}^{t} x(t)dt$	$\frac{1}{j\omega}X(j\omega) + \pi X(0)\delta(\omega)$
4.3.6	Differentiation in Frequency	$tx(t)$	$j\frac{d}{d\omega}X(j\omega)$
4.3.3	Conjugate Symmetry for Real Signals	$x(t)$ real	$\begin{cases} X(j\omega) = X^*(-j\omega) \\ \mathcal{R}e\{X(j\omega)\} = \mathcal{R}e\{X(-j\omega)\} \\ \mathcal{I}m\{X(j\omega)\} = -\mathcal{I}m\{X(-j\omega)\} \\ \lvert X(j\omega)\rvert = \lvert X(-j\omega)\rvert \\ \measuredangle X(j\omega) = -\measuredangle X(-j\omega) \end{cases}$
4.3.3	Symmetry for Real and Even Signals	$x(t)$ real and even	$X(j\omega)$ real and even
4.3.3	Symmetry for Real and Odd Signals	$x(t)$ real and odd	$X(j\omega)$ purely imaginary and odd
4.3.3	Even-Odd Decomposition for Real Signals	$x_e(t) = \mathcal{E}v\{x(t)\}$ [$x(t)$ real] $x_o(t) = \mathcal{O}d\{x(t)\}$ [$x(t)$ real]	$\mathcal{R}e\{X(j\omega)\}$ $j\mathcal{I}m\{X(j\omega)\}$
4.3.7	Parseval's Relation for Aperiodic Signals $\int_{-\infty}^{+\infty} \lvert x(t)\rvert^2 dt = \frac{1}{2\pi}\int_{-\infty}^{+\infty} \lvert X(j\omega)\rvert^2 d\omega$		

TABLE 4.2 BASIC FOURIER TRANSFORM PAIRS

Signal	Fourier transform	Fourier series coefficients (if periodic)
$\sum_{k=-\infty}^{+\infty} a_k e^{jk\omega_0 t}$	$2\pi \sum_{k=-\infty}^{+\infty} a_k \delta(\omega - k\omega_0)$	a_k
$e^{j\omega_0 t}$	$2\pi\delta(\omega - \omega_0)$	$a_1 = 1$ $a_k = 0$, otherwise
$\cos \omega_0 t$	$\pi[\delta(\omega - \omega_0) + \delta(\omega + \omega_0)]$	$a_1 = a_{-1} = \frac{1}{2}$ $a_k = 0$, otherwise
$\sin \omega_0 t$	$\frac{\pi}{j}[\delta(\omega - \omega_0) - \delta(\omega + \omega_0)]$	$a_1 = -a_{-1} = \frac{1}{2j}$ $a_k = 0$, otherwise
$x(t) = 1$	$2\pi\,\delta(\omega)$	$a_0 = 1, \quad a_k = 0, \ k \neq 0$ (this is the Fourier series representation for any choice of $T > 0$)
Periodic square wave $x(t) = \begin{cases} 1, & \lvert t\rvert < T_1 \\ 0, & T_1 < \lvert t\rvert \leq \frac{T}{2} \end{cases}$ and $x(t+T) = x(t)$	$\sum_{k=-\infty}^{+\infty} \frac{2\sin k\omega_0 T_1}{k}\,\delta(\omega - k\omega_0)$	$\frac{\omega_0 T_1}{\pi}\,\mathrm{sinc}\left(\frac{k\omega_0 T_1}{\pi}\right) = \frac{\sin k\omega_0 T_1}{k\pi}$
$\sum_{k=-\infty}^{+\infty} \delta\left(t - kT\right)$	$2\pi \sum_{k=-\infty}^{+\infty} \delta\left(\omega - \frac{2\pi k}{T}\right)$	$\frac{1}{T}$ for all k

© 2011
TFT-72

and

$x(t + T) = x(t)$

$\sum_{n=-\infty}^{+\infty} \delta(t - nT)$	$\frac{2\pi}{T} \sum_{k=-\infty}^{+\infty} \delta\left(\omega - \frac{2\pi k}{T}\right)$	$a_k = \frac{1}{T}$ for all k
$x(t)\begin{cases} 1, & \lvert t\rvert < T_1 \\ 0, & \lvert t\rvert > T_1 \end{cases}$	$\frac{2 \sin \omega T_1}{\omega}$	—
$\frac{\sin Wt}{\pi t}$	$X(j\omega) = \begin{cases} 1, & \lvert\omega\rvert < W \\ 0, & \lvert\omega\rvert > W \end{cases}$	—
$\delta(t)$	1	—
$u(t)$	$\frac{1}{j\omega} + \pi \delta(\omega)$	—
$\delta(t - t_0)$	$e^{-j\omega t_0}$	—
$e^{-at}u(t), \mathcal{R}e\{a\} > 0$	$\frac{1}{a + j\omega}$	—
$te^{-at}u(t), \mathcal{R}e\{a\} > 0$	$\frac{1}{(a + j\omega)^2}$	—
$\frac{t^{n-1}}{(n-1)!}e^{-at}u(t), \mathcal{R}e\{a\} > 0$	$\frac{1}{(a + j\omega)^n}$	—

Outline

- Representation of Aperiodic Signals: the Continuous-Time Fourier Transform
- The Fourier Transform for Periodic Signals
- Properties of the Continuous-Time Fourier Transform
- The Convolution Property
- The Multiplication Property
- Systems Characterized by Linear Constant-Coefficient Differential Equations

- A useful class of CT LTI systems:

$$a_N \frac{d^N y(t)}{dt^N} + a_{N-1} \frac{d^{N-1} y(t)}{dt^{N-1}} + \cdots + a_1 \frac{dy(t)}{dt} + a_0 y(t)$$

$$= b_M \frac{d^M x(t)}{dt^M} + b_{M-1} \frac{d^{M-1} x(t)}{dt^{M-1}} + \cdots + b_1 \frac{dx(t)}{dt} + b_0 x(t)$$

$$\sum_{k=0}^{N} a_k \frac{d^k y(t)}{dt^k} = \sum_{k=0}^{M} b_k \frac{d^k x(t)}{dt^k}$$

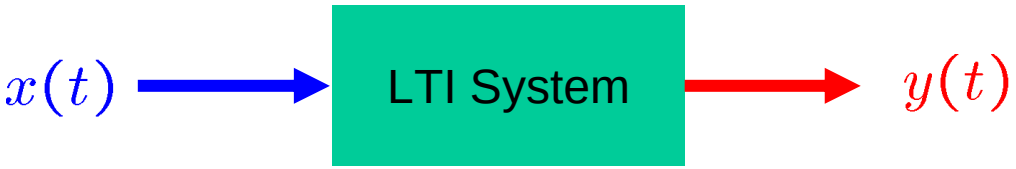

$$Y(jw) = X(jw)H(jw) \qquad H(jw) = \frac{Y(jw)}{X(jw)}$$

$$\sum_{k=0}^{N} a_k \frac{d^k y(t)}{dt^k} = \sum_{k=0}^{M} b_k \frac{d^k x(t)}{dt^k}$$

$$\sum_{k=0}^{N} a_k \quad \frac{d^k y(t)}{dt^k} = \sum_{k=0}^{M} b_k \quad \frac{d^k x(t)}{dt^k}$$

$$\sum_{k=0}^{N} a_k (jw)^k \; Y(jw) = \sum_{k=0}^{M} b_k (jw)^k \; X(jw)$$

$$Y(jw) \left[\sum_{k=0}^{N} a_k (jw)^k \right] = X(jw) \left[\sum_{k=0}^{M} b_k (jw)^k \right]$$

$$\Rightarrow \quad H(jw) = \frac{Y(jw)}{X(jw)} = \frac{\sum_{k=0}^{M} b_k (jw)^k}{\sum_{k=0}^{N} a_k (jw)^k} = \frac{b_M (jw)^M + \cdots + b_1 (jw) + b_0}{a_N (jw)^N + \cdots + a_1 (jw) + a_0}$$

- Examples 4.24 & 4.25:

$$\frac{dy(t)}{dt} + ay(t) = x(t)$$

$$H = \frac{Y}{X}$$

$$\Rightarrow \quad H(jw) = \frac{1}{jw + a}$$

$$(jw)Y(jw) + aY(jw) = X(jw)$$

$$\Rightarrow \quad h(t) = e^{-at}u(t)$$

$$\frac{d^2y(t)}{dt^2} + 4\frac{dy(t)}{dt} + 3\,y(t) = \frac{dx(t)}{dt} + 2\,x(t)$$

$$\Rightarrow \quad H(jw) = \frac{(jw) + 2}{(jw)^2 + 4(jw) + 3} = \frac{(jw + 2)}{(jw + 1)(jw + 3)}$$

$$= \frac{1/2}{jw + 1} + \frac{1/2}{jw + 3}$$

$$\Rightarrow \quad h(t) = \frac{1}{2}e^{-t}u(t) + \frac{1}{2}e^{-3t}u(t)$$

- Example 4.26:

$$x(t) = e^{-t}u(t) \longrightarrow \boxed{\text{LTI System}} \longrightarrow y(t) = ???$$

$$H(jw) = \frac{(jw+2)}{(jw+1)(jw+3)}$$

$$\Rightarrow \quad Y(jw) = X(jw)H(jw)$$

$$= \left[\frac{1}{jw+1}\right]\left[\frac{jw+2}{(jw+1)(jw+3)}\right]$$

$$= \frac{jw+2}{(jw+1)^2(jw+3)}$$

$$= \frac{\frac{1}{4}}{jw+1} + \frac{\frac{1}{2}}{(jw+1)^2} - \frac{\frac{1}{4}}{jw+3}$$

$$\Rightarrow \quad y(t) = \left[\frac{1}{4}e^{-t} + \frac{1}{2}te^{-t} - \frac{1}{4}e^{-3t}\right]u(t)$$

- Representation of Aperiodic Signals: the CT FT
- The FT for Periodic Signals
- Properties of the CT FT
  - Linearity
  - Time Shifting
  - Frequency Shifting
  - Conjugation
  - Time Reversal
  - Time and Frequency Scaling
  - Convolution
  - Multiplication
  - Differentiation in Time
  - Integration
  - Differentiation in Frequency
  - Conjugate Symmetry for Real Signals
  - Symmetry for Real and Even Signals & for Real and Odd Signals
  - Even-Odd Decomposition for Real Signals
  - Parseval's Relation for Aperiodic Signals
- The Convolution Property
- The Multiplication Property
- Systems Characterized by Linear Constant-Coefficient Differential Equations

Questions for Chapter 4

- Why to study FT
  - In order to analyze or represent aperiodic signals
- How to develop FT
  - From FS and let T -> infinity
- Do periodic signals have FT
  - Yes, their FT is function of isolated impulses
- Why to know the properties of FT
  - Avoid using the fundamental formulas of FT to compute the FT
- What the duality of FT and why
  - FT and IFT have almost identical integration formulas
- Why to know the convolution property
  - To analyze system response and/or design proper circuits
  - To simplify computation
- Why to know the multiplication property
  - For signal modulation with different-frequency carriers
  - To simplify computation

X(jw) of Aperiodic Signals and a_k of Periodic Signals

$$a_k = \frac{1}{T} X(jw)\Big|_{w=kw_0}$$

$$X(jw) = \sum_{k=-\infty}^{+\infty} 2\pi \; a_k \; \delta(w - kw_0)$$

$$= \sum_{k=-\infty}^{+\infty} 2\pi \; \frac{1}{T} X(jkw_0) \; \delta(w - kw_0)$$

$$w = mw_0$$

$$X(jmw_0) = \sum_{k=-\infty}^{+\infty} 2\pi \; \frac{1}{T} X(jkw_0) \; \delta(mw_0 - kw_0)$$

$$= 2\pi \; \frac{1}{T} \; X(jmw_0)$$

$$\Rightarrow \; 2\pi = T$$

X(jw) of Aperiodic Signals and a_k of Periodic Signals

$$a_k = \frac{1}{T} X_a(jw)\Big|_{w=kw_0}$$

$$X_p(jw) = \sum_{k=-\infty}^{+\infty} 2\pi \; a_k \; \delta(w - kw_0)$$

$$= \sum_{k=-\infty}^{+\infty} 2\pi \; \frac{1}{T} X_a(jkw_0) \; \delta(w - kw_0)$$

$$w = mw_0$$

$$X_p(jmw_0) = \sum_{k=-\infty}^{+\infty} 2\pi \; \frac{1}{T} X_a(jkw_0) \; \delta(mw_0 - kw_0)$$

$$= 2\pi \; \frac{1}{T} \; X_a(jmw_0)$$

X(jw) of Aperiodic Signals and a_k of Periodic Signals

$x_a(t)$ $T_1 = 1$

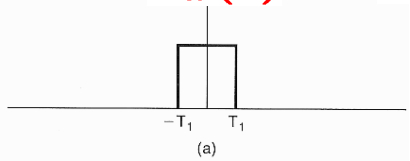

$X_a(jw)$

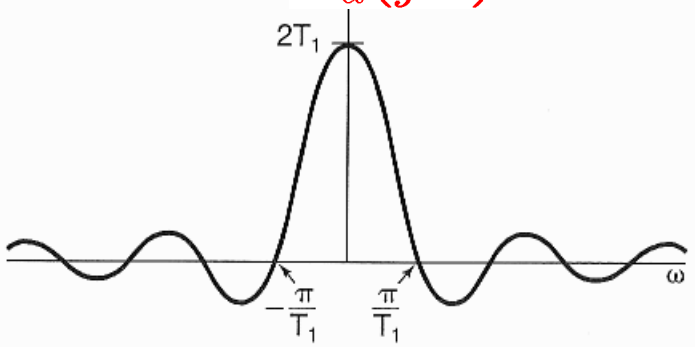

$T = 4$ $w_0 = 2\pi/4 = \pi/2$ $X_a(jw) = 2\,\dfrac{\sin(wT_1)}{w} = 2\,\dfrac{\sin(w)}{w}$

$x_p(t)$

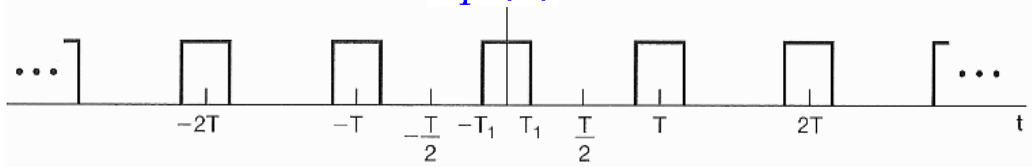

$$\Rightarrow \quad a_k = \frac{1}{T} X_a(jw)\Big|_{w=kw_0}$$

$$= \frac{\sin(k\pi/2)}{\pi k}$$

$$\Rightarrow \quad X_p(jw) = \sum_{k=-\infty}^{+\infty} 2\pi a_k \delta(w - kw_0) = \sum_{k=-\infty}^{+\infty} \frac{2\sin(k\pi/2)}{k} \delta(w - kw_0)$$

$$\Rightarrow \quad X_p(jmw_0) = \frac{2\sin(m\pi/2)}{m}$$

X(jw) of Aperiodic Signals and a_k of Periodic Signals

$x_a(t)$ $T_1 = 1$

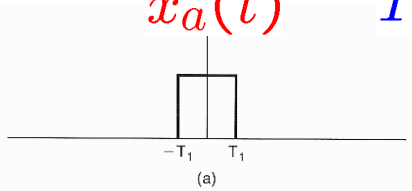

$X_a(jw)$

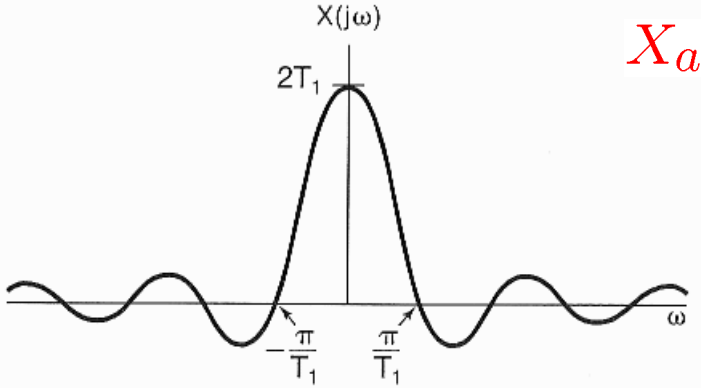

$T = 4$ $w_0 = 2\pi/4 = \pi/2$ $X_a(jw) = 2\dfrac{\sin(wT_1)}{w} = 2\dfrac{\sin(w)}{w}$

$x_p(t)$

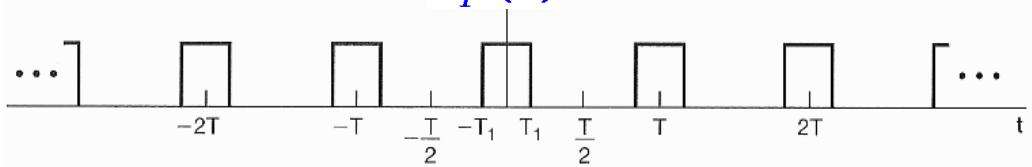

$\Rightarrow a_k = \dfrac{1}{T}X_a(jw)\Big|_{w=kw_0}$

$\Rightarrow X_p(jmw_0) = \dfrac{2\sin(m\pi/2)}{m} = 2\pi a_m = \dfrac{\sin(k\pi/2)}{\pi k}$

$= \dfrac{2\pi}{T}X_a(jmw_0)$

$= \dfrac{\pi}{2}X_a(jmw_0)$

m	0	1
a_m	1/2	$1/\pi$
$2\pi a_m$	π	2
$X_p(jmw_0)$	π	2
$X_a(jmw_0)$	2	$4/\pi$

$X_p(jw)$

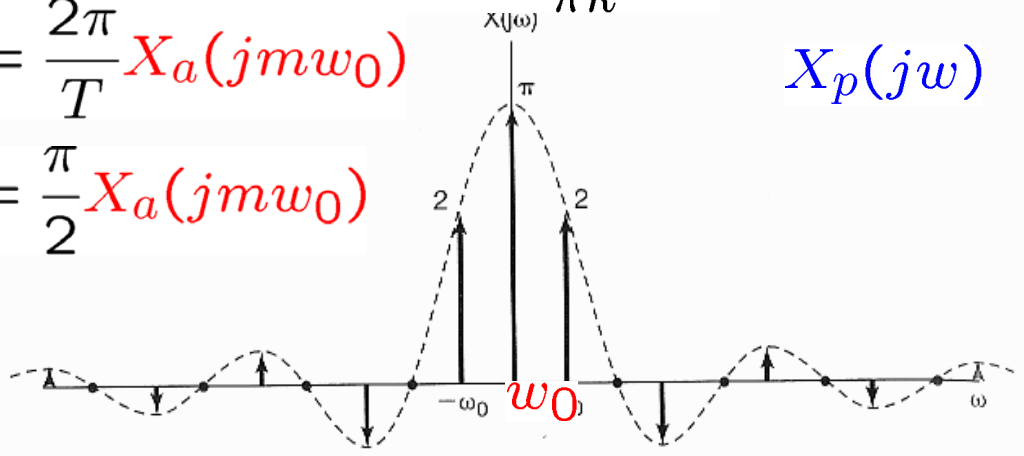

Flowchart

Signals & Systems (Chap 1)

LTI & Convolution (Chap 2)

Bounded/Convergent

Periodic

FS (Chap 3)

– CT

– DT

Aperiodic

FT

– CT (Chap 4)

– DT (Chap 5)

Unbounded/Non-convergent

LT – CT (Chap 9)

zT – DT (Chap 10)

Time-Frequency (Chap 6)

CT-DT (Chap 7)

Communication (Chap 8)

Control (Chap 11)