



RTS Scanner Removal and Installation Guide

version 1.0 | 07/27/2009



Power off the RTS Kiosk and unplug prior to maintenance.



Tools Needed:

- Magnetic Phillips head screw driver

Timeframe:

Approximatley 20 minutes for removal/installation process.

STEPS FOR REMOVAL



1

Unpackage replacement Scanner and set aside box for return shipping.




2

Remove 4 screws from back cover.



3

Remove back cover from kiosk and set to one side.

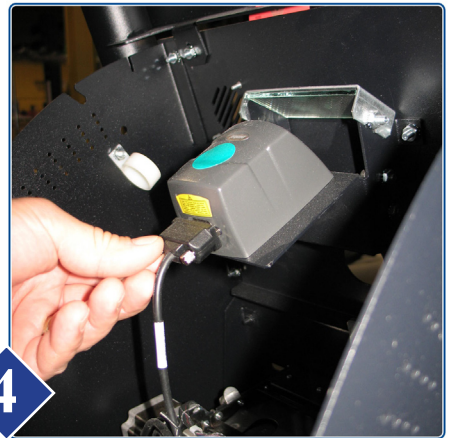

4


Unscrew scanner cable by hand from back of scanner.



5

Unscrew 3 screws holding scanner to scanner mount.


STEPS FOR REMOVAL

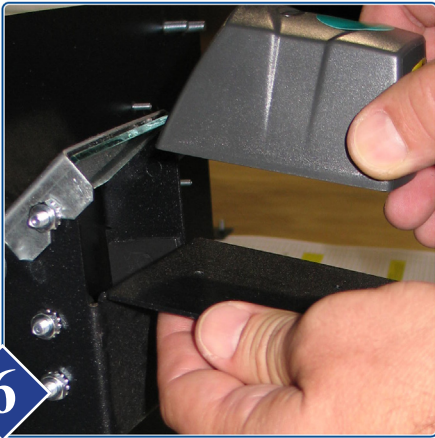

6 Replace defective scanner with replacement scanner.



7 Secure scanner using the 3 screws removed in step 5.

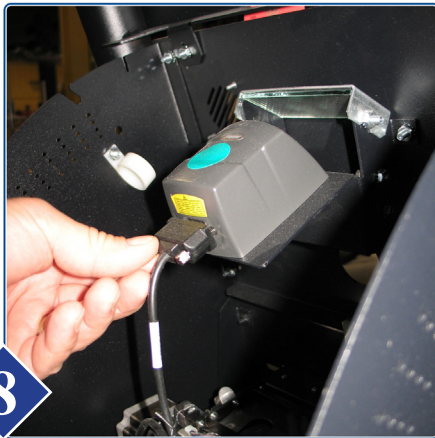

8 Plug in scanner cable to scanner and tighten cable screws by hand.



9 Replace back cover.



10 Secure back cover to kiosk using the 4 screws removed in step 3.

FINAL STEP

Use return shipping label included inside the replacement box and drop off package to UPS Center for return shipping no later than the following day.

Please do not remove, damage, or marker over the Serial Label on the box. This information is used to catalog completion of replacement install and return.