



smorphi²

transforming learning with
transformer robots

assembly & info

(contents)

PART LIST	-----	(02)
BASIC ASSEMBLY TIPS	-----	(03)
SMORPHI ASSEMBLY		
A MECHANICAL	-----	(05)
B ELECTRONIC	-----	(22)
APP	-----	(41)
FURTHER EXPLORATION	-----	(44)

(part list)

8 x Acrylic Base Plate



4 x Aluminium Base Plate



8 x Base Skirt Panel A



8 x Base Skirt Panel B



8 x Mecanum Wheel (Right)



8 x Mecanum Wheel (Left)



16 x Mecanum Motor



16 x Motor Shaft Sleeve



16 x Motor Mount



6 x Solenoid



6 x Solenoid Latch Mount



6 x Solenoid Latch Guide



6 x Solenoid Catch



All colors of parts are represented accurately here.
In the assembly steps, colors of some parts will be changed for diagram clarity.

6 x Hinge Mount



3 x Hinge Mechanism



1 x Battery



2 x Battery bracket



1 x Masterboard (ESP32)



4 x Slaveboard



2 x Sound Sensor



1 x Temperature Sensor



4 x IR Sensor



1 x Pixy2 Camera



1 x Pixy2 Mount



10 x Sensor Lock



32 x Hex M-F M3 Nylon 45mm



28 x Hex F-F M3 Nylon 10mm



200 x Cap Screw M3x5



50 x Cap Screw M3x25



15 x Countersunk Screw M4x8



2 x Wing Screw M3x5



1 x USB-C Cable



9 x 4-pin Connector



4 x 8-pin Connector



1 x Battery Charger



1 x Ceramic Screwdriver CD-25




1 x HEX Key 1.5mm




1 x Ribbon cable
(included in pixycam package)





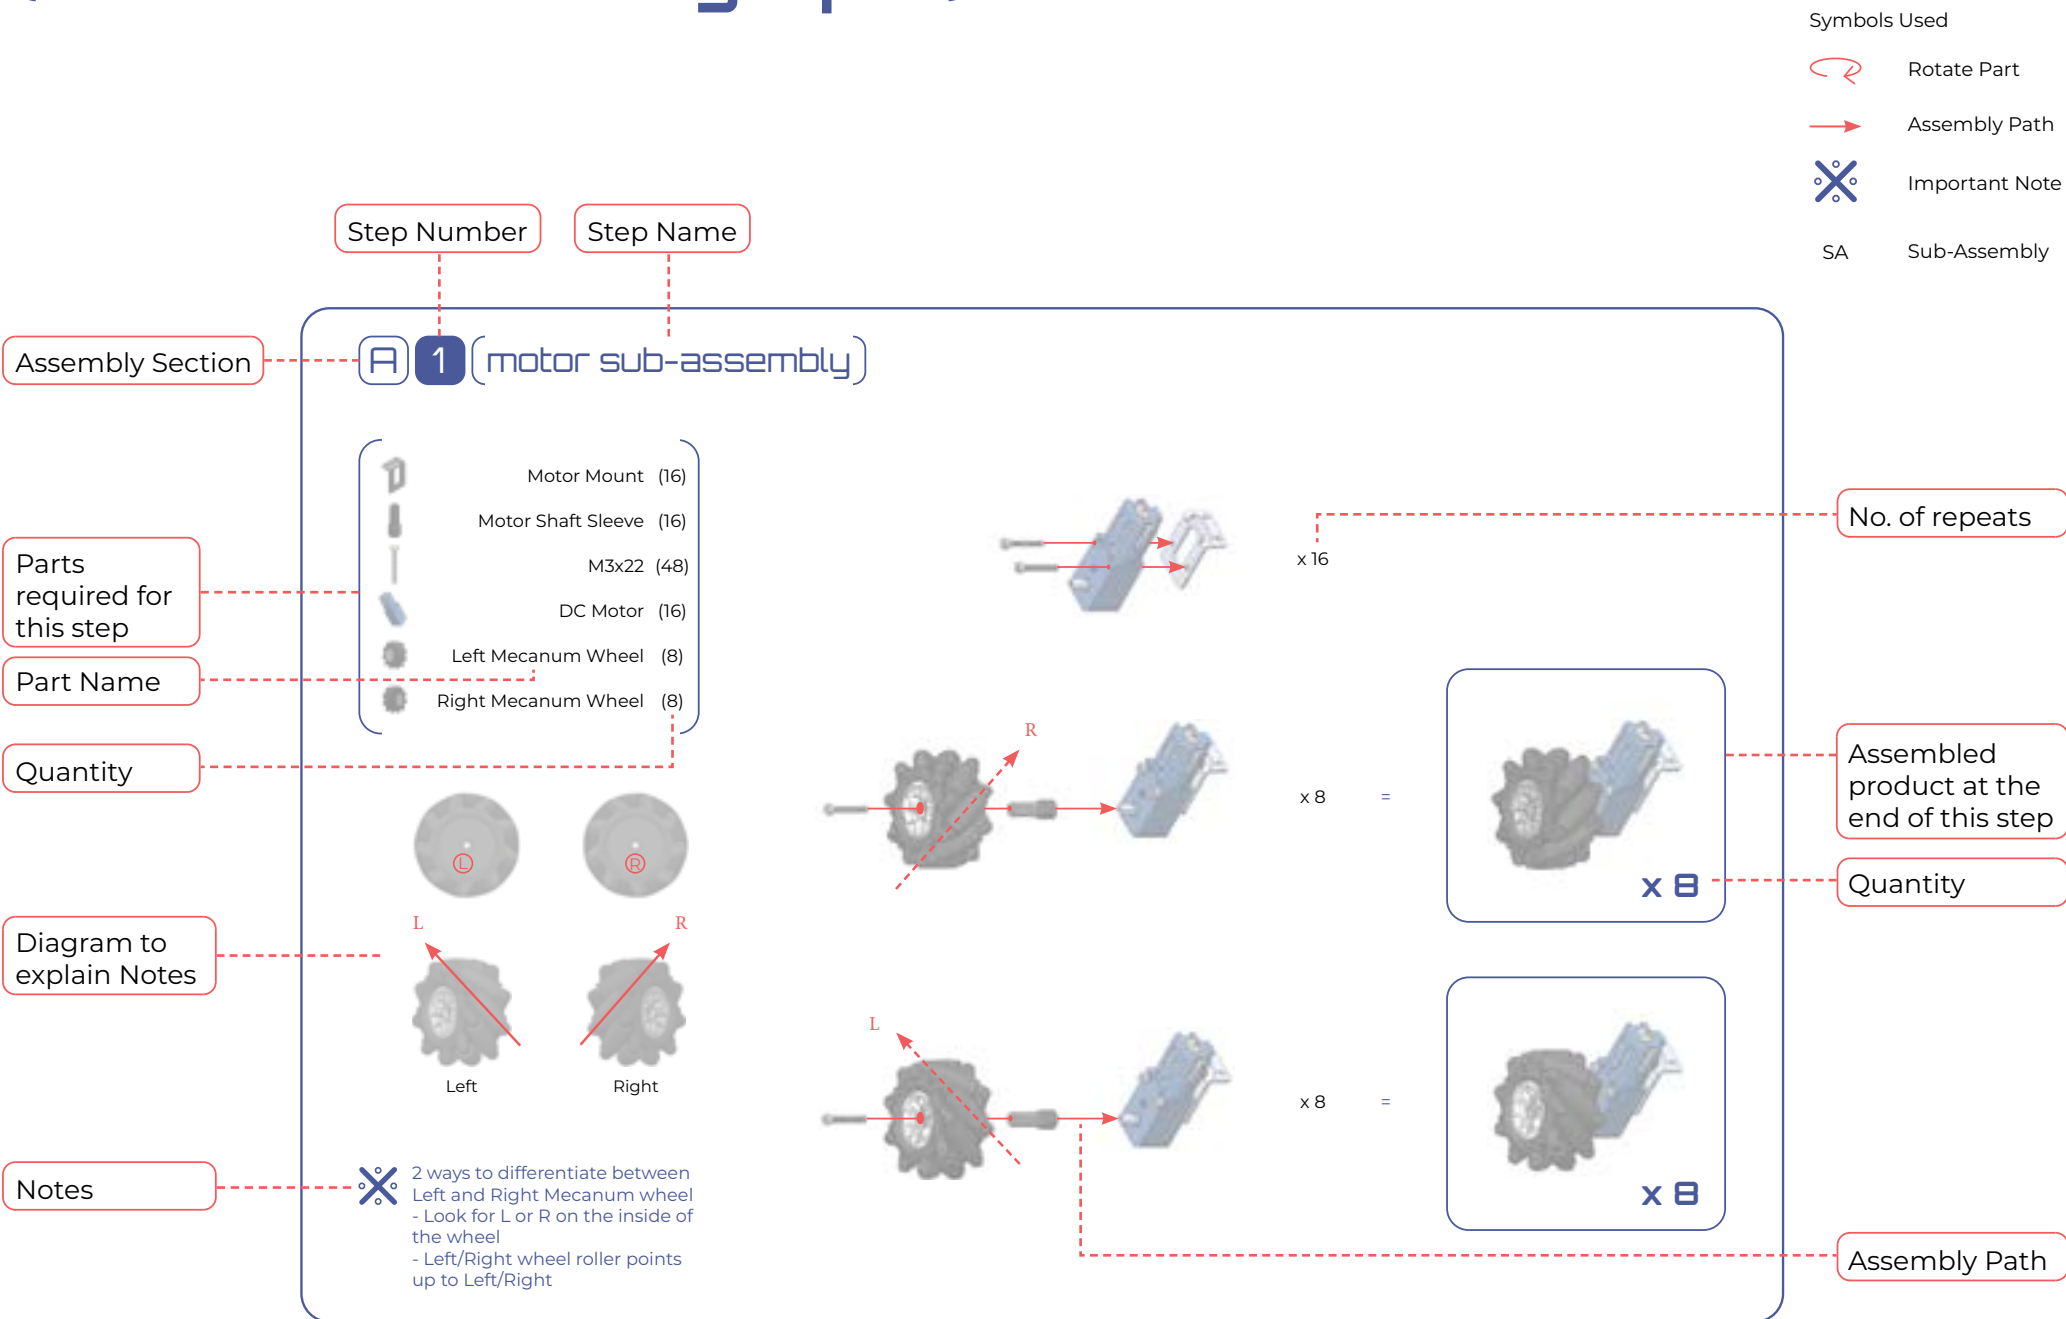

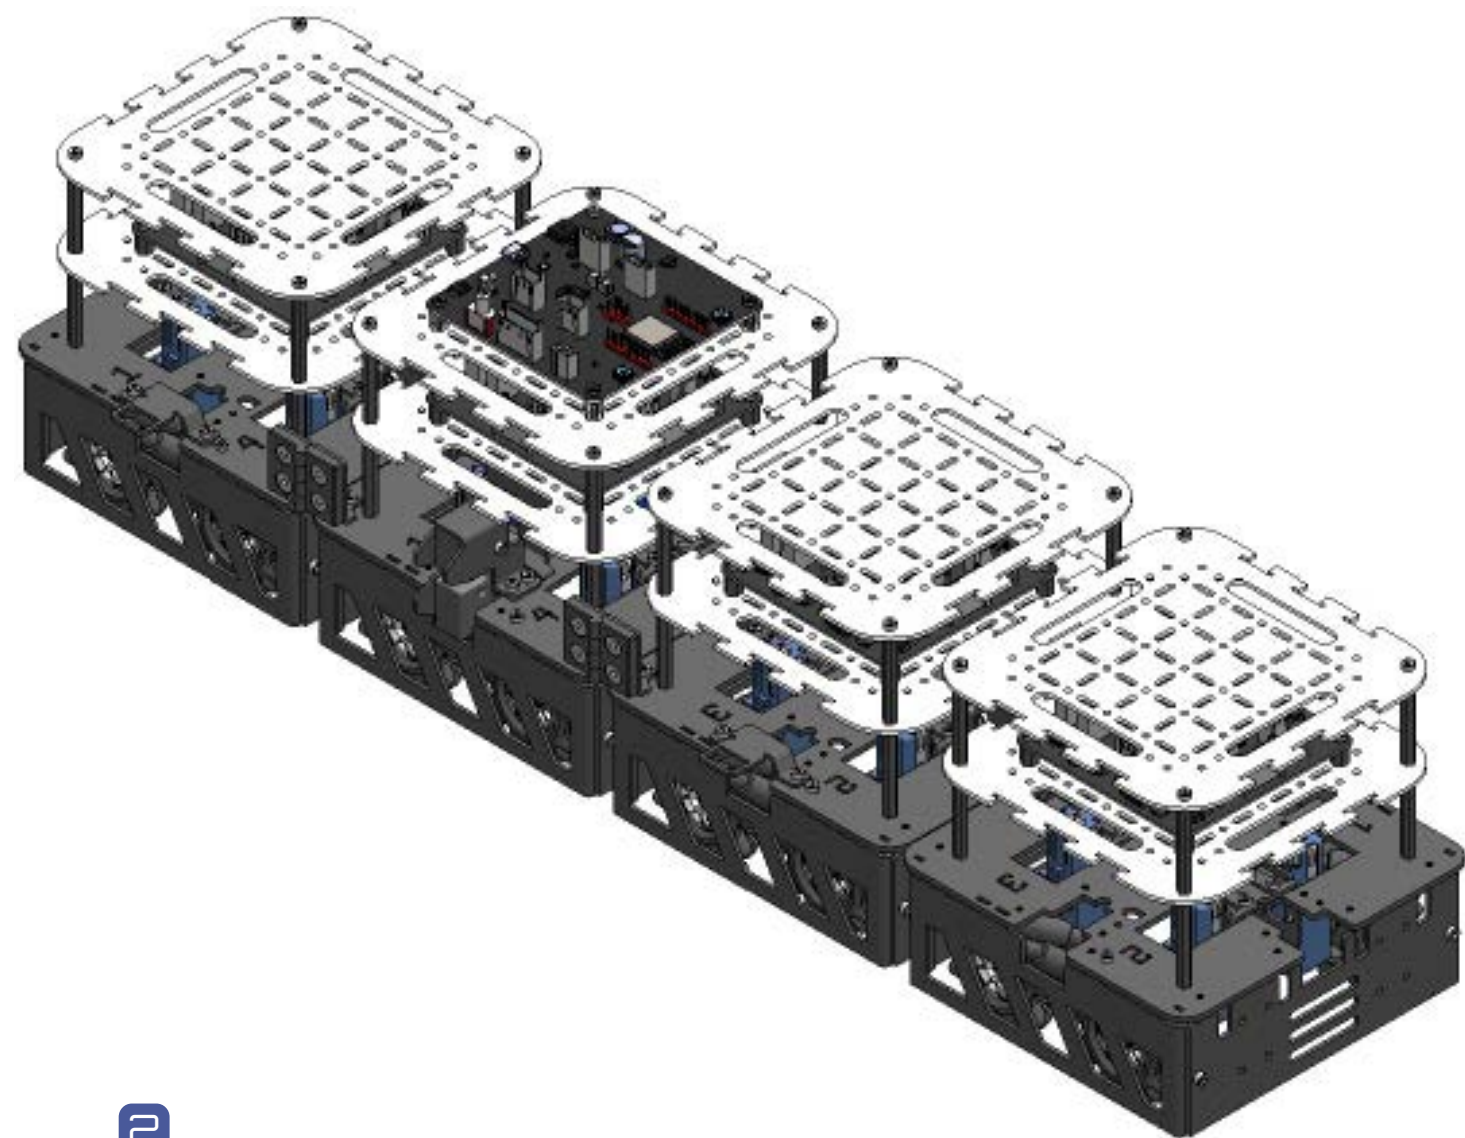


(basic assembly tips)







A 1 (motor sub-assembly)

-  Motor Mount (16)
-  Motor Shaft Sleeve (16)
-  M3x22 (48)
-  DC Motor (16)
-  Left Mecanum Wheel (8)
-  Right Mecanum Wheel (8)

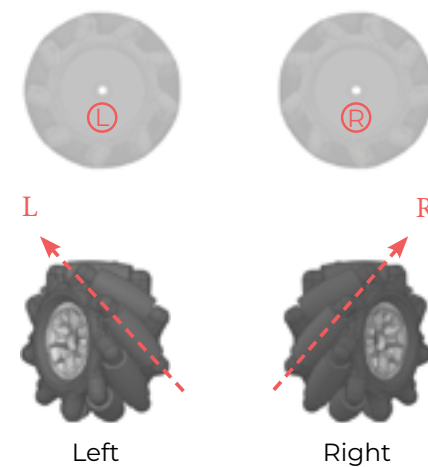


- ✕ 2 ways to differentiate between Left and Right Mecanum wheel
- Look for L or R on the inside of the wheel
 - Left/Right wheel roller points up to Left/Right

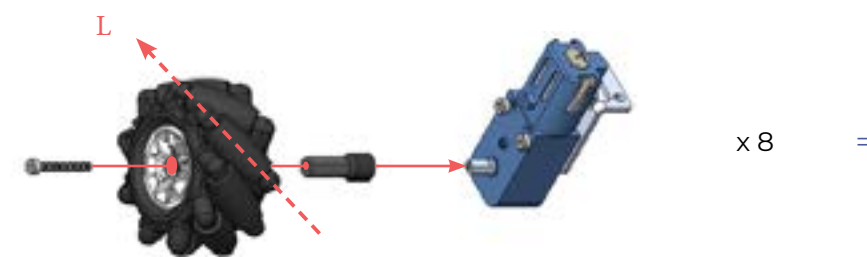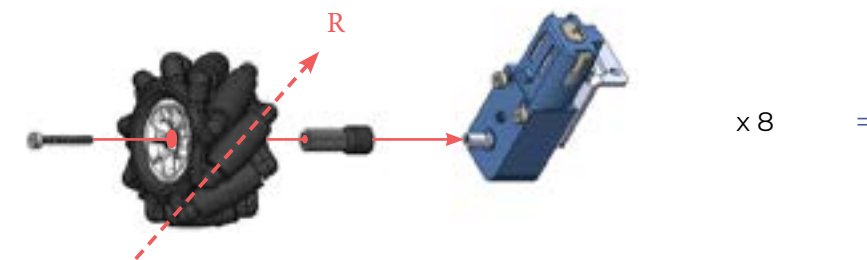







A2 (base module sub-assembly)

- AI Base Plate (4)
- Hex M-F M3 45mm (16)
- M3x5 (32)
- Left Wheel SA (8)
from A.1
- Right Wheel SA (8)
from A.1

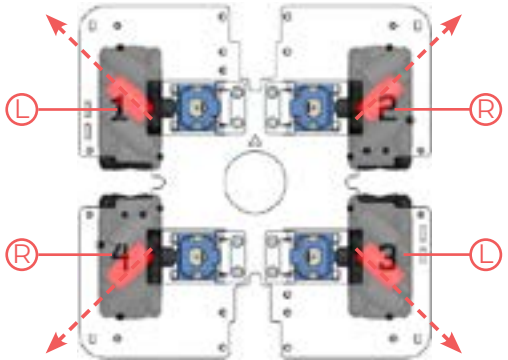


✖ Make sure that the numbers are facing the right way up as shown in the plan view above.

✖ Before attaching each wheel, check that the wheel is of the correct orientation for each numbered slot.

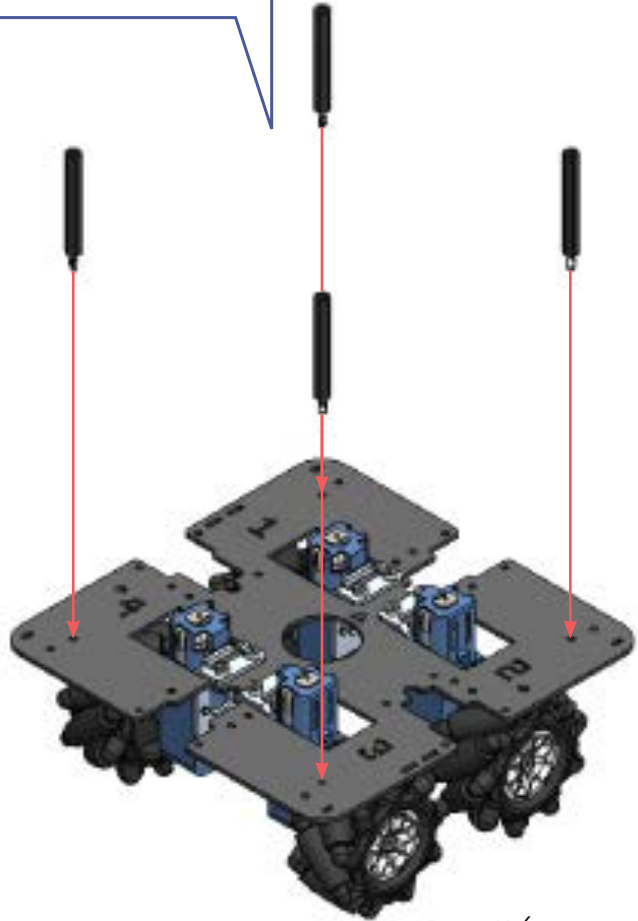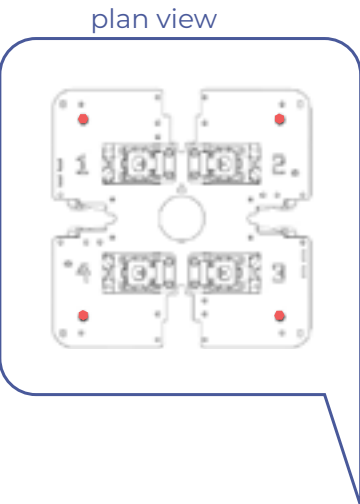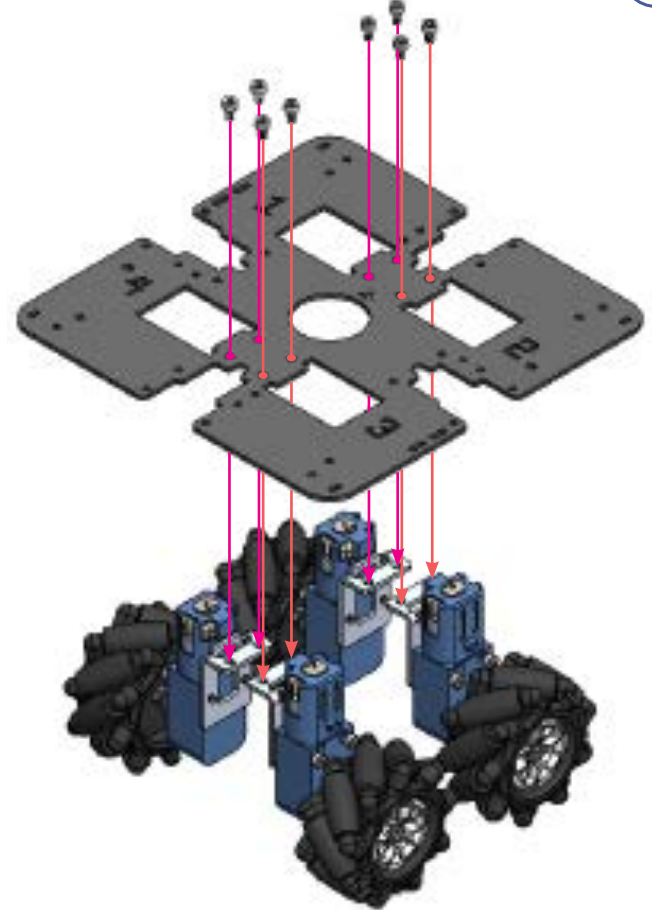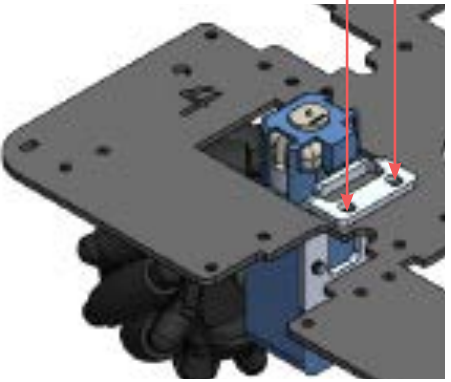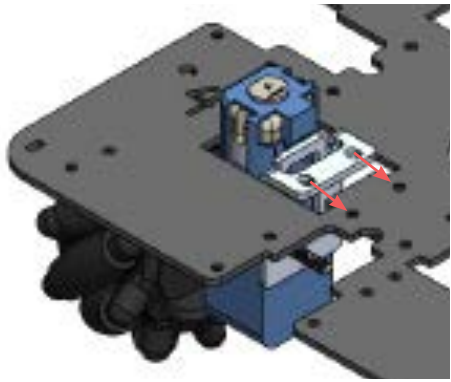
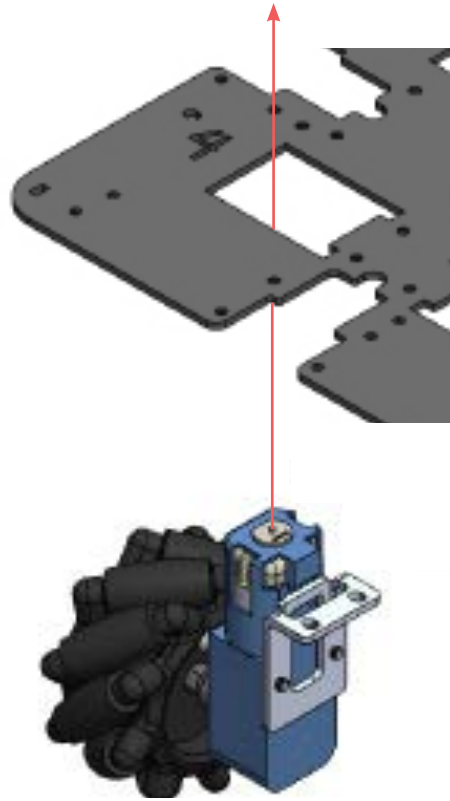


x 4 =

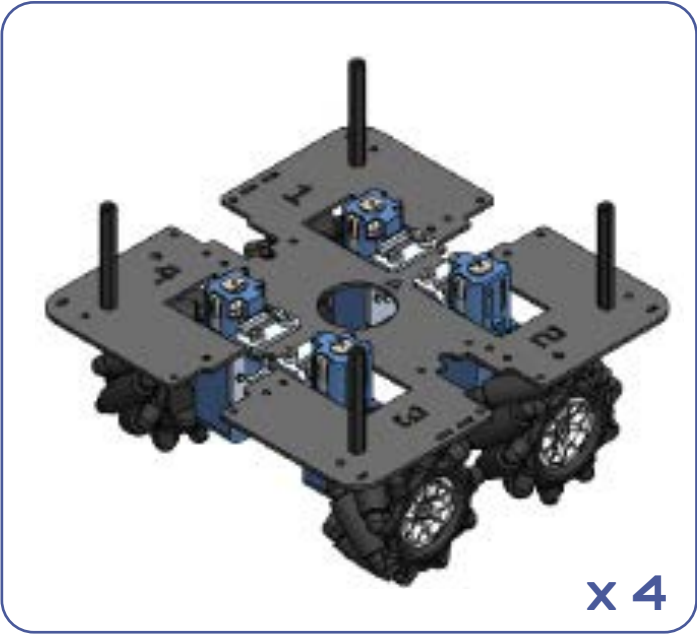


x 4

- Base Skirt Panel A (8)
- Base Skirt Panel B (8)
- M3 x 5 (24)

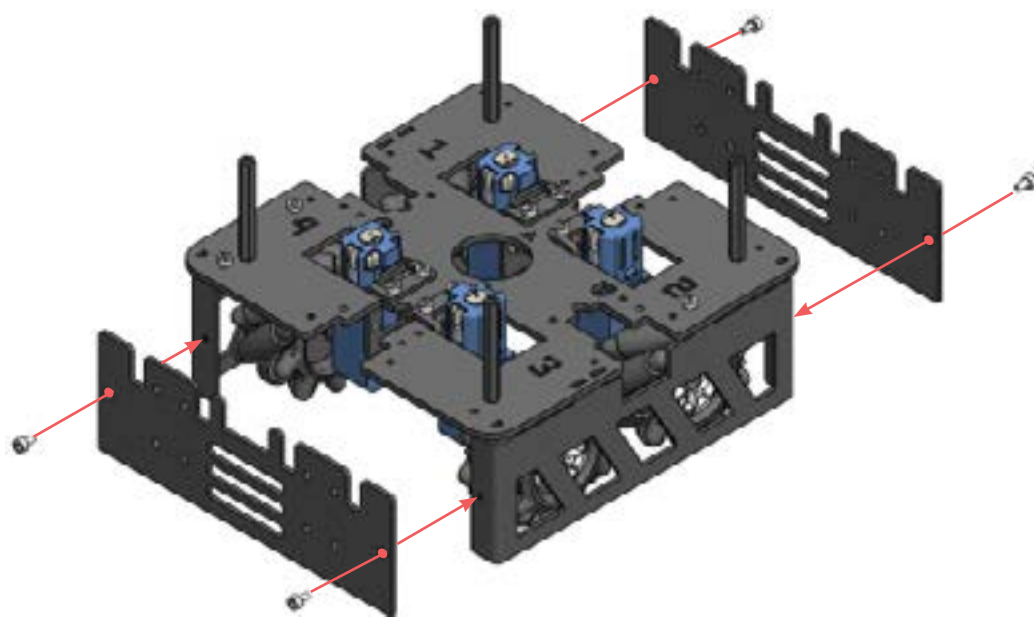
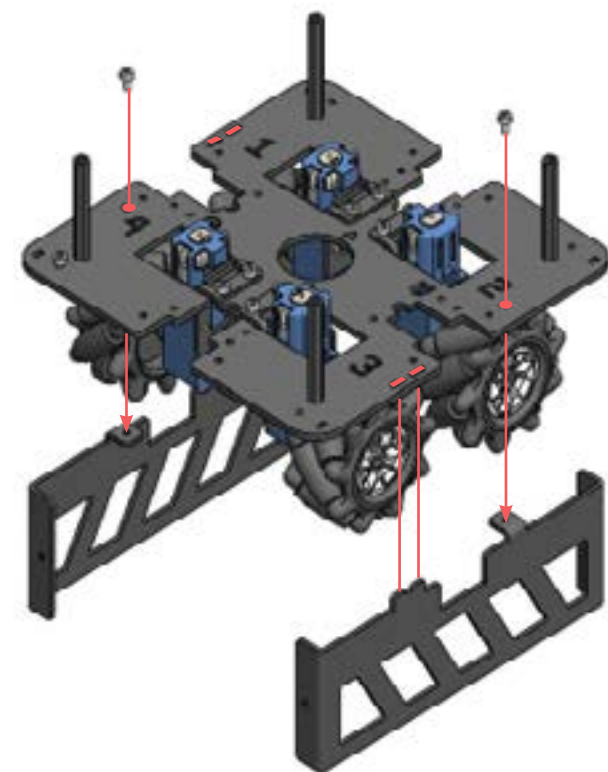


x 4 =

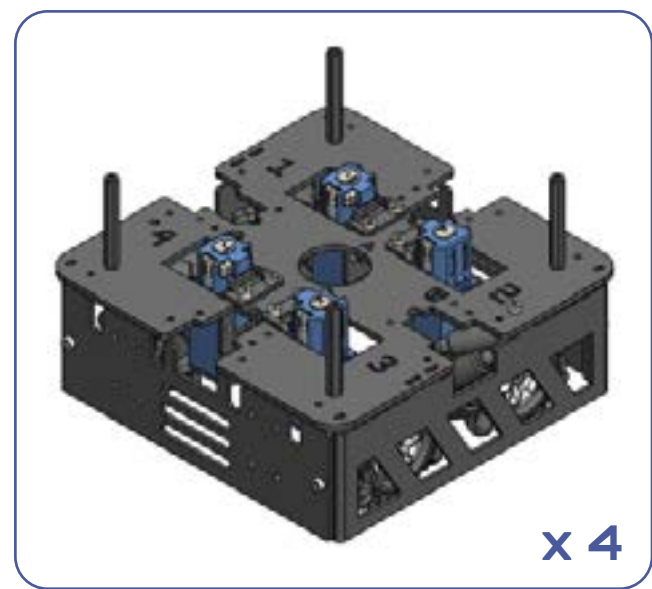



A3 (solenoid latch sub-assembly)

- Solenoid latch (6)
- Solenoid latch mount (6)
- Solenoid latch guide (6)
- M3 x 5 (12)

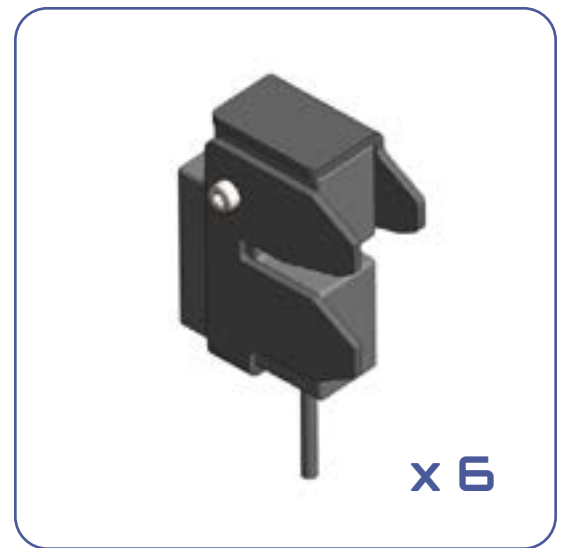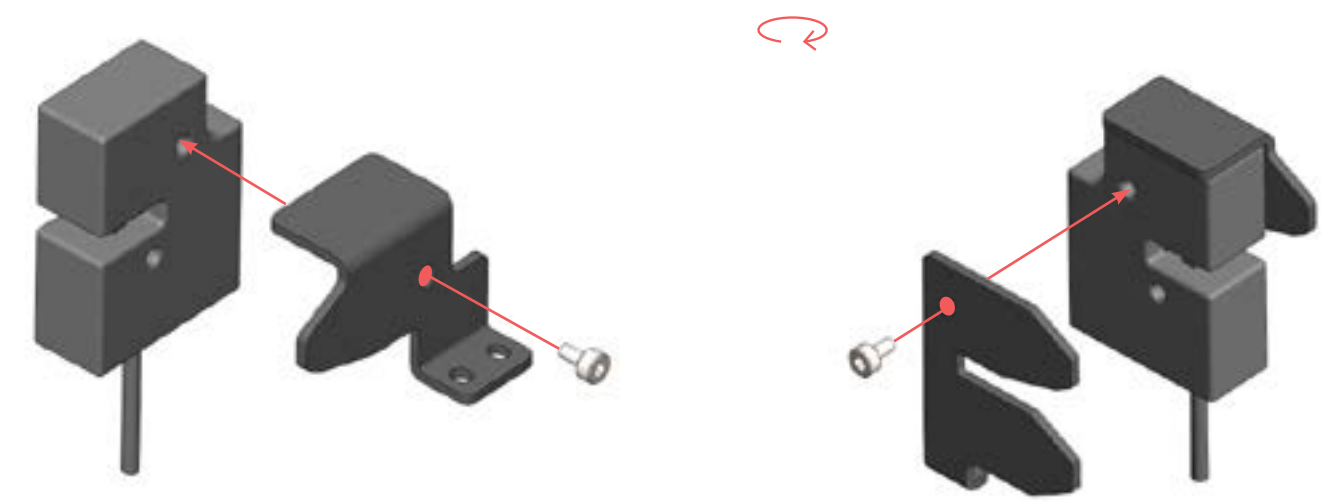

A 4 (module 1 mechanical sub-assembly)

- Hinge mount (1)
- Solenoid catch (1)
- Solenoid latch SA (2)
from A.3
- Base Module SA (1)
from A.2
- M3 x 5 (7)





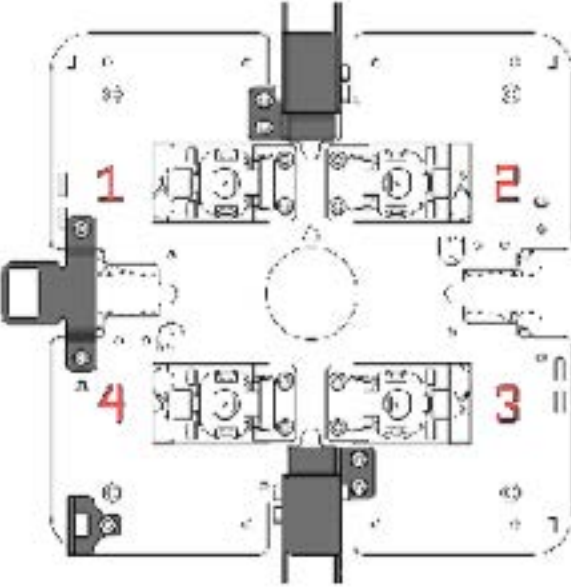
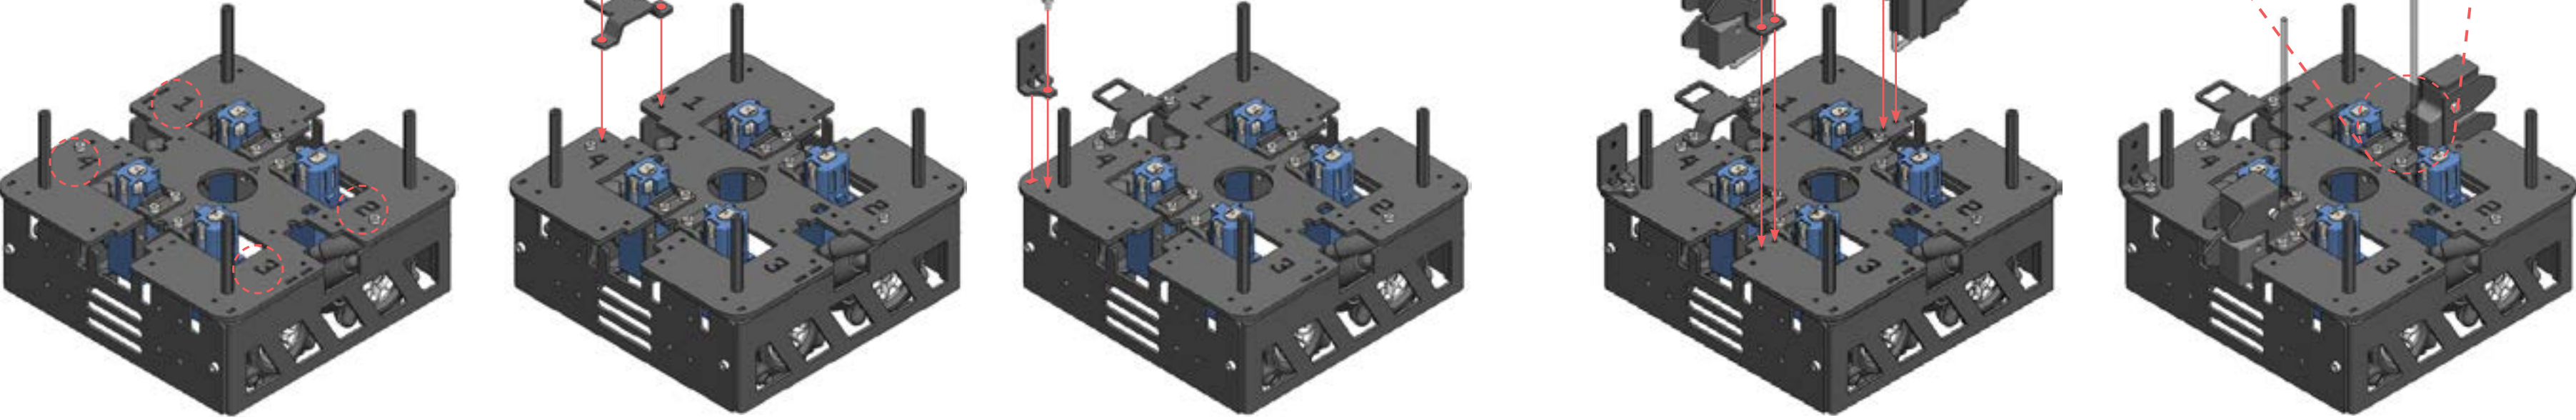


✖ Pay attention to the numbers and their positions in relation to the parts being attached.

✖ Check that the parts have been attached in the right location, in relation to the numbers.

A5 (module 2 mechanical sub-assembly)

- Hinge mount (2)
- Solenoid catch (2)
- Solenoid latch SA (1)
from A.3
- Battery bracket (2)
- Li-ion Battery (1)
- Base Module SA (1)
from A.2
- M3 x 5 (9)
- Wing Screw M3 x 5 (1)

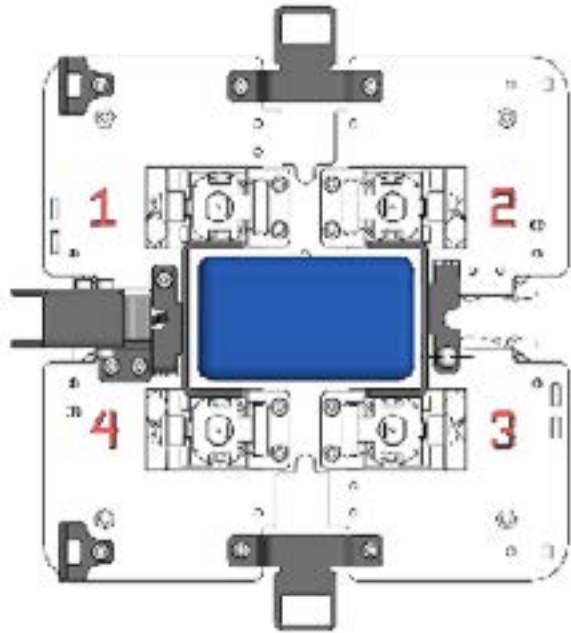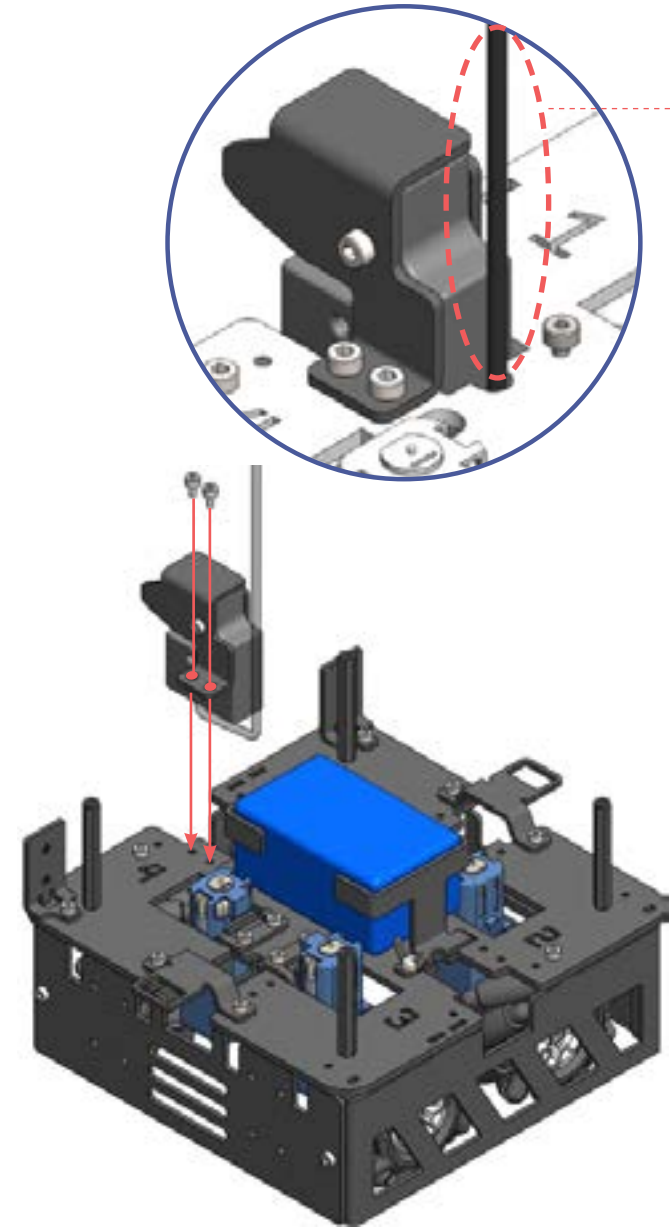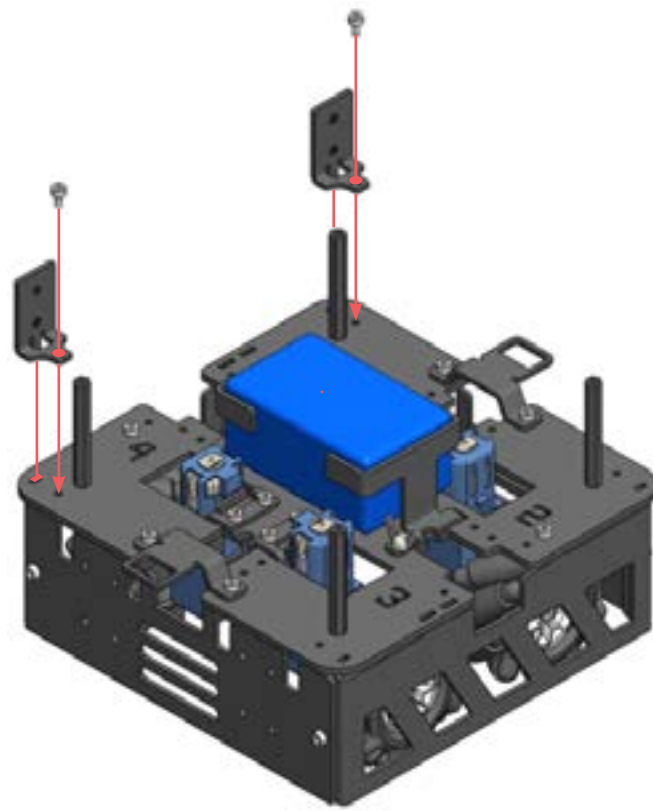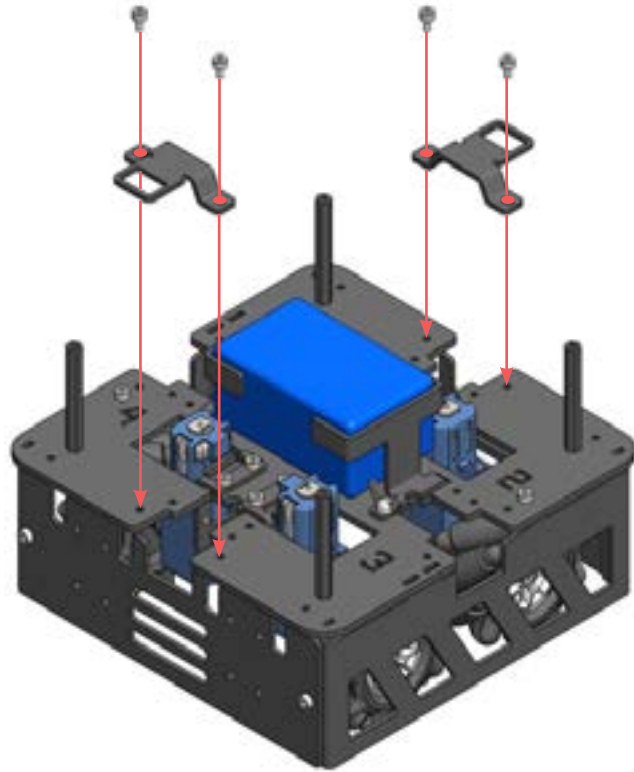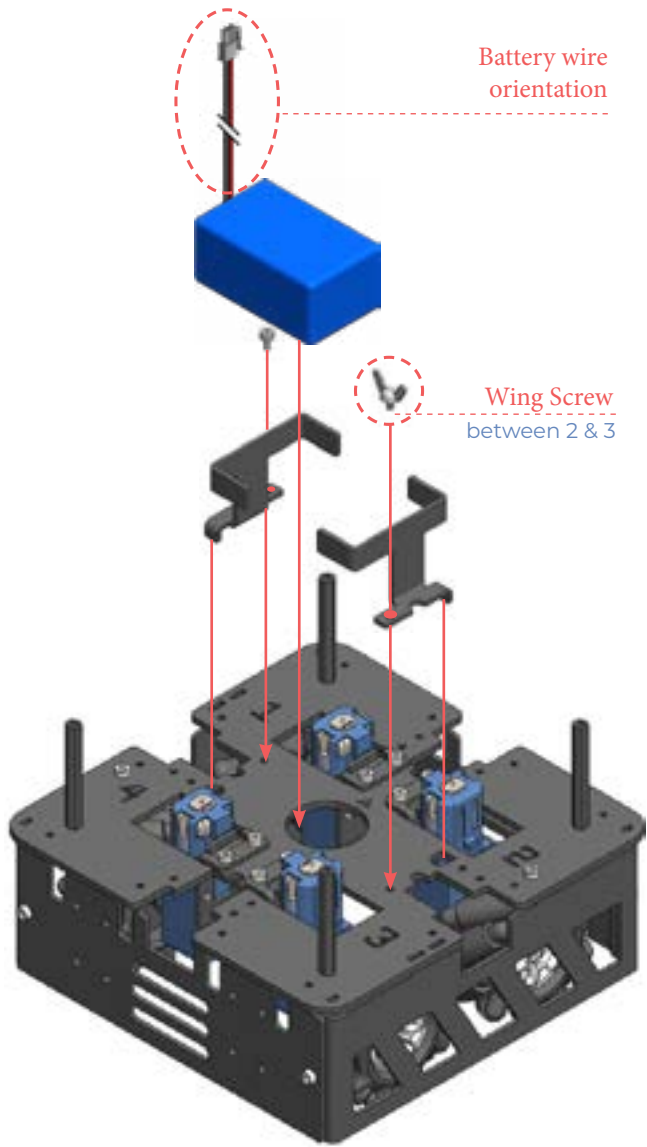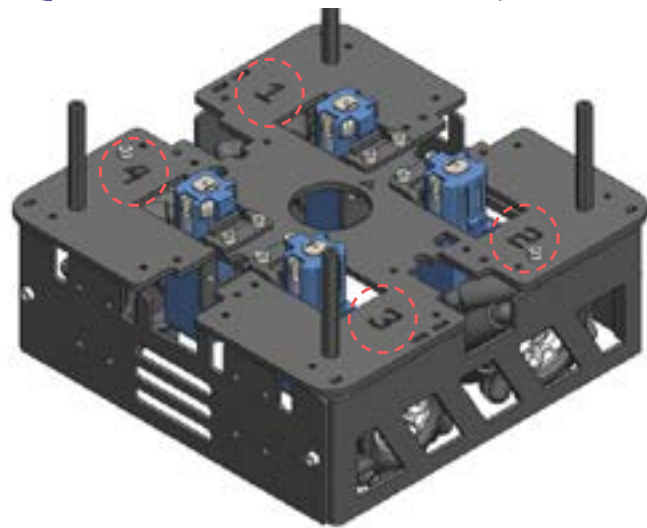


✖ Pay attention to the numbers and their positions in relation to the parts being attached.


✖ Check that the parts have been attached in the right location.

A6 (module 3 mechanical sub-assembly)

- Hinge mount (2)
- Solenoid catch (2)
- Solenoid latch SA (2)
from A.3
- Base Module SA (1)
from A.2
- M3 x 5 (10)

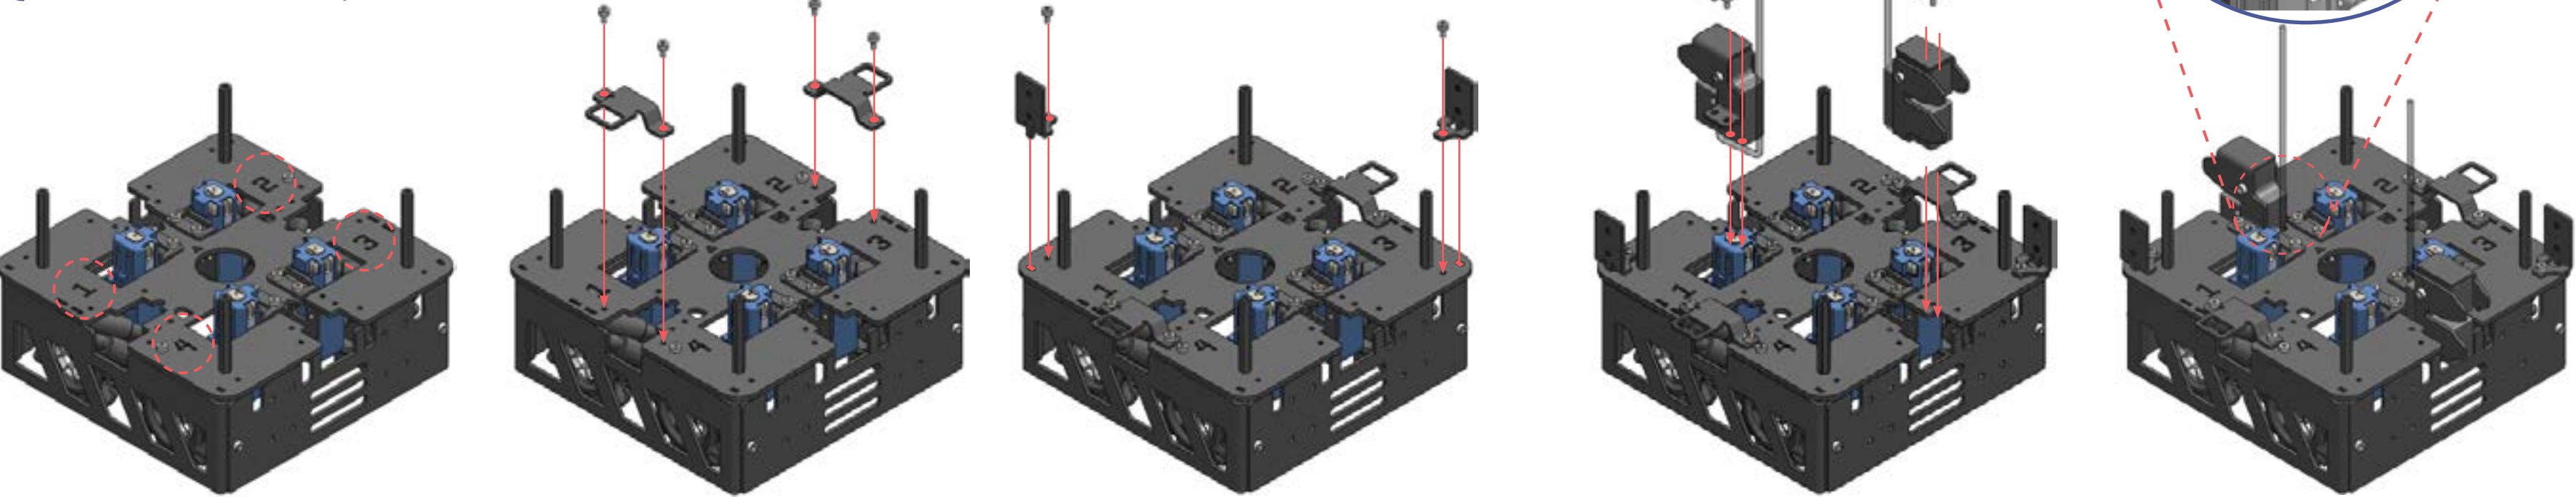

Solenoid Wire

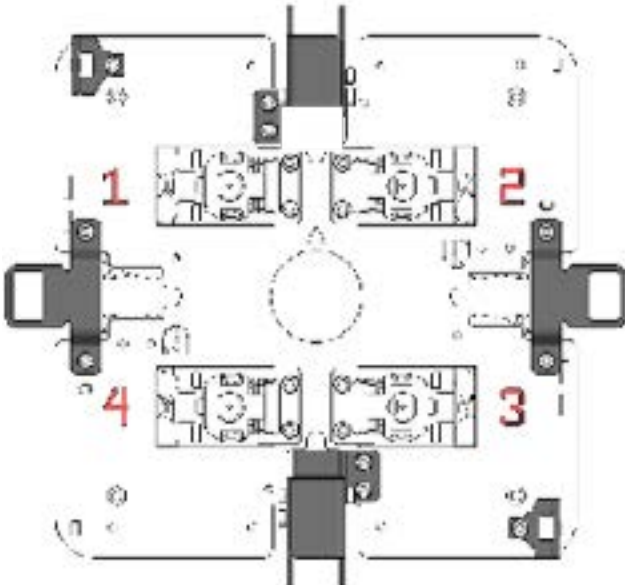


⌘ Pay attention to the numbers and their positions in relation to the parts being attached.


⌘ Check that the parts have been attached in the right location, in relation to the numbers.

A7 (module 4 mechanical sub-assembly)

- Hinge mount (1)
- Solenoid catch (1)
- Solenoid latch SA (1)
from A.3
- Base Module SA (1)
from A.2
- M3 x 5 (5)

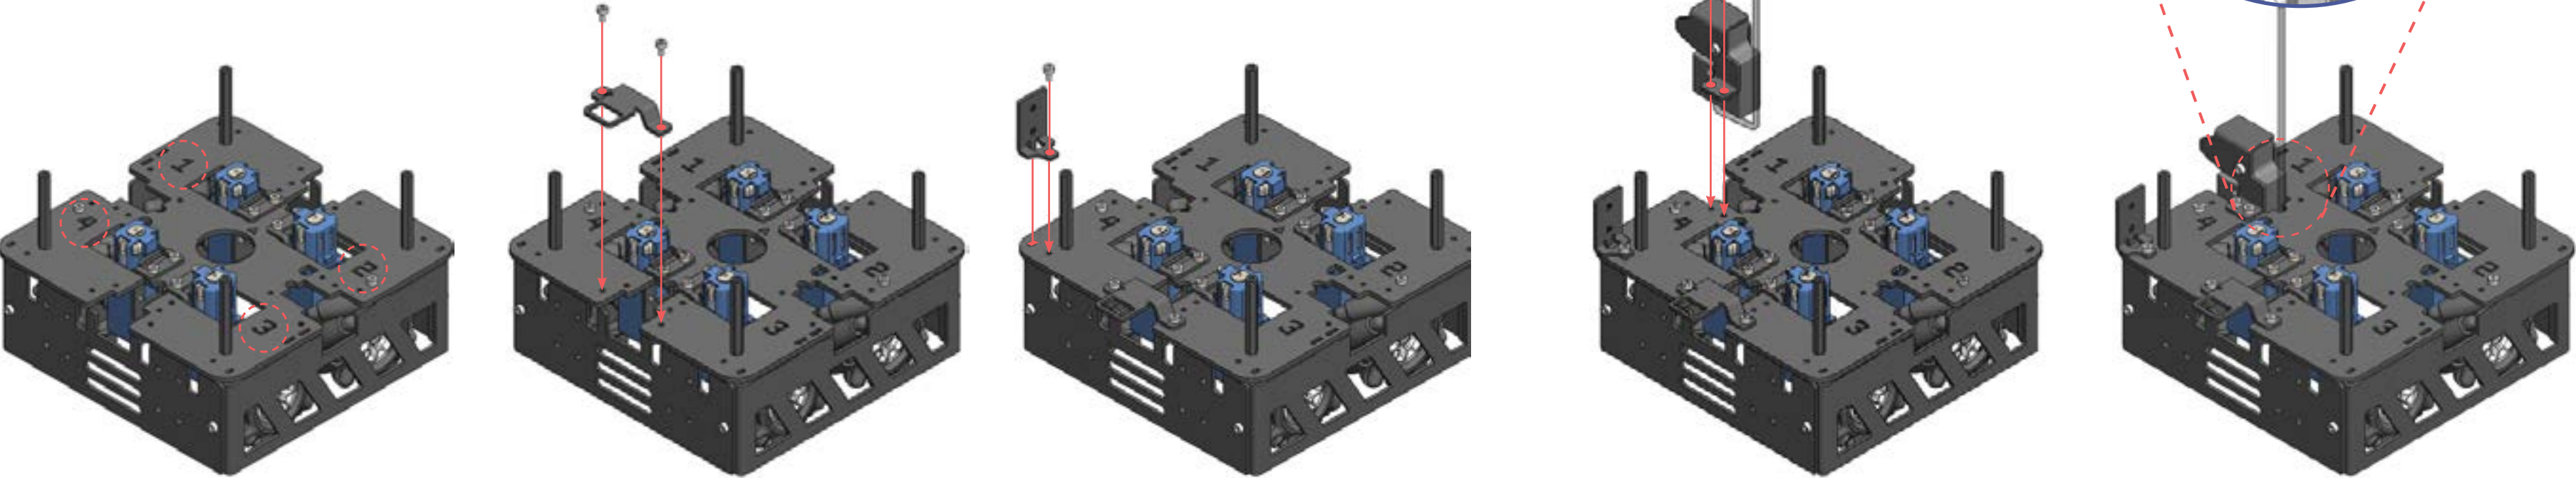

⊗ Pay attention to the numbers and their positions in relation to the parts being attached.

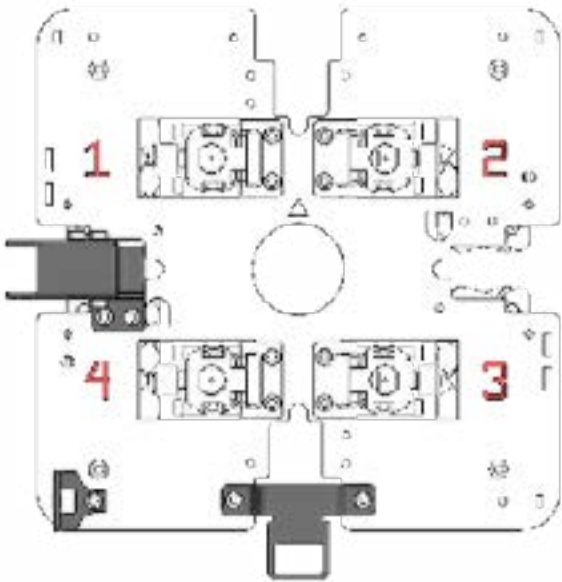


⊗ Check that the parts have been attached in the right location.




A B (full mechanical assembly)




- Module 1 (1)
from A.4
- Module 2 (1)
from A.5
- Module 3 (1)
from A.6
- Module 4 (1)
from A.7
- Hinge mechanism (3)
M4 x 8 (12)

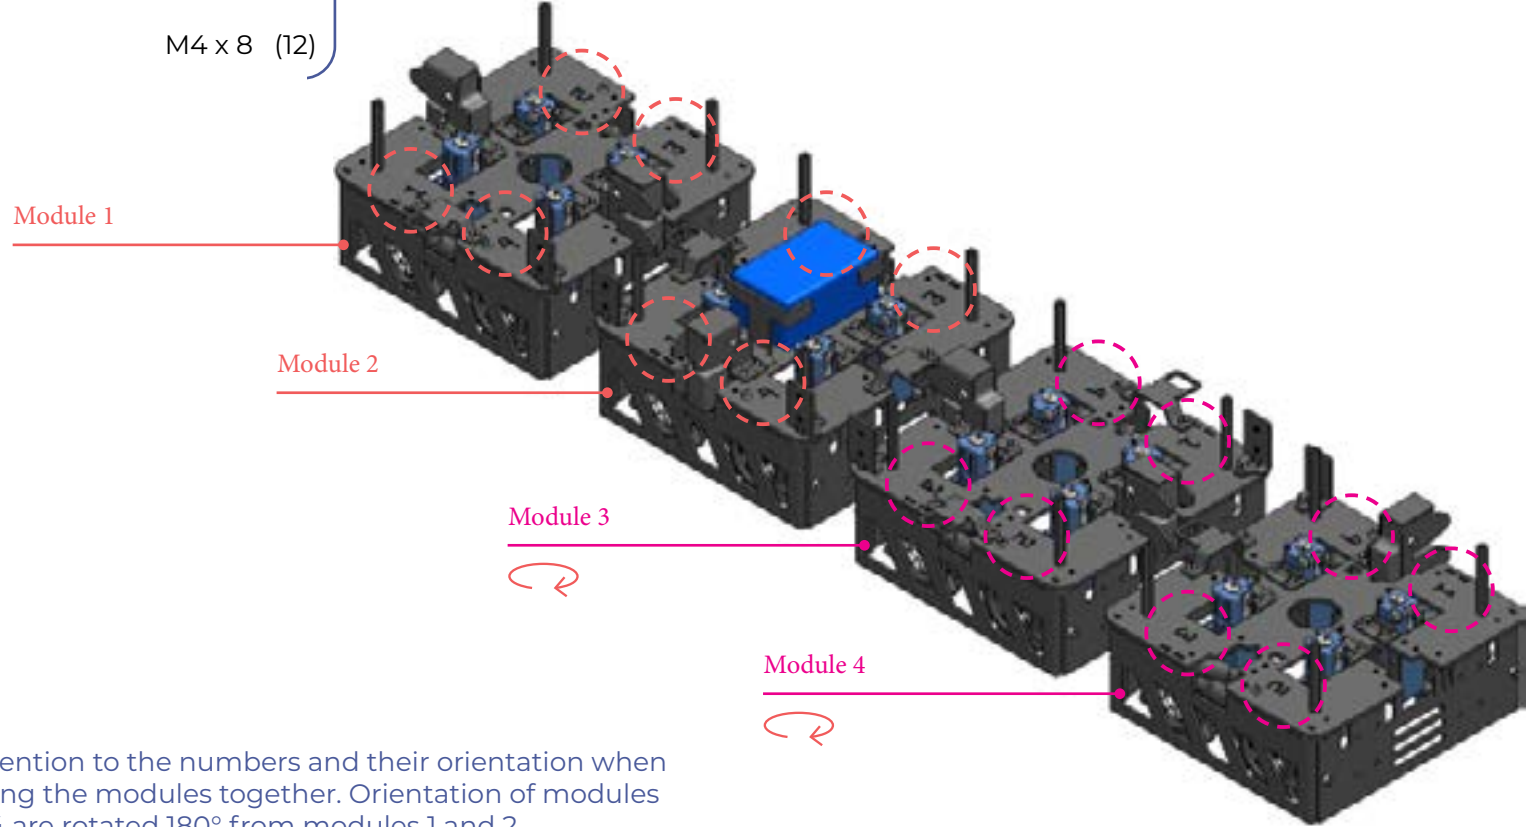


⊗ Pay attention to the numbers and their orientation when attaching the modules together. Orientation of modules 3 and 4 are rotated 180° from modules 1 and 2.

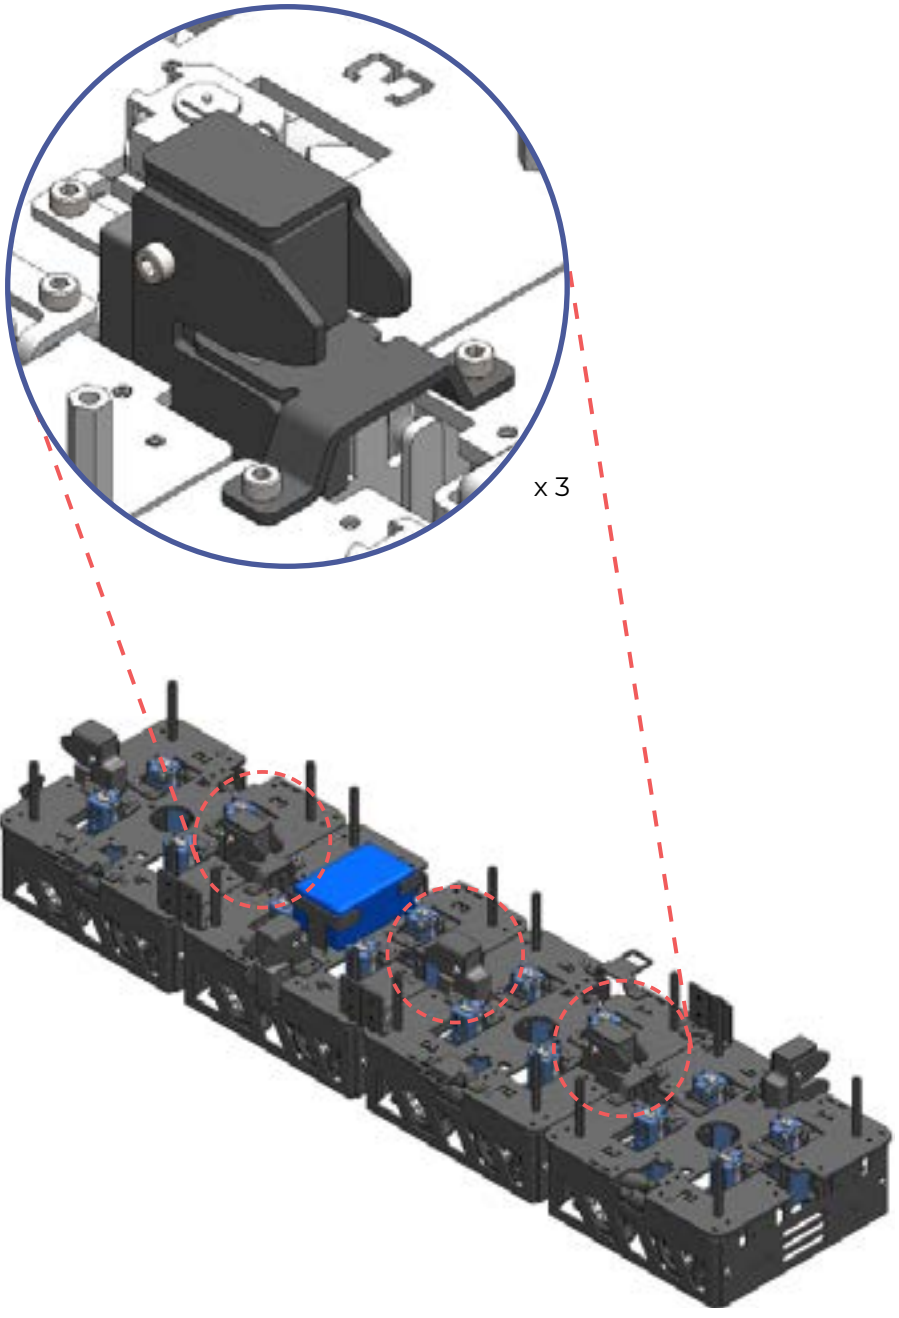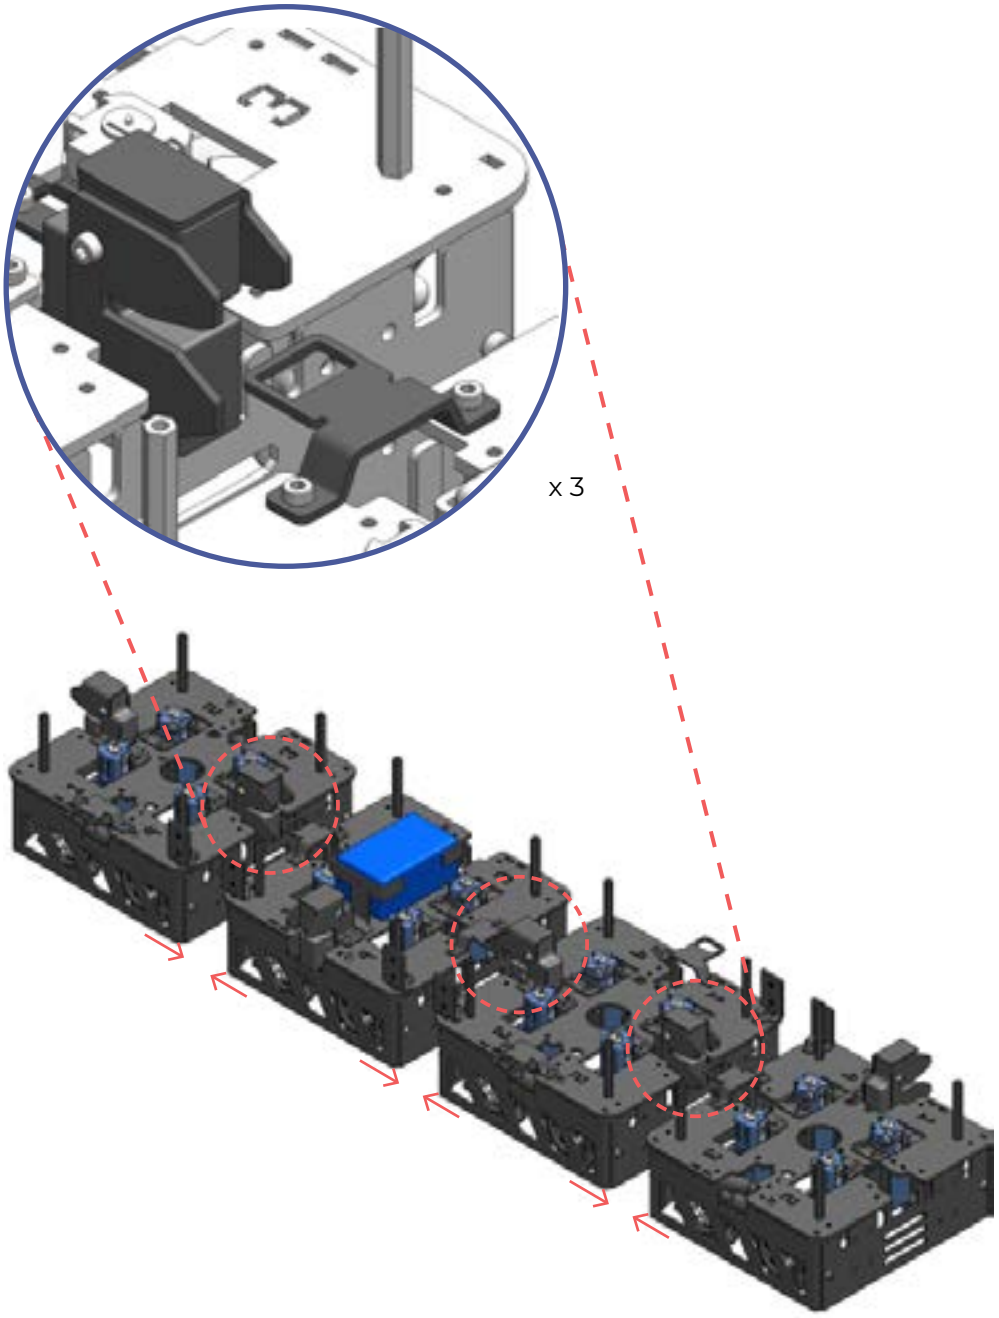
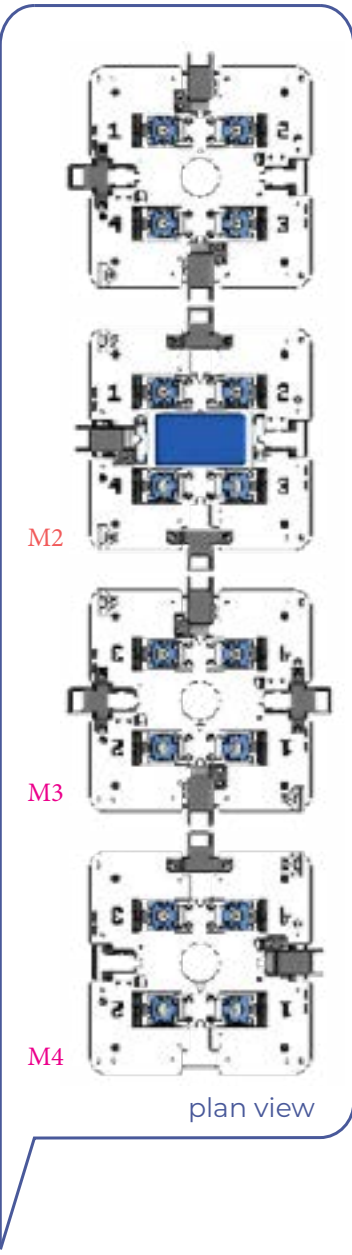


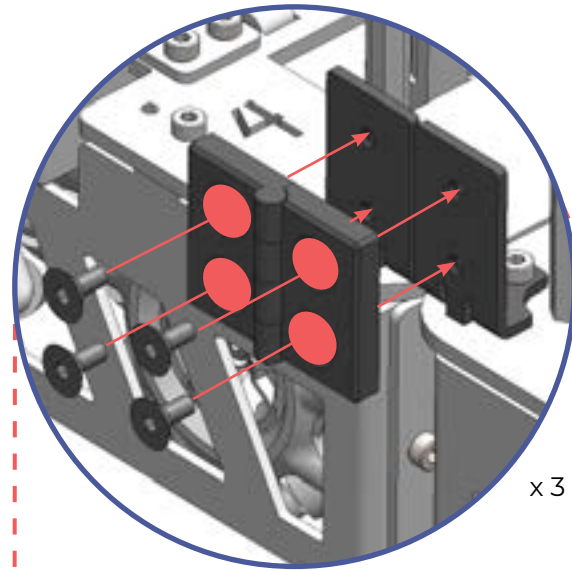

x 3

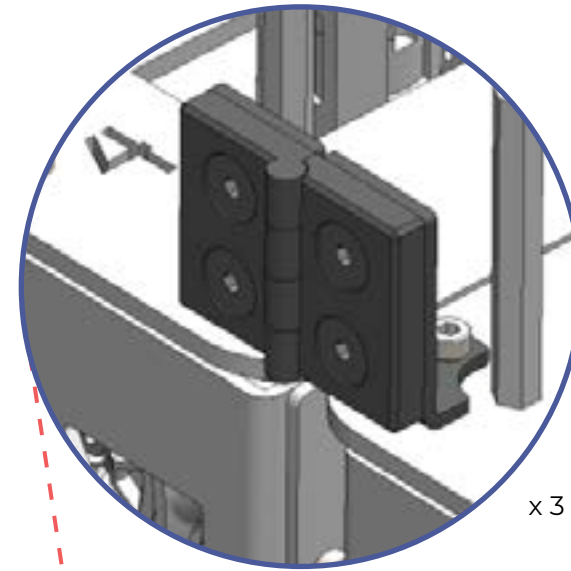


x 3

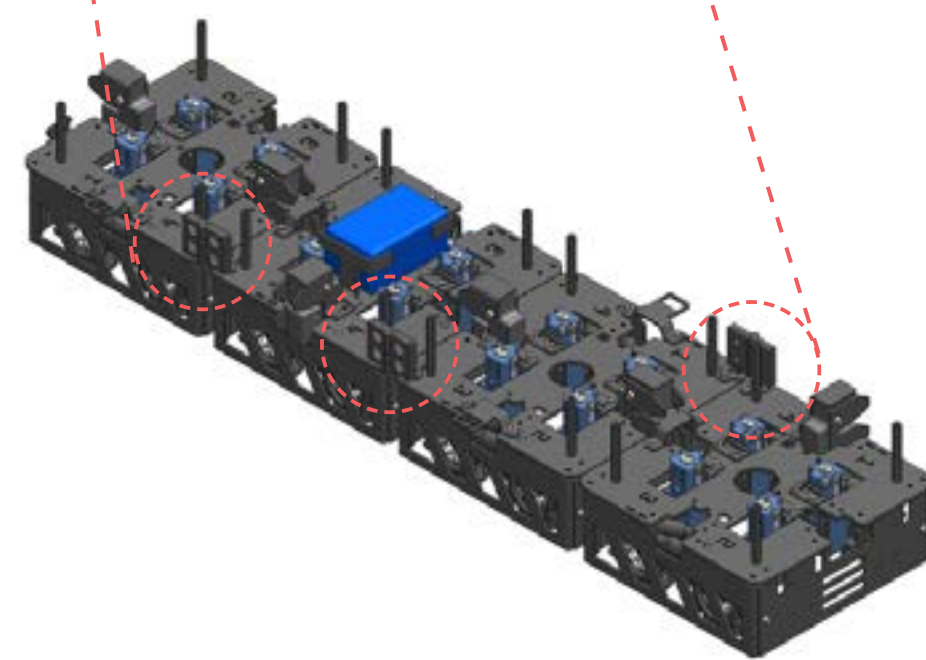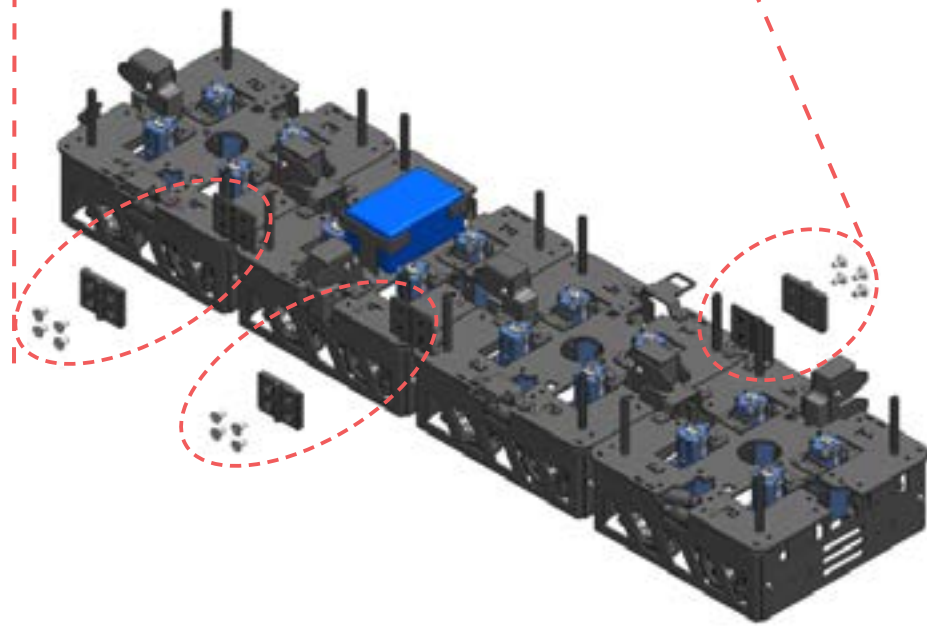

Check all the positions of solenoids, solenoid catches, hinge mounts before proceeding to section B.




mechanical assembly completed

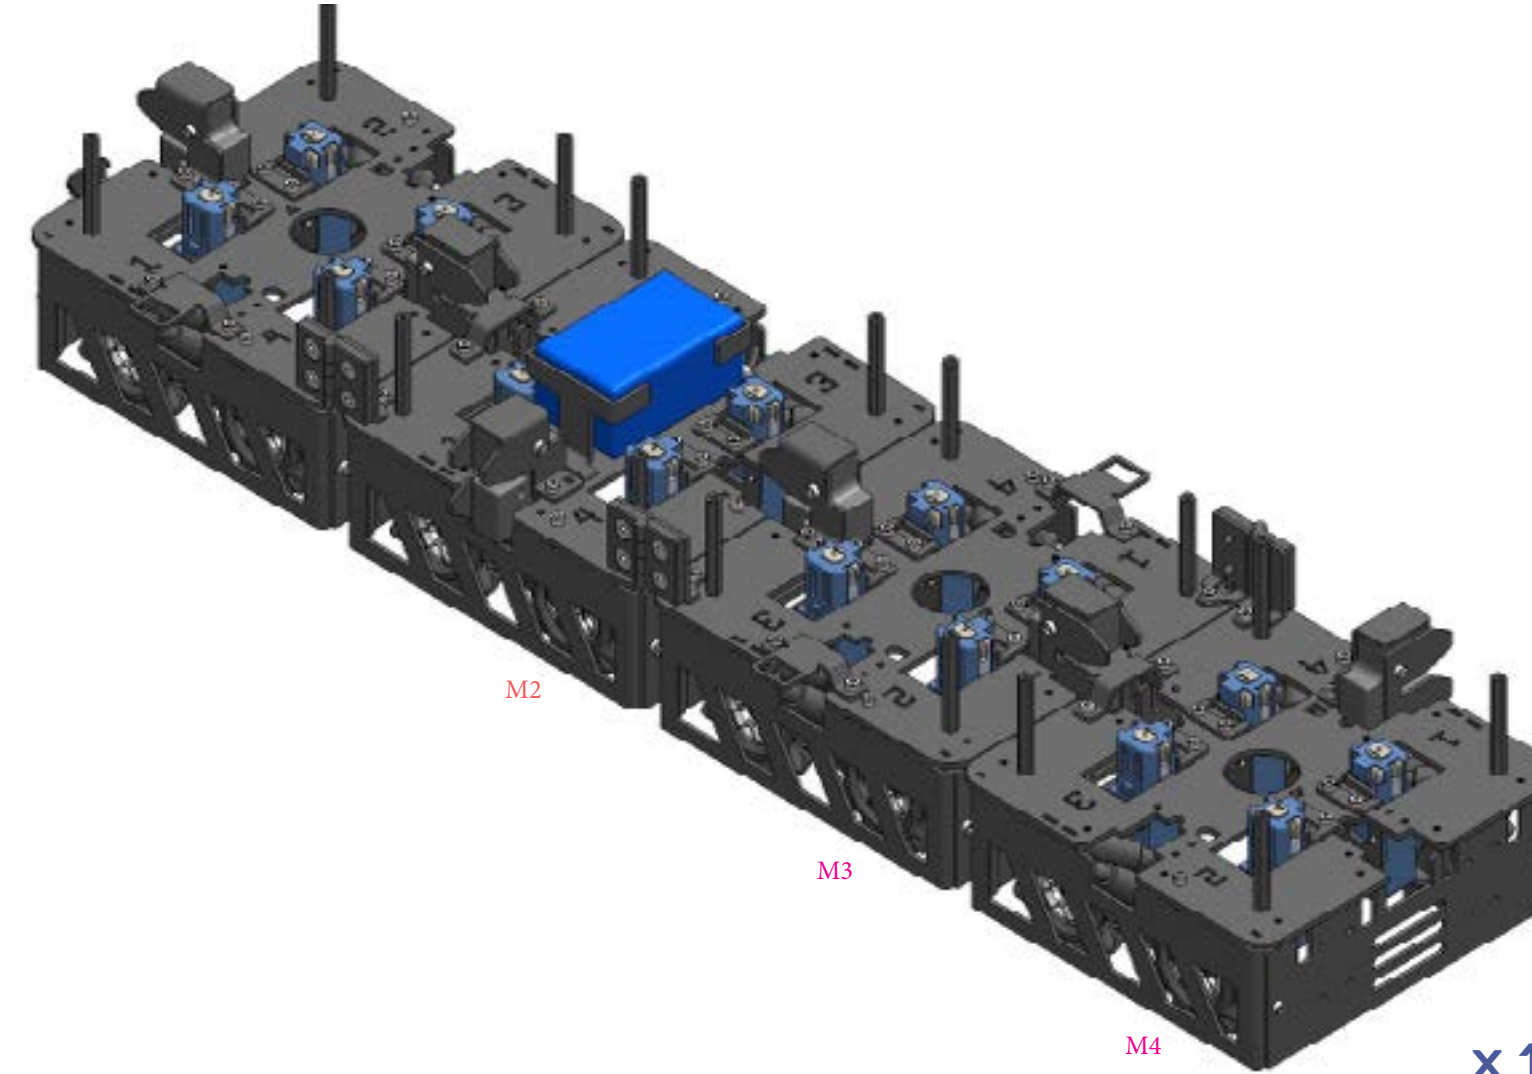



x 1

B1 (e-tray sub-assembly)

- Acrylic base plate (4)
- Slaveboard (4)
- Hex F-F M3 10mm (16)
- M3 x 5 (32)



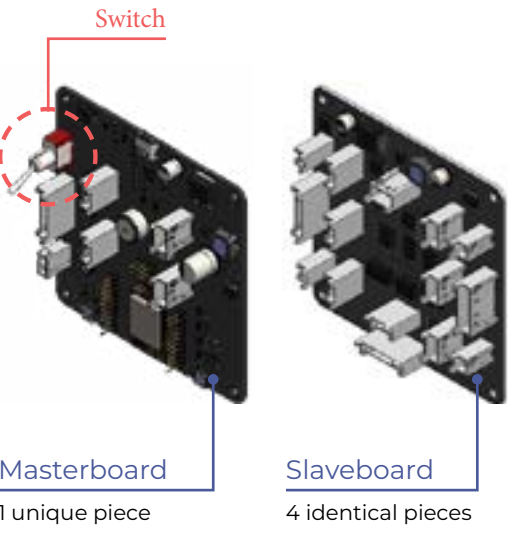


- ✖ Make sure that you are attaching the slaveboards and not the masterboard.
- ✖ How to differentiate between masterboard and slaveboards:
 - Masterboard has a special switch

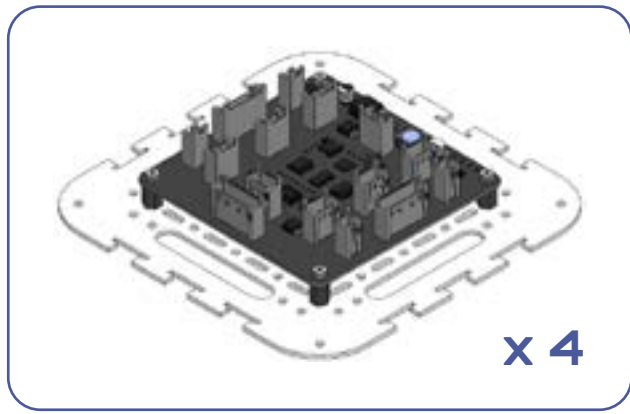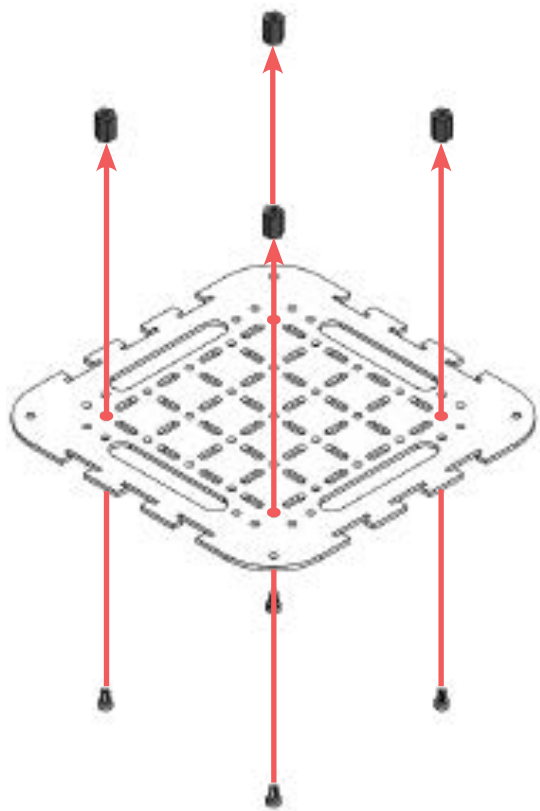


B2 (e-tray onto mechanical assembly)

- e-tray SA (4)
from B.1
- full mechanical SA (1)
from A.8
- Hex M-F M3 45mm (16)

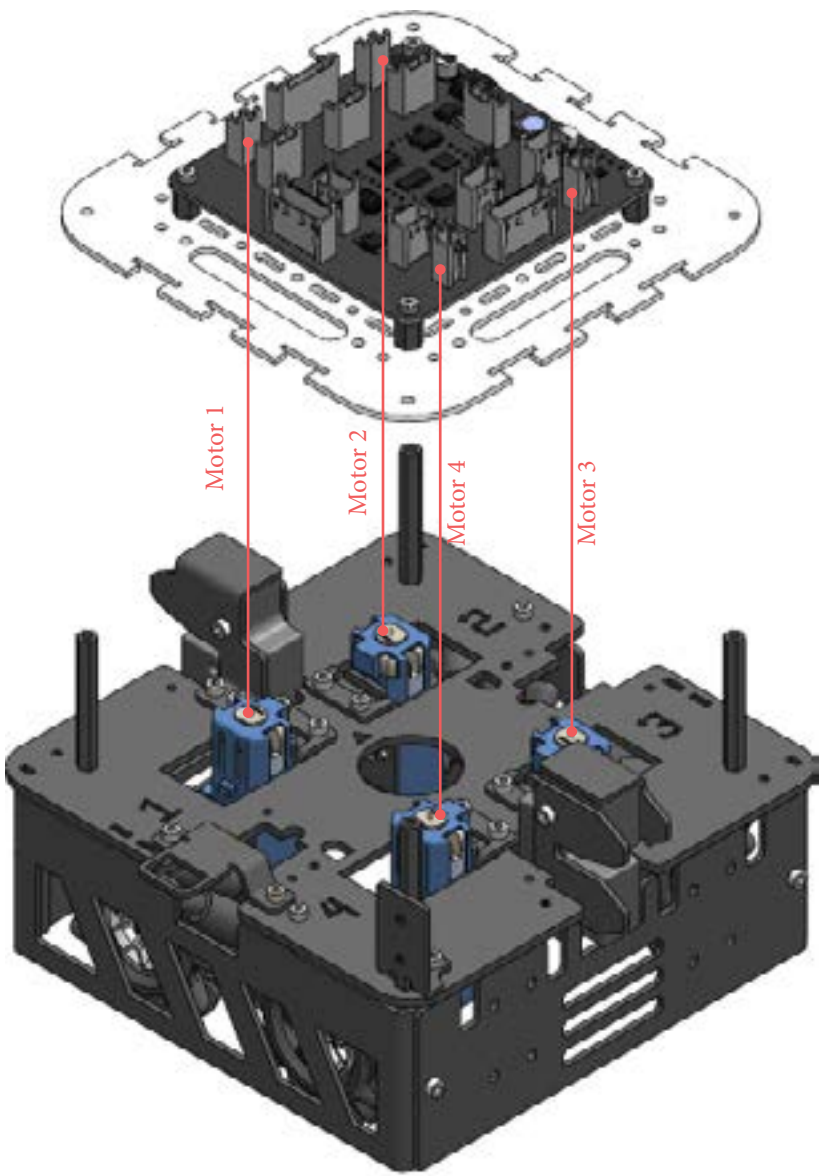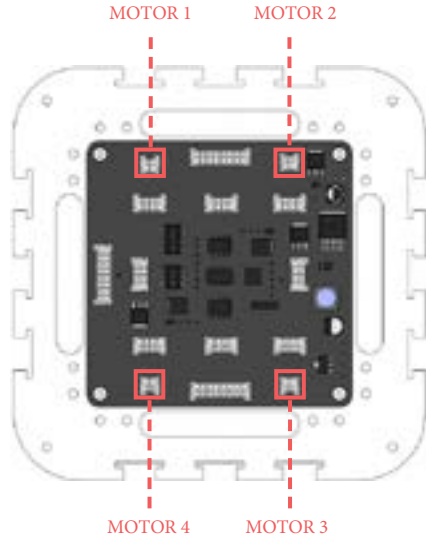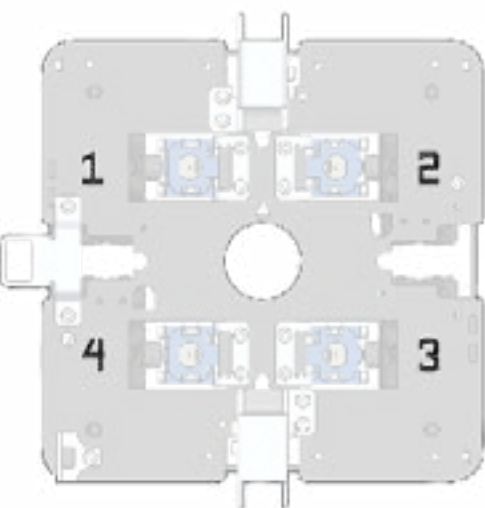



- ✖ Orientate e-tray SA and base module as shown on the right. Motor 1 connector on e-tray should be on top of Motor 1 of base module. Same goes for Motor 2, 3 and 4.


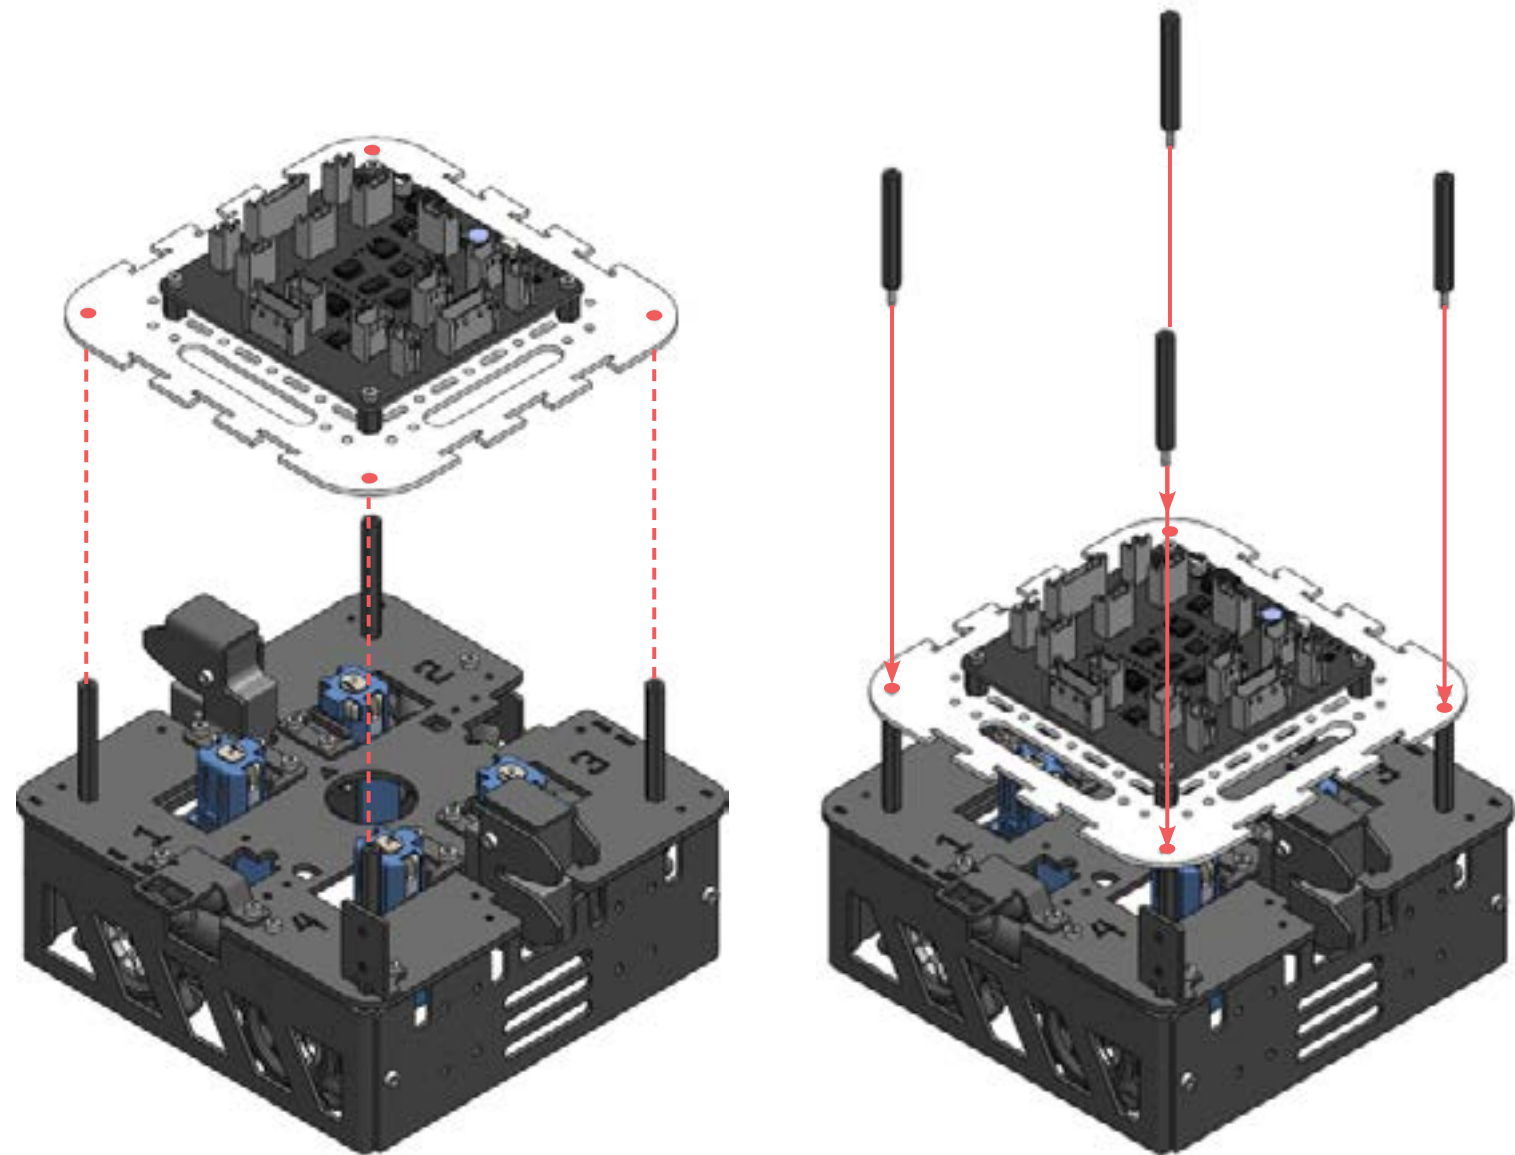


Before attaching the e-tray SA, please flip all the cables and connectors for motors and solenoids (not shown in diagram for clarity) out, for easy attachment later on.




Orientation of modules 3 and 4 are rotated 180° from modules 1 and 2. Therefore, make sure that the e-tray SAs for module 3 and 4 are also rotated 180° to correspond to the motor orientation as numbered.

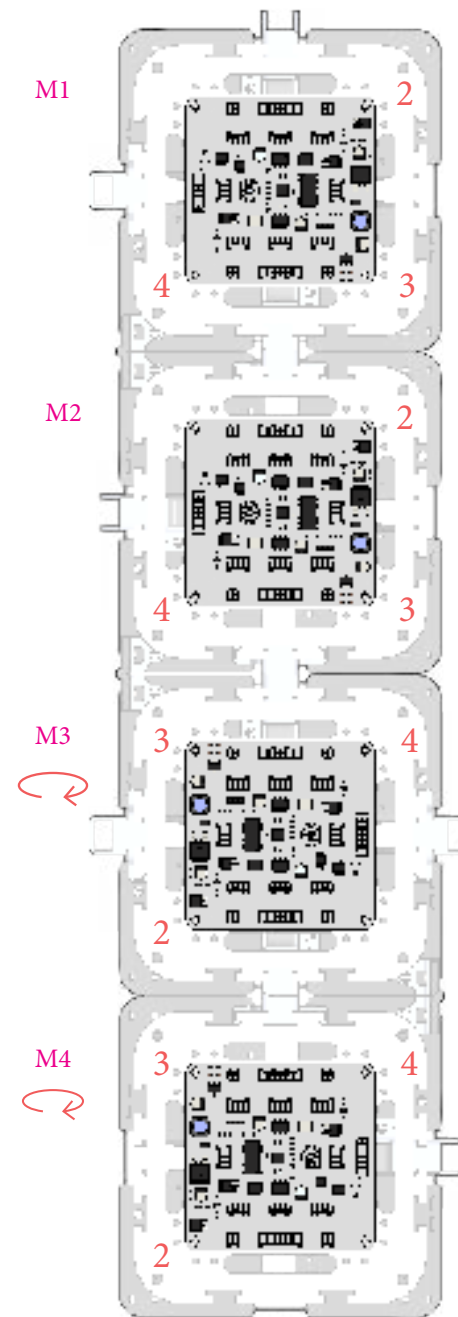
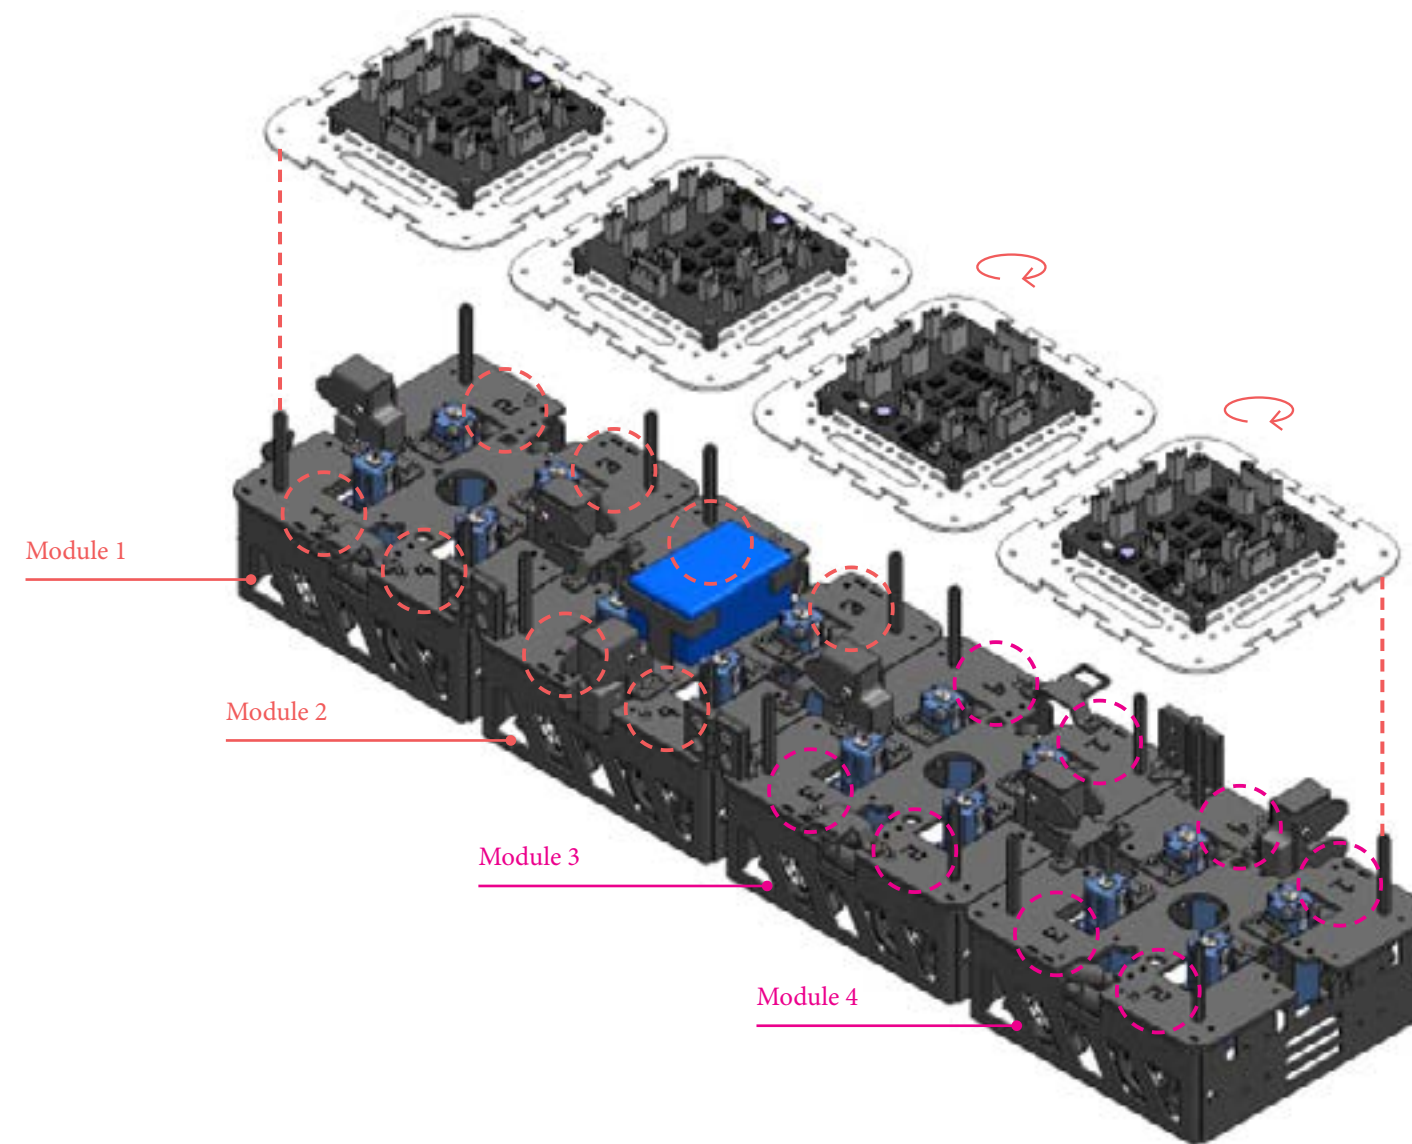


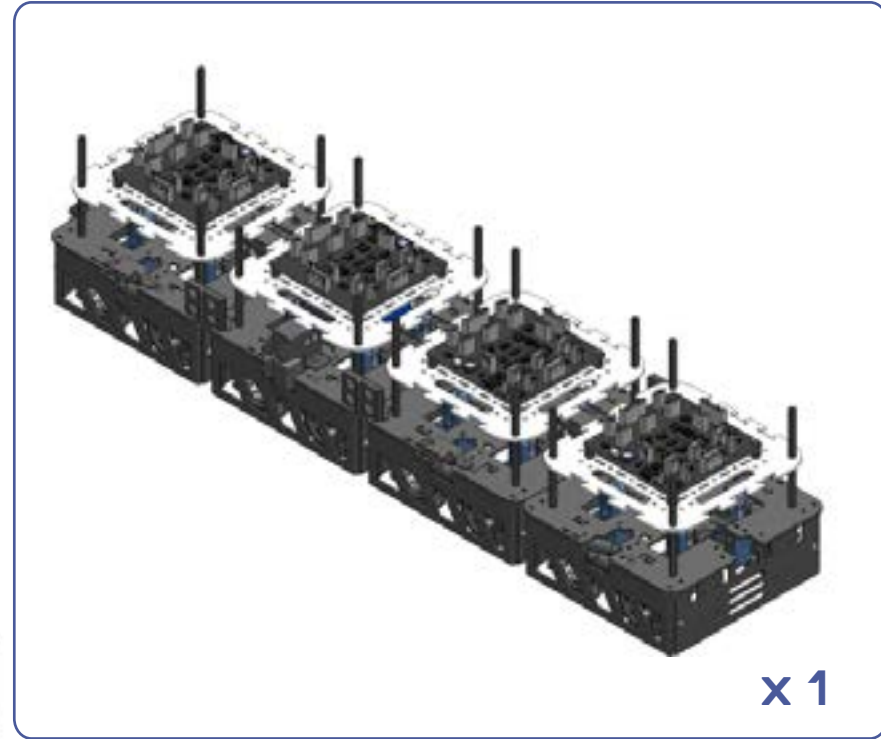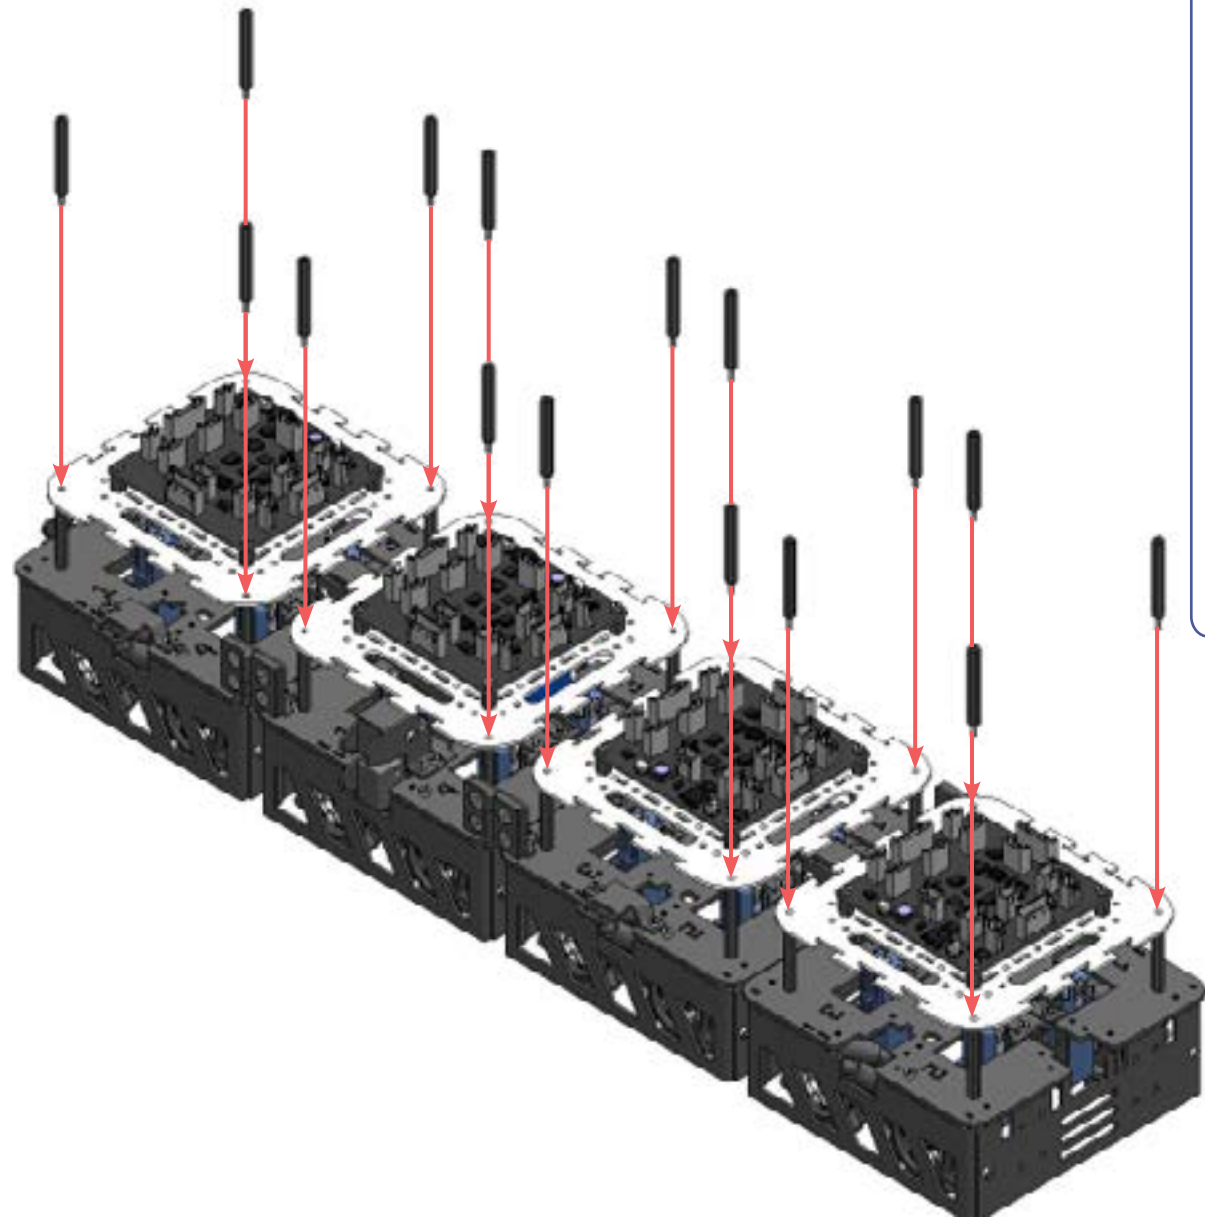


B3 (all module motor cable connection)

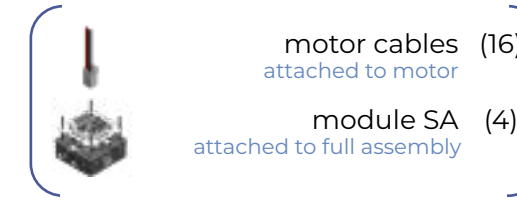

To unplug cable:
Press and pull out
the connector

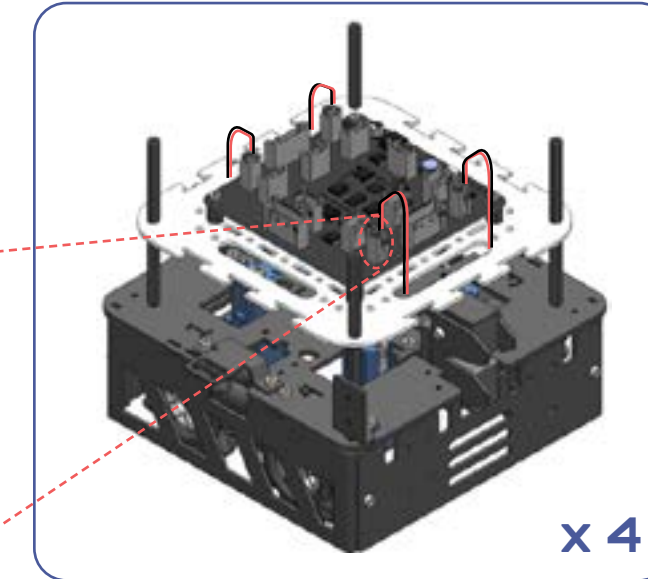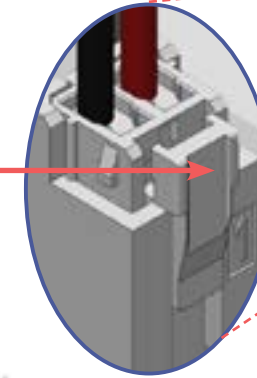


Note: Position of solenoid latch and solenoid catch is different for each module

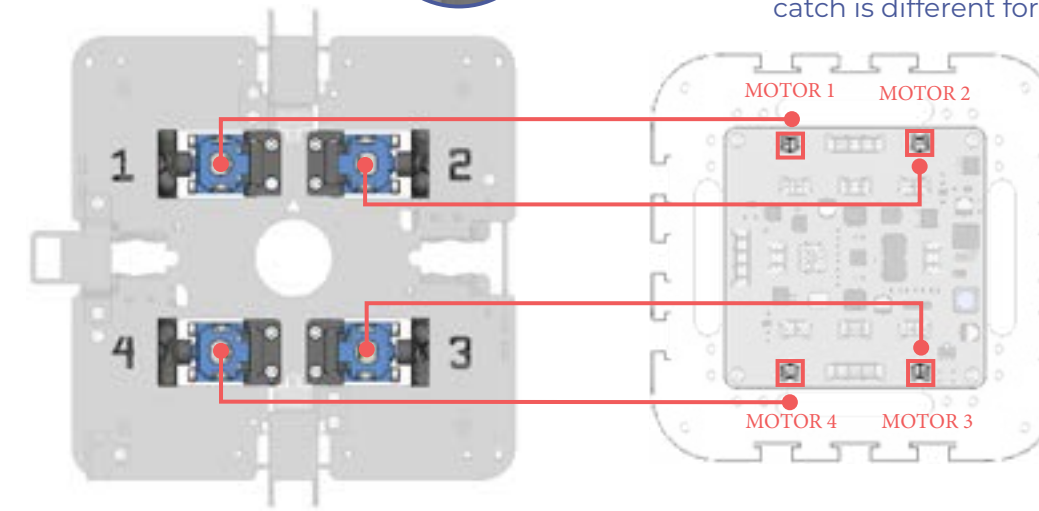

✖ Make sure that Motor 1 is connected to Motor 1 connector on Slaveboard; the same goes for Motor 2, 3 and 4.


✖ Motor cable connection is the same for all 4 modules

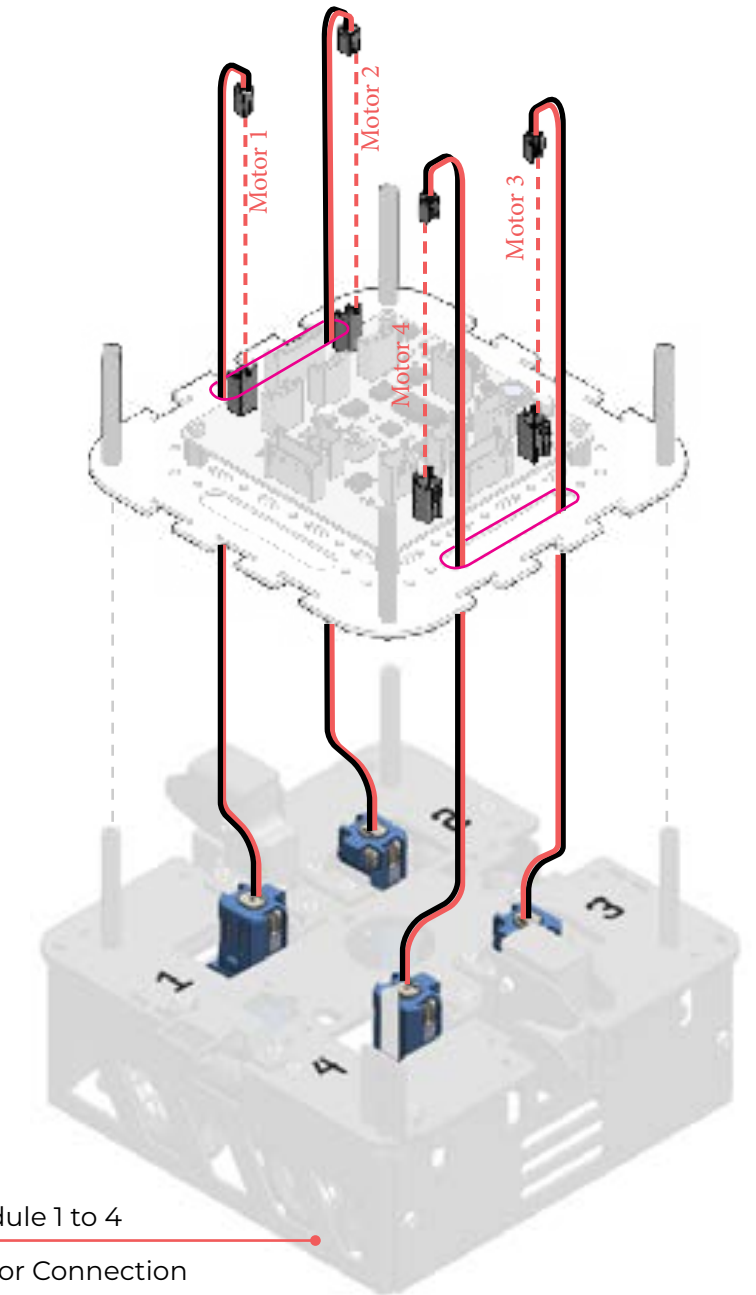


Module 1 to 4
Motor Connection

Opening to pass wire through

B4 (module 1 solenoid cable connection)

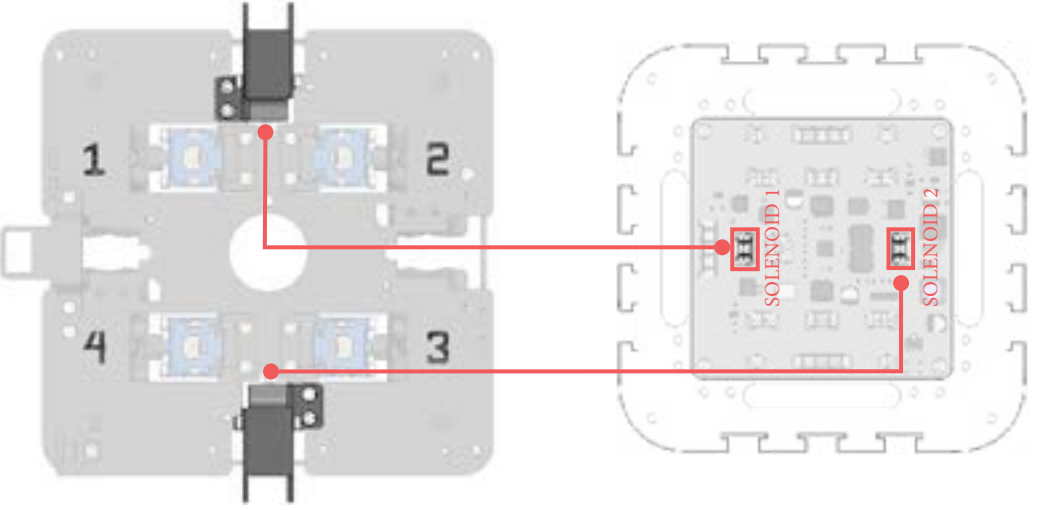


✖ Make sure to connect the solenoid to the labelled solenoid connector exactly as in the diagram below.

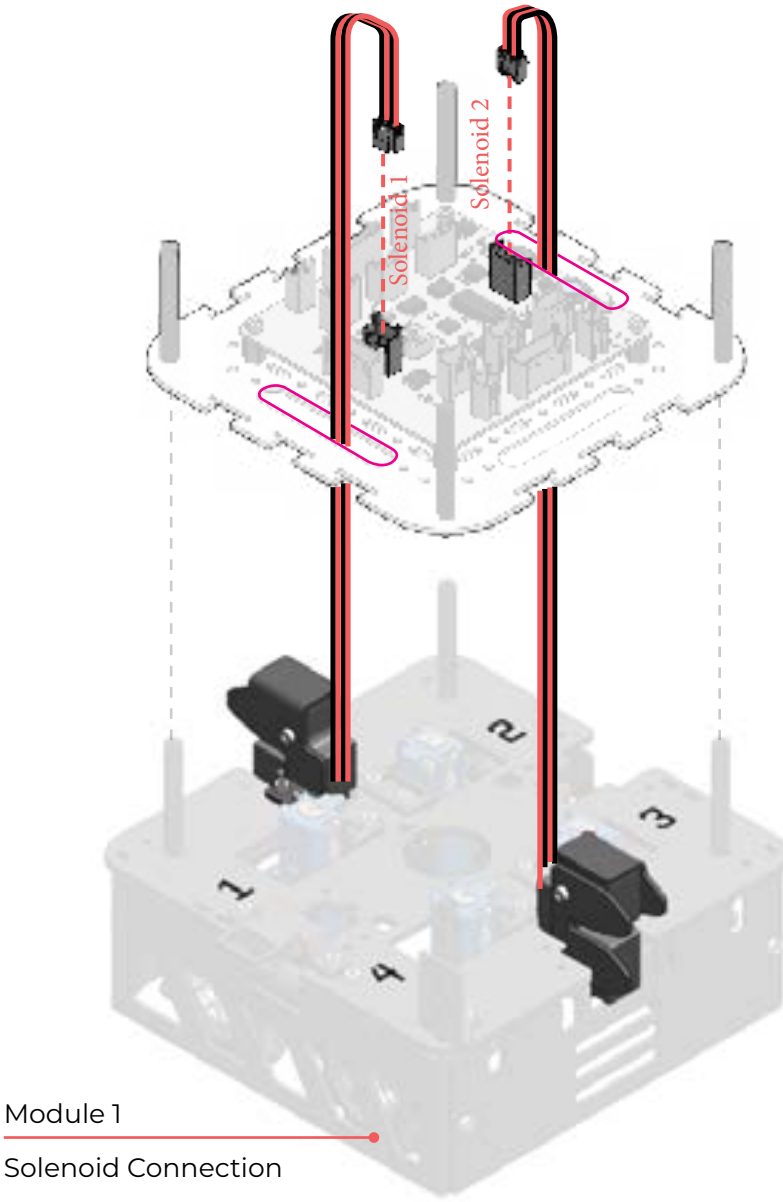


Module 1
Solenoid Connection

Opening to pass wire through

B5 (module 2 solenoid cable connection)

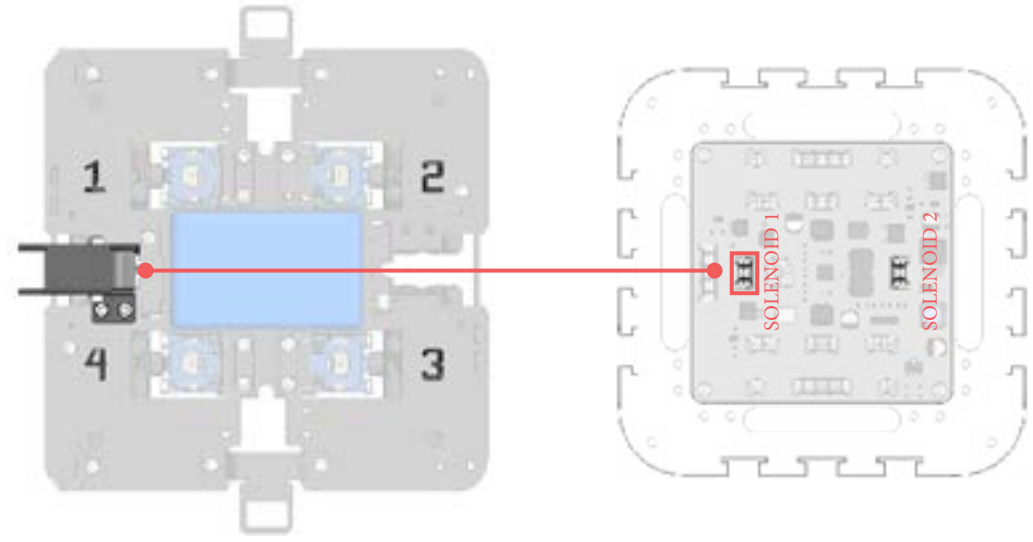



✖ Make sure to connect the solenoid to the labelled solenoid connector exactly as in the diagram below.

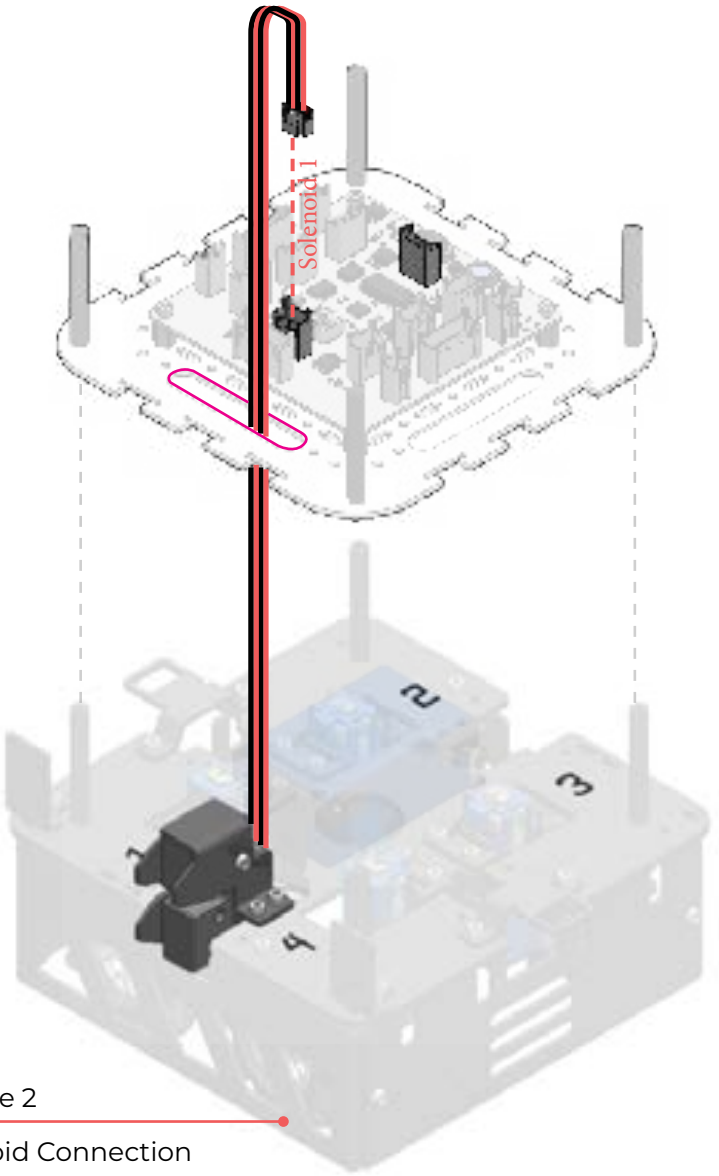


Module 2
Solenoid Connection

Opening to pass wire through

B6 (module 3 solenoid cable connection)

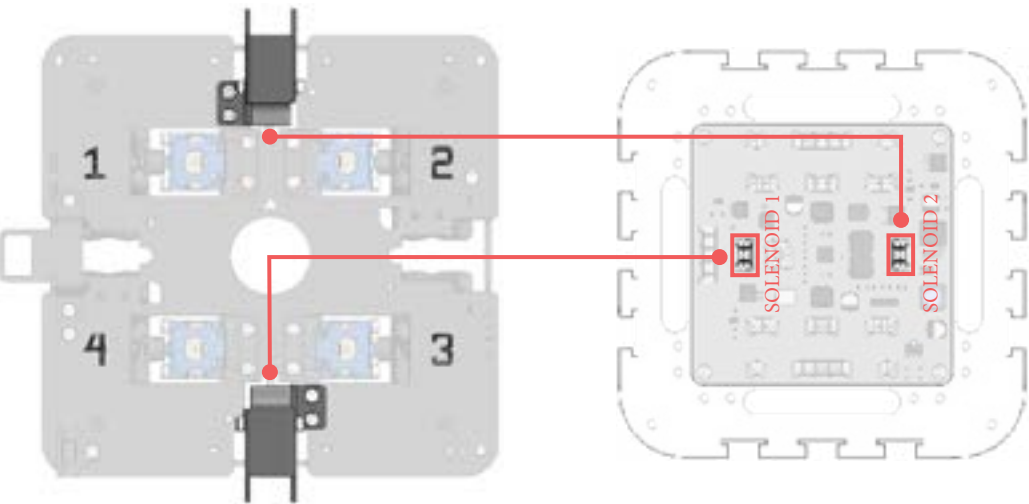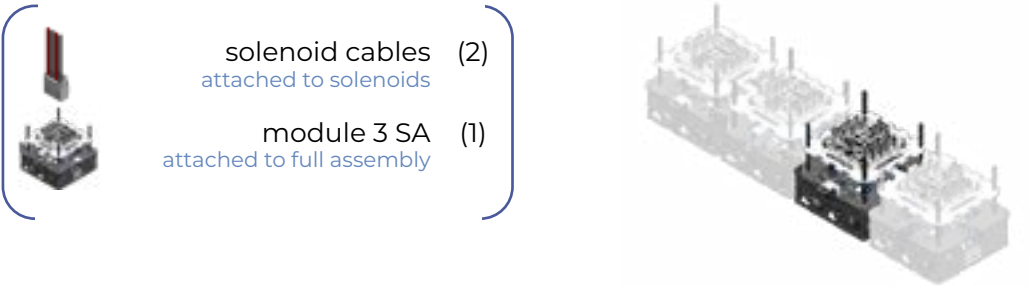


✖ Make sure to connect the solenoid to the labelled solenoid connector exactly as in the diagram below.

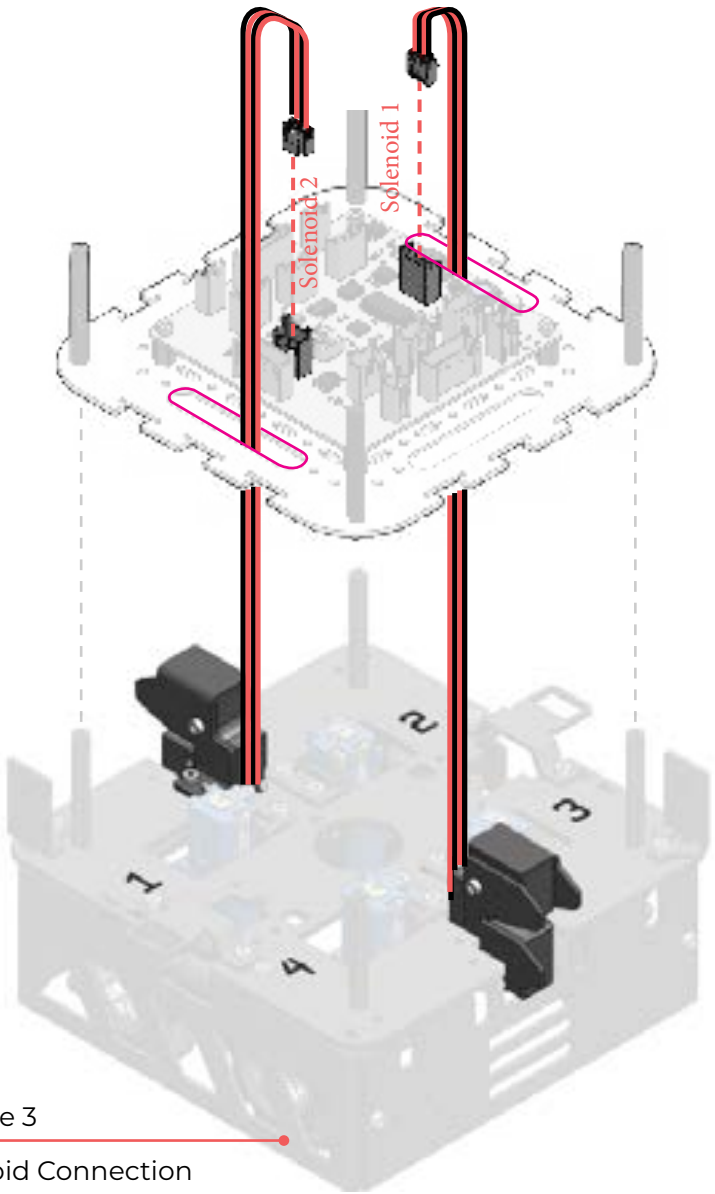


Module 3
Solenoid Connection

Opening to pass wire through

B7 (module 4 solenoid cable connection)

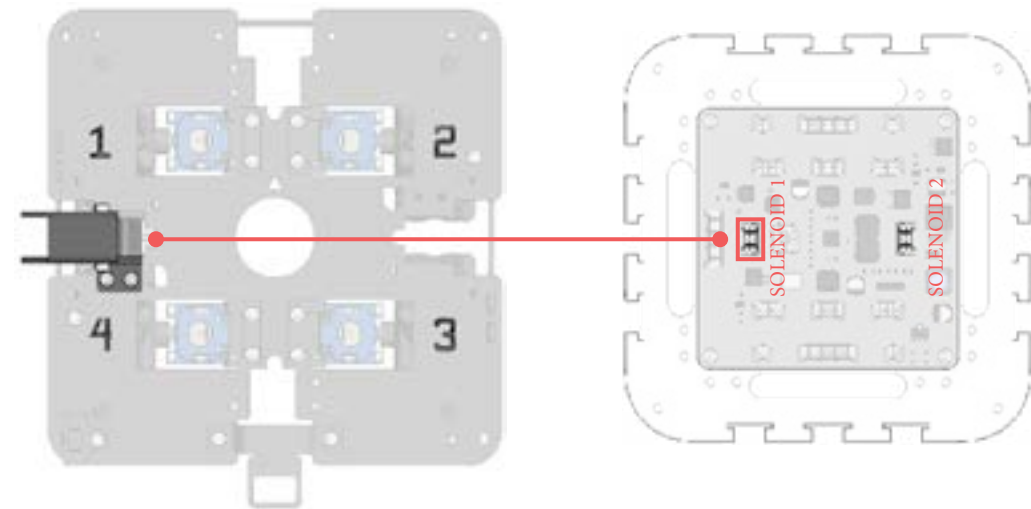


✖ Make sure to connect the solenoid to the labelled solenoid connector exactly as in the diagram below.

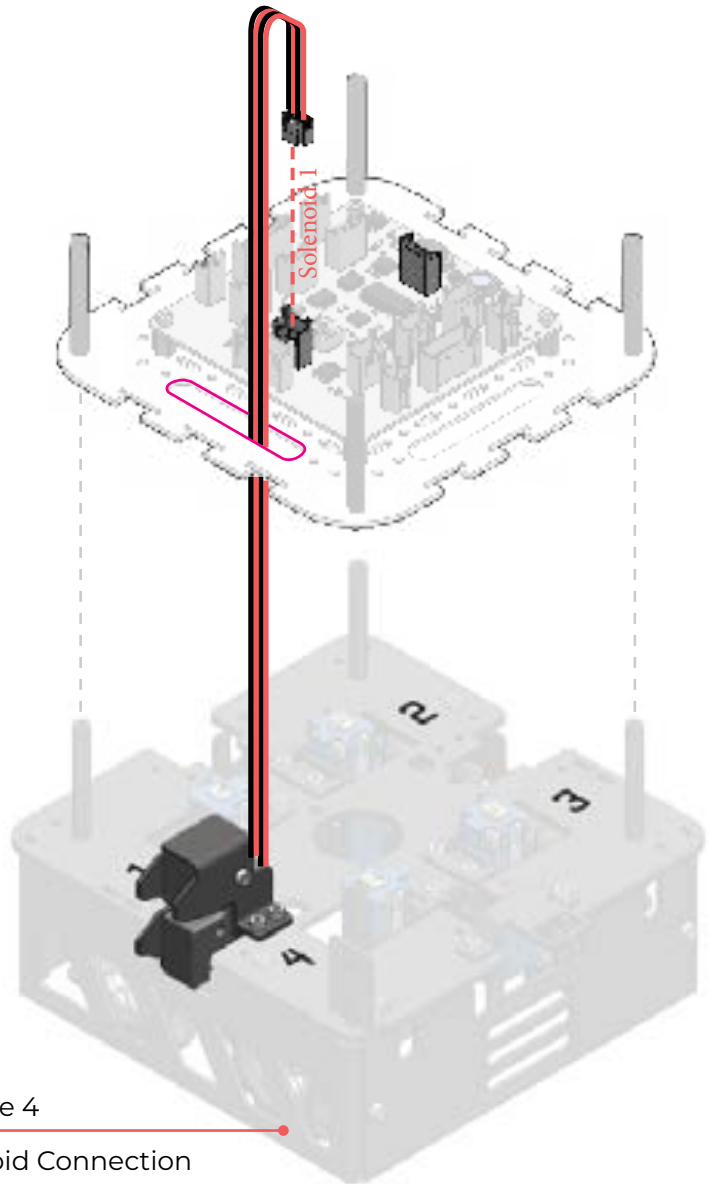



Module 4
Solenoid Connection

Opening to pass wire through


B8 (inter-module cable connection)

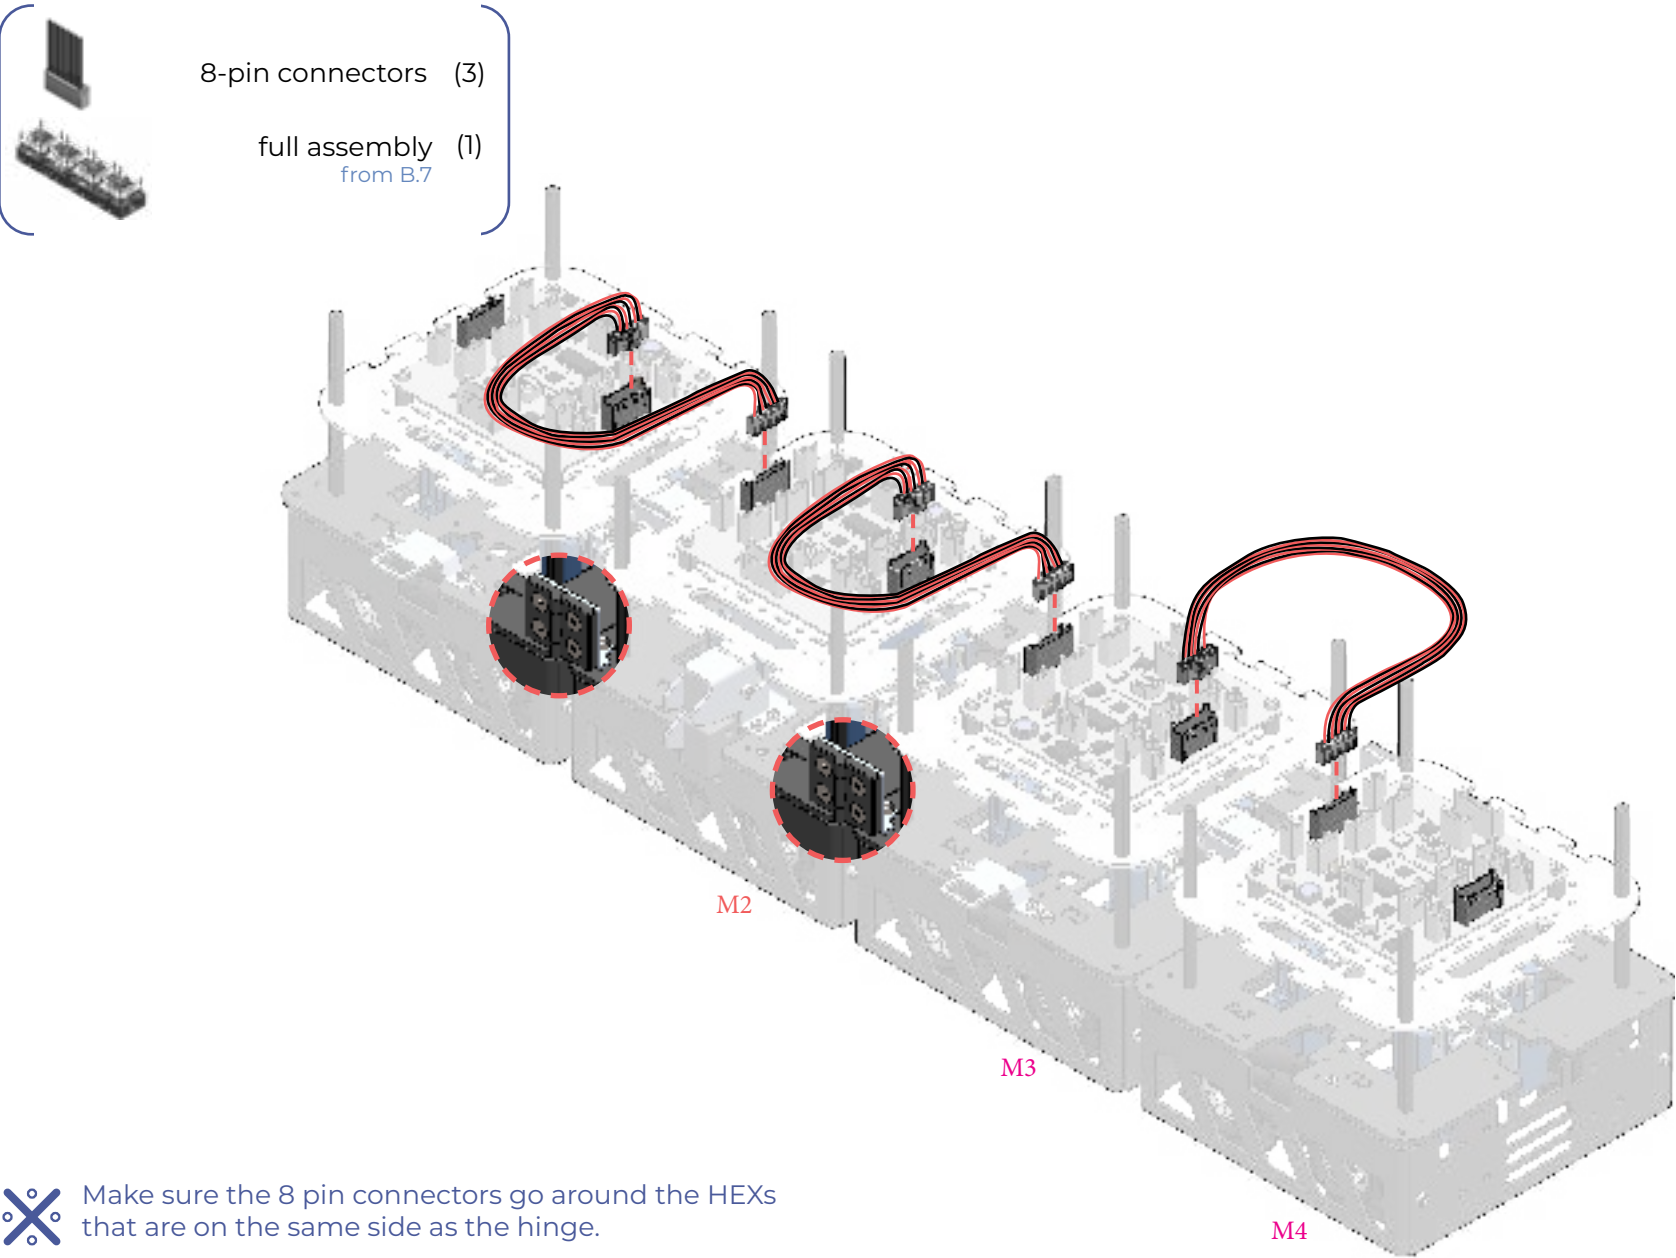

B9 (address selection)

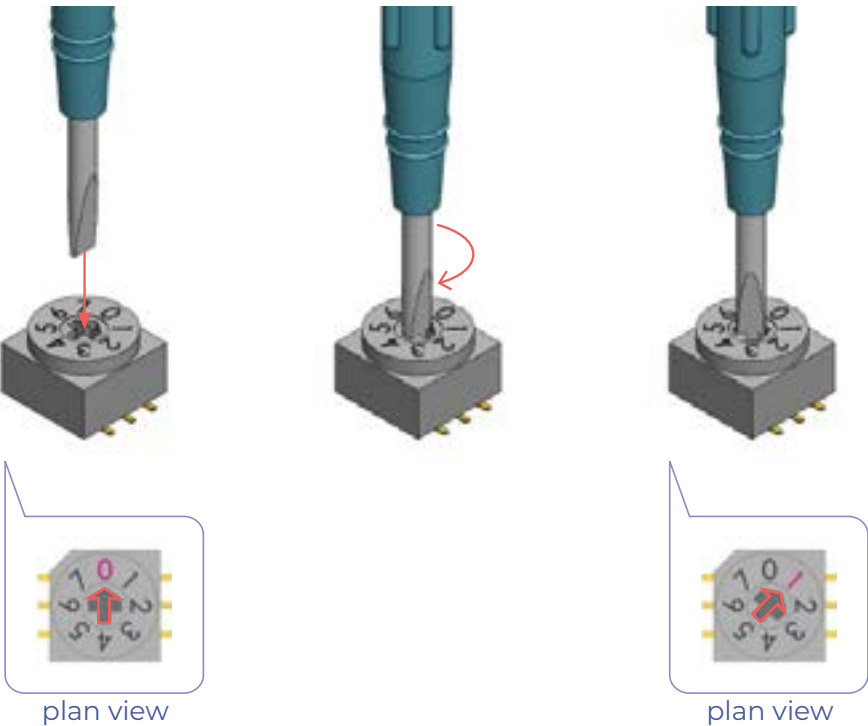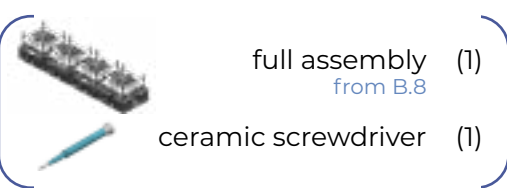


✖ Use the ceramic screwdriver to adjust the rotary switch and select the address for all 4 modules.
Module 1: Address 0, Module 2: Address 1,
Module 3: Address 2, Module 4: Address 3



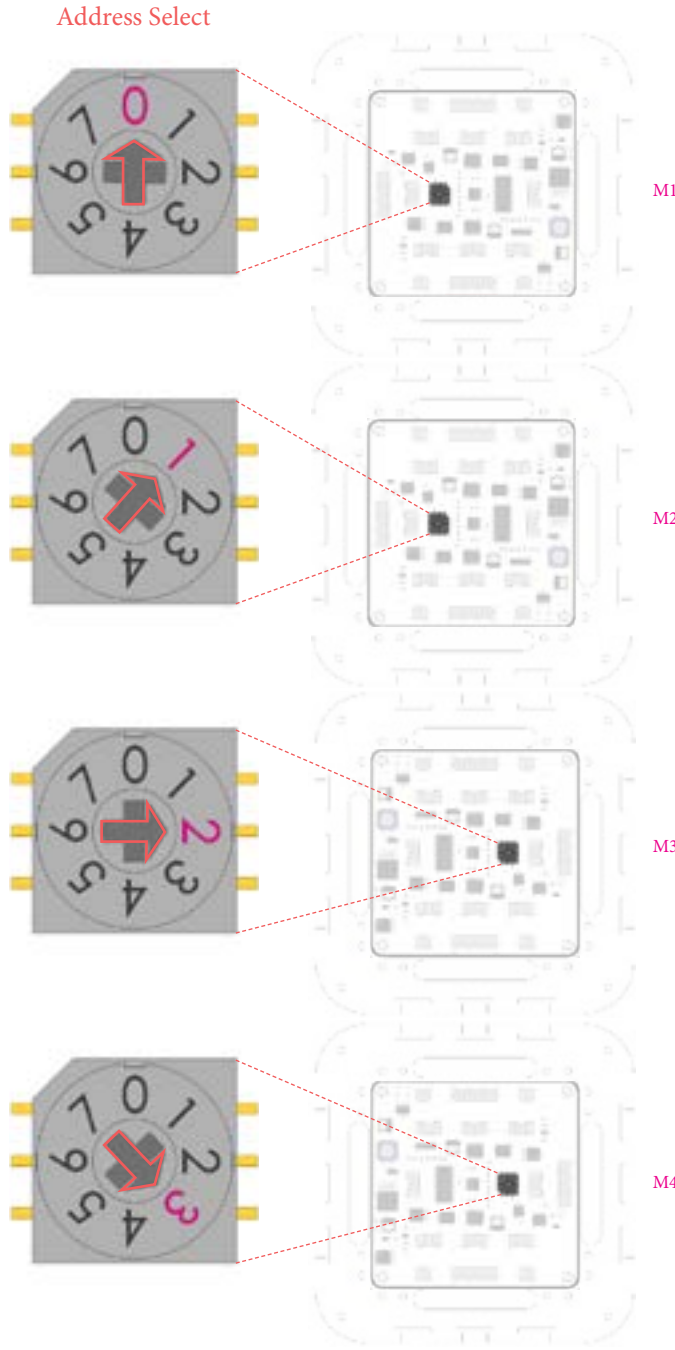


B10 (masterboard e-tray sub-assembly)

- Acrylic base plate (1)
- Masterboard (ESP32) (1)
- Hex F-F M3 10mm (4)
- M3 x 5 (8)

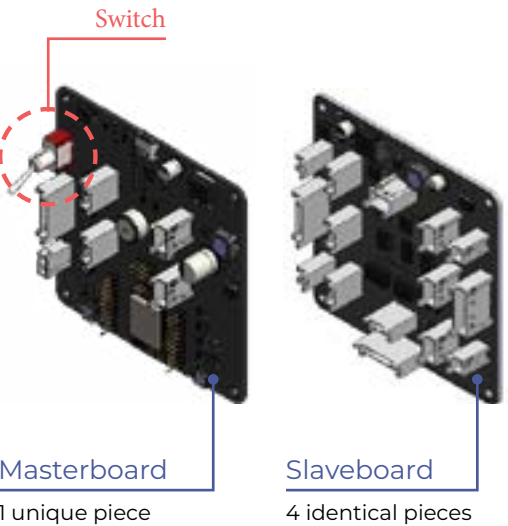


- Make sure that you are attaching the masterboard and not the slaveboards.
- How to differentiate between masterboard and slaveboards:
 - Masterboard has a special switch

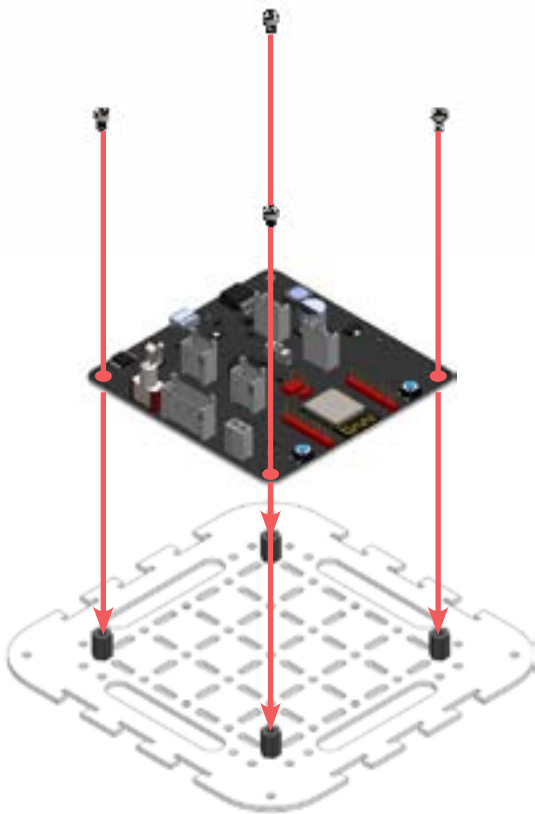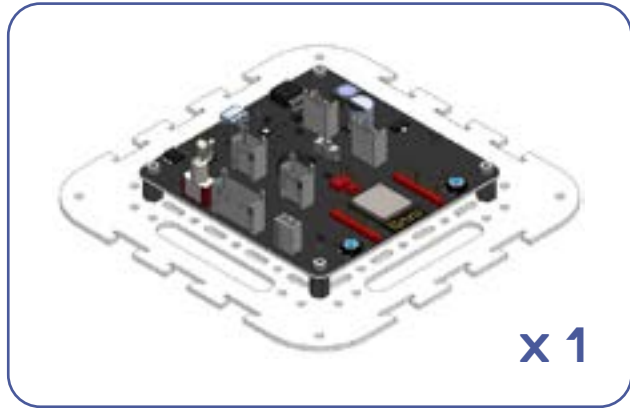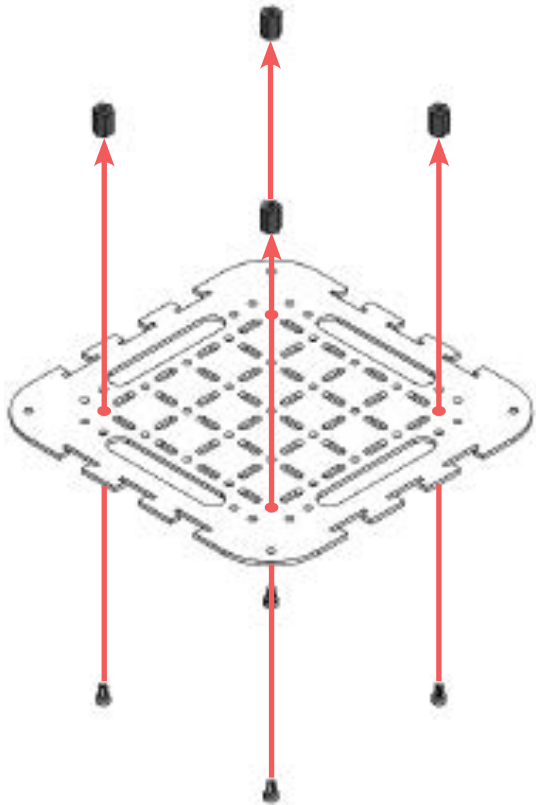


B11 (masterboard e-tray onto main assembly)

- masterboard e-tray SA (1)
from B.10
- full mechanical SA (1)
from B.9
- 8-pin connector (1)
- M3 x 5 (4)

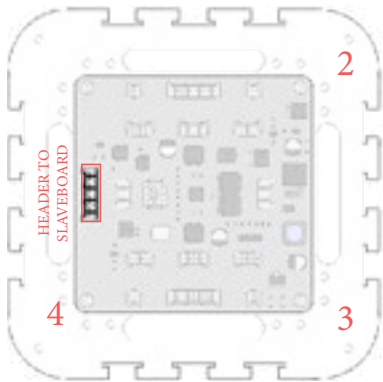


- Align the header to slaveboard connector on the masterboard to face the side connecting Motor 1 and 4.


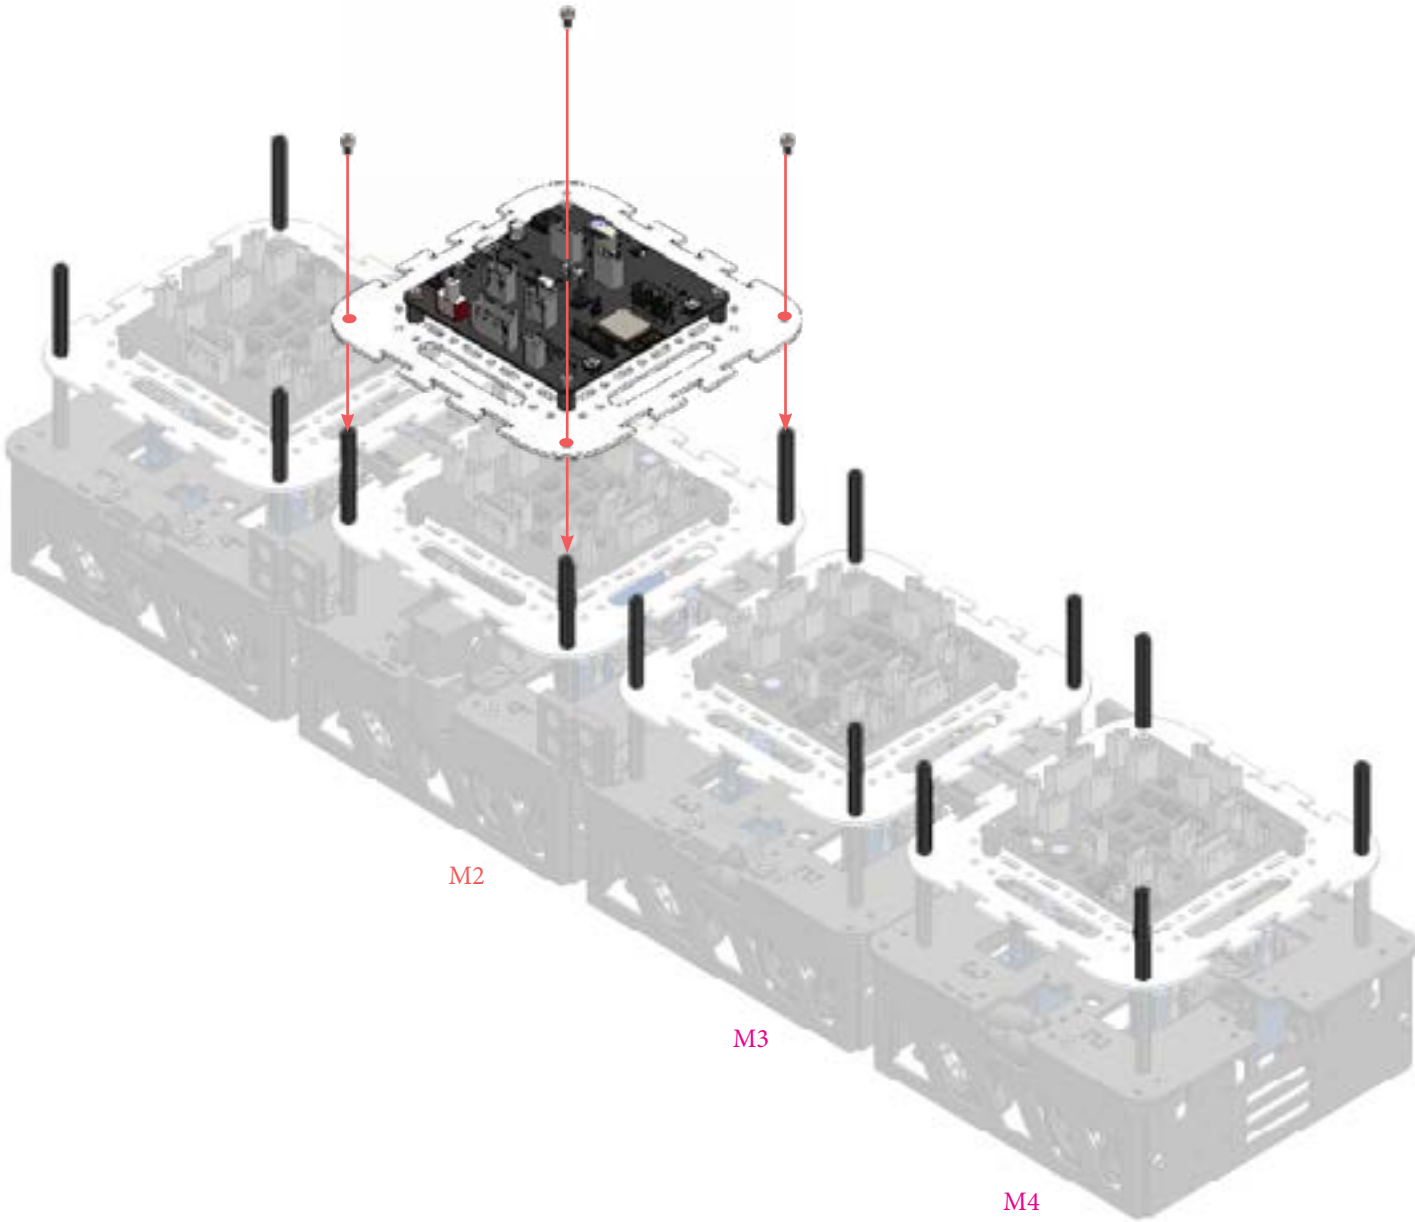




“DO NOT PLUG-IN / UNPLUG THE CONNECTOR CABLES WHILE THE POWER SUPPLY IS ACTIVELY PROVIDED (EITHER THROUGH BATTERY/ USB)”

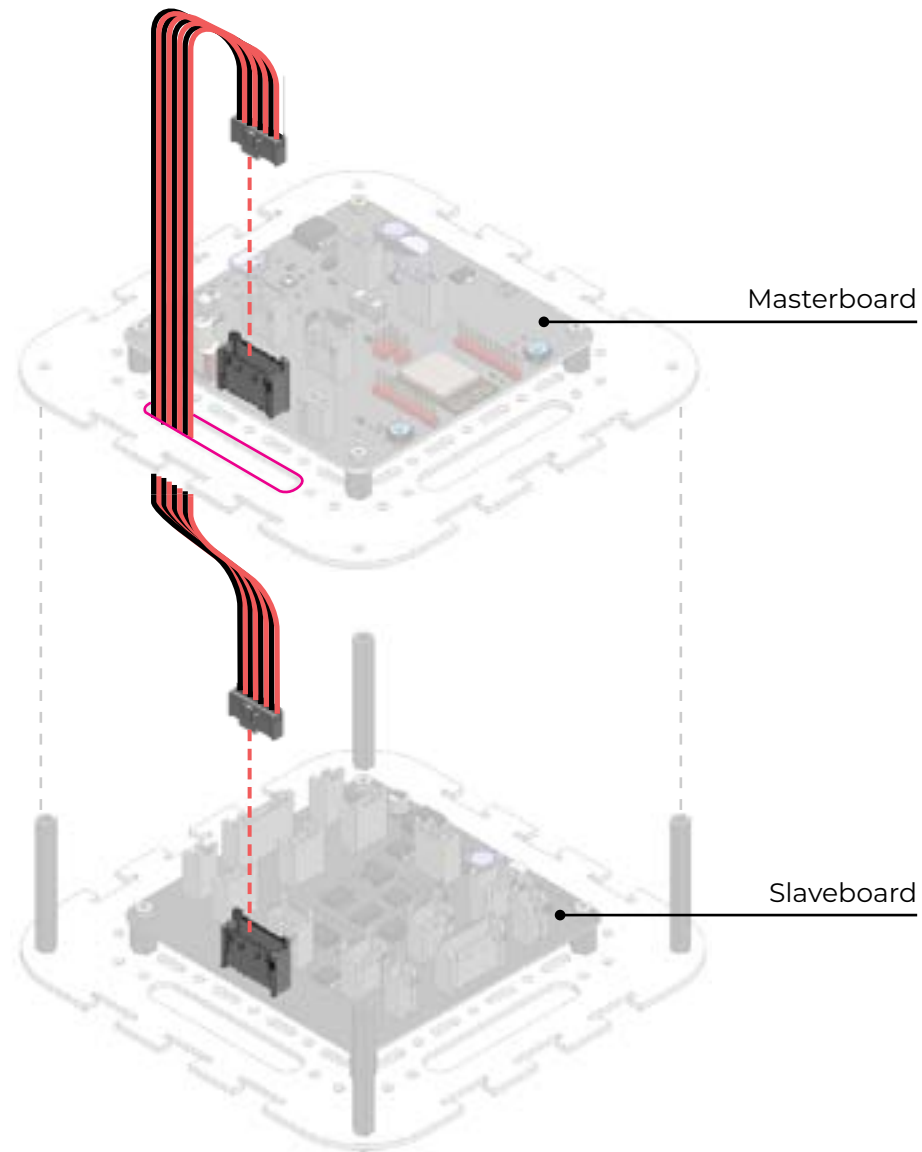

Opening to pass wire through

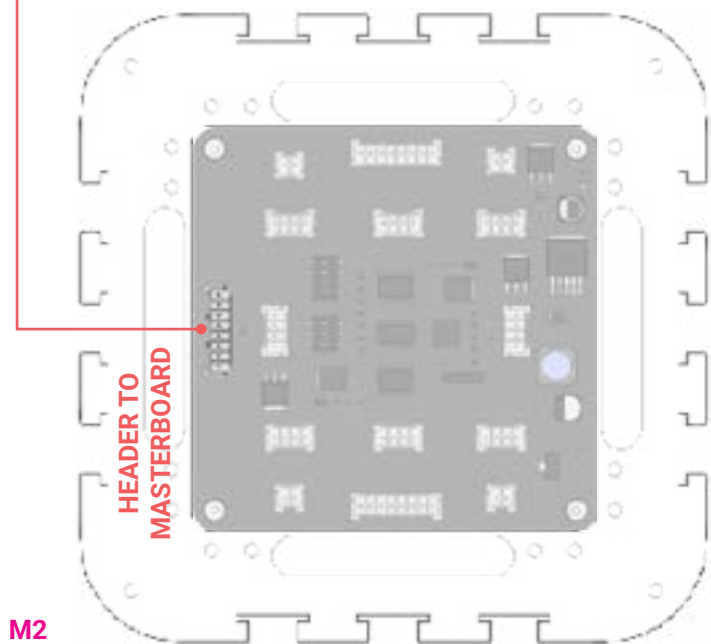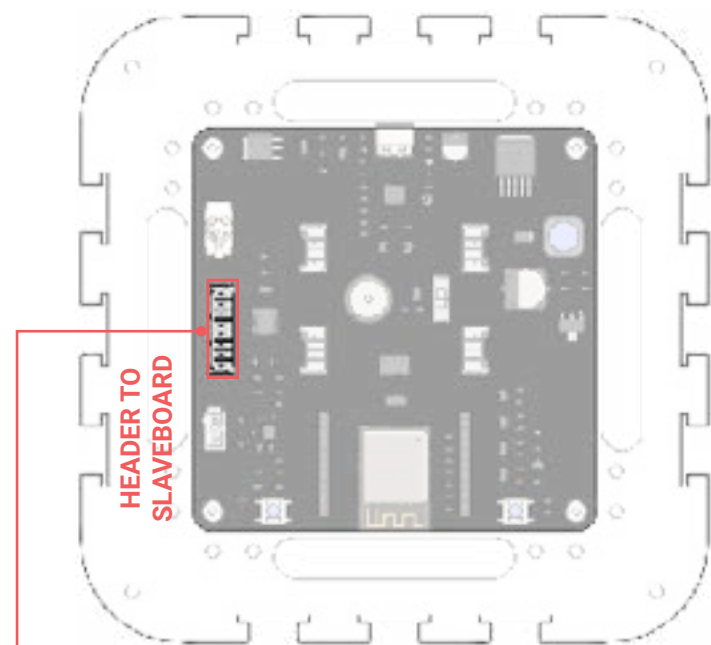

M2



B12 (attach acrylic covers)



Acrylic base plate (3)


full mechanical SA (1)
from B.11

M3 x 5 (12)

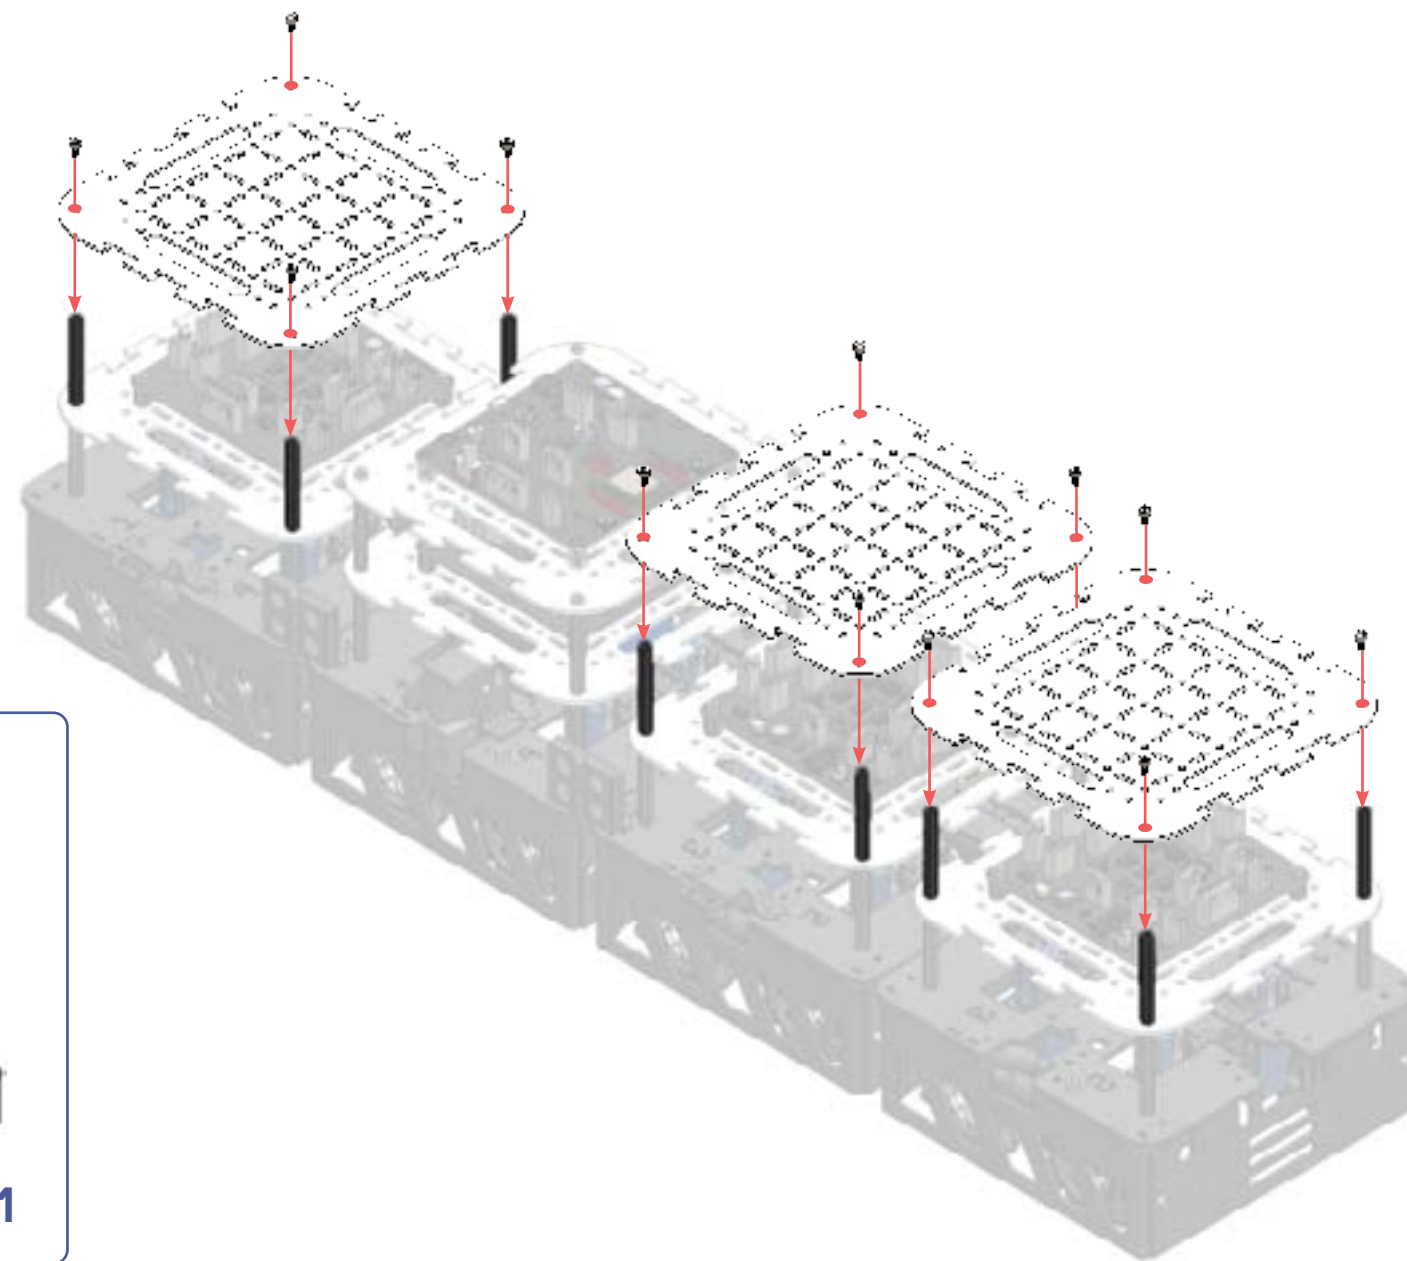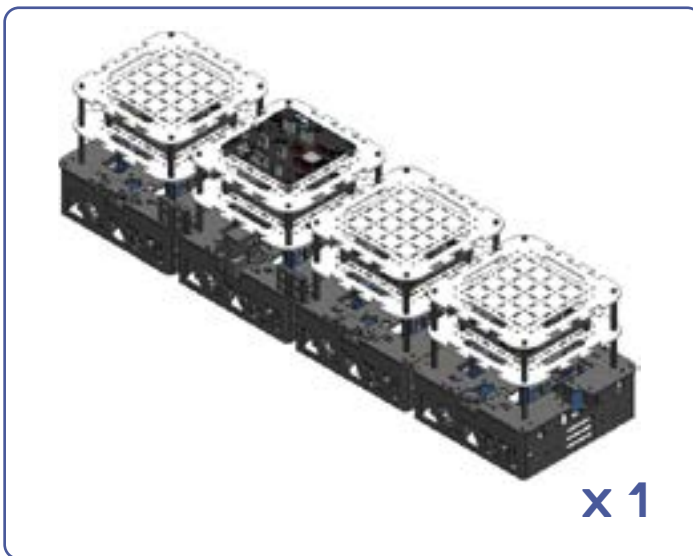


B 13 (connect battery to masterboard)

- Li-ion Battery (1)
- full mechanical SA (1)

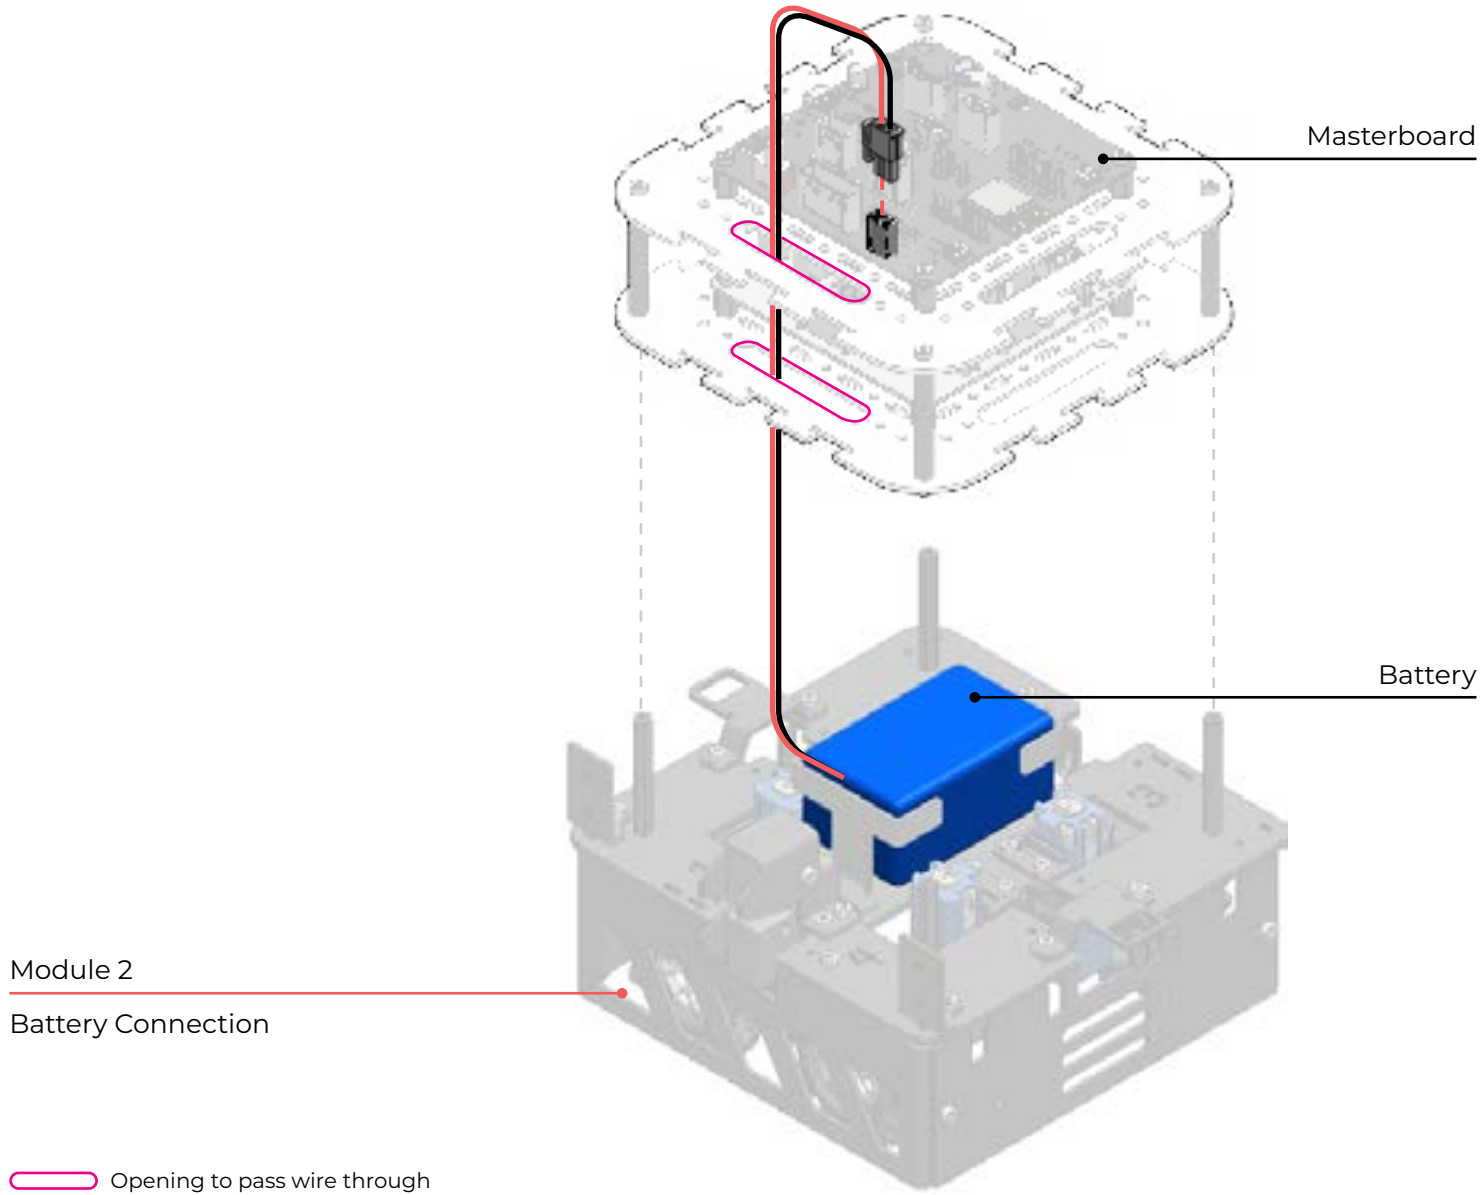


Opening to pass wire through

B 14 (check connection)

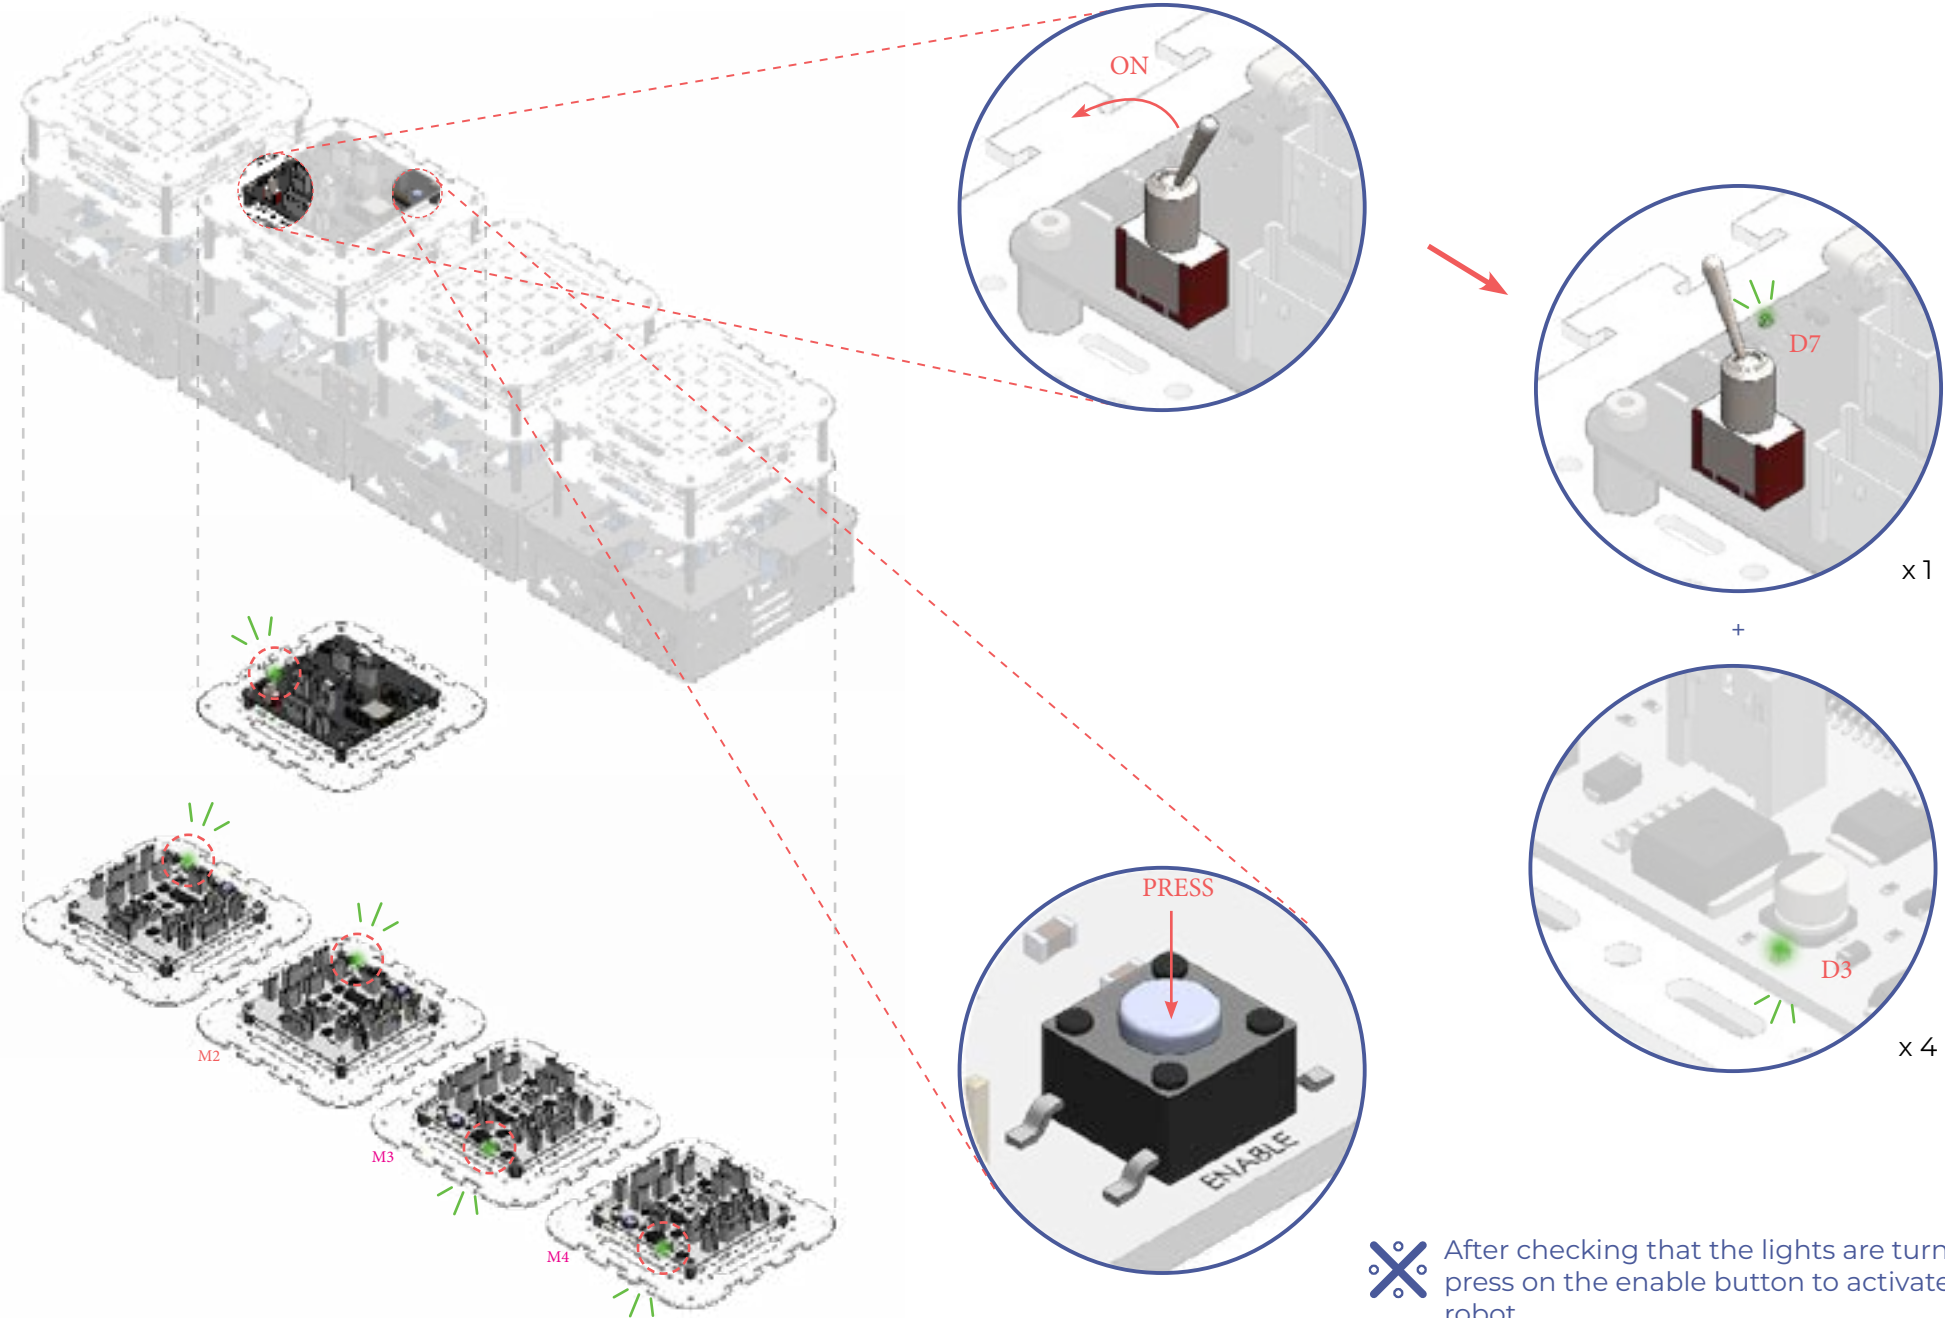

After checking that the lights are turned on, press on the enable button to activate the robot.

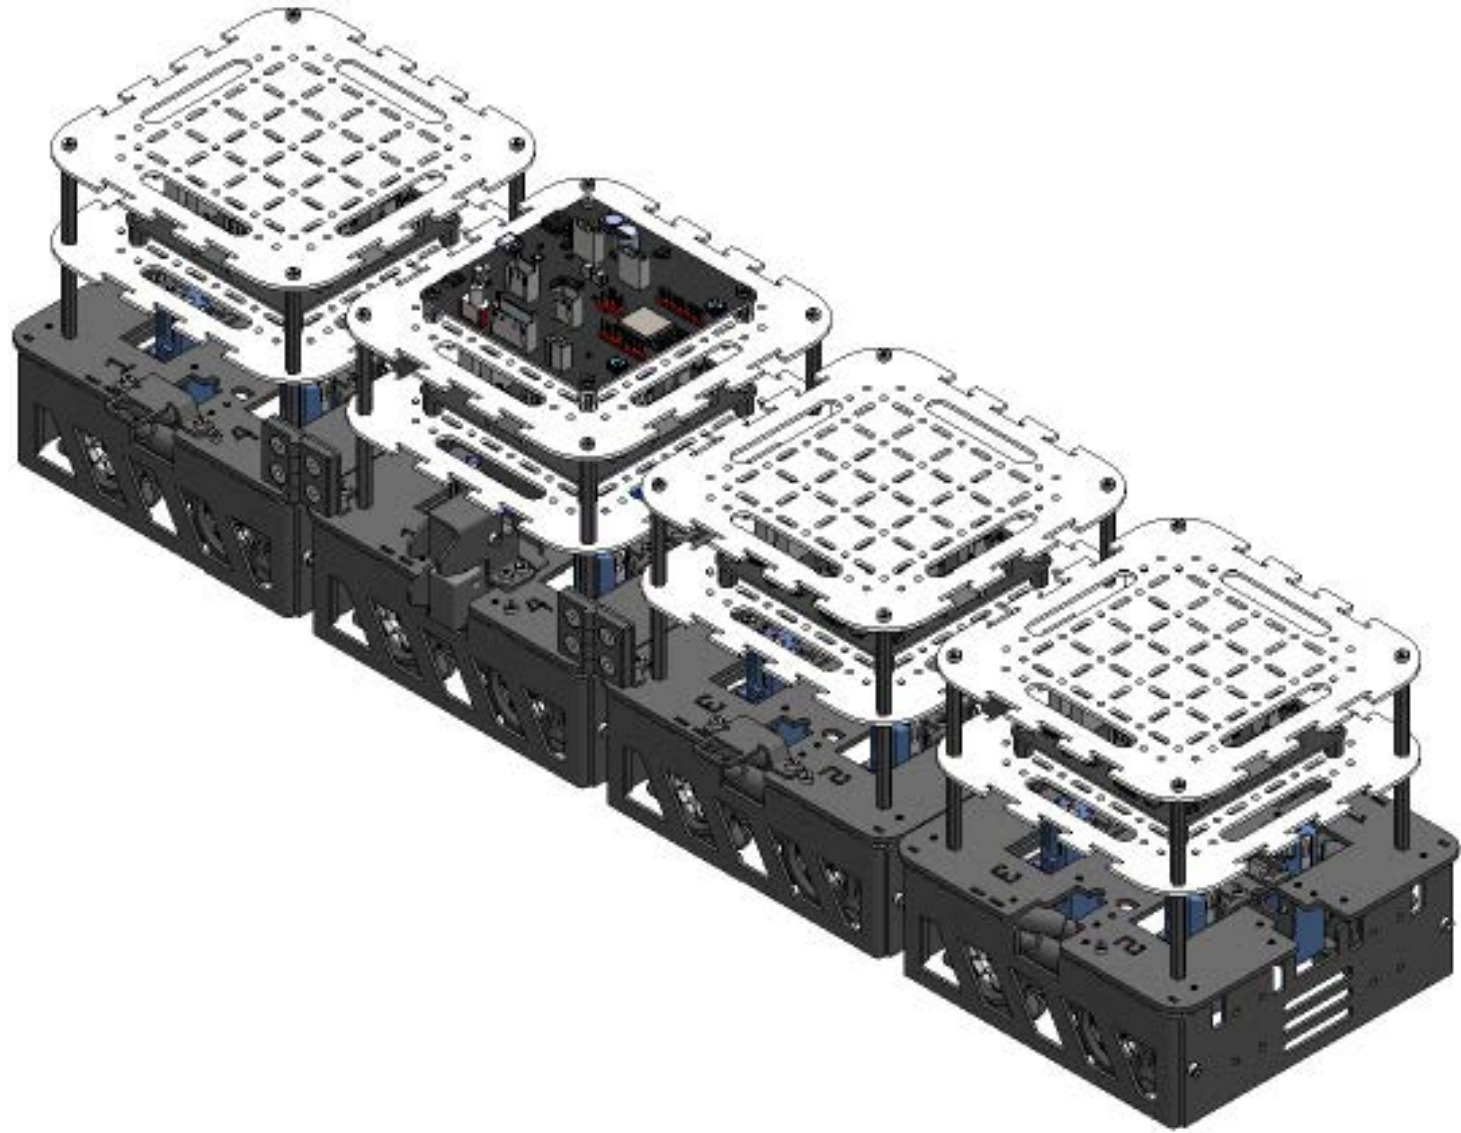


B electronic assembly completed

smorphi is ready!
next step: connect with app




1. App Download.


⌘ Not all devices are compatible now.
See the table below to check if your device is compatible with the Smorphi app.

Smorphi App Information	
Available Platforms	(Android)
Download from	(Google Play)
App Icon & Name	 smorphi
System Requirements OS Requirements	(Android 6+ Bluetooth 4.0+)

2. Bluetooth Connection. Turn on Smorphi and the Bluetooth of your smart device. Tap on Smorphi app icon to launch application.

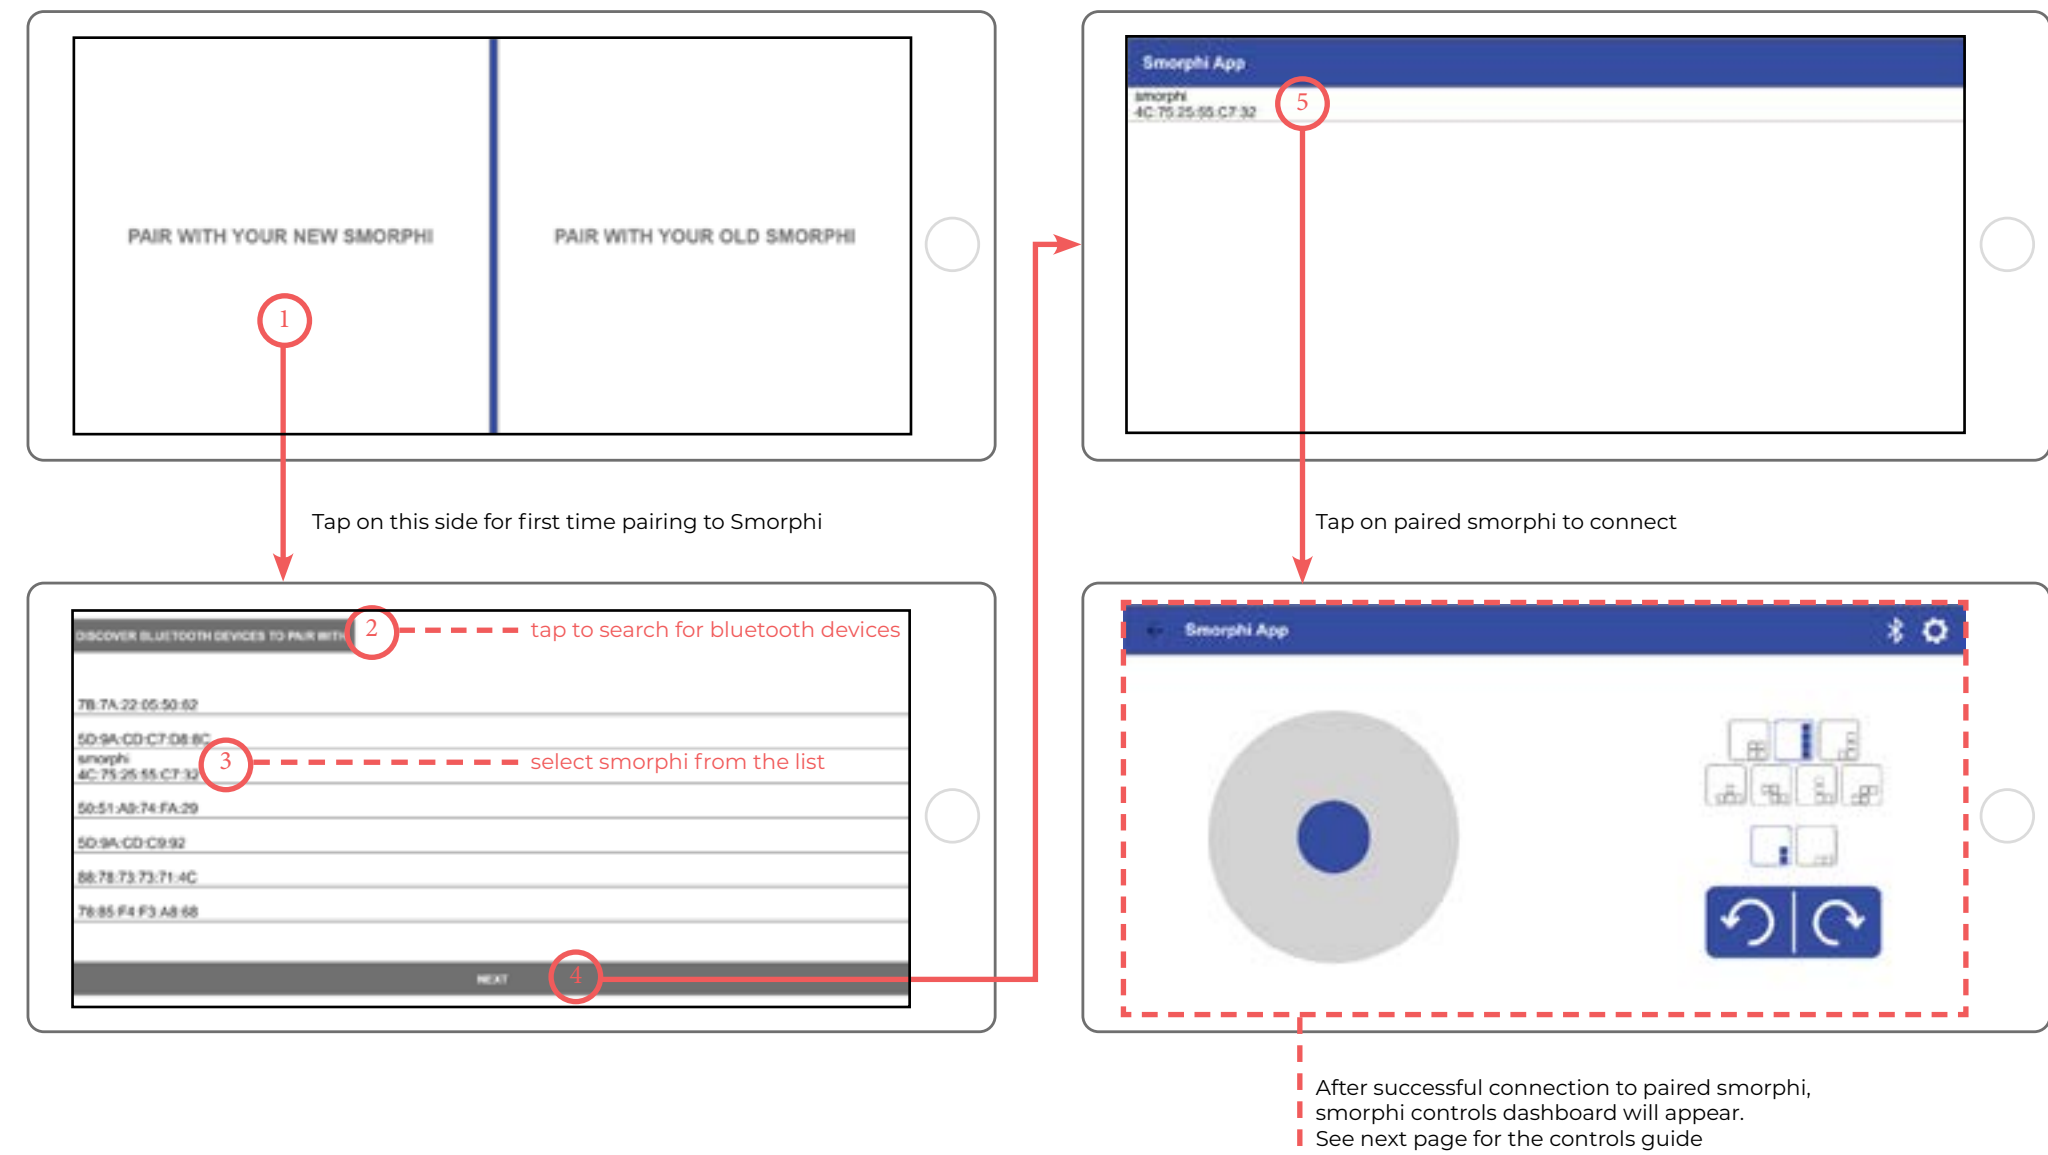

3. Smorphi controls dashboard guide.

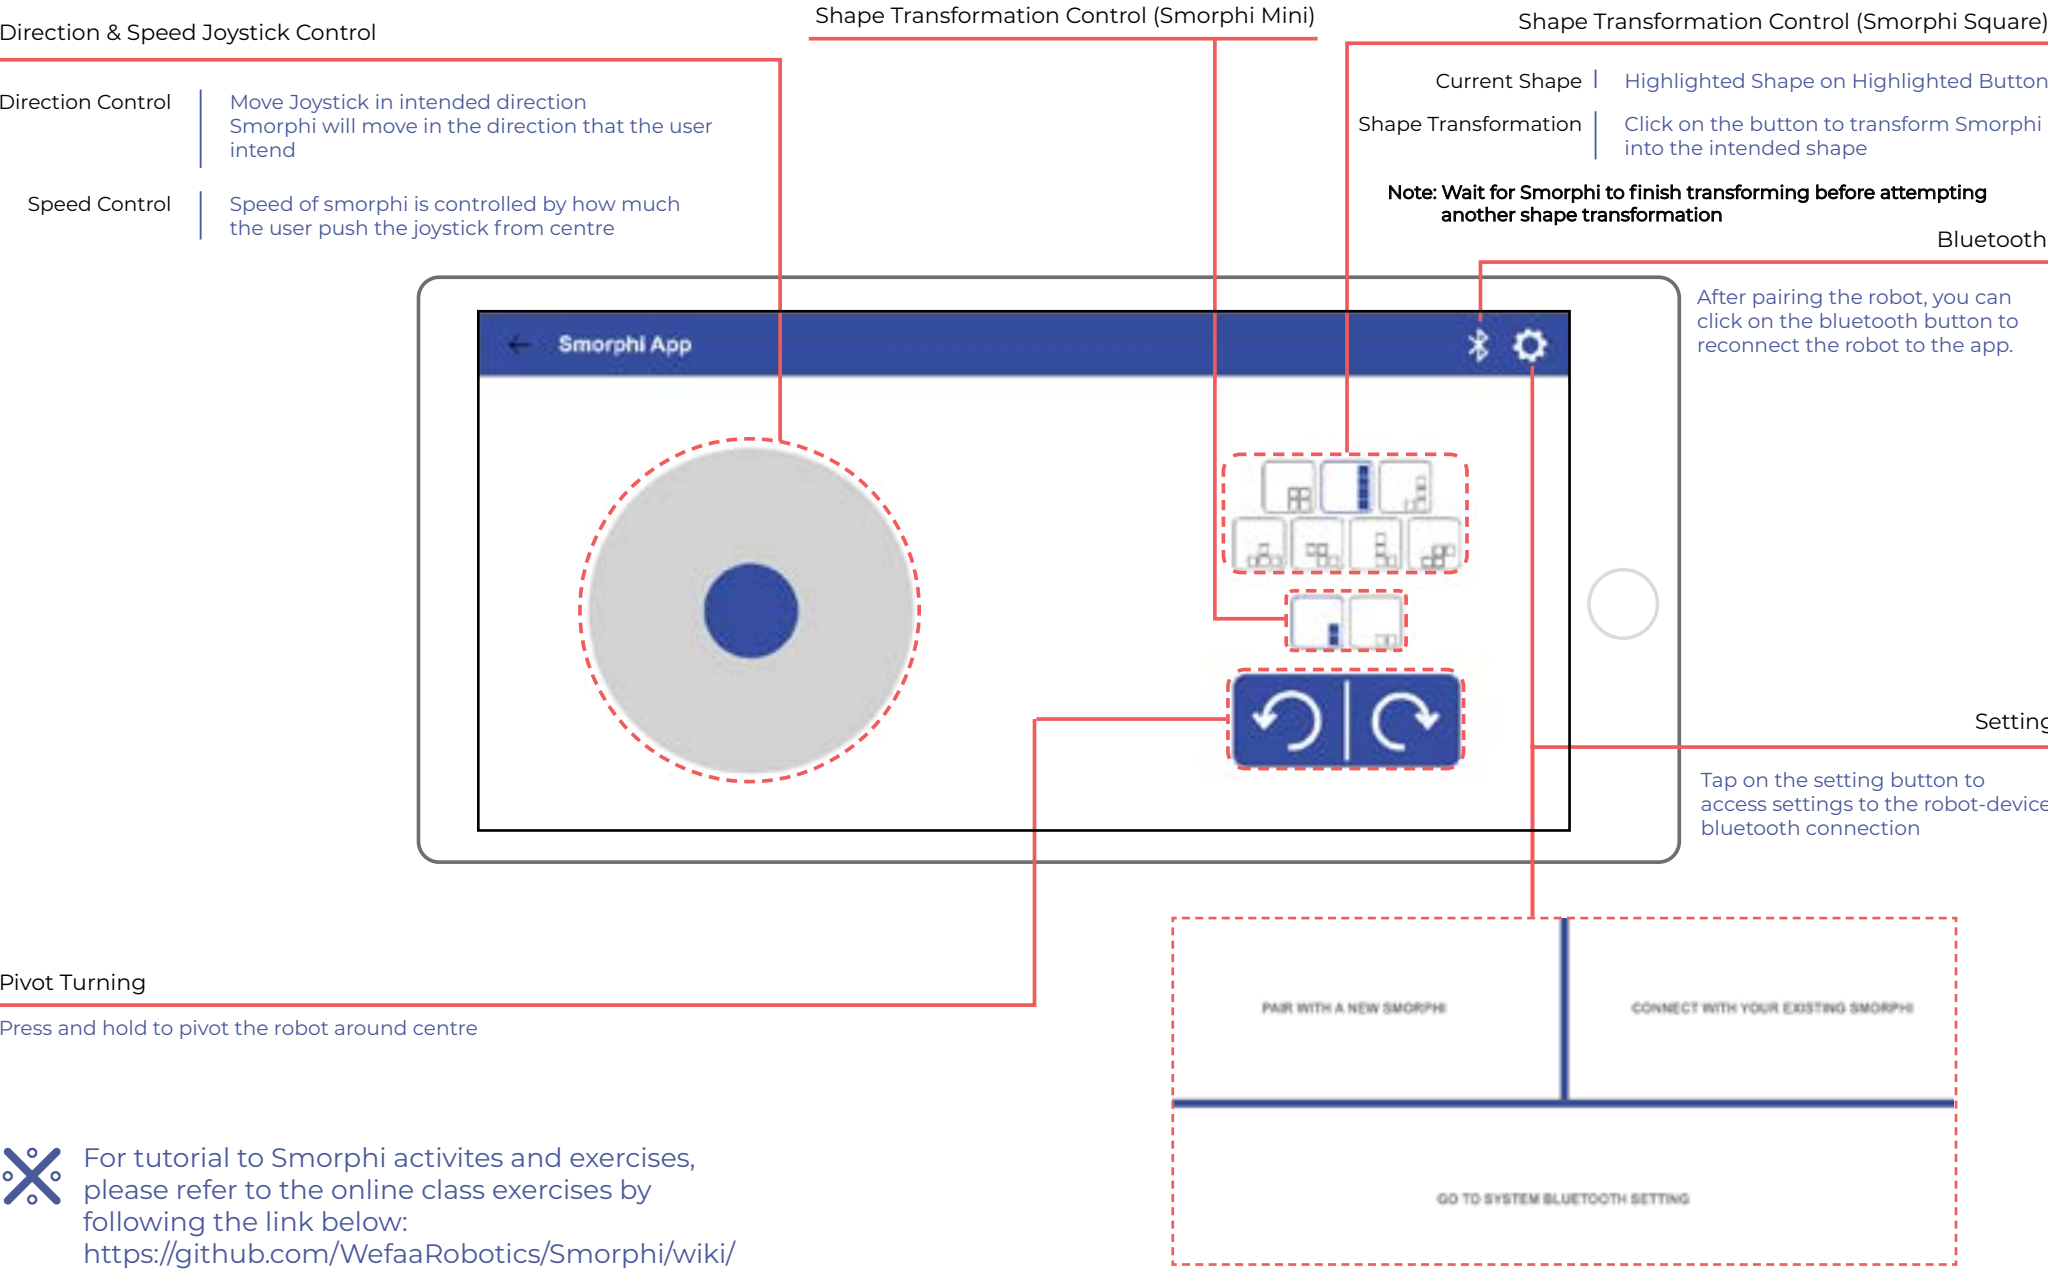

✖ For tutorial to Smorphi activites and exercises, please refer to the online class exercises by following the link below:
<https://github.com/WefaaRobotics/Smorphi/wiki/>

(sensors)



sound sensor (x2)

Sound sensor measures volume of sound. Onboard potentiometer* can be used to tune the range of sensing. Possible applications: sound-triggered shape transformation or sound-triggered locomotion.



IR sensor (x4)

IR sensors comes with 2 different modes, toggled by the switch onboard the sensor itself. One IR is front-facing and can be used to detect obstacles ahead. The other IR faces the ground and can be used for path tracking.

✖ For sensor related activities and implementation, please refer to the online class exercises by following the link below:
<https://github.com/WefaaRobotics/Smorphi/wiki/Robot-Exercises>



temperature sensor (x1)

Temperature sensor measures surrounding temperature, with a range of -55°C to 125°C.





Pixy2 camera (x1)


Pixy2 Camera is able to colour code, detect and track lines and intersections, and learn to detect objects taught to it.

* Tutorial on how to operate the potentiometer can be found by following the link below:
<https://github.com/WefaaRobotics/Smorphi/wiki/Exercise-6>

(sound/IR sensor wiring)

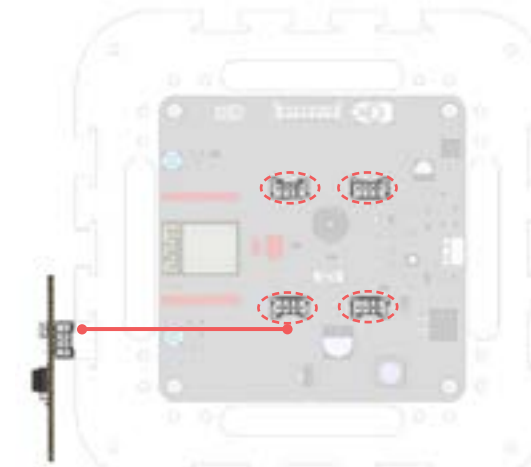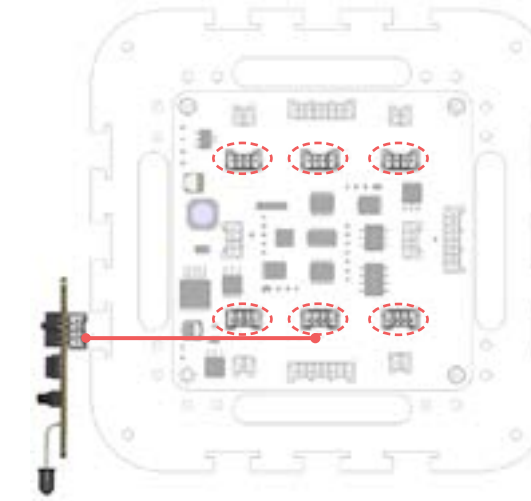


✖ Sound/IR sensor can be connected to any of the 6 sensor ports on the slaveboard (top) or any of the 4 sensor ports on the masterboard (bottom).

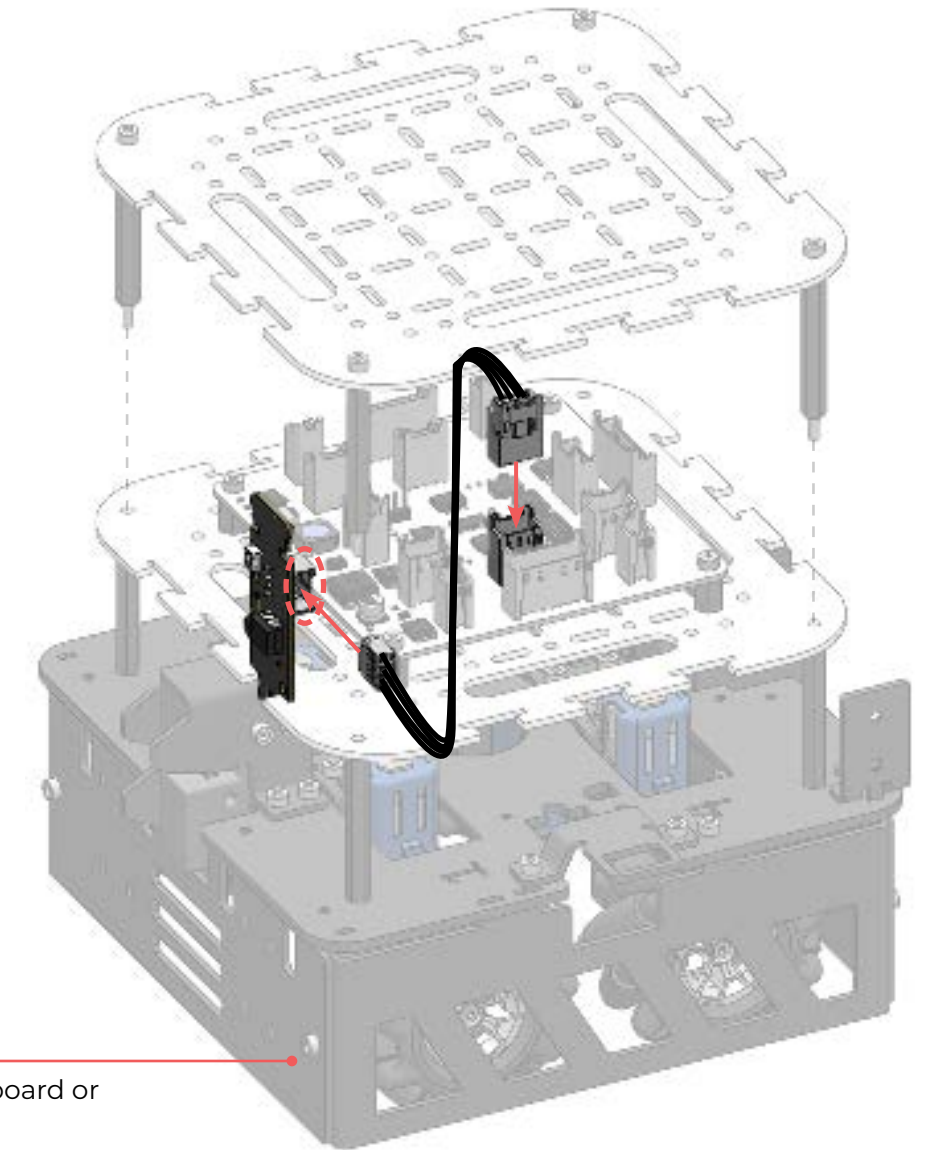

Module 1/2/3/4

Connect to masterboard or slaveboard

(temperature sensor wiring)

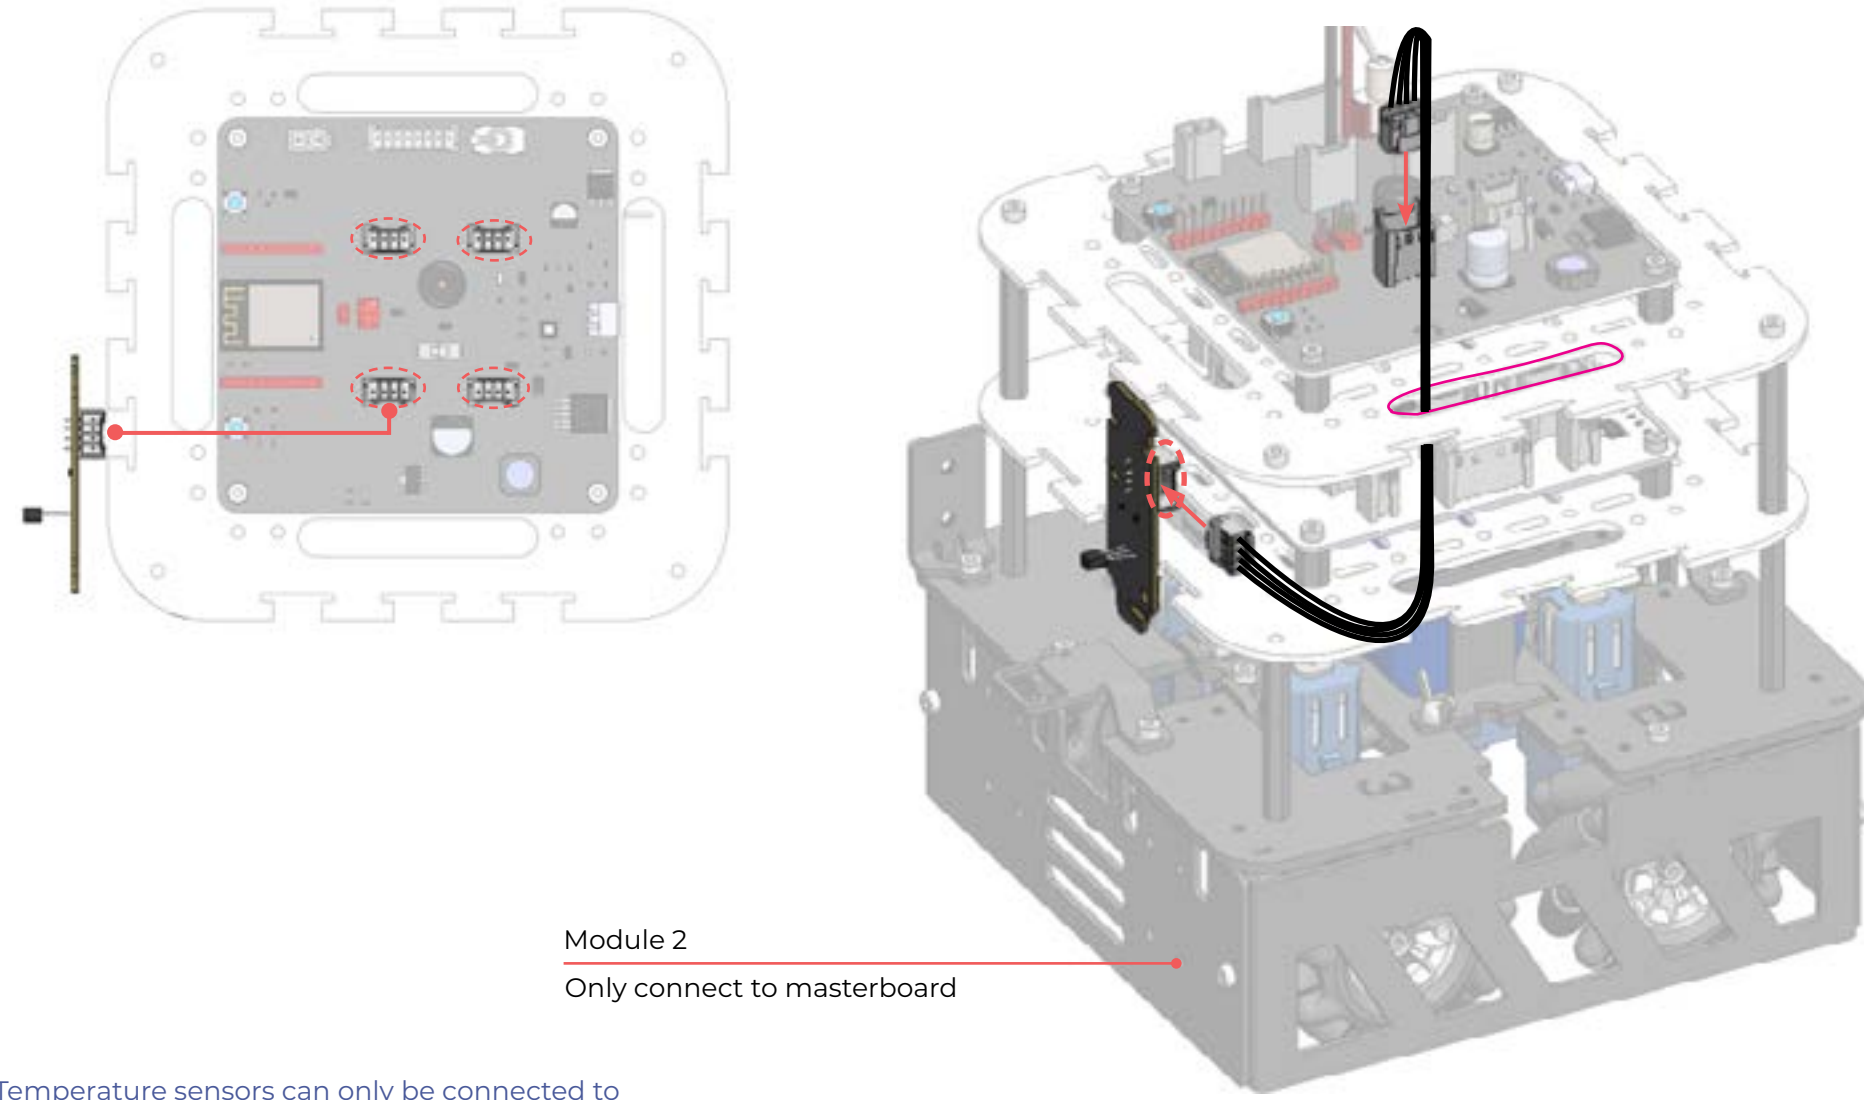


Module 2
Only connect to masterboard

✖ Temperature sensors can only be connected to any of the 4 sensor ports on the masterboard.


Opening to pass wire through

(sensor position 1)

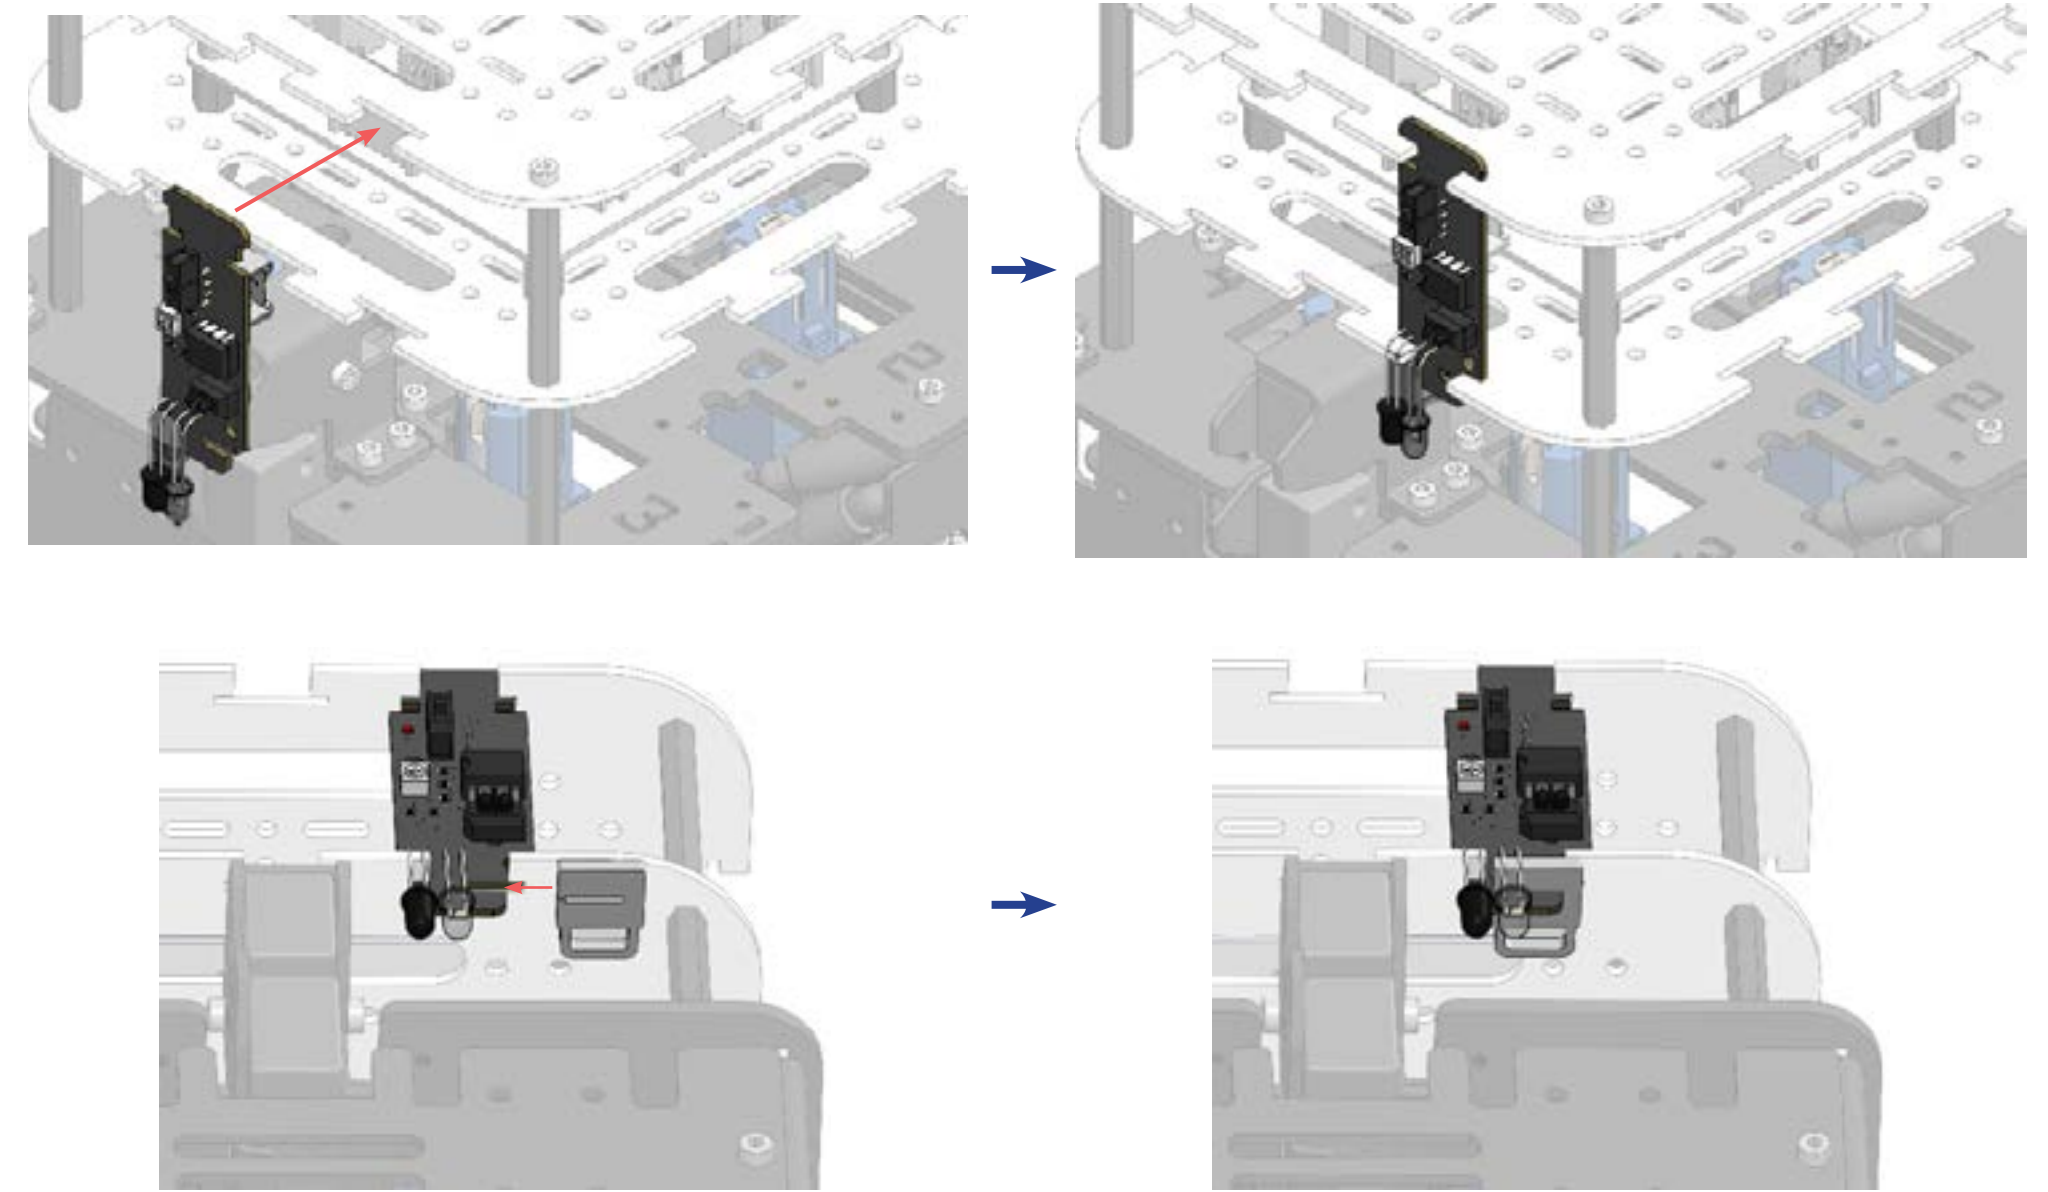


✖ Sensors can be secured to the robot using the sensor lock provided.

(sensor position 2)

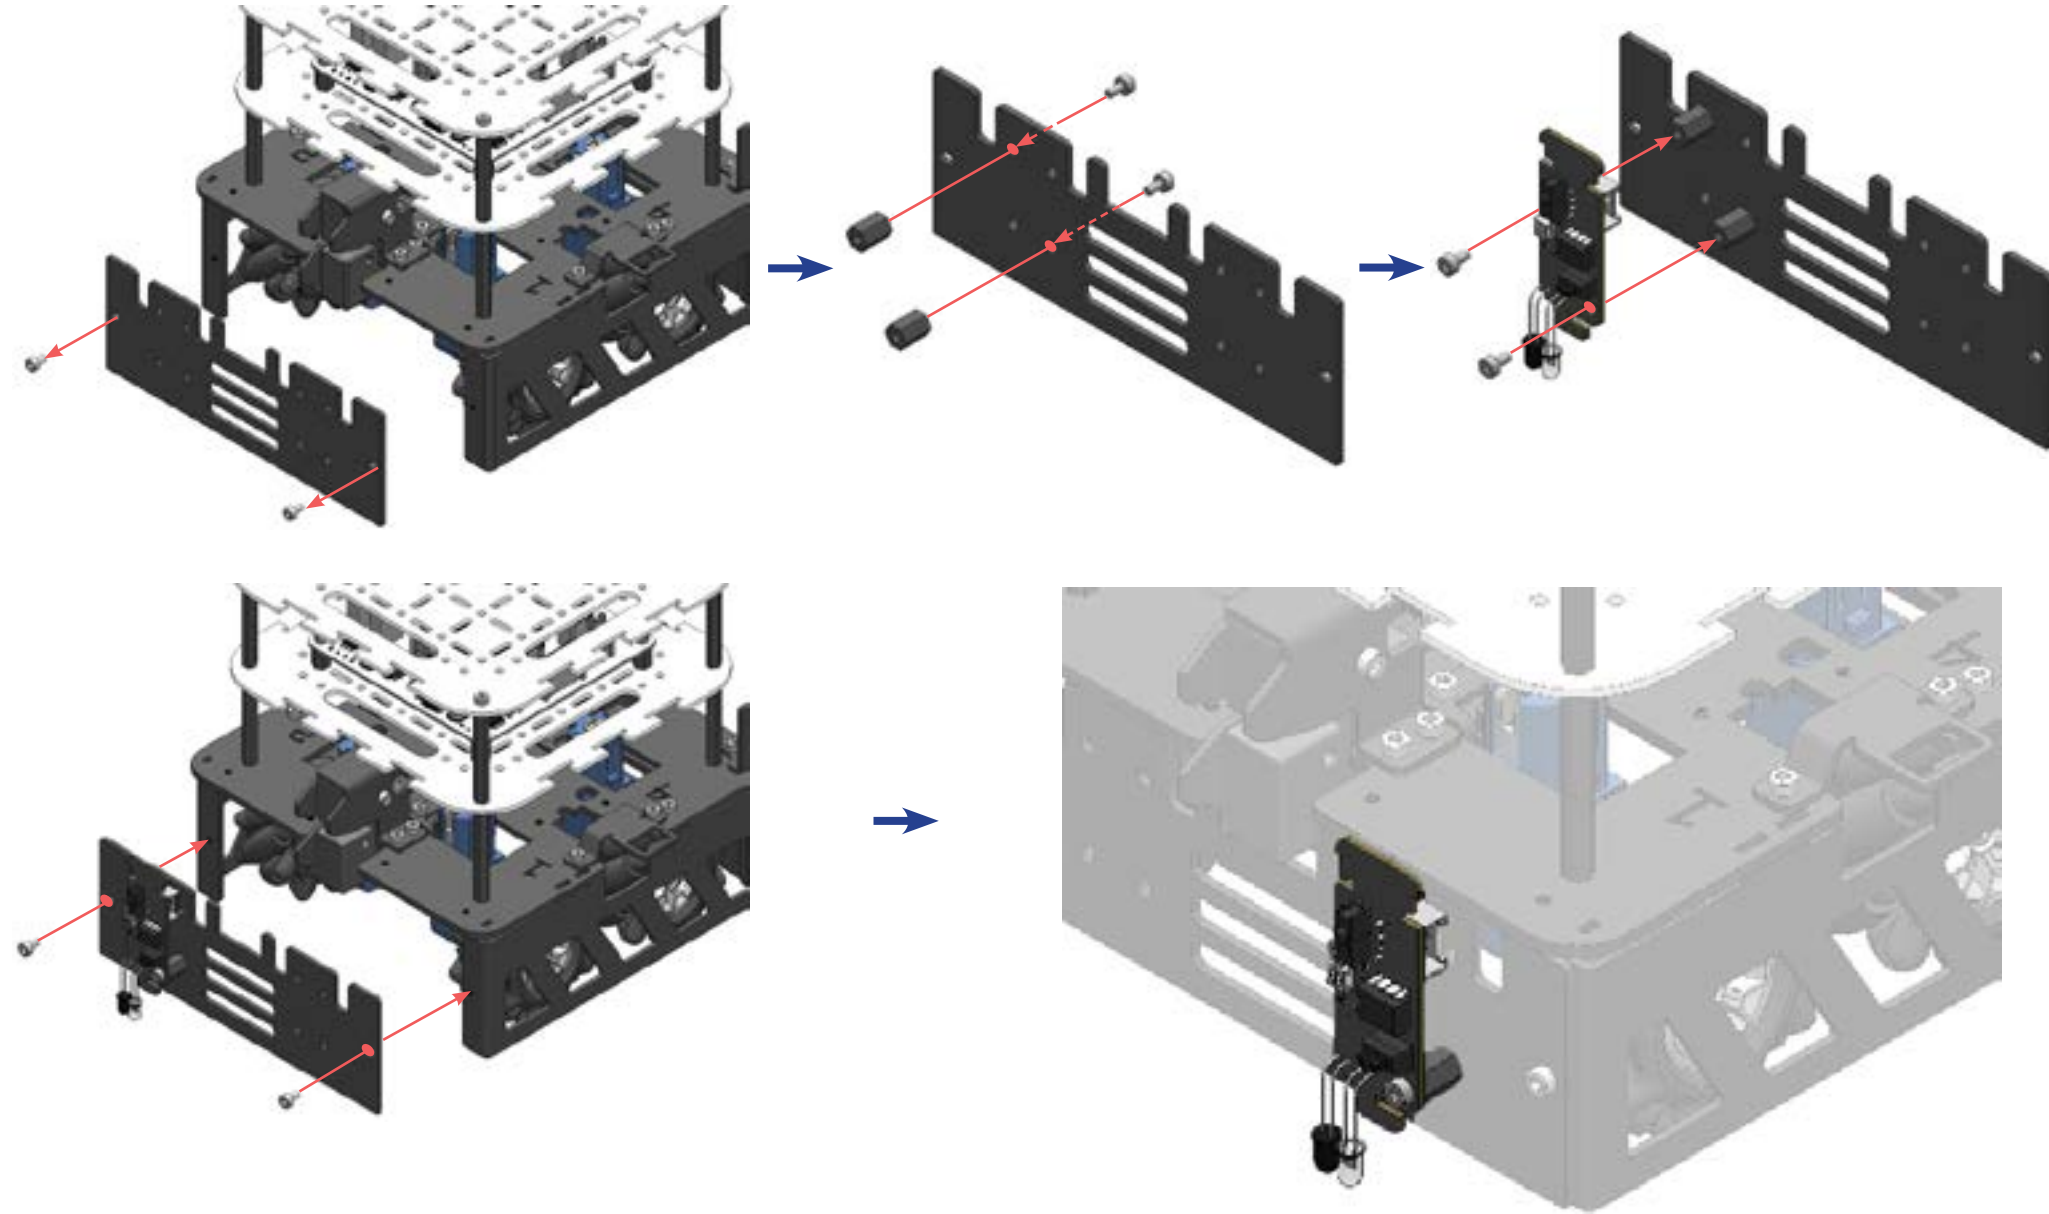


✕ Sensors can also be attached at the skirt panel of the robot.

(pixycam wiring)

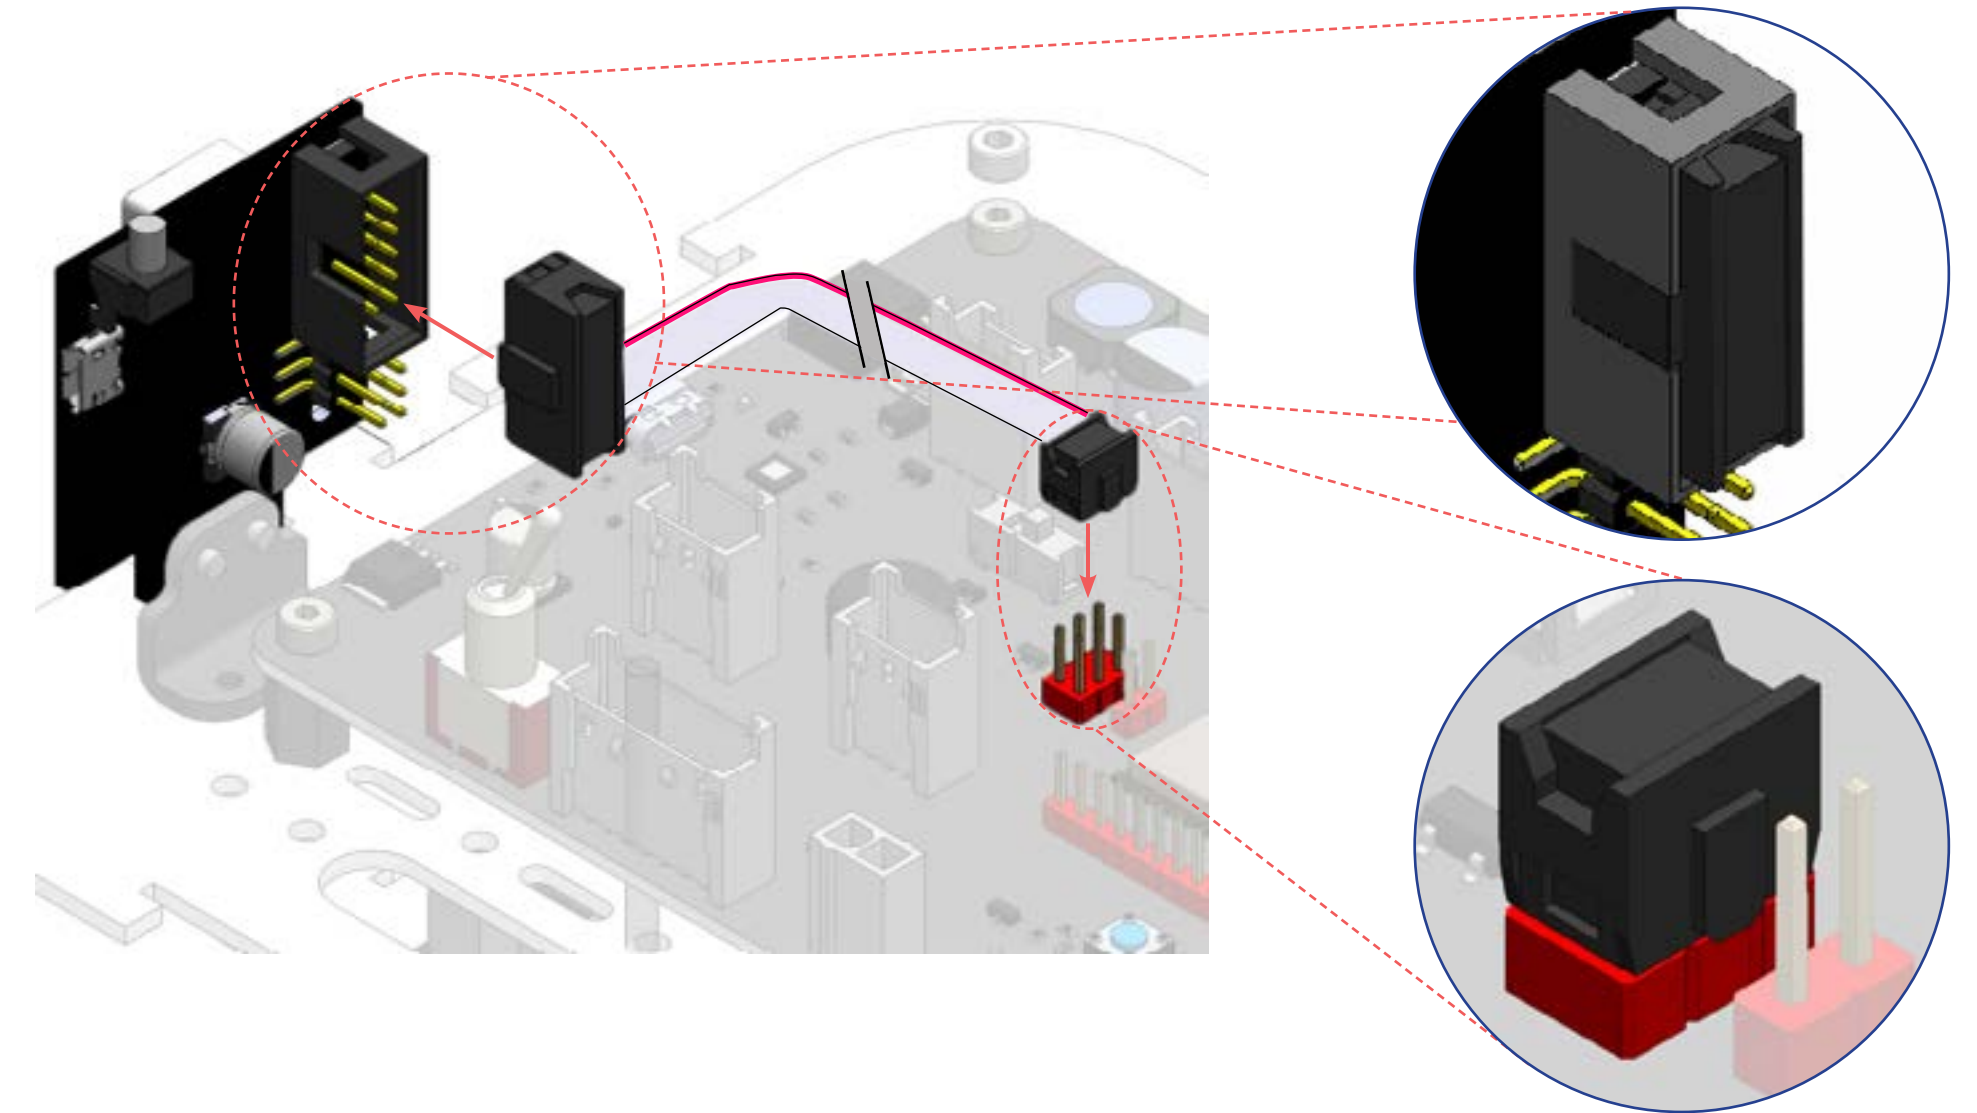


✕ Use the flat ribbon cable to connect the pixycam to the masterboard
6 pin side to the masterboard
10 pin side to the pixycam

(mounting the pixycam)

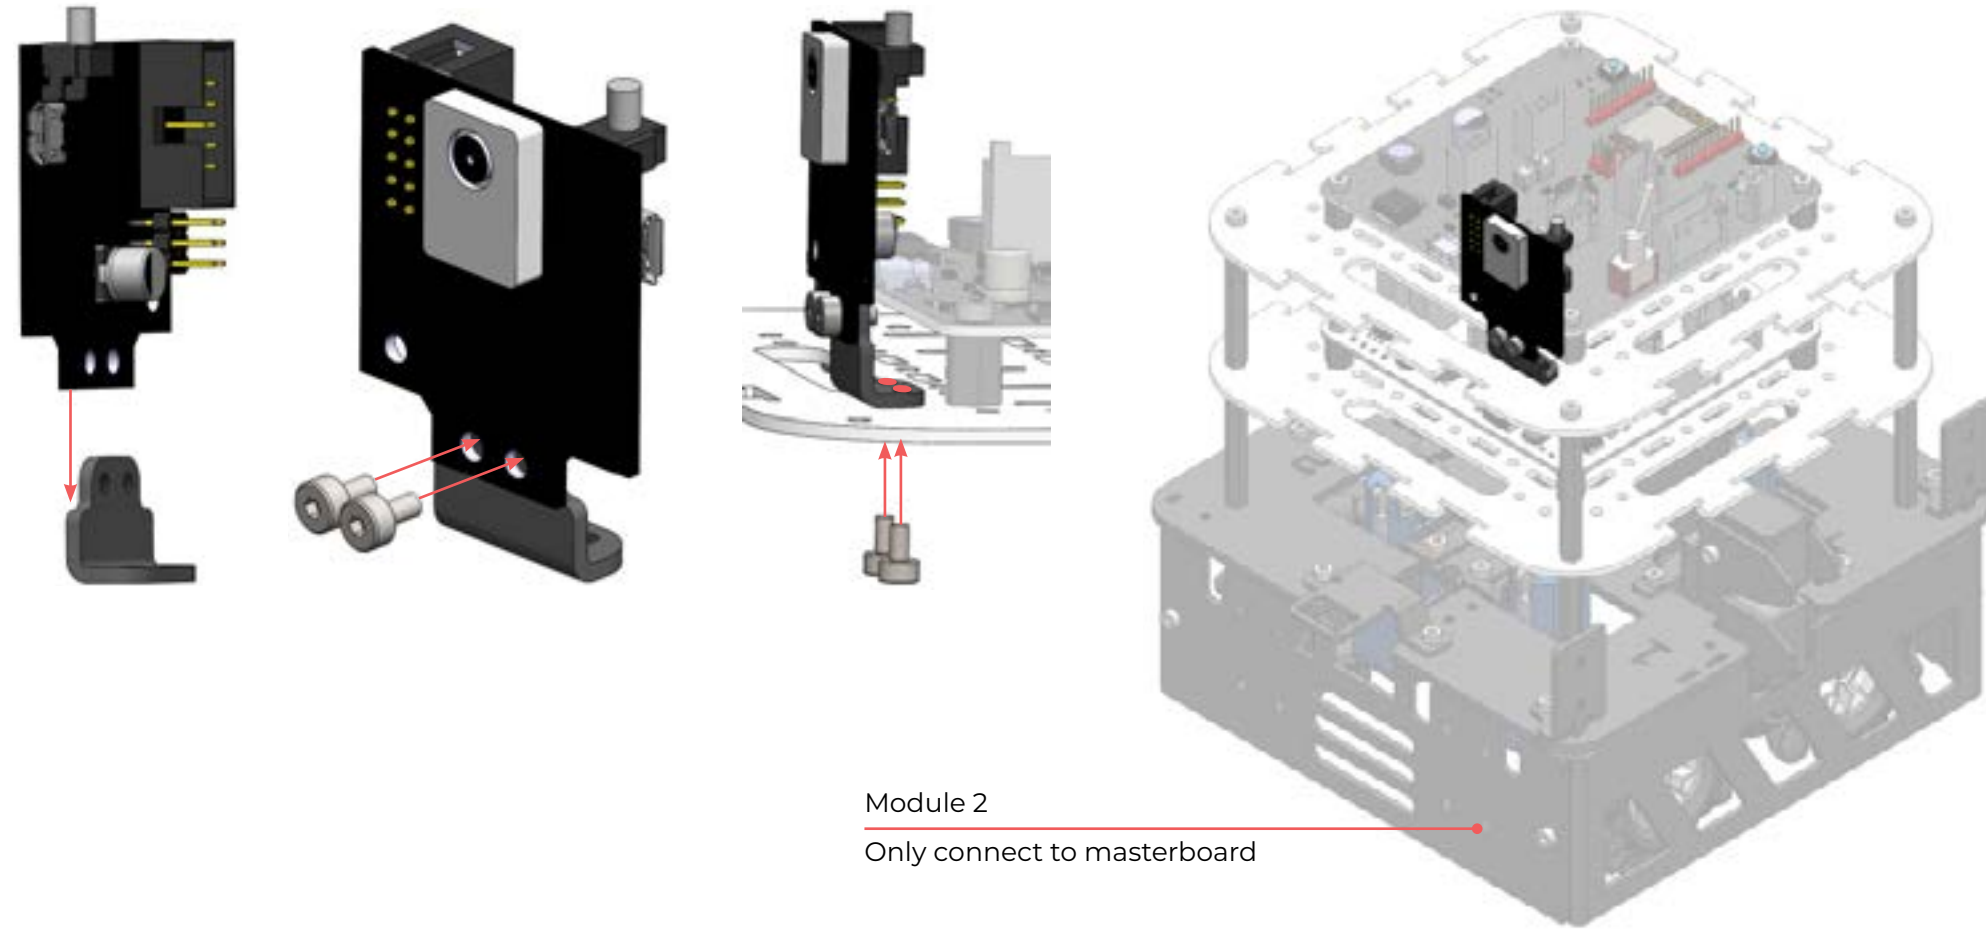

✖ Pixycam can be mounted on anywhere on the acrylic board.

(connect to laptop)

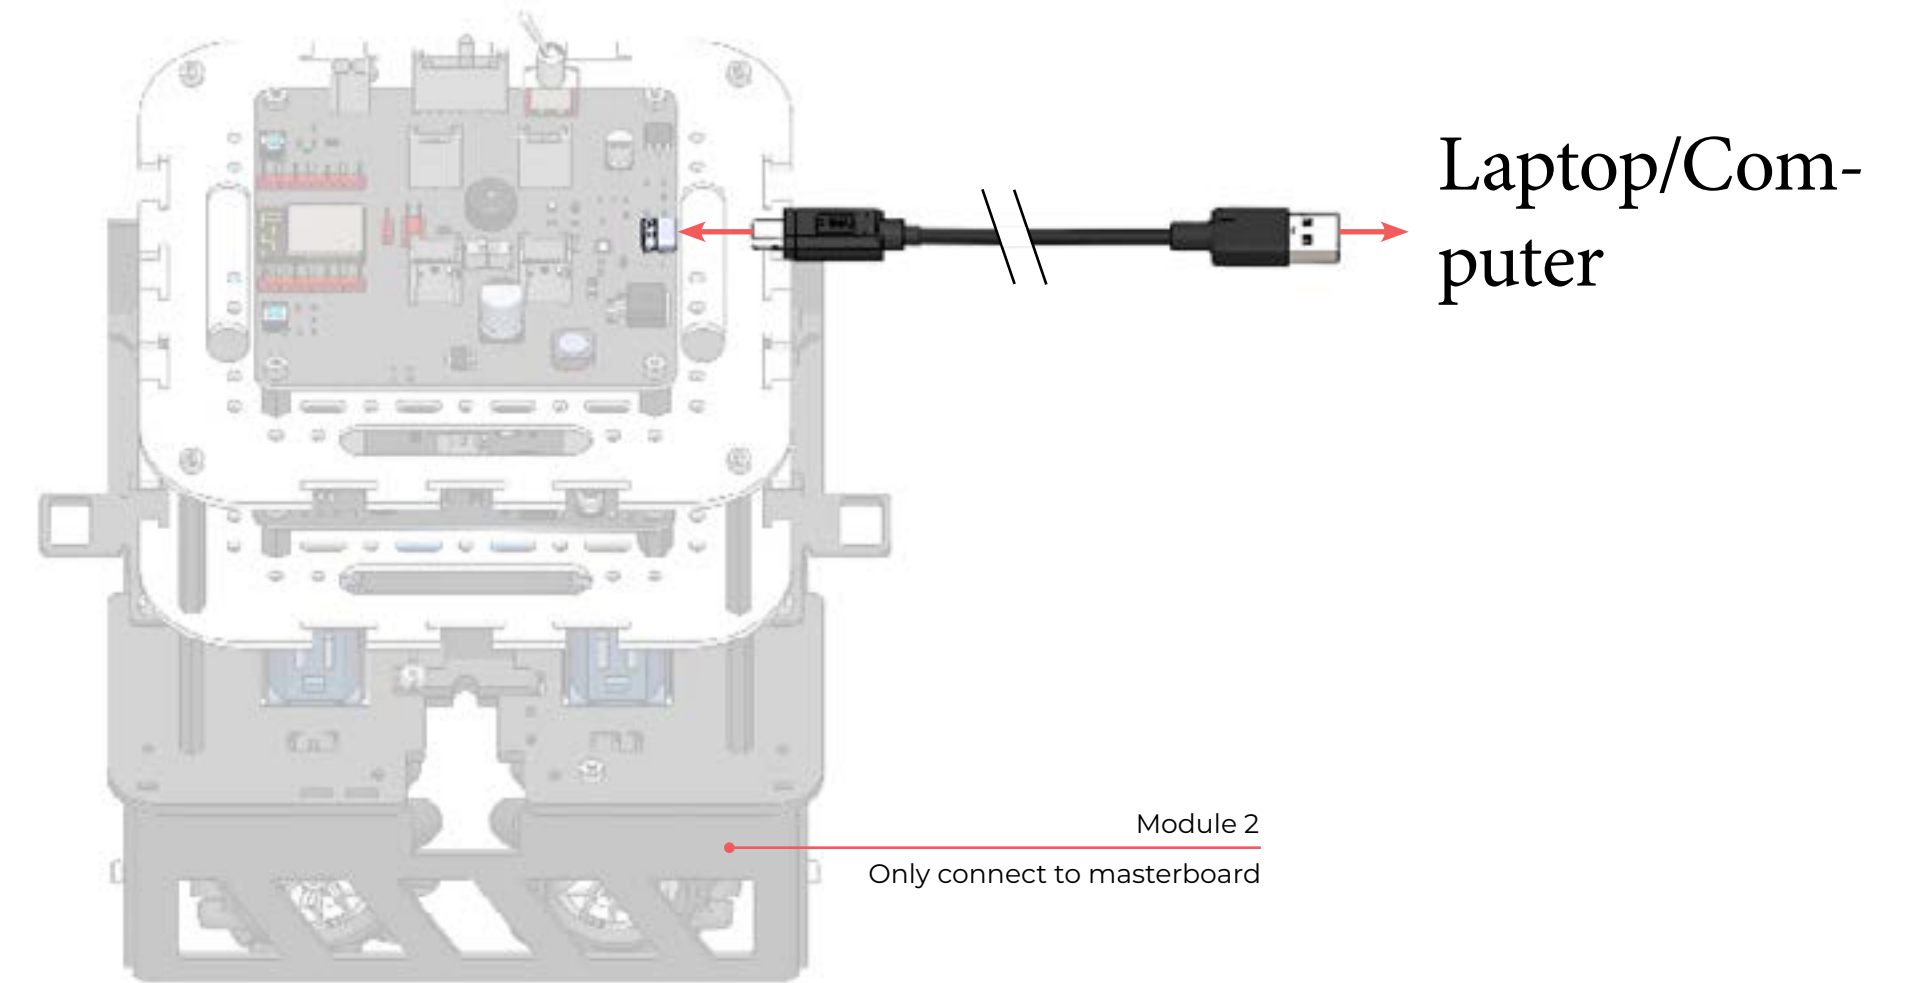

✖ Plug in the USB-C cable as shown above to connect the masterboard to the computer. It allows us to upload our code from our computer onto the masterboard.

[charging]

