Chapter 1

SIGNAL ANALYSIS

Signal analysis is performed in this chapter. The aim is to first provide a brief introduction to the Discrete Fourier Transform (DFT) in the context of its application to MultiFrequency analysis for Flutter Derivative Identification. This is then applied to single- and multi-frequency signal extraction. Finally, potential sources of error and methods to mitigate them are discussed.

This chapter is organised as follows:

1. Introduction to DFT
2. Single Frequency
3. Multi-Frequency

1.1 Introduction to DFT

The Fourier Transform is a mathematical tool used to convert a signal from the time domain to the frequency domain. Since real-world data consists of discrete numbers rather than continuous mathematical functions, the transform cannot be applied directly. Therefore, the Discrete Fourier Transform (DFT) is used in such cases. The DFT converts time-varying data into the frequency domain, and its inputs are the time-varying data and the sampling frequency. The sampling frequency defines how many samples are taken per second; in the CFD context used in this thesis, it is equal to $1/\Delta t$, where Δt is the time step.

The Fast Fourier Transform (FFT) is derived from the DFT and offers significantly greater computational efficiency. Several open-source tools are available to perform FFT computations, one of which is provided by the `scipy.fft` module in Python. Since Python is used for post-processing throughout this thesis, the SciPy FFT tool is employed to convert the obtained aerodynamic forces and moments into the frequency domain.

Since the DFT operates on a discrete set of values, it is subject to certain inherent limitations that can affect the quality of the transformation and the usability of its results. It is therefore necessary to study these issues before applying the FFT to flutter derivative calculations. This is the focus of the present chapter: to examine the issues associated with the DFT and to investigate its efficient application in the multi-frequency method for flutter derivative identification.

The accuracy of extracting the amplitude of a particular signal using the FFT depends on two parameters:

1. The frequency of the signal to be extracted.
2. The frequency bin of the data.

The frequency bin refers to the discrete set of frequency values produced by the FFT during domain conversion. If the frequency of the signal to be extracted coincides with

one of the values in the frequency bin, the extracted amplitude will be accurate and free from discretisation errors.

Calculation of Frequency Bin

The spacing between two adjacent frequencies in the bin is known as the *bin spacing*, and the *frequency resolution* of an FFT refers to how small this spacing is. A smaller bin spacing corresponds to a higher frequency resolution. As shown by the formula, the resolution depends on the length of the data record.

If the signal frequency does not coincide with a frequency bin value, the amplitude obtained from the FFT will contain an error. This effect is known as *spectral leakage*: since no bin directly corresponds to the signal frequency, its amplitude is distributed across two adjacent bins. Therefore, using a longer data record increases the accuracy of the DFT by reducing the bin spacing and mitigating spectral leakage.

Another important issue to be aware of is *aliasing*. The maximum signal frequency that can be extracted using an FFT is limited by the Nyquist frequency, given by:

$$f_{\text{Nyquist}} = \frac{f_s}{2} \tag{1.1}$$

where f_s is the sampling frequency. The implications of this limit are twofold. First, if the frequency of interest lies above the Nyquist frequency, it cannot be extracted. Second, even if the frequency of interest lies within the Nyquist limit, any other signal with a frequency above it will be folded back into the valid frequency range by the FFT. If such a folded component does not fall on a bin, it will introduce additional spectral leakage. While the probability of this aliased component coinciding exactly with a frequency of interest is low, this effect should be kept in mind when using the FFT in practice.

These two effects combined impose restrictions on the frequencies that can be extracted and the accuracy with which they can be obtained, in various forms:

1. As discussed, if the frequency of interest does not have a finite decimal representation or does not fall on a frequency bin, spectral leakage will introduce error.

2. The length of the data record determines a frequency bin that may or may not match the frequency of interest.

3. The frequency of interest must lie within the Nyquist frequency.

4. If random noise such as white noise is present in the data, the extracted amplitude will contain error even if the signal frequency falls on a bin. This is because random noise excites many frequencies simultaneously, and any overlap with the frequency range of the signal of interest will disturb the extracted amplitude. Since the noise is random, a large bin spacing further compounds this error through spectral leakage.

1.2 Single Frequency

This section studies the effects discussed in Section 1 as applied to a single-frequency signal. A sample sine wave is generated with discrete points, passed to the FFT tool from the SciPy module, and the resulting amplitudes are analysed. Since the amplitude of the input signal is known, it is compared against the FFT output and the error is examined for the following cases:

1. Single Frequency — Bin Match
2. Single Frequency — Non-Bin Match
3. Single Frequency — Bin Match with Noise
4. Frequency Bin Resolution on Non-Matching Bin

The input signal parameters used throughout this section are as follows:

- Total time: 10 seconds
- Sampling rate: 500 Hz (i.e. each second is divided into 500 discrete samples)

The resulting frequency bins are:

Frequency Bin: 0 | 0.1 | 0.2 | 0.3 | 0.4 | 0.5 | 0.6 | $\cdots$ | 250.0 Hz

Note that the maximum frequency is 250 Hz, which is the Nyquist limit for this configuration.

1.2.1 Bin Match

A signal with a frequency of 0.4 Hz and an amplitude of 1.0 is used as input. Since 0.4 Hz falls directly on a frequency bin, no spectral leakage is expected.

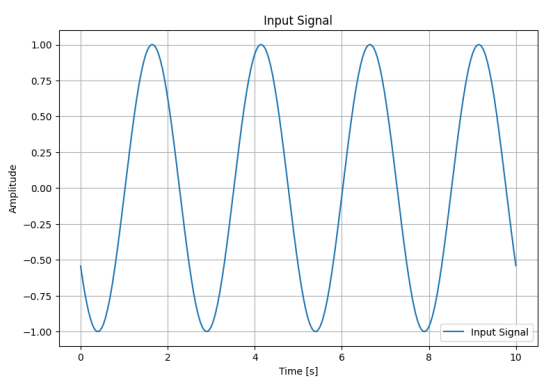

(a) Input signal at 0.4 Hz.

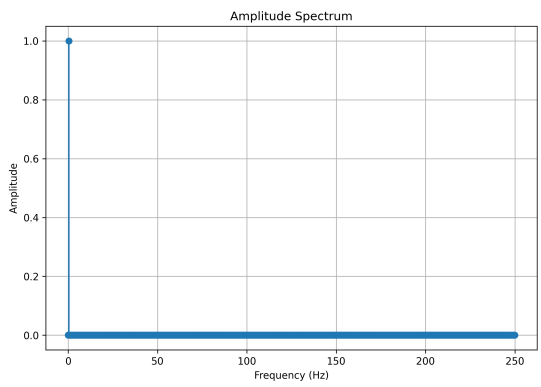

(b) FFT amplitude spectrum — bin match.

Figure 1.1: Single-frequency bin-match case: input signal and corresponding FFT spectrum.

As shown in Figure 1.1, the amplitude output from the FFT is 1.00, which matches the input signal amplitude exactly. This confirms that when the signal frequency falls on a frequency bin, no discretisation error is introduced.

1.2.2 Non-Bin Match

In this case, the input signal frequency is changed to 0.45 Hz, which does not coincide with any frequency bin. Since 0.45 Hz lies midway between the 0.4 Hz and 0.5 Hz bins, the FFT assigns its amplitude to the nearest neighbouring bin.

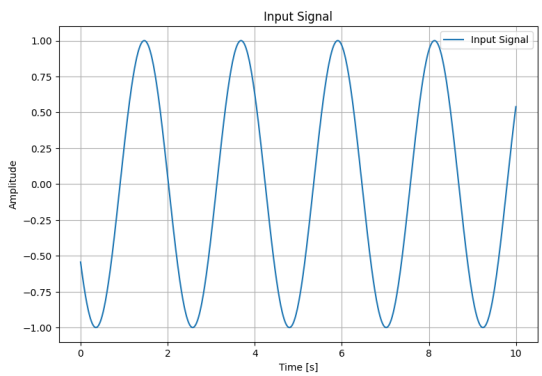

(a) Input signal at 0.45 Hz.

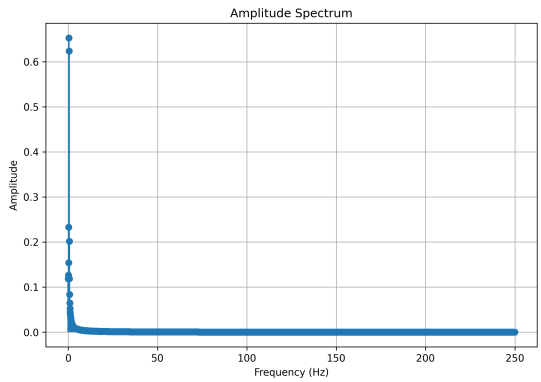

(b) FFT amplitude spectrum — non-bin match.

Figure 1.2: Single-frequency non-bin-match case: input signal and corresponding FFT spectrum showing spectral leakage.

As shown in Figure 1.2, the extracted amplitude is 0.653, corresponding to an error of 34.70%. This demonstrates that when the signal frequency does not fall on a frequency bin, spectral leakage causes a significant reduction in accuracy.

1.2.3 Bin Match with Noise

In this case, the input signal is kept at 0.4 Hz. Additionally, white noise with an amplitude of 0.2 is superimposed on the signal to assess its effect on the extracted amplitude.

As shown in Figure 1.3, the extracted amplitude is 0.99, corresponding to an error of only 0.04%. Although noise does introduce a small error, its effect is considerably less severe than that of spectral leakage, provided the signal frequency falls on a frequency bin.

1.2.4 Frequency Bin Resolution on Non-Matching Bin

The amplitude error associated with a non-bin-matched frequency is based on the relative position of that frequency between its two nearest bins. The closer the frequency lies to the midpoint between two adjacent bins, the greater the spectral leakage and, consequently, the larger the resulting error.

To illustrate this, consider a signal at 0.54 Hz with the same configuration as above, where the neighbouring frequency bins are located at 0.5 Hz and 0.6 Hz. This frequency

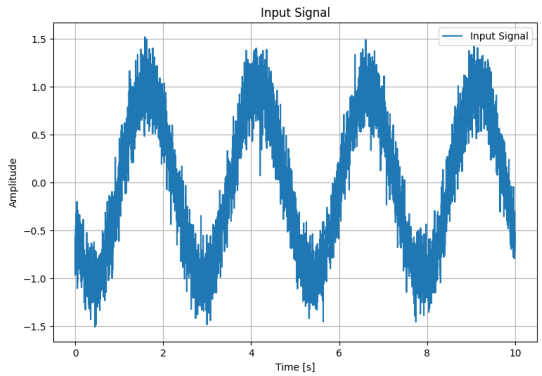

(a) Input signal at 0.4 Hz with white noise.

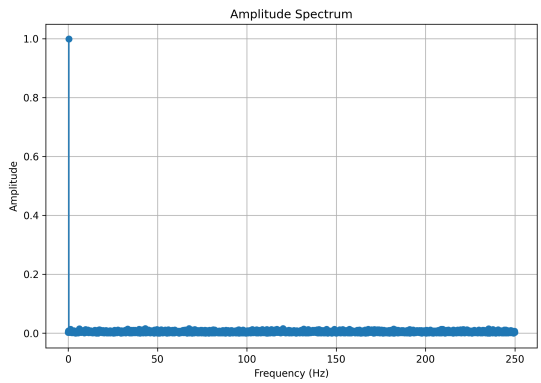

(b) FFT amplitude spectrum — bin match with noise.

Figure 1.3: Single-frequency bin-match case with added white noise: input signal and corresponding FFT spectrum.

falls near the centre of the interval between the two adjacent bins, producingan error of 21.77%. When the total record length is extended to 20 s, the bin spacing is reduced, placing the neighbouring bins at 0.5 Hz and 0.55 Hz. In this finer-resolution case, the error decreases to 5.6%, since 0.54 Hz now lies closer, in relative terms, to one of its neighbouring bins.

This behaviour is further illustrated by examining a signal at 0.53 Hz. In the first configuration (bin spacing of 0.1 Hz), the normalised distance of 0.53 Hz from the midpoint between its nearest bins is $0.3/0.5 = 0.6$, yielding an error of 11.68%. In the second configuration (bin spacing of 0.05 Hz), this ratio increases to $0.2/0.25 = 0.8$, and the error rises to 24.02%, despite the absolute distance to the nearest bin being smaller. This result highlights that it is the relative position within the bin interval that determines the magnitude of spectral leakage error. One approach to mitigate error in the limiting case, where the frequency falls exactly at the midpoint between two bins, is to sum the amplitudes of the two neighbouring bins. However, this method introduces additional uncertainty and should therefore be applied with caution.

Another approach is improving the frequency resolution through a longer data record reduces spectral leakage error by moving the signal frequency closer to a bin in relative terms. However, as the resolution increases, the sensitivity of the error also increases. Consequently, while a finer frequency resolution is generally beneficial for accuracy, its associated increase in error sensitivity must be carefully considered when increasingthe length.

1.3 Multi-Frequency

This section extends the analysis of the previous section to multi-frequency signals. The primary objectives are to determine whether increasing the number of frequency components affects accuracy, to examine the impact of a frequency not falling on a bin in a multi-component signal, and to assess the effect of noise in such cases.

The data length and frequency bins are kept identical to those used in the single-frequency analysis:

- Total time: 10 seconds
- Sampling rate: 500 Hz

Frequency Bin: 0 | 0.1 | 0.2 | 0.3 | 0.4 | 0.5 | 0.6 | $\cdots$ | 250.0 Hz

The following cases are examined:

1. Multi-Frequency — All Components Bin-Matched
2. Multi-Frequency — Bin Match with Noise
3. Multi-Frequency — One Component Non-Bin-Matched

1.3.1 All Components Bin-Matched

In this case, all input frequencies are chosen to fall on frequency bins, and the amplitude accuracy of the FFT output is verified for each component.

Table 1.1: FFT amplitude detection results for a multi-frequency bin-matched signal.

Input Frequency (Hz)	**Input Amplitude**	**FFT Amplitude**	**Error (%)**
0.40	1.0	1.000	0.00
0.80	4.0	4.000	0.00
1.00	3.0	3.000	0.00
1.20	1.0	1.000	0.00
1.40	2.0	2.000	0.00
		Overall Error	**0.00%**

As seen in Table 1.1 and Figure 1.4, all five frequency components are extracted with zero error. This confirms that when all signal frequencies fall on frequency bins, the FFT produces accurate results regardless of the number of frequency components present.

1.3.2 Bin Match with Noise

The same multi-frequency signal is used here, with the addition of white noise at an amplitude of 0.2. The aim is to assess whether the noise effect observed in the single-frequency case persists under multi-frequency conditions.

As shown in Table 1.2 and Figure 1.5, the introduction of white noise produces small but non-zero errors across all frequency components. Consistent with the single-frequency case, the errors remain small relative to those caused by spectral leakage, provided all frequencies fall on bins.

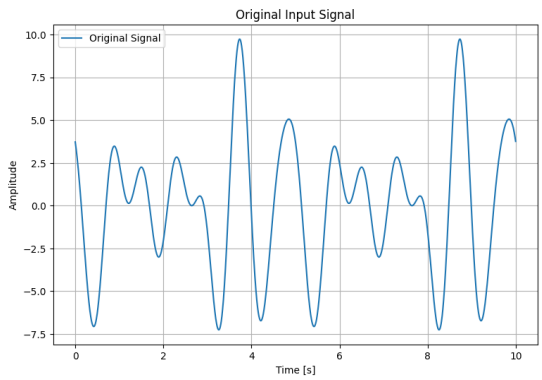

(a) Multi-frequency input signal — all bin-matched.

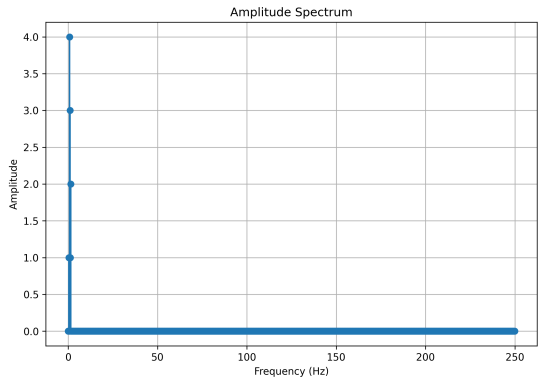

(b) FFT amplitude spectrum — all components bin-matched.

Figure 1.4: Multi-frequency bin-matched case: input signal and corresponding FFT spectrum with zero error across all components.

Table 1.2: FFT amplitude detection results for a multi-frequency bin-matched signal with added white noise.

Input Frequency (Hz)	**Input Amplitude**	**FFT Amplitude**	**Error (%)**
0.40	1.0	1.000	0.04
0.80	4.0	4.000	0.15
1.00	3.0	3.000	0.15
1.20	1.0	1.000	0.09
1.40	2.0	2.000	0.07
		Overall Error	**0.12%**

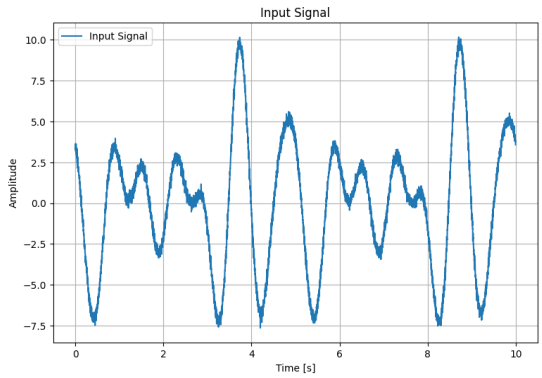

(a) Multi-frequency input signal with white noise.

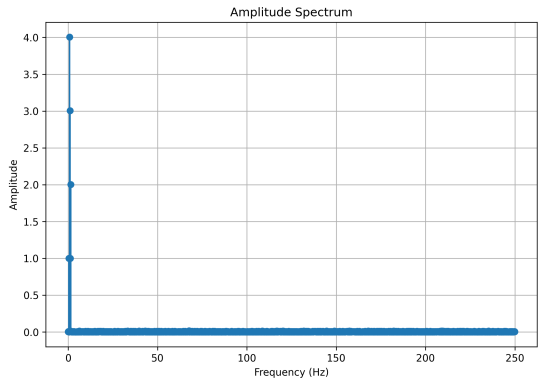

(b) FFT amplitude spectrum — bin match with noise.

Figure 1.5: Multi-frequency bin-matched case with added white noise: input signal and corresponding FFT spectrum.

1.3.3 One Component Non-Bin-Matched

In this case, the effect of a single frequency component not falling on a frequency bin is investigated within a multi-frequency signal. Specifically, the analysis examines whether the resulting error is isolated to the non-matching frequency or whether it propagates to neighbouring frequency components as well.

To investigate this, a multi-frequency signal identical to the previous case is used, with an additional component at 1.05 Hz introduced. Since the frequency bins are located at 1.0 Hz and 1.1 Hz, this frequency falls exactly midway between two adjacent bins, making it a worst-case spectral leakage scenario.

Table 1.3: FFT amplitude detection results for a multi-frequency signal with one non-bin-matched component at 1.05 Hz.

Input Frequency (Hz)	Input Amplitude	FFT Amplitude	Error (%)
0.40	1.0	1.0095	0.95
0.80	4.0	3.8793	3.02
1.00	3.0	2.4999	16.67
1.05	1.0	0.9654	3.45
1.10	1.0	0.2145	78.55
1.40	2.0	2.0152	0.76
		Overall Error	**17.23%**

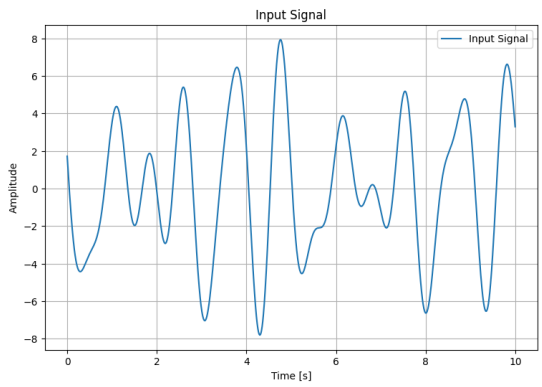

(a) Multi-frequency input signal with one non-bin-matched component.

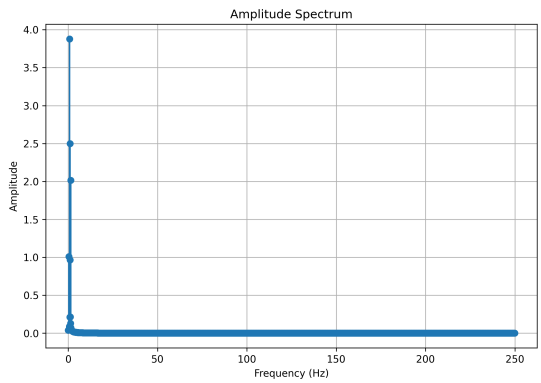

(b) FFT amplitude spectrum showing spectral leakage from the non-bin-matched component.

Figure 1.6: Multi-frequency case with one non-bin-matched component at 1.05 Hz: input signal and FFT spectrum illustrating leakage into neighbouring bins.

As shown in Table 1.3 and Figure 1.6, spectral leakage from the 1.05 Hz component does not remain isolated to that frequency alone. It also corrupts the amplitudes of neighbouring frequency components, particularly 1.00 Hz and 1.10 Hz, which exhibit errors of 16.67% and 78.55% respectively.

A key observation is that the magnitude of this leakage-induced error decreases with increasing spectral distance from the non-bin-matched frequency. This spatial decay of

leakage is also visible in the FFT spectrum, where the spurious disturbance diminishes progressively at frequencies further from 1.05 Hz. This behaviour underlines the importance of ensuring that all frequency components in a multi-frequency signal fall on frequency bins before applying the FFT.