SIGNAL PROCESSING
Through GATE

EE1205-TA Group

Author: Sayyam Palrecha

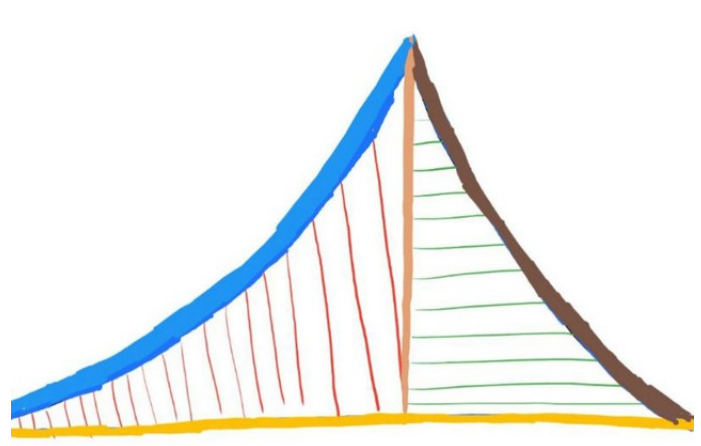

Contents

Introduction

This book provides solutions to signal processing problems in GATE.

Chapter 1

Harmonics

1.1

Chapter 2

2.1

Chapter 3

Z-transform

Chapter 4

Systems

4.1

Chapter 5

5.1

Chapter 6

Sampling

6.1

Chapter 7

Contour Integration

7.1

Chapter 8

Laplace Transform

8.1 Consider the differential equation $\frac{d^2y}{dx^2} - 2\frac{dy}{dx} + y = 0$. The boundary conditions are $y = 0$ and $\frac{dy}{dx} = 1$ at $x = 0$. Then the value of y at $x = \frac{1}{2}$ (GATE AE 2022)

Solution:

Parameters	**Values**	**Description**
$y(0)$	0	y at $x = 0$
$y'(0)$	1	$\frac{dy}{dx}$ at $x = 0$

Table 8.1: Parameters

$$\frac{d^2y}{dx^2} \overset{\mathcal{L}}{\longleftrightarrow} s^2Y(s) - sy(0) - y'(0) \tag{8.1}$$

$$\frac{dy}{dx} \overset{\mathcal{L}}{\longleftrightarrow} sY(s) - y(0) \tag{8.2}$$

Applying Laplace Transform, using (8.1) and (8.2),

$$s^2Y(s) - sy(0) - y'(0) - 2(sY(s) - y(0)) + Y(s) = 0 \tag{8.3}$$

From Table 8.1,

$$(s^2 - 2s + 1)Y(s) - 1 = 0 \tag{8.4}$$

$$Y(s) = \frac{1}{(s-1)^2} \tag{8.5}$$

$$t^n \xleftrightarrow{\mathcal{L}} \frac{n!}{s^{n+1}} \tag{8.6}$$

$$e^{at}x(t) \xleftrightarrow{\mathcal{L}} X(s-a) \tag{8.7}$$

Taking Inverse Laplace Transform for $Y(s)$, using (8.6) and (8.7),

$$y(x) = xe^x \tag{8.8}$$

$$\implies y\left(\frac{1}{2}\right) = \frac{\sqrt{e}}{2} \tag{8.9}$$

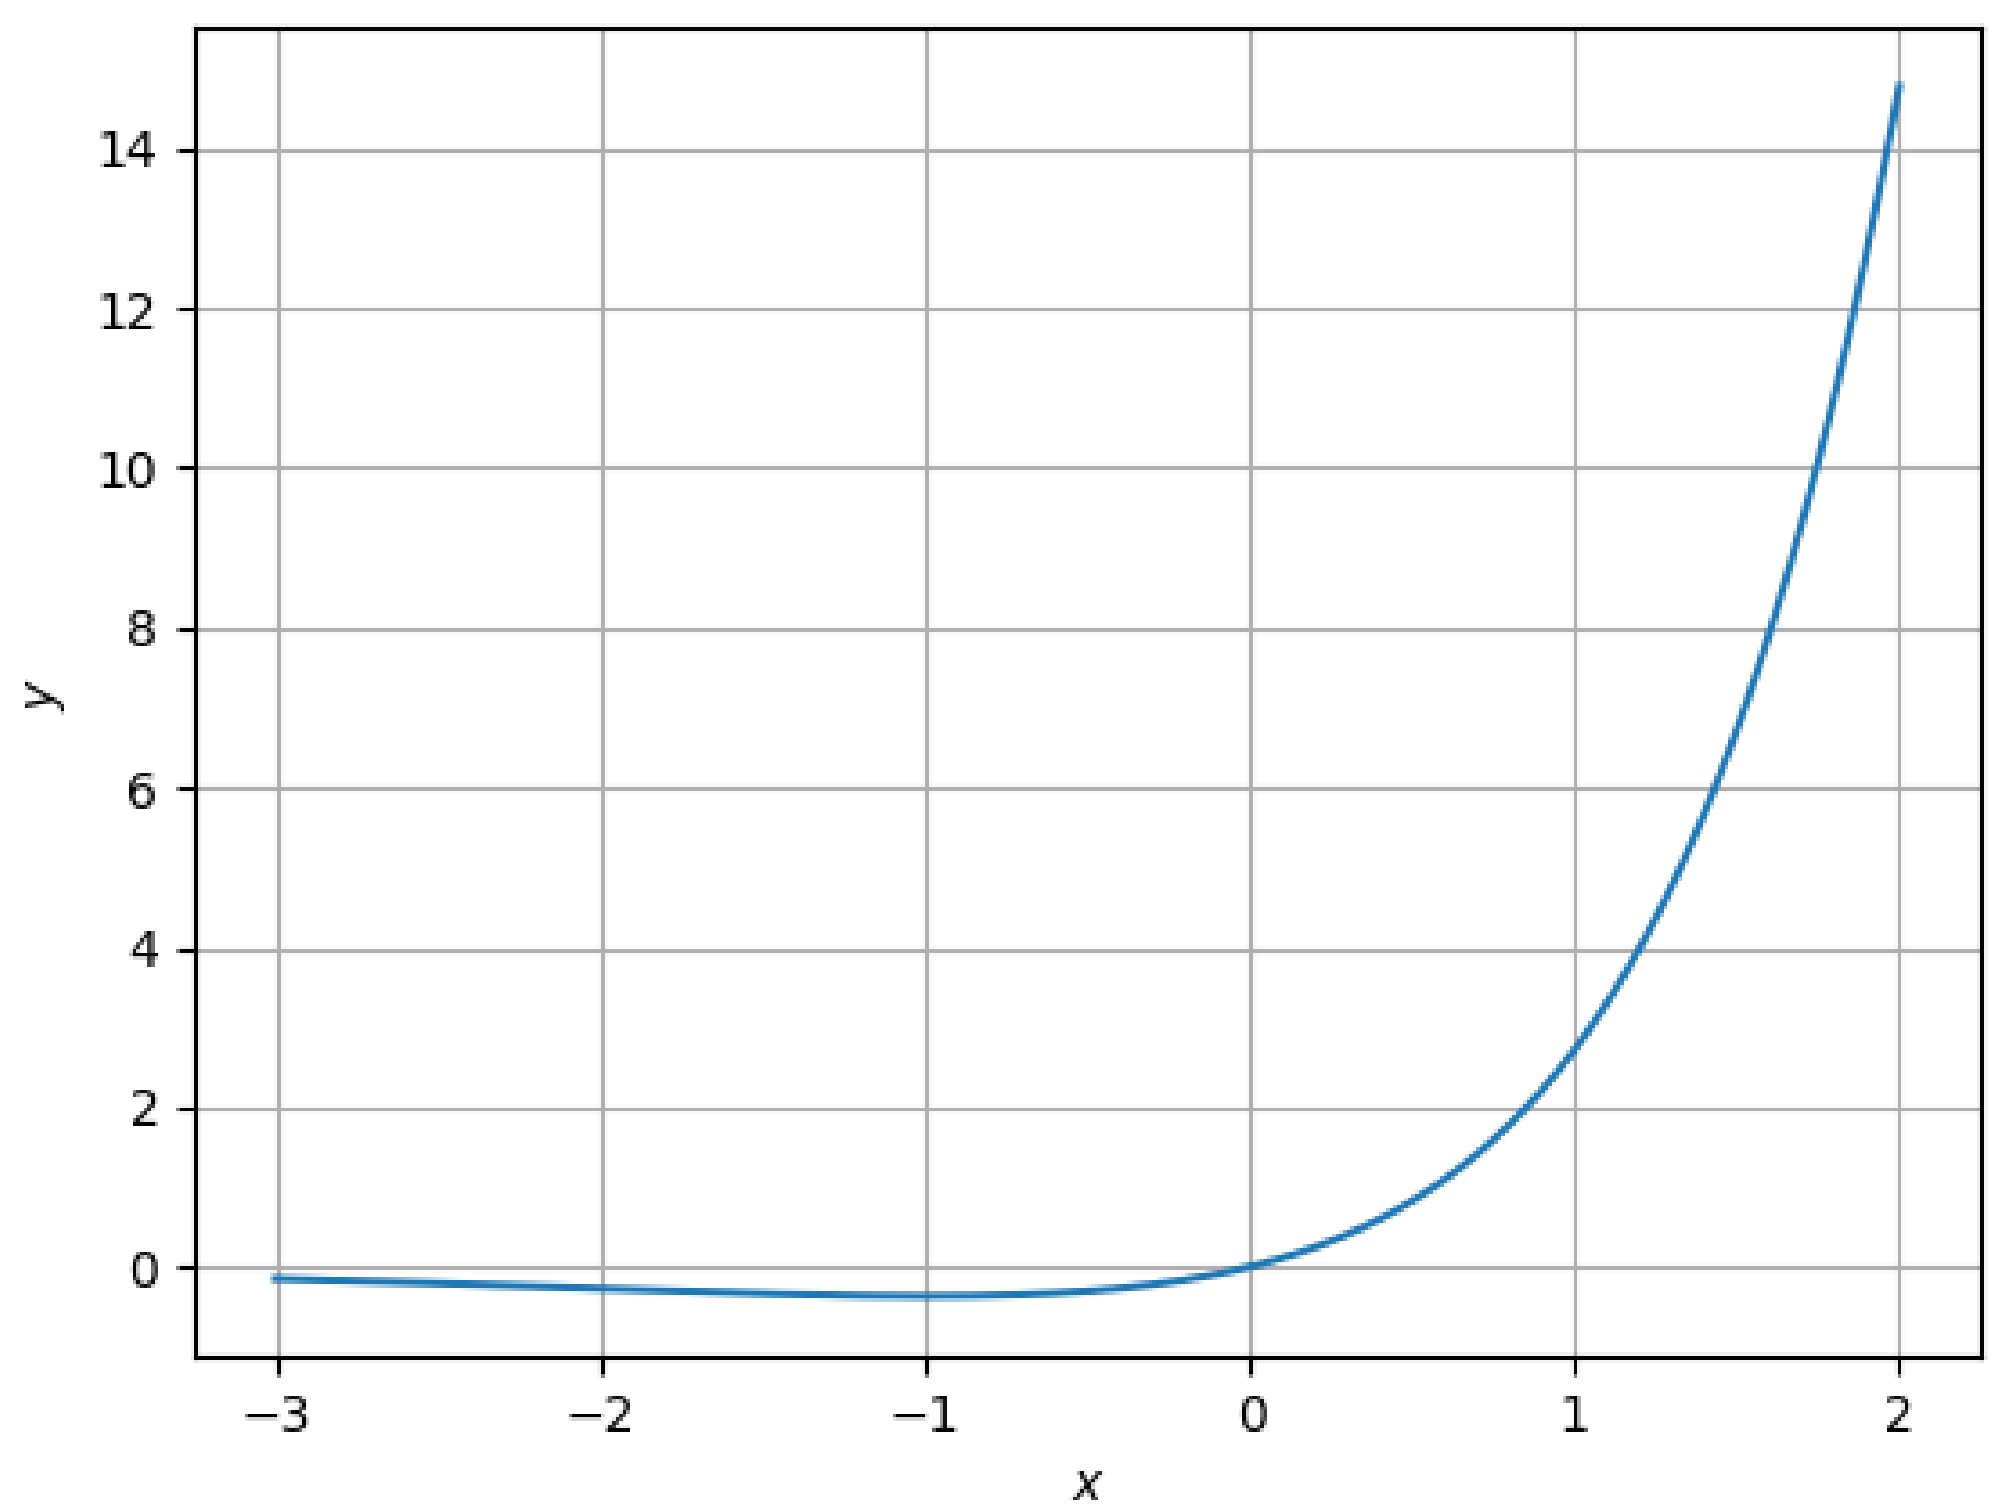

Figure 8.1: Plot of $y(x)$

8.2 A process described by the transfer function

$$G_p(s) = \frac{(10s+1)}{(5s+1)}$$

is forced by a unit step input at time $t = 0$. The output value immediately after the unit step input (at $t = 0^+$) is ? (Gate 2022 CH 34)

Solution:

Parameters	**Description**
$X(s)$	Laplace transform of $x(t)$
$Y(s)$	Laplace transform of $y(t)$
$G_p(s) = \frac{Y(s)}{X(s)}$	Transfer function
$x(t) = u(t)$	unit step function

Table 8.2: Given parameters

$$G_p(s) = \frac{Y(s)}{X(s)} = \frac{(10s+1)}{(5s+1)} \tag{8.10}$$

$$u(t) \xleftrightarrow{\mathcal{L}} \frac{1}{s} \tag{8.11}$$

From equation (8.11):

$$Y(s) = \frac{(10s+1)}{s(5s+1)} \tag{8.12}$$

$$= \frac{1}{s} + \frac{5}{5s+1} \tag{8.13}$$

Taking inverse laplace transformation,

$$\frac{1}{s} \xleftrightarrow{\mathcal{L}^{-1}} u(t) \tag{8.14}$$

$$\frac{1}{s-c} \xleftrightarrow{\mathcal{L}^{-1}} e^{ct}u(t) \tag{8.15}$$

$$y(t) = \left(1 + e^{\frac{-t}{5}}\right) u(t) \tag{8.16}$$

$$y(0^+) = 2 \tag{8.17}$$

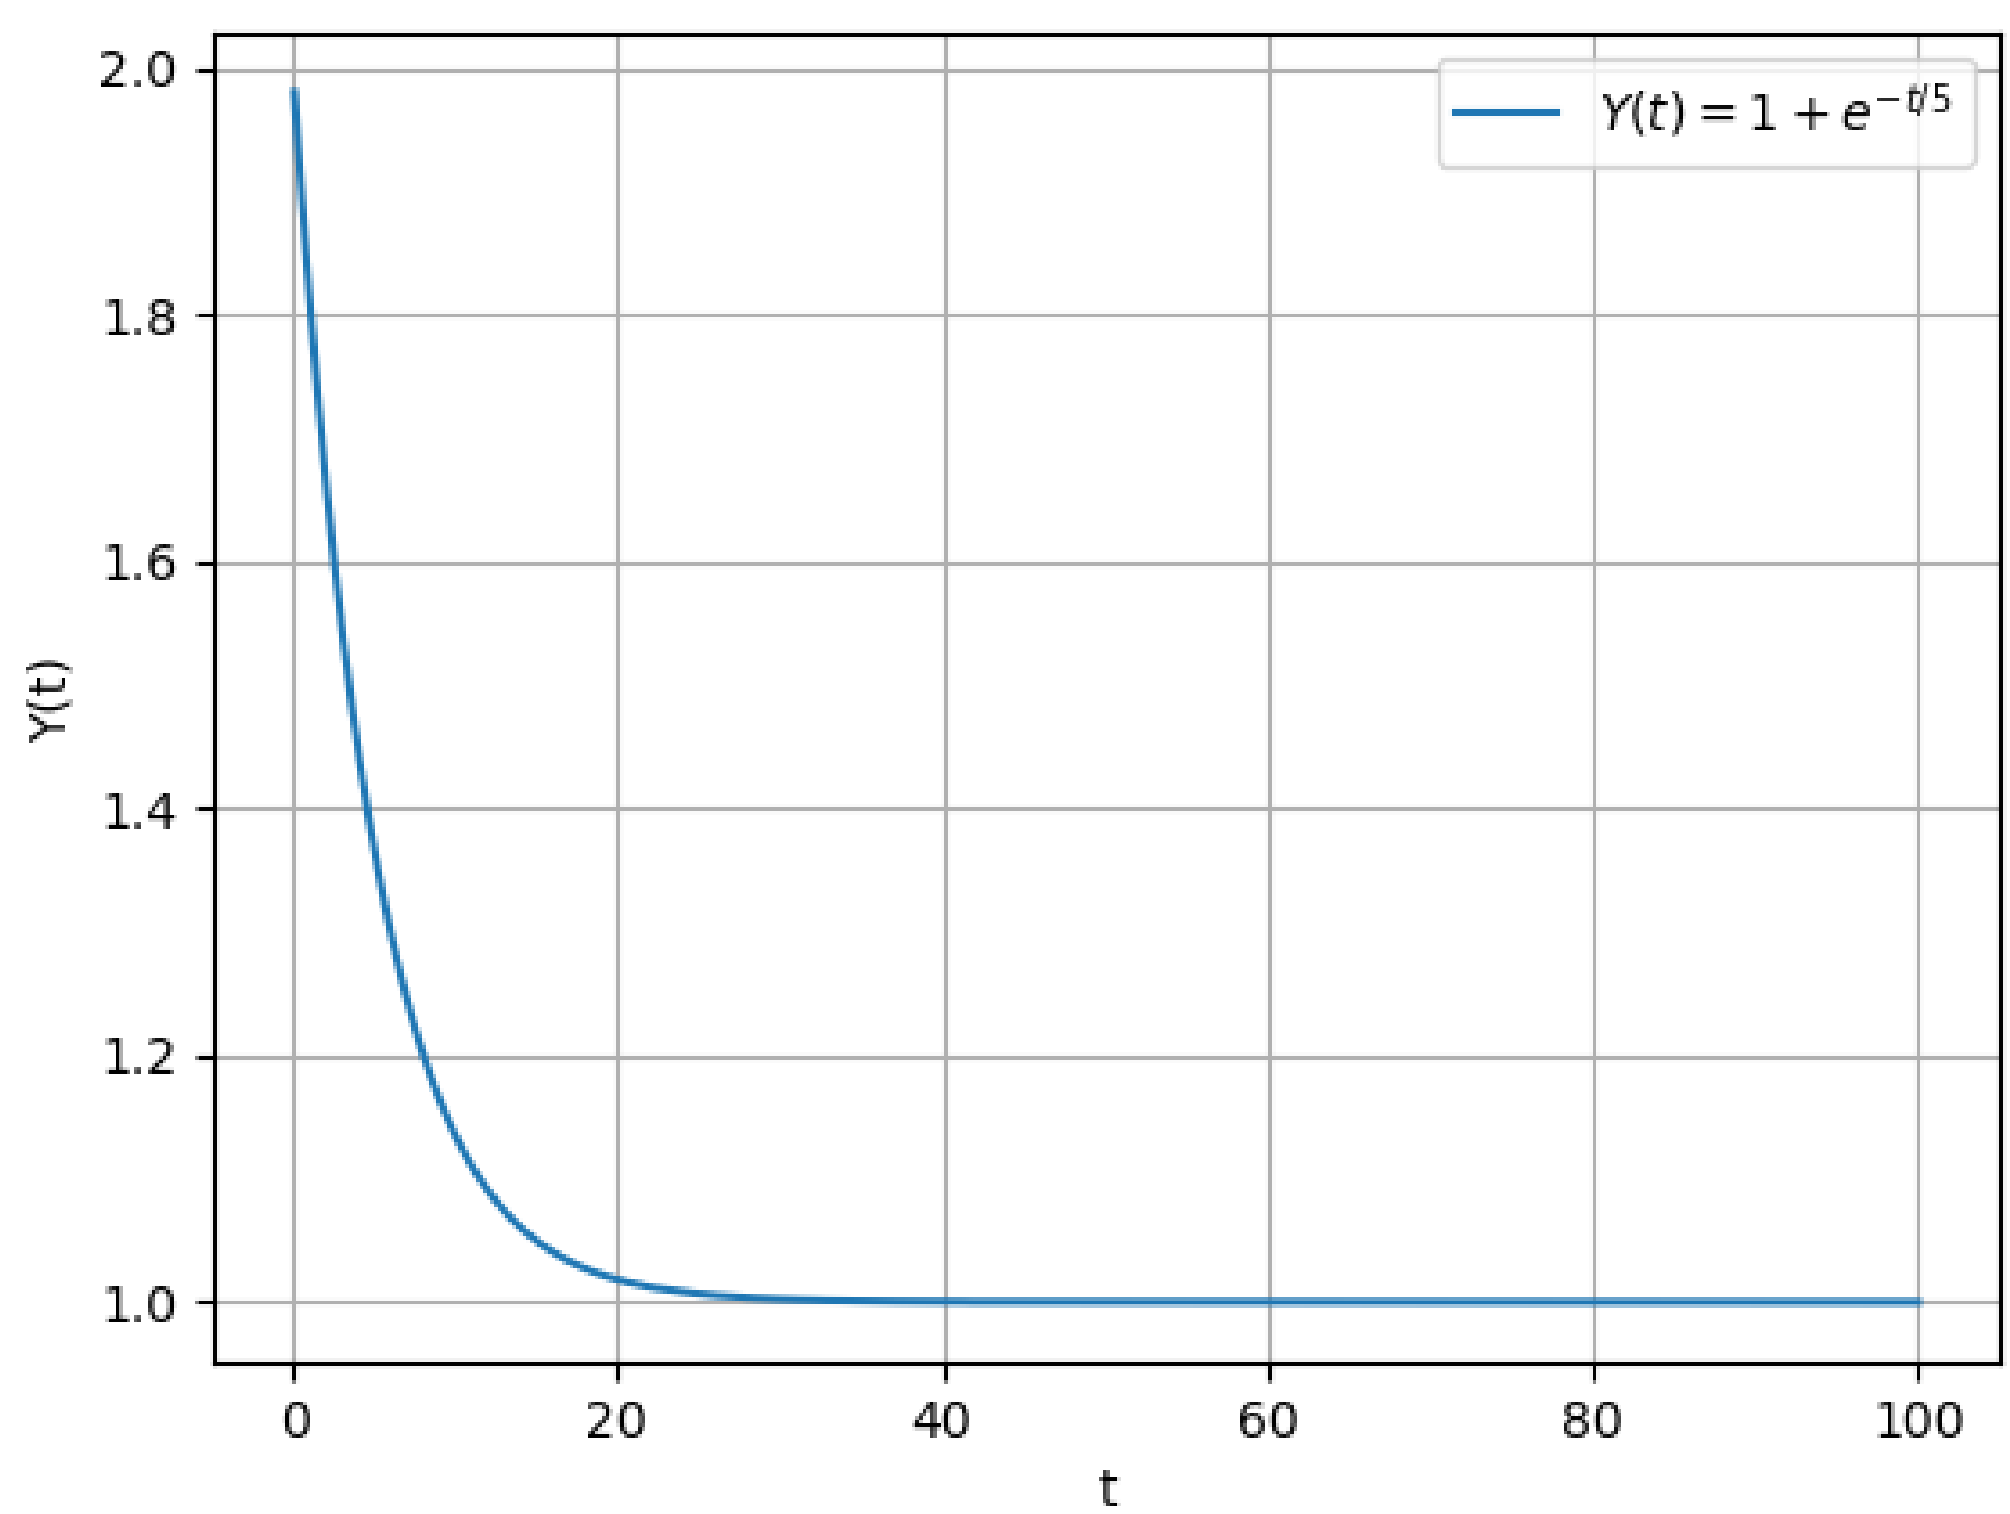

Figure 8.2: Graph of y(t)

Chapter 9

Fourier transform

9.1