Jashore University of Science and Technology

Electrical and Electronic Engineering

Project


CE 1202: Engineering Drawing with CAD

Project Name: Demonstration on Complete Flat Design.
Vanue: Sir Jogodish Chondro Bosu Academic Buliding Ground Floor (North), JUST.

Submitted to	Submitted By
Jahedul Islam Lecturer, Dept. of EEE, JUST	**Group 1:** **1. Md. Samiul Kabir (221102)** **2. Milton Mistry (221104)** **3. Md. Mafuz Rana(221103)** **4. Md. Basel (221134)**

Comments:


Date of Submission: 20.04.2024

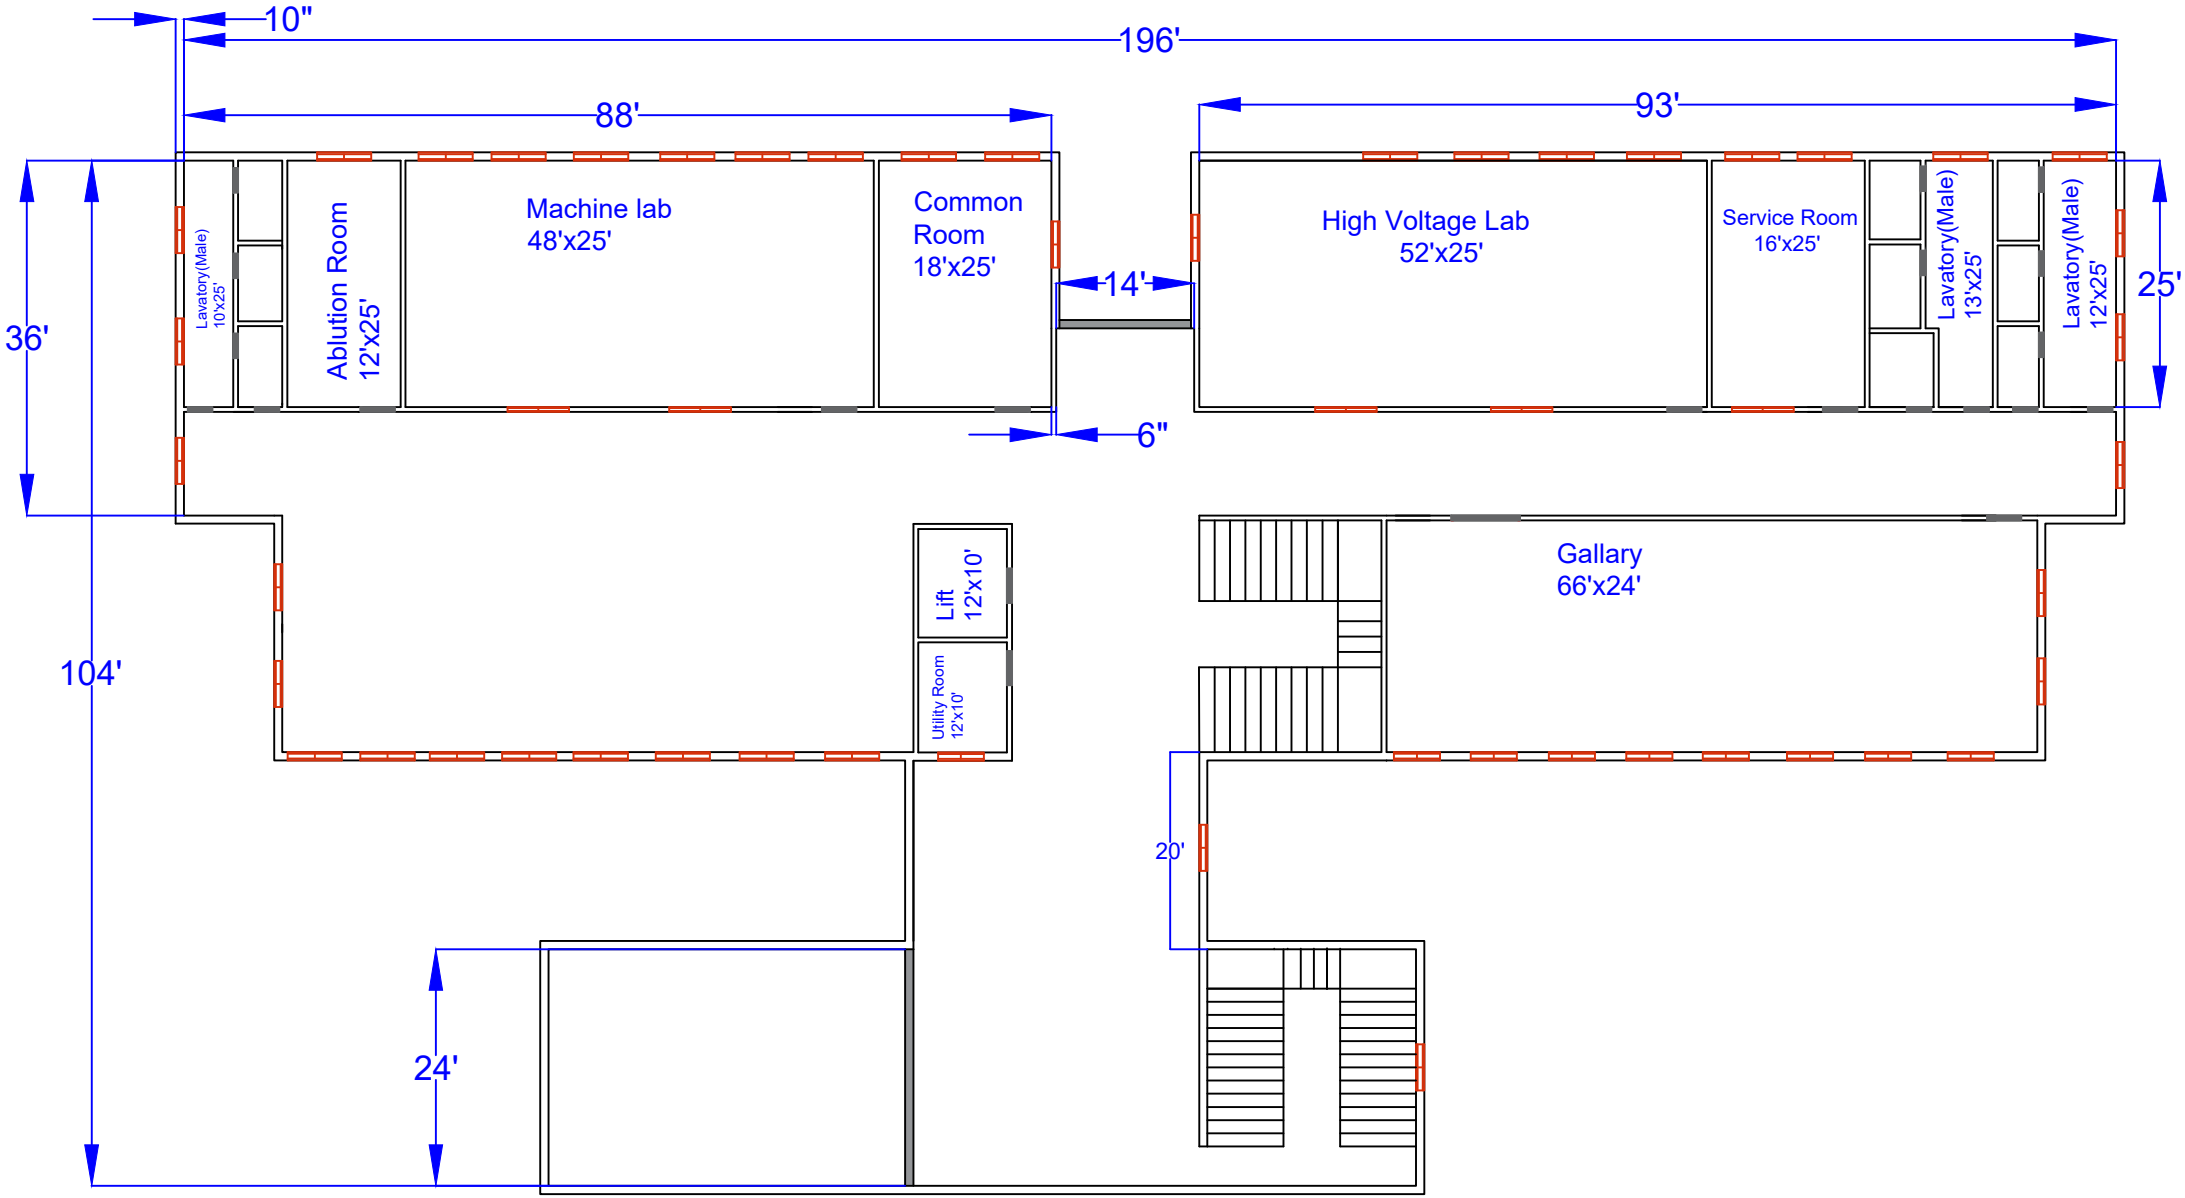


Civil Layout : Ground floor (North side)




Fixture and Fittings Layouts:Ground floor(North side)

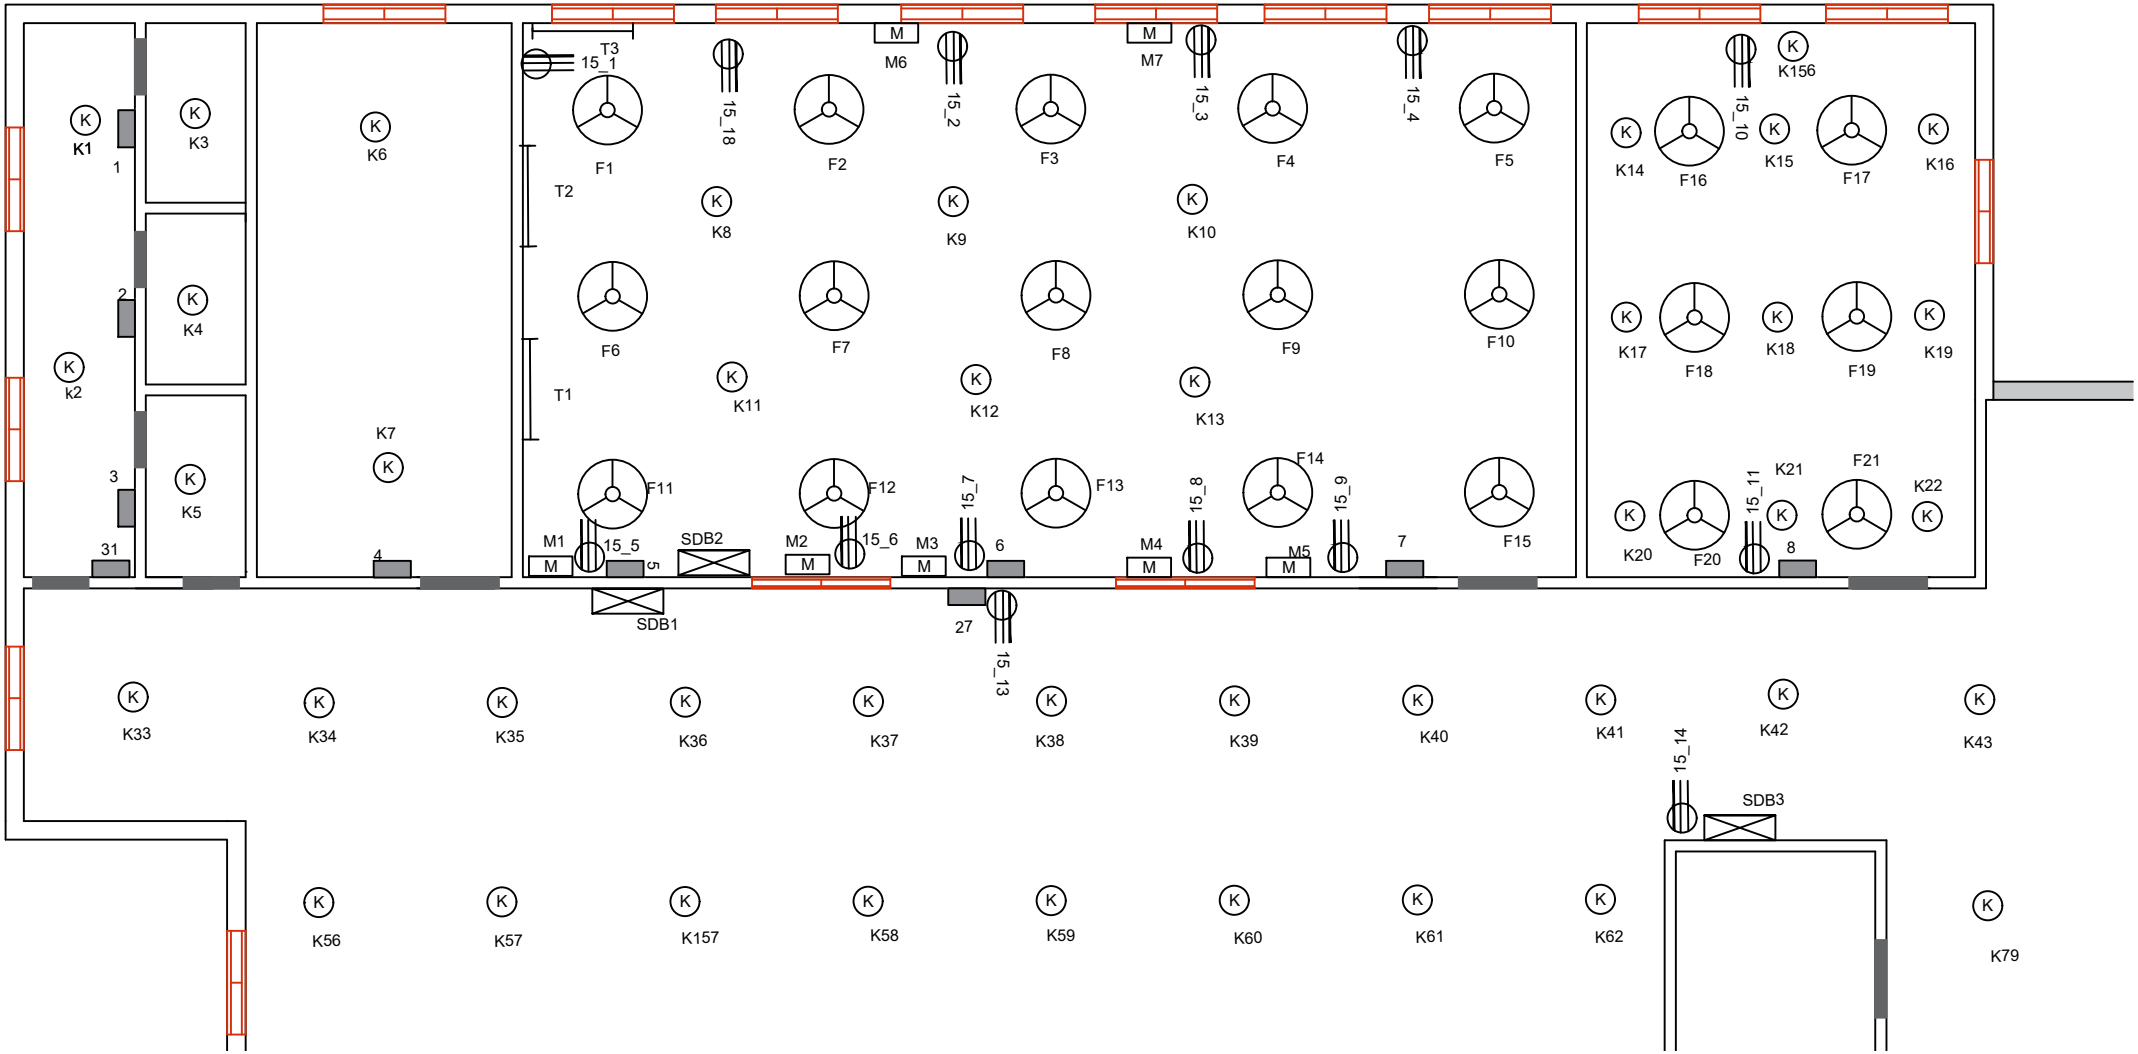


Fixture and Fittings layouts: Ground floor (west-north side))

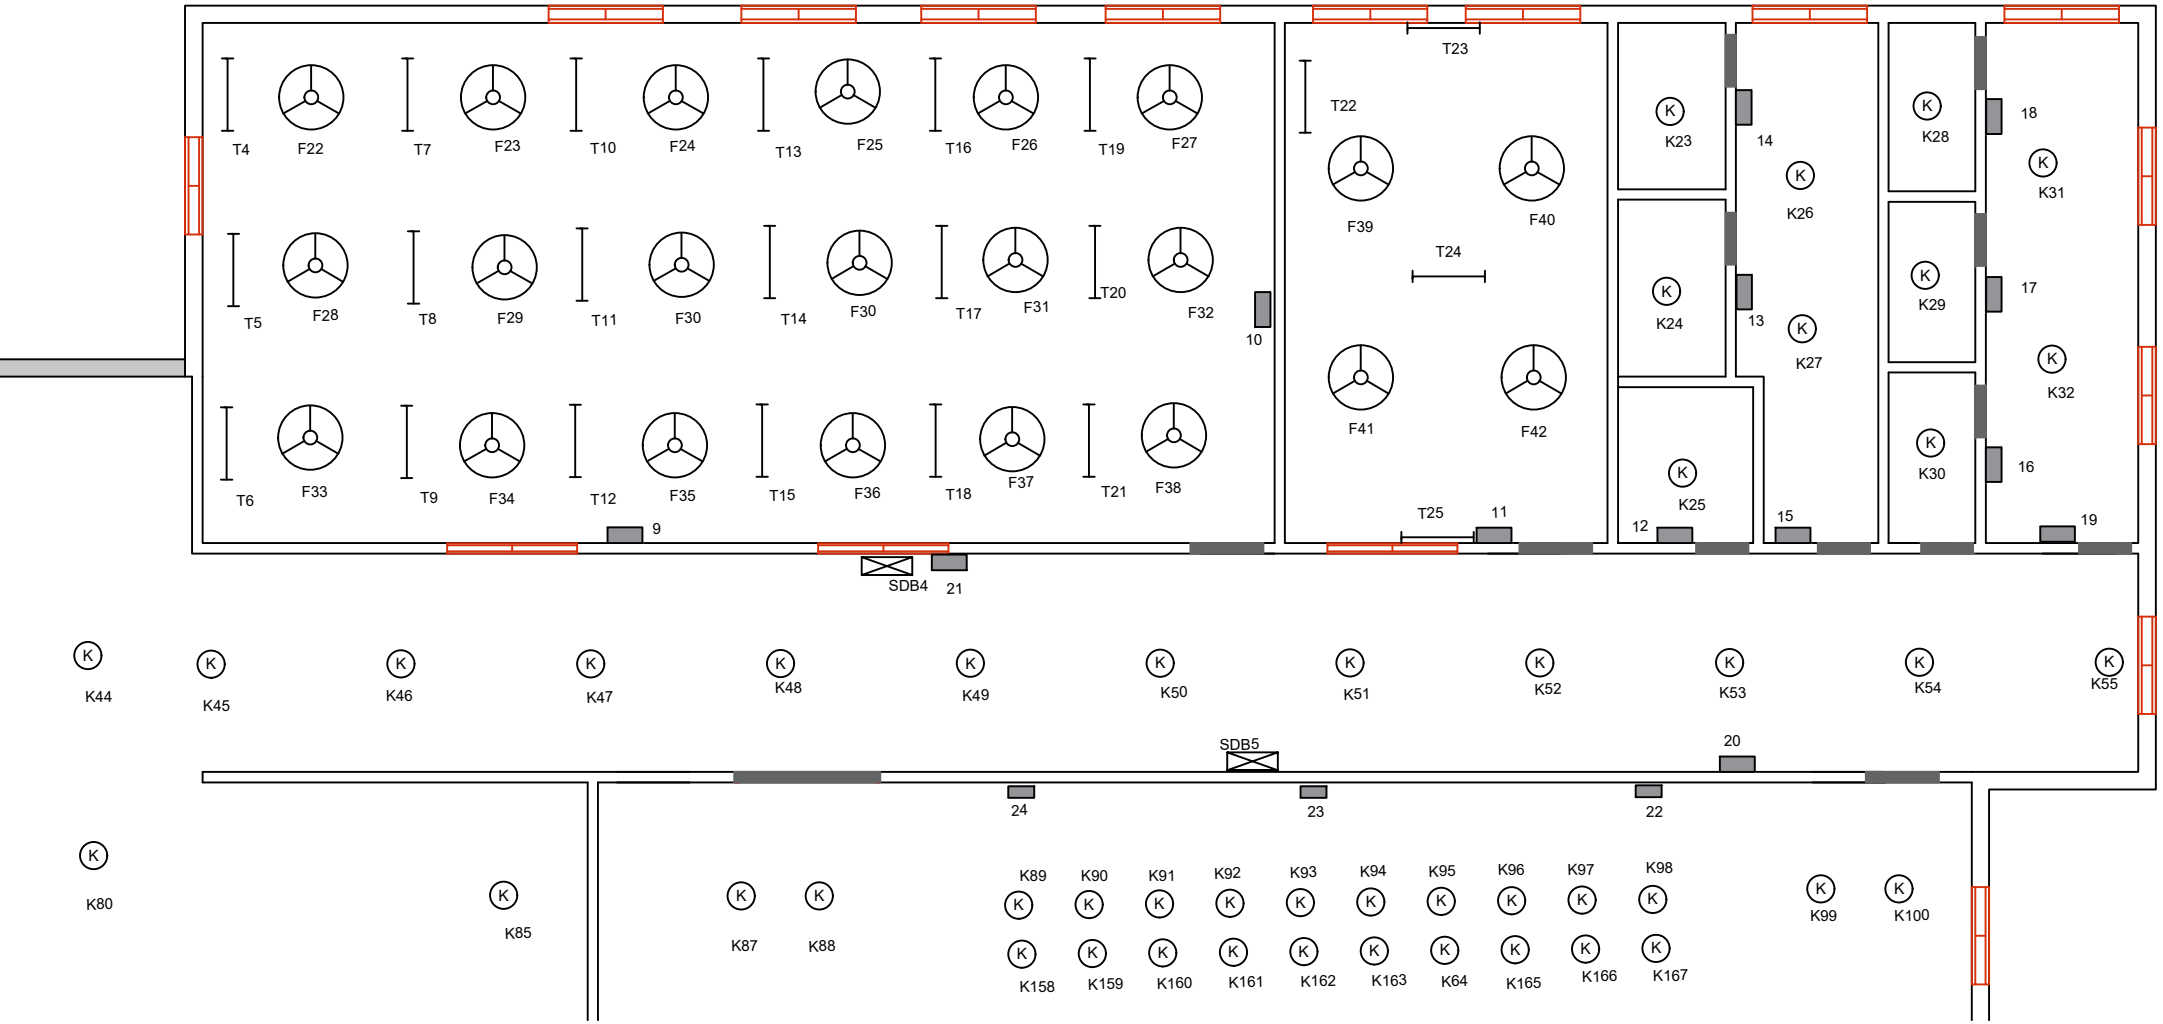


Fixture and Fittings layouts: Ground floor(east-north side)

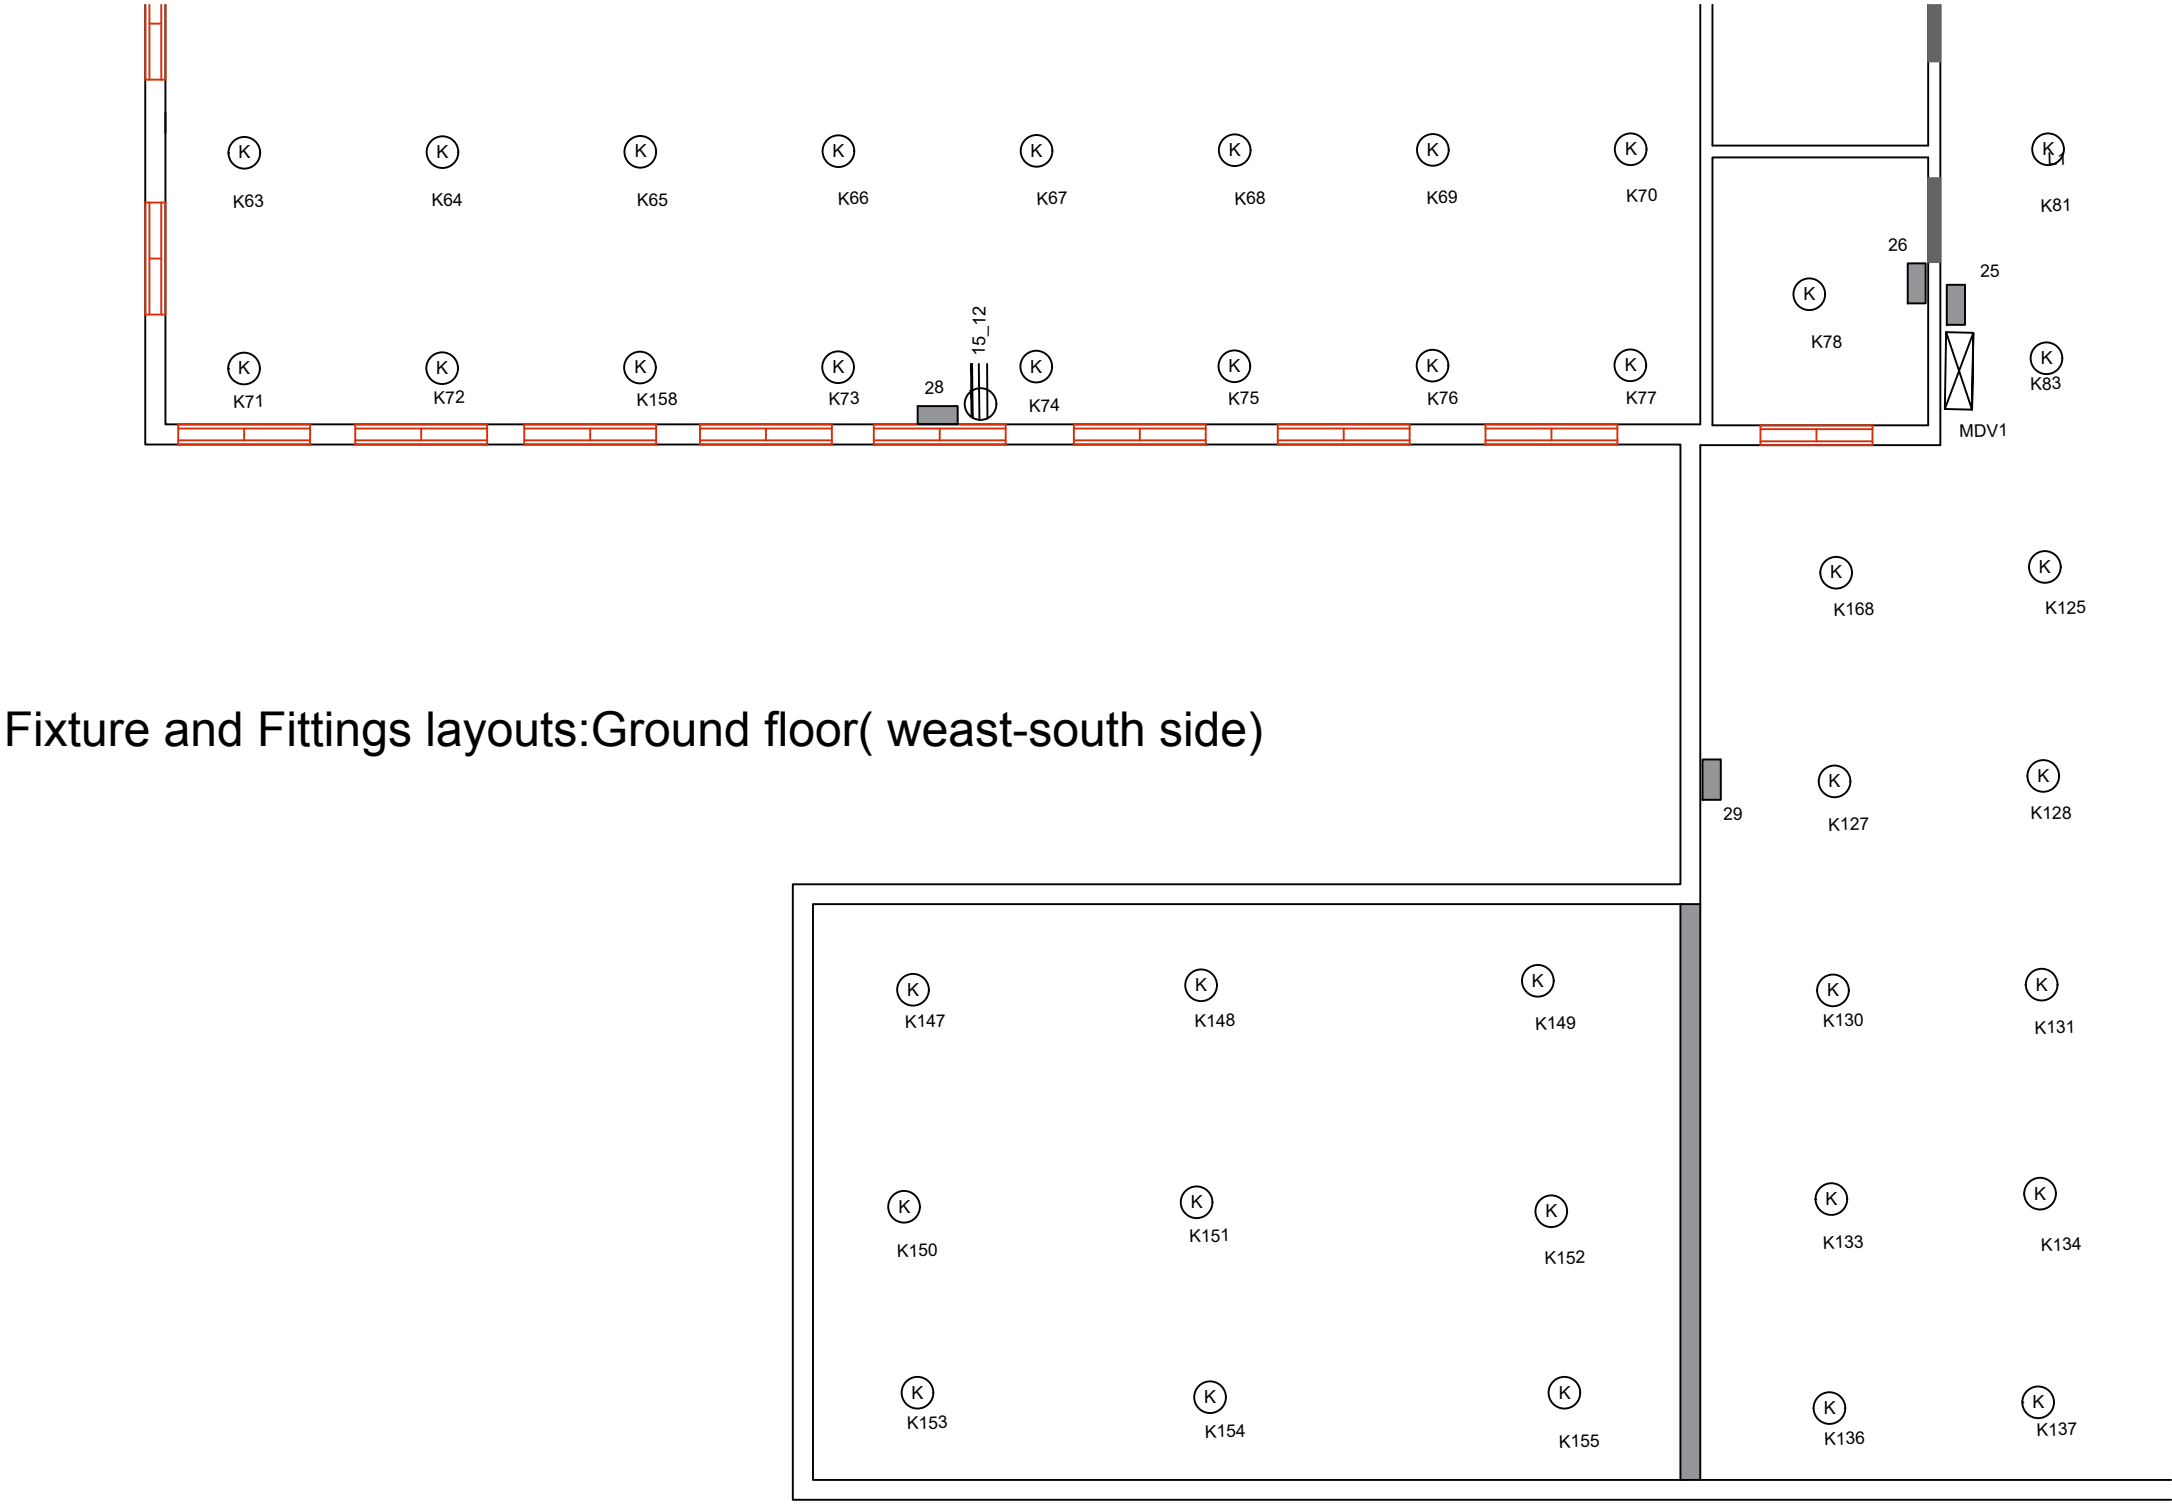

Fixture and Fittings layouts:Ground floor(weast-south side)

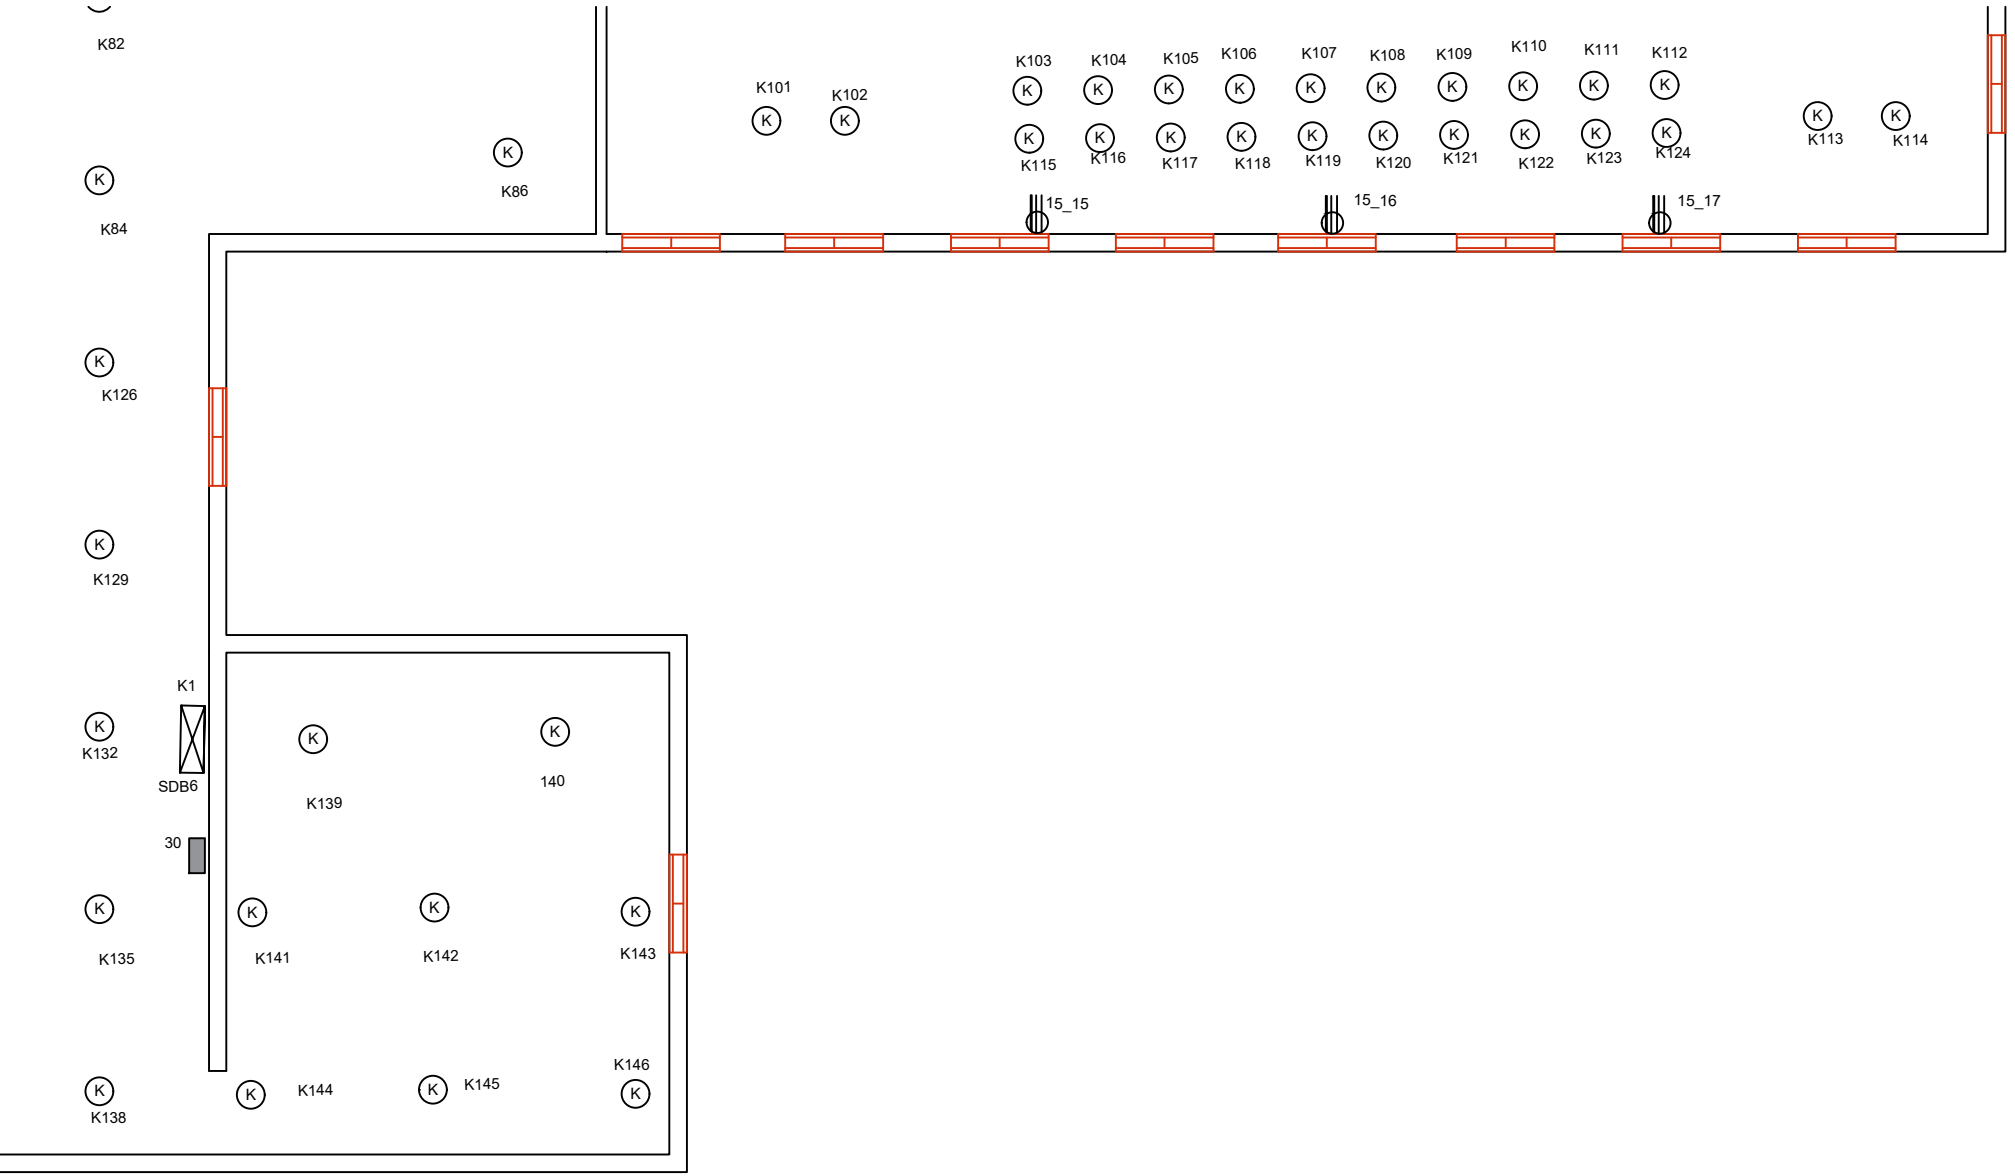

Fixture and Fittings layouts: Ground floor(east-south side)

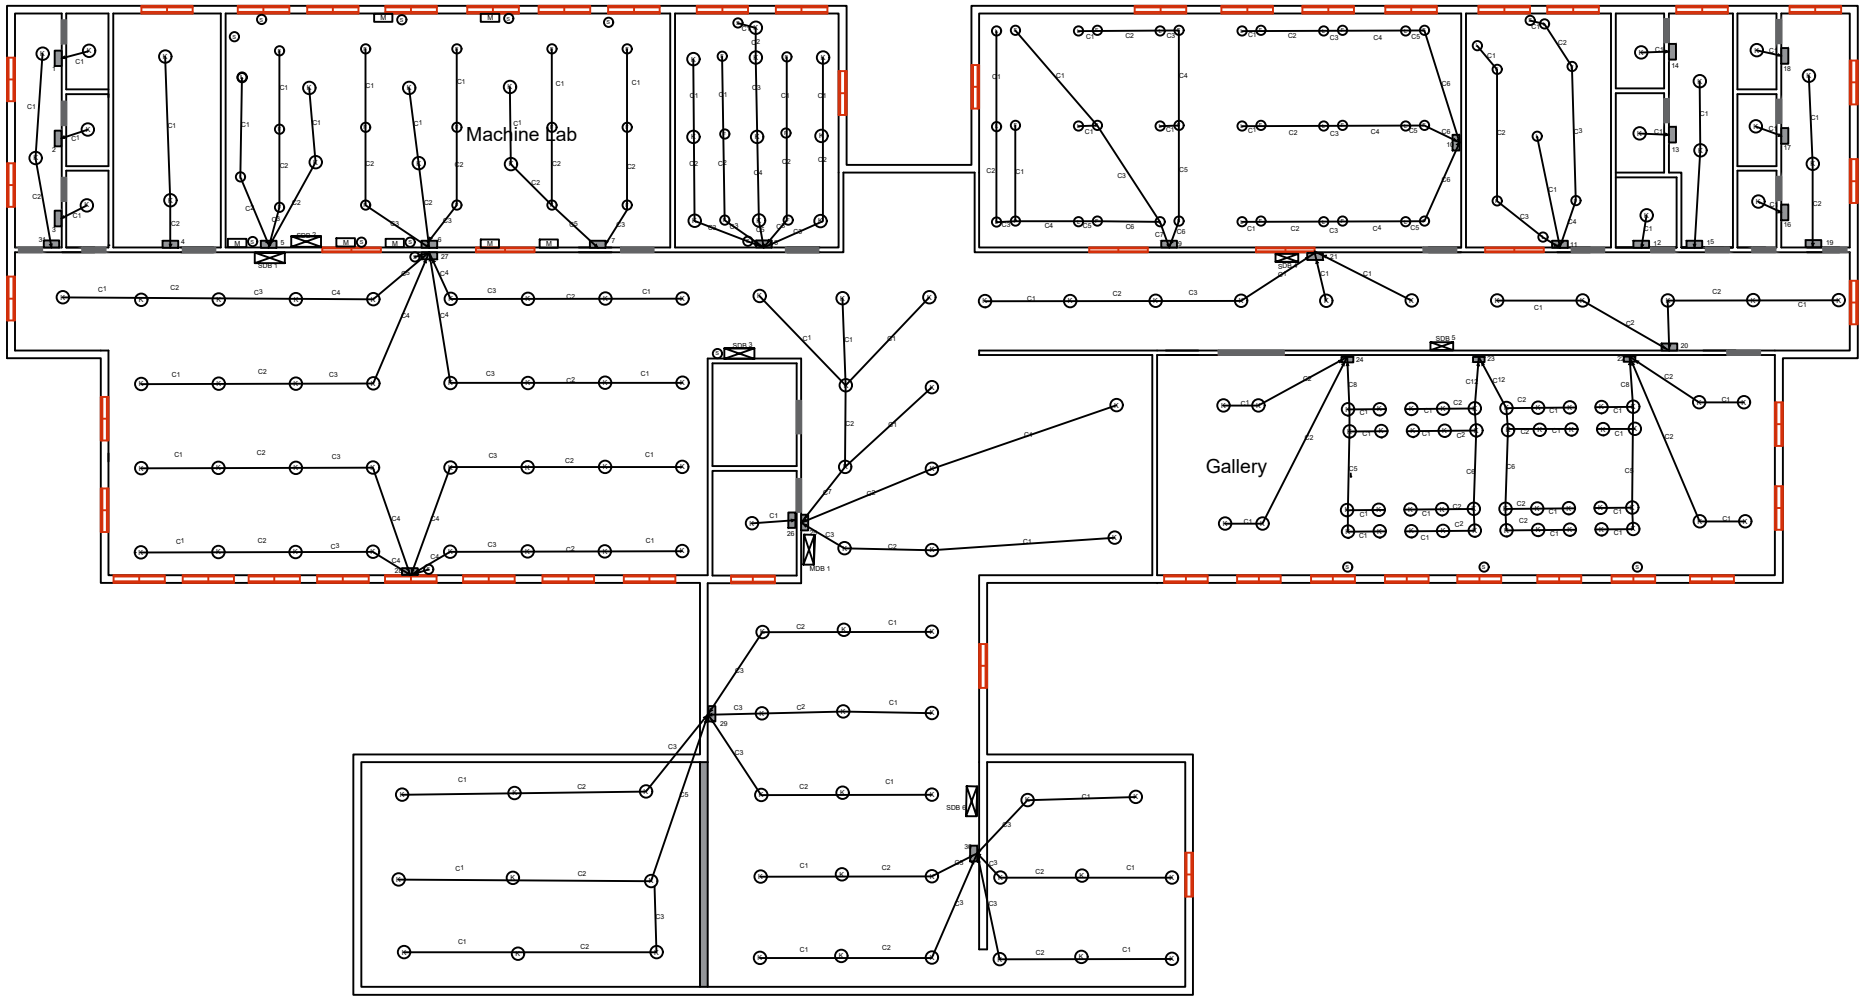

Conduit Layout :Layer 1 (internal room / Light Load)


North

Legend

- S — 2/3 Pin 5A Socket
- L — Light at Lintel Level
- F — Ceiling Fan
- Switch Board Concealed
- Distribution Board
- K — Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2


Conduit Layout :Layer 1 (internal room / Light Load) (West side)

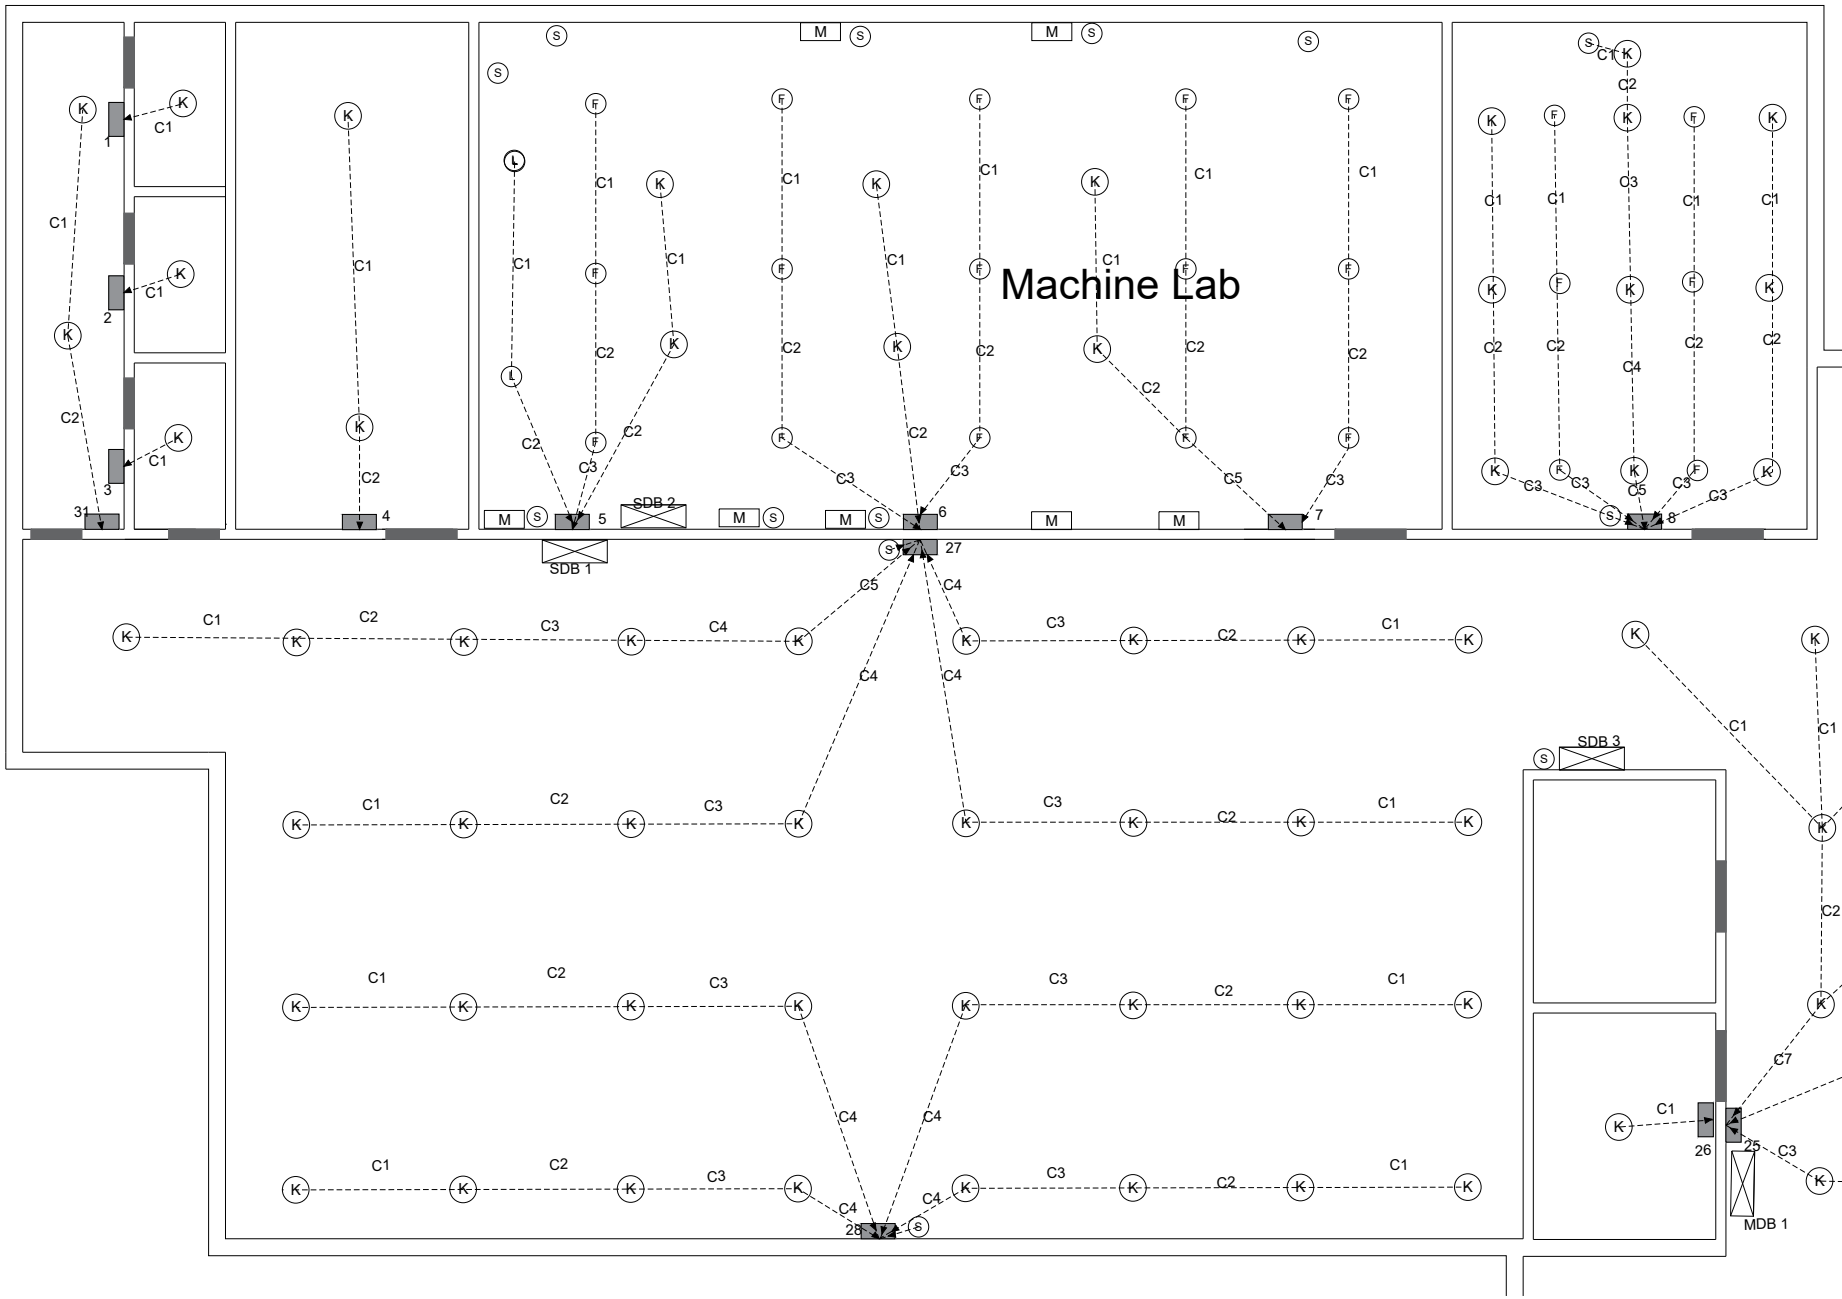

Legend

- S — 2 /3 Pin 5A Socket
- L — Light at Lintel Level
- F — Ceiling Fan
- Switch Board Concealed
- Distribution Board
- K — Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2

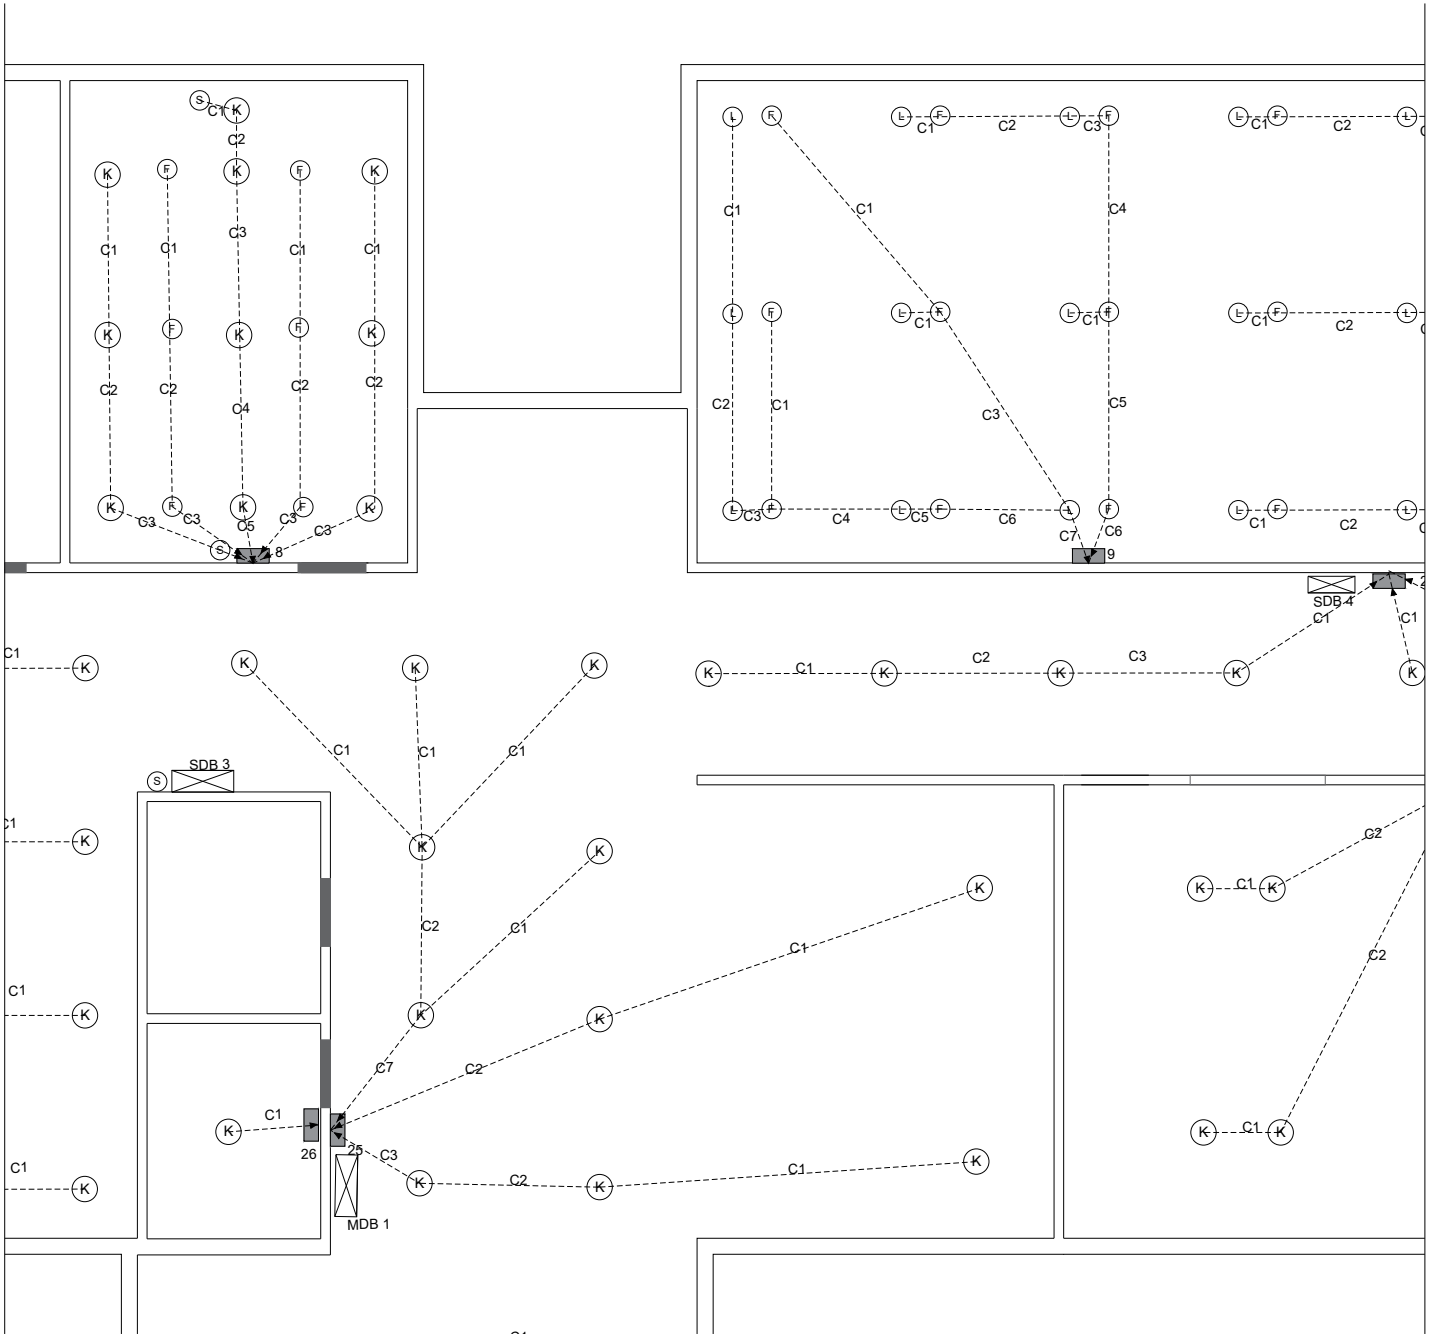


Conduit Layout :Layer 1 (internal room / Light Load) (North side)

North

Legend

- S — 2 /3 Pin 5A Socket
- L — Light at Lintel Level
- F — Ceiling Fan
- Switch Board Concealed
- Distribution Board
- K — Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2

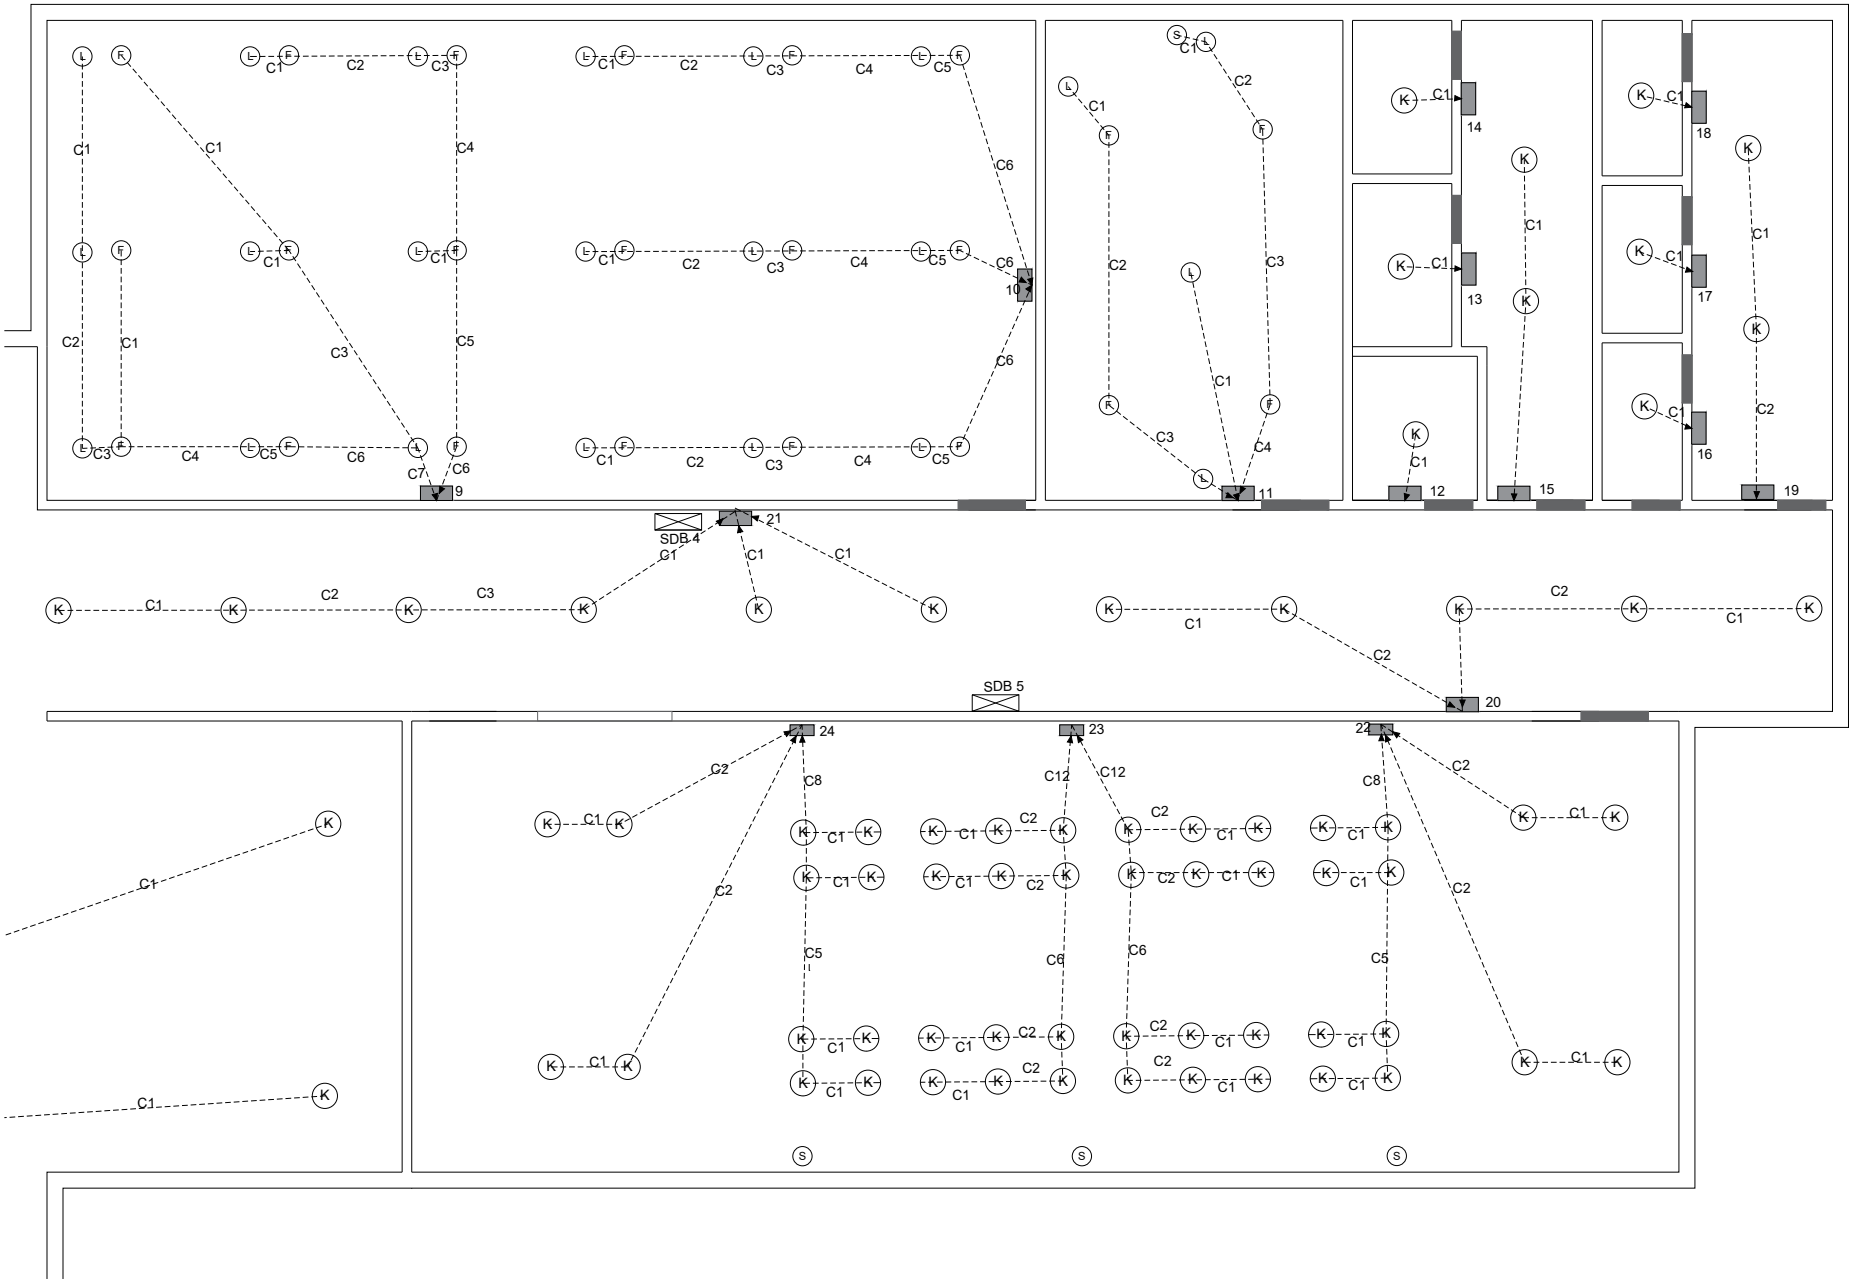


Conduit Layout :Layer 1 (internal room / Light Load) (East side)

North

Legend

- S — 2 /3 Pin 5A Socket
- L — Light at Lintel Level
- F — Ceiling Fan
- Switch Board Concealed
- Distribution Board
- K — Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2

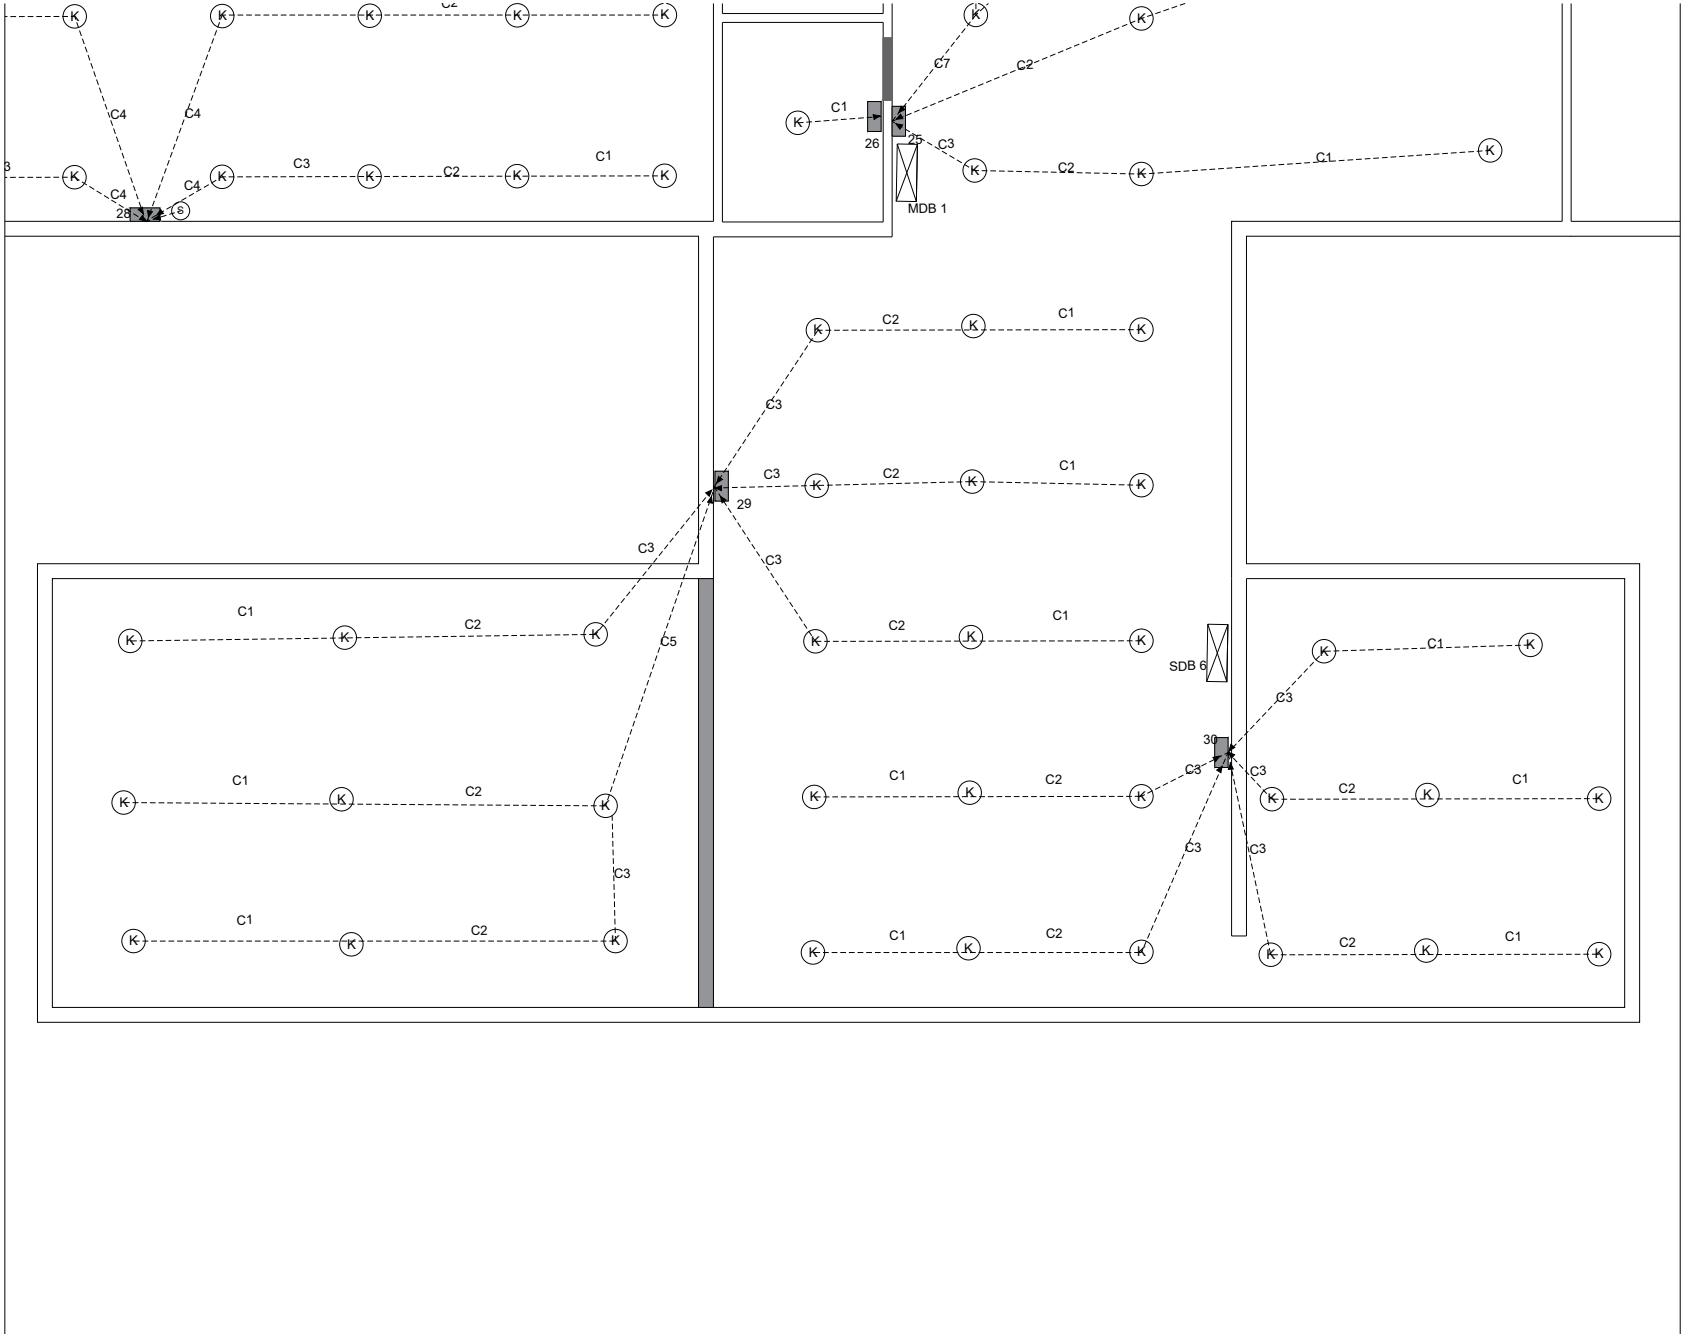


Conduit Layout :Layer 1 (internal room / Light Load) (South side)

North

Legend

- S — 2 /3 Pin 5A Socket
- L — Light at Lintel Level
- F — Ceiling Fan
- Switch Board Concealed
- Distribution Board
- K — Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2

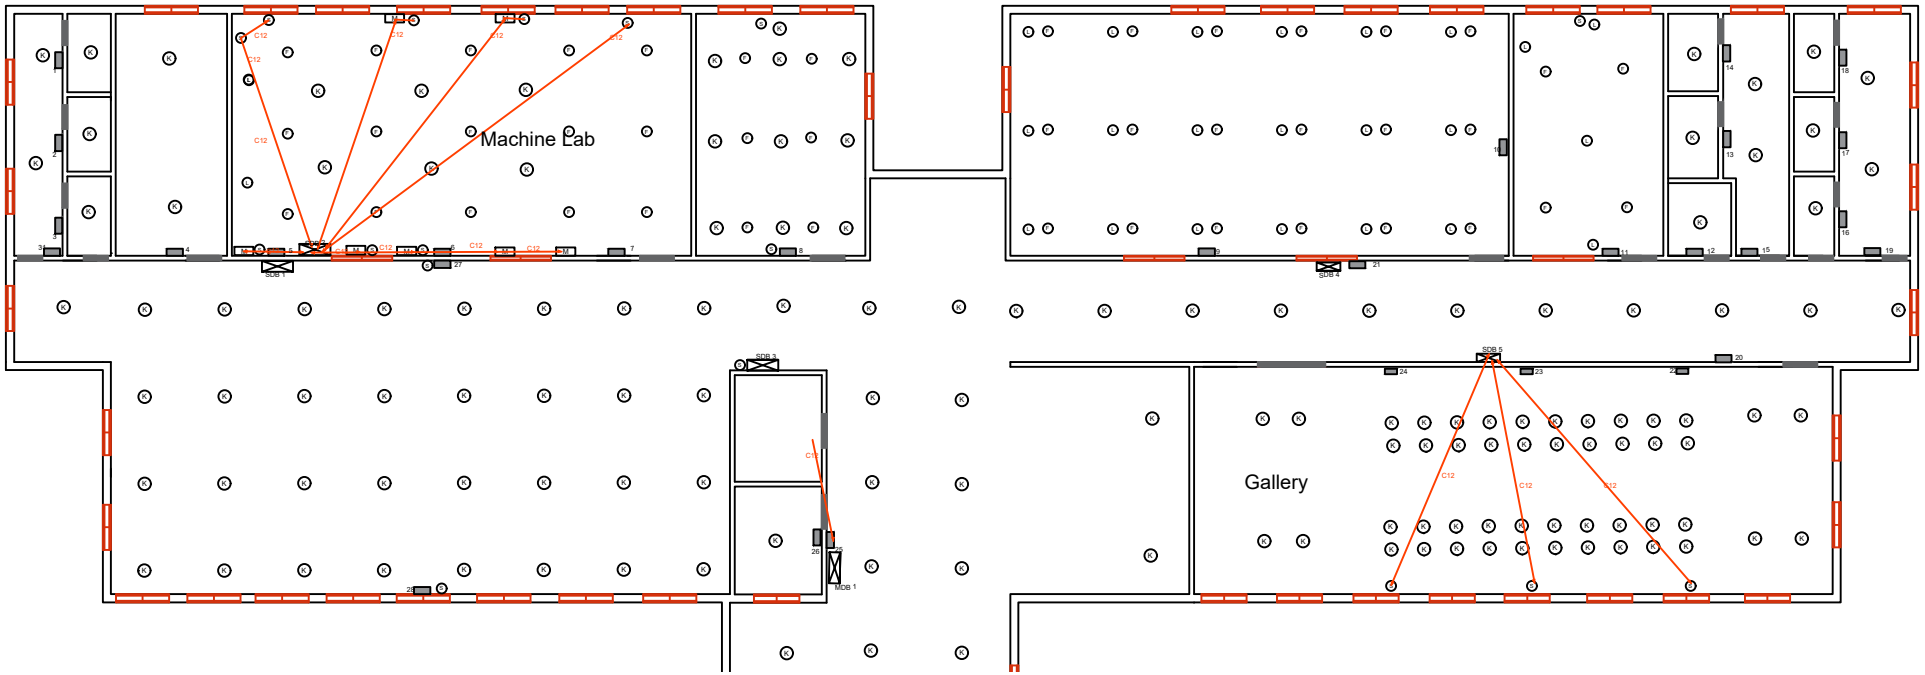

Conduit Layout :Layer 2 (Heavy Load)


North

Legend


- S — 2 /3 Pin 5A Socket
- L — Light at Lintel Level
- F — Ceiling Fan
- Switch Board Concealed
- Distribution Board
- K — Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2

Conduit Layout :Layer 2 (Heavy Load) (Machine Lab)

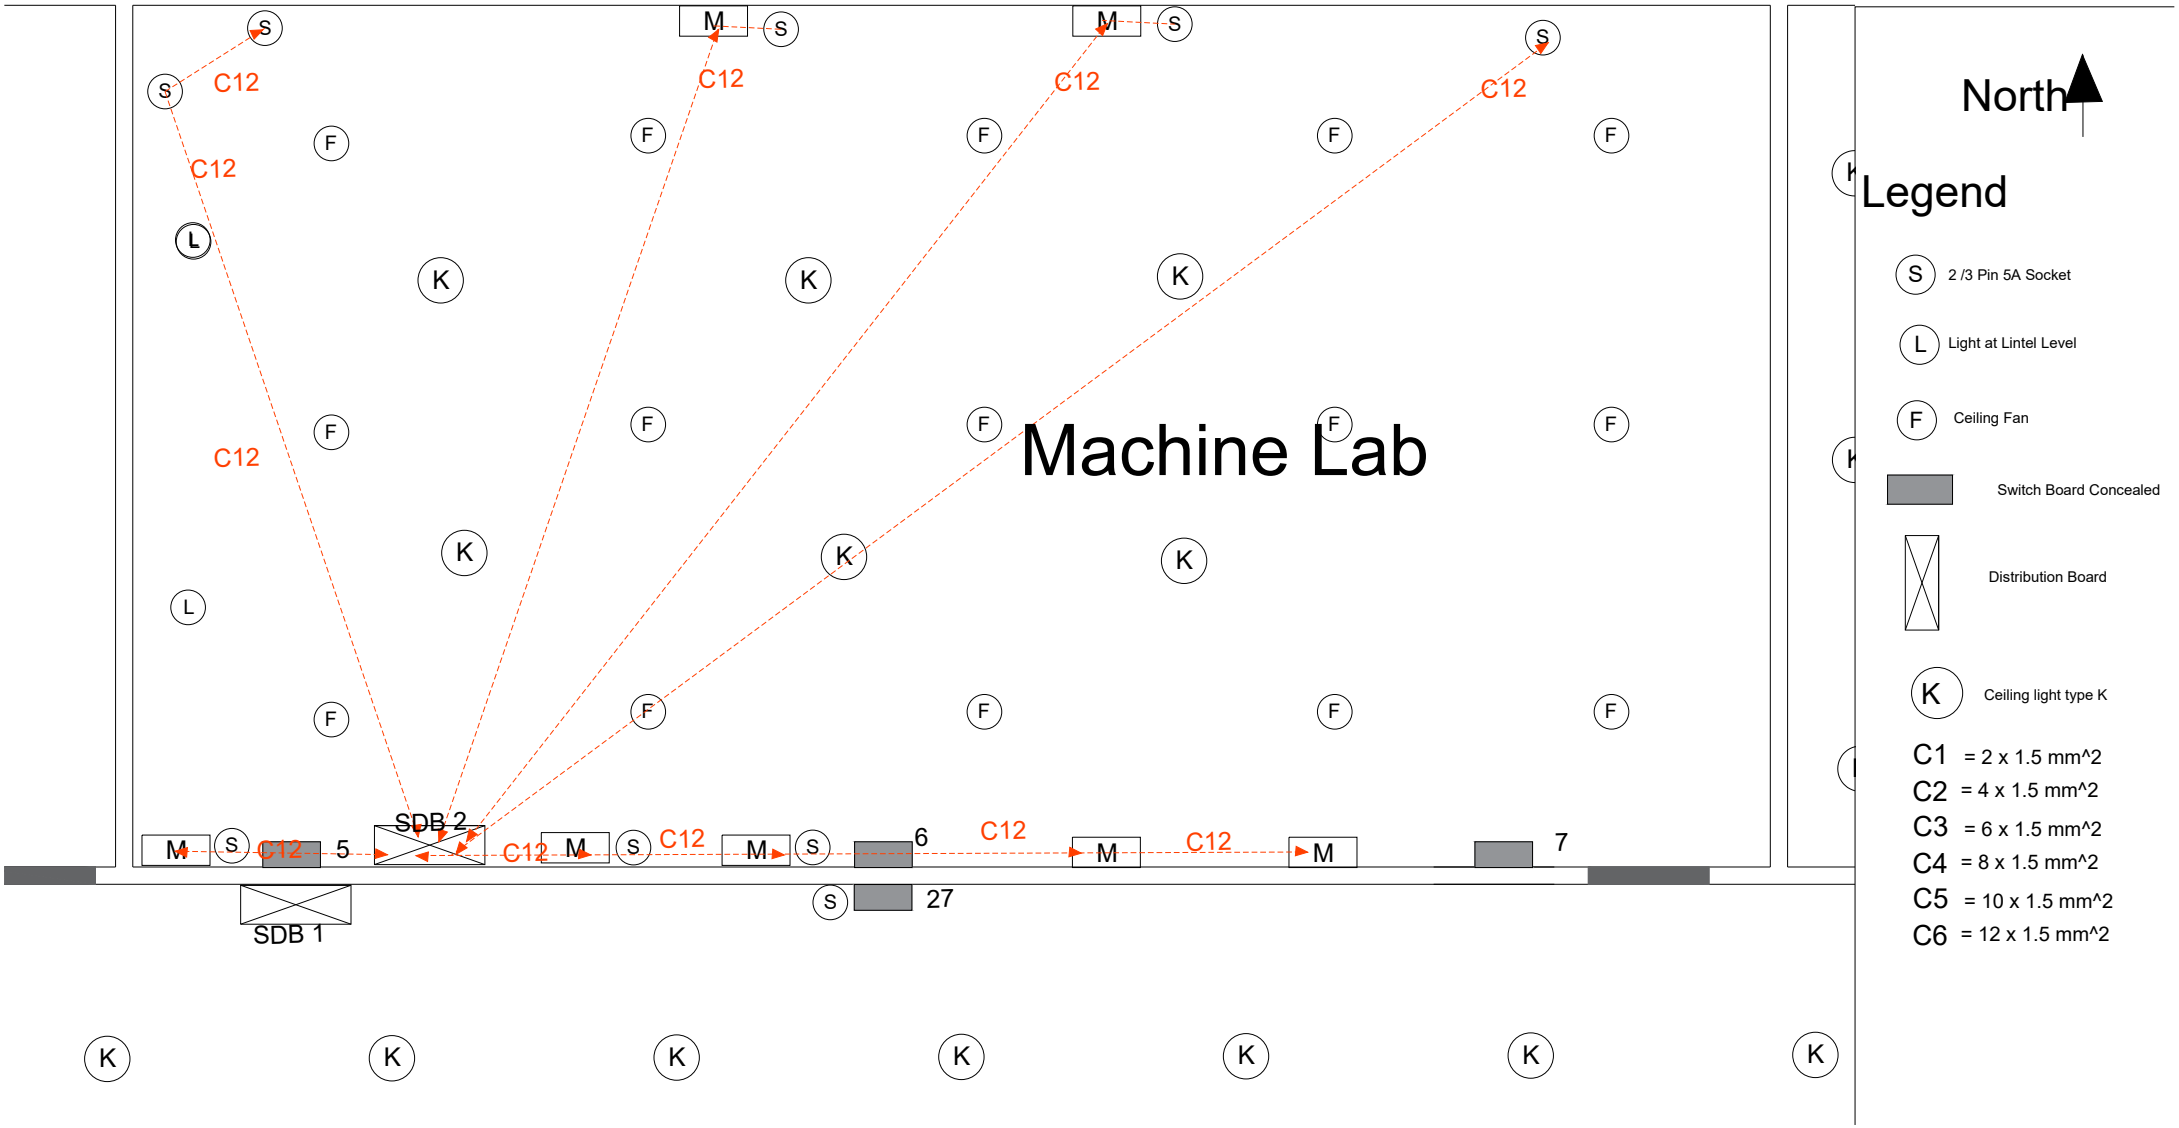

Conduit Layout :Layer 2 (Heavy Load) (Gallery)

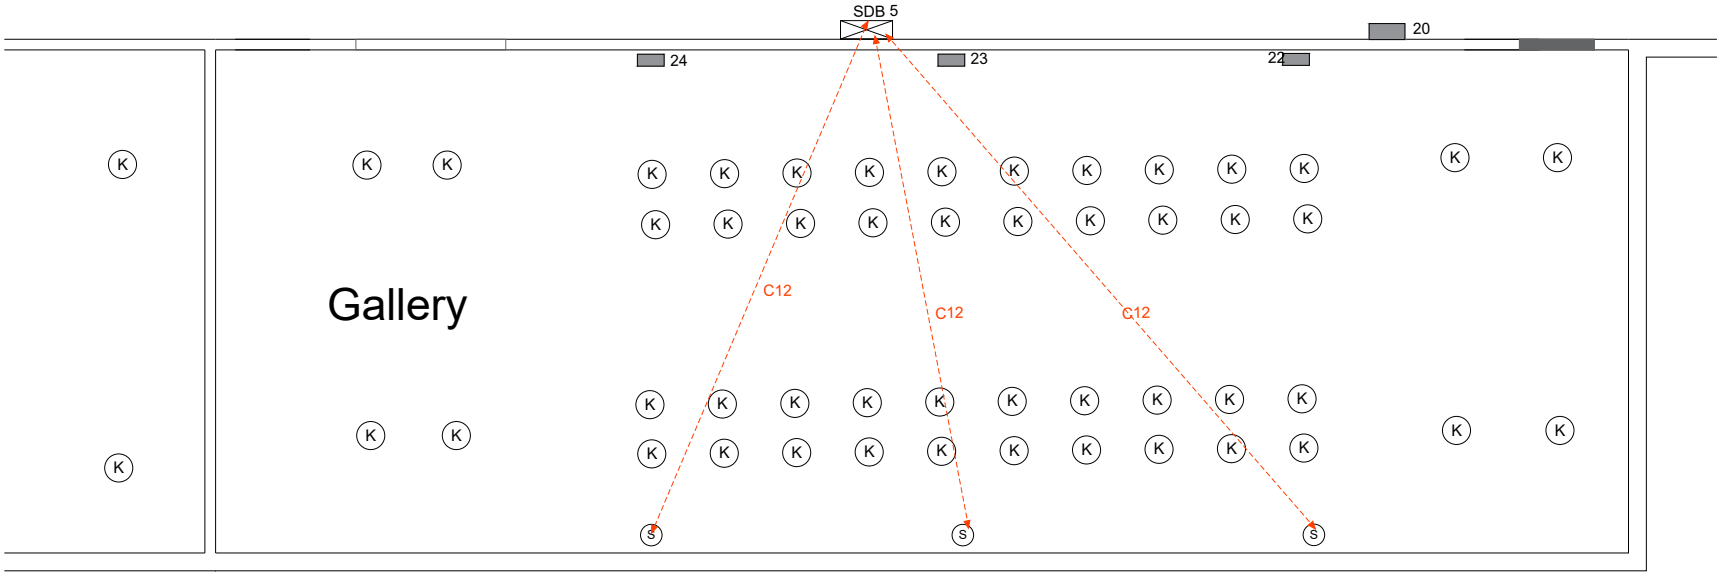


North

Legend


- S — 2 /3 Pin 5A Socket
- L — Light at Lintel Level
- F — Ceiling Fan
- Switch Board Concealed
- Distribution Board
- K — Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2

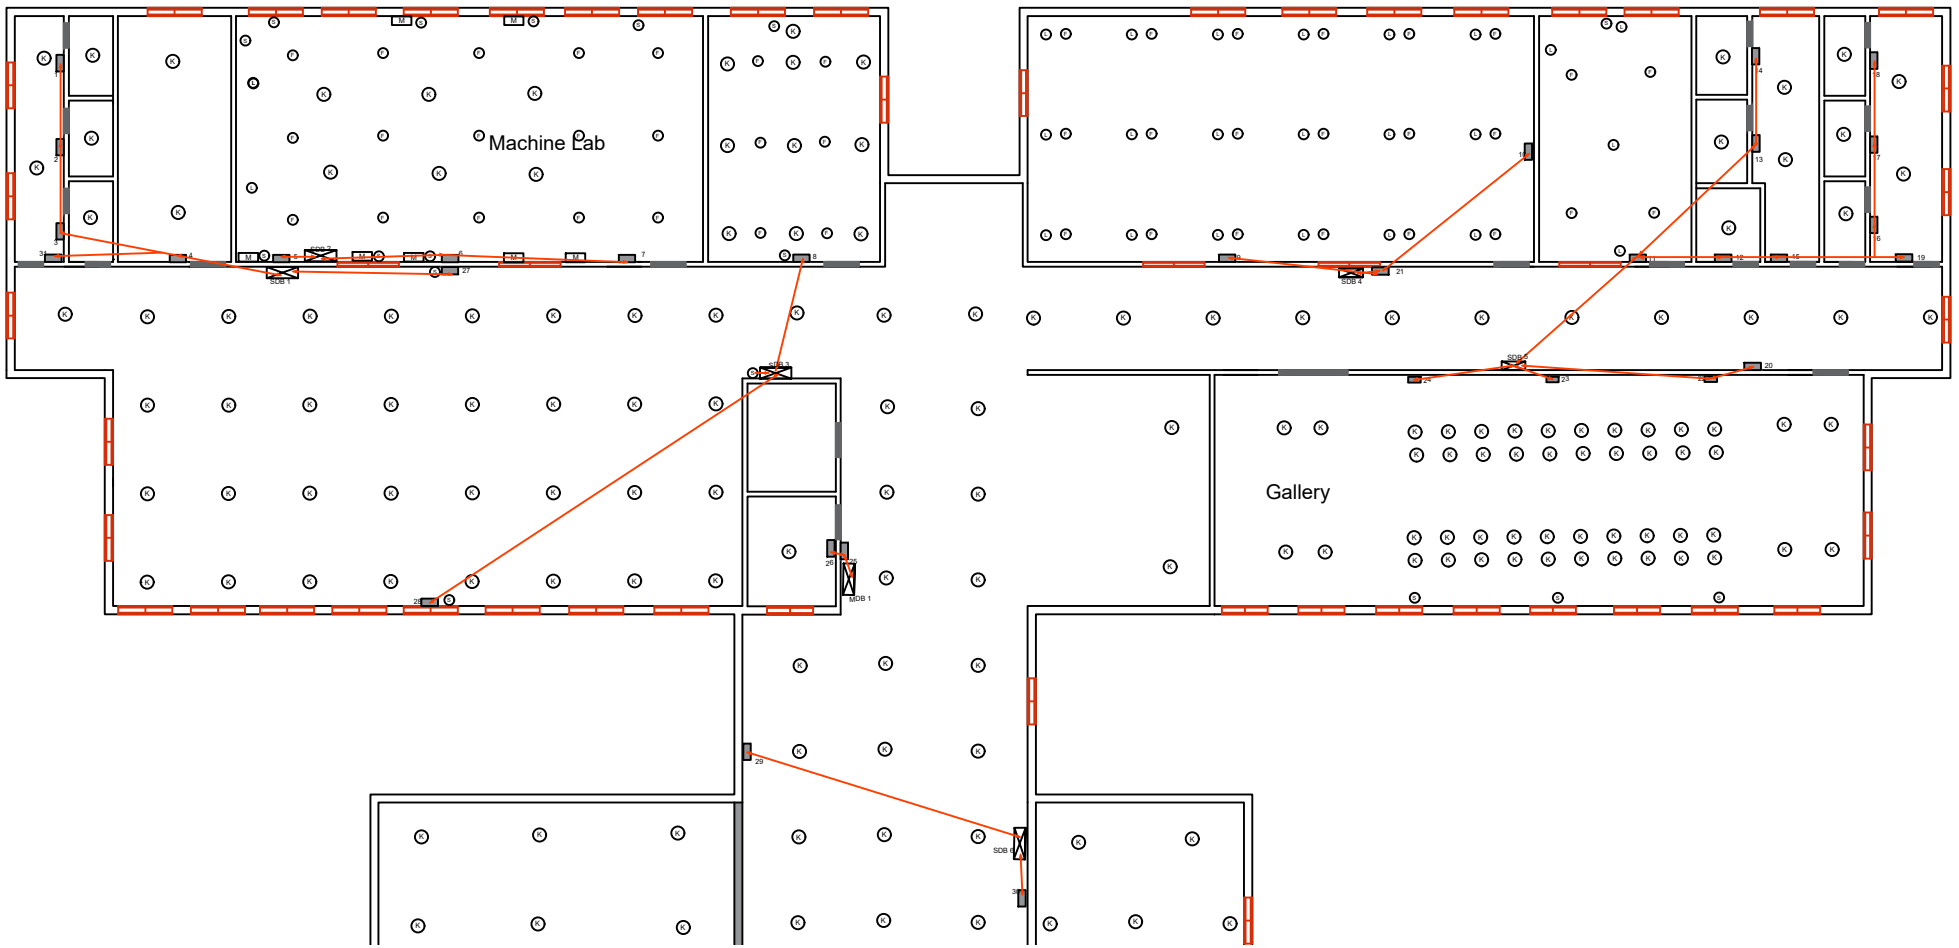

Conduit Layout :Layer 3 (SB Grouping and SB-SDB)

Conduit Layout :Layer 3 (SB Grouping and SB-SDB) (West side)

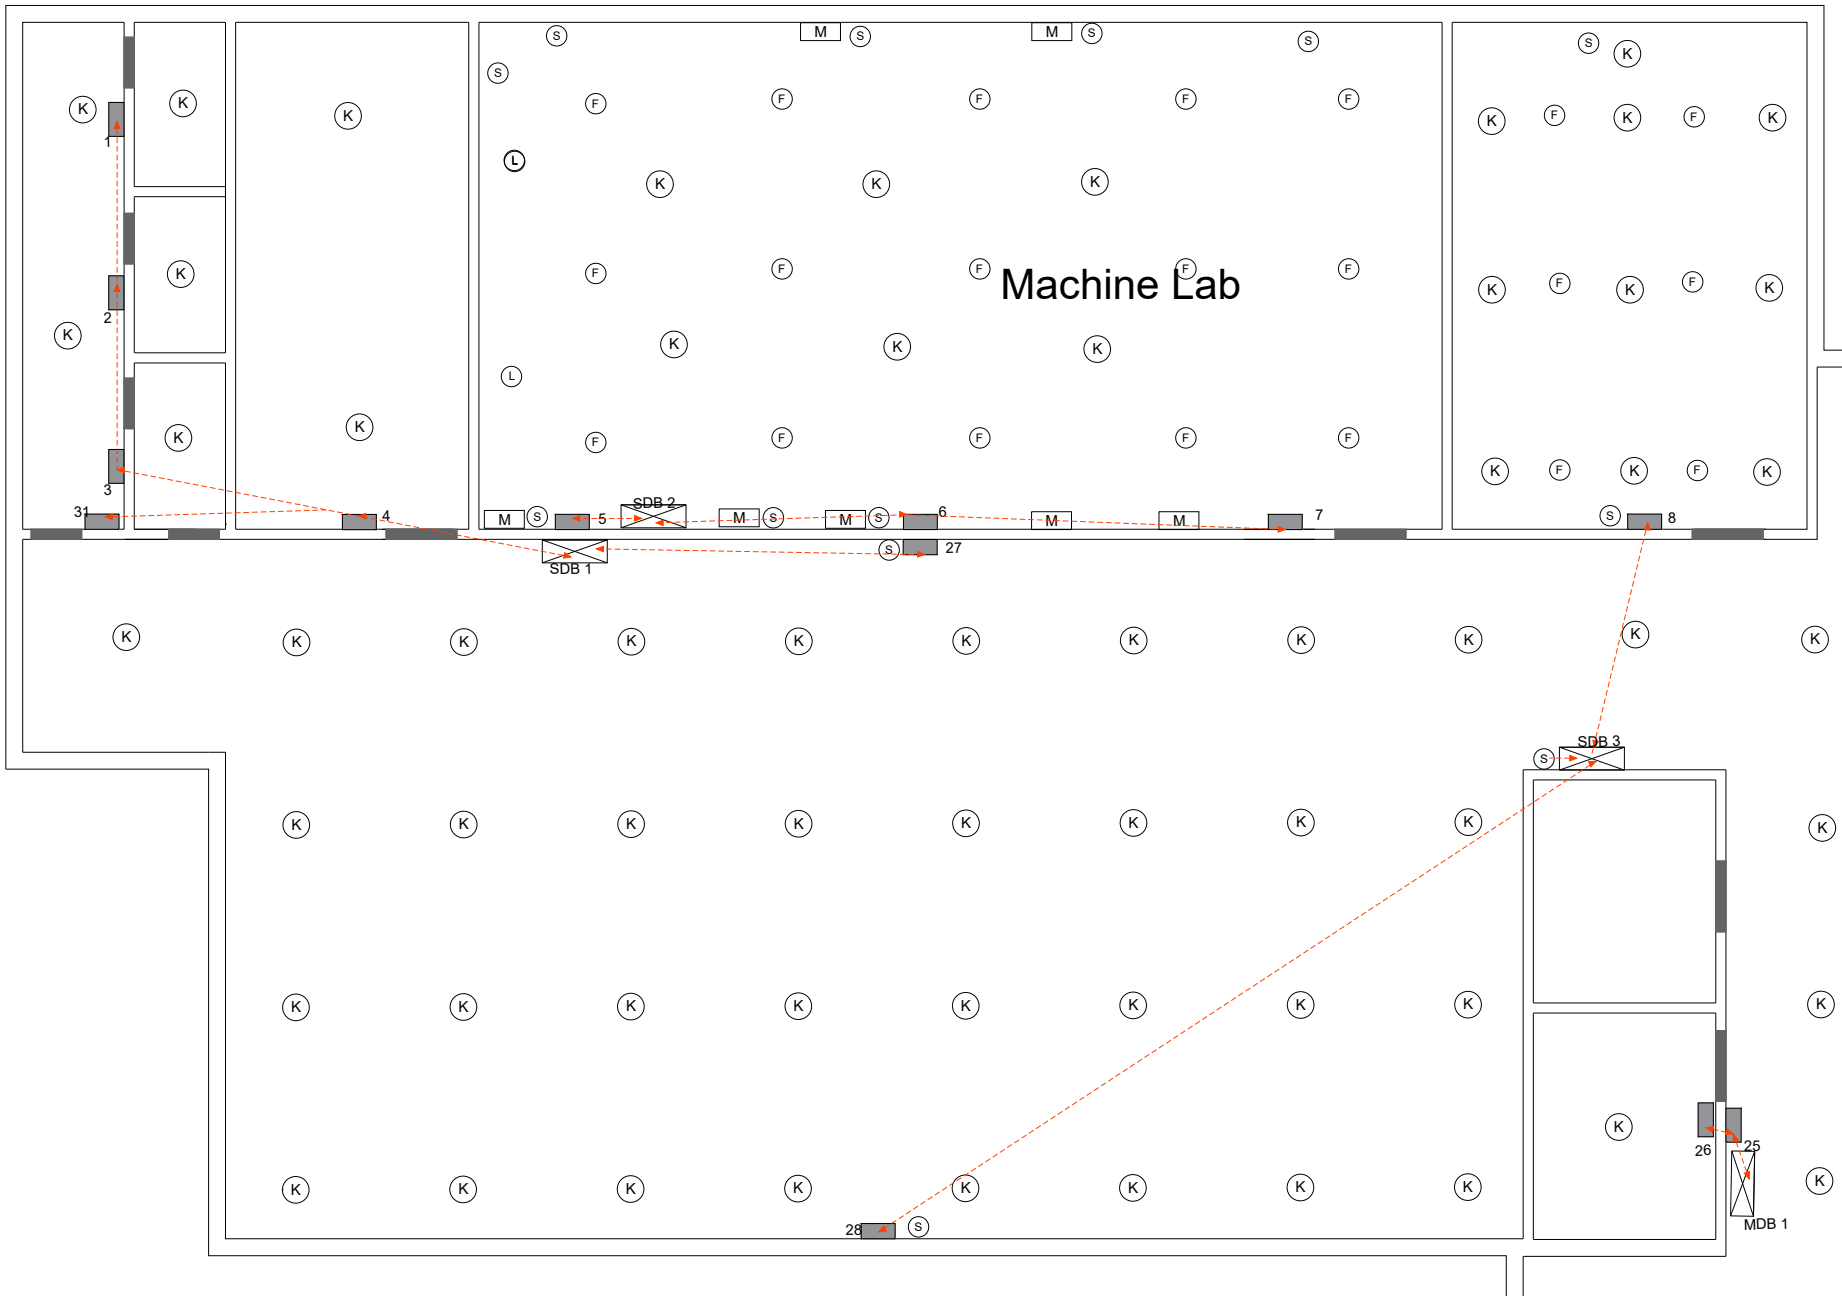

North

Legend

- S — 2 /3 Pin 5A Socket
- L — Light at Lintel Level
- F — Ceiling Fan
- Switch Board Concealed
- Distribution Board
- K — Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2

Conduit Layout :Layer 3 (SB Grouping and SB-SDB) (North side)




North

Legend

- S — 2 /3 Pin 5A Socket
- L — Light at Lintel Level
- F — Ceiling Fan
- Switch Board Concealed
- Distribution Board
- K — Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2

Conduit Layout :Layer 3 (SB Grouping and SB-SDB) (East side)

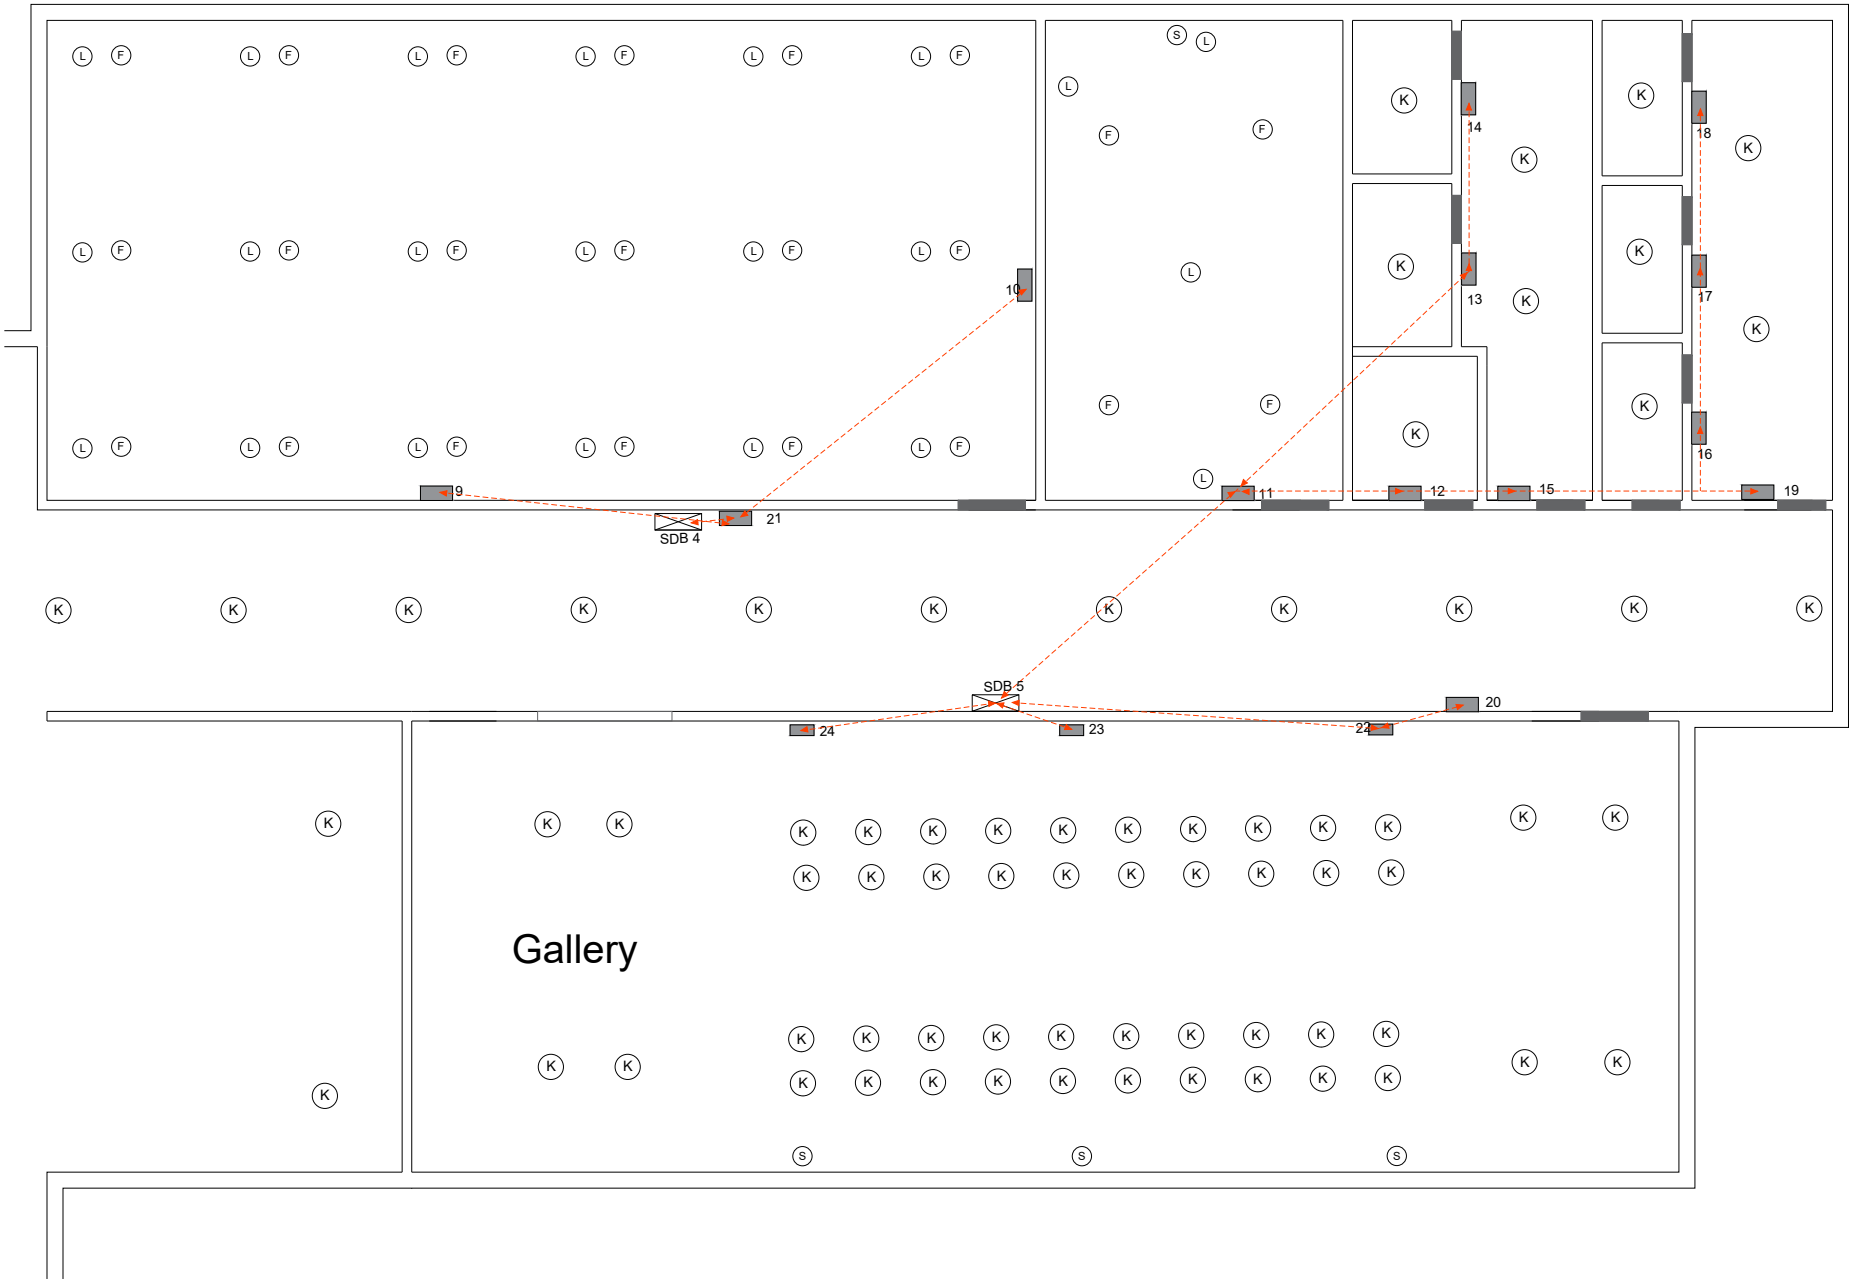


North

Legend

- S — 2 /3 Pin 5A Socket
- L — Light at Lintel Level
- F — Ceiling Fan
- Switch Board Concealed
- Distribution Board
- K — Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2

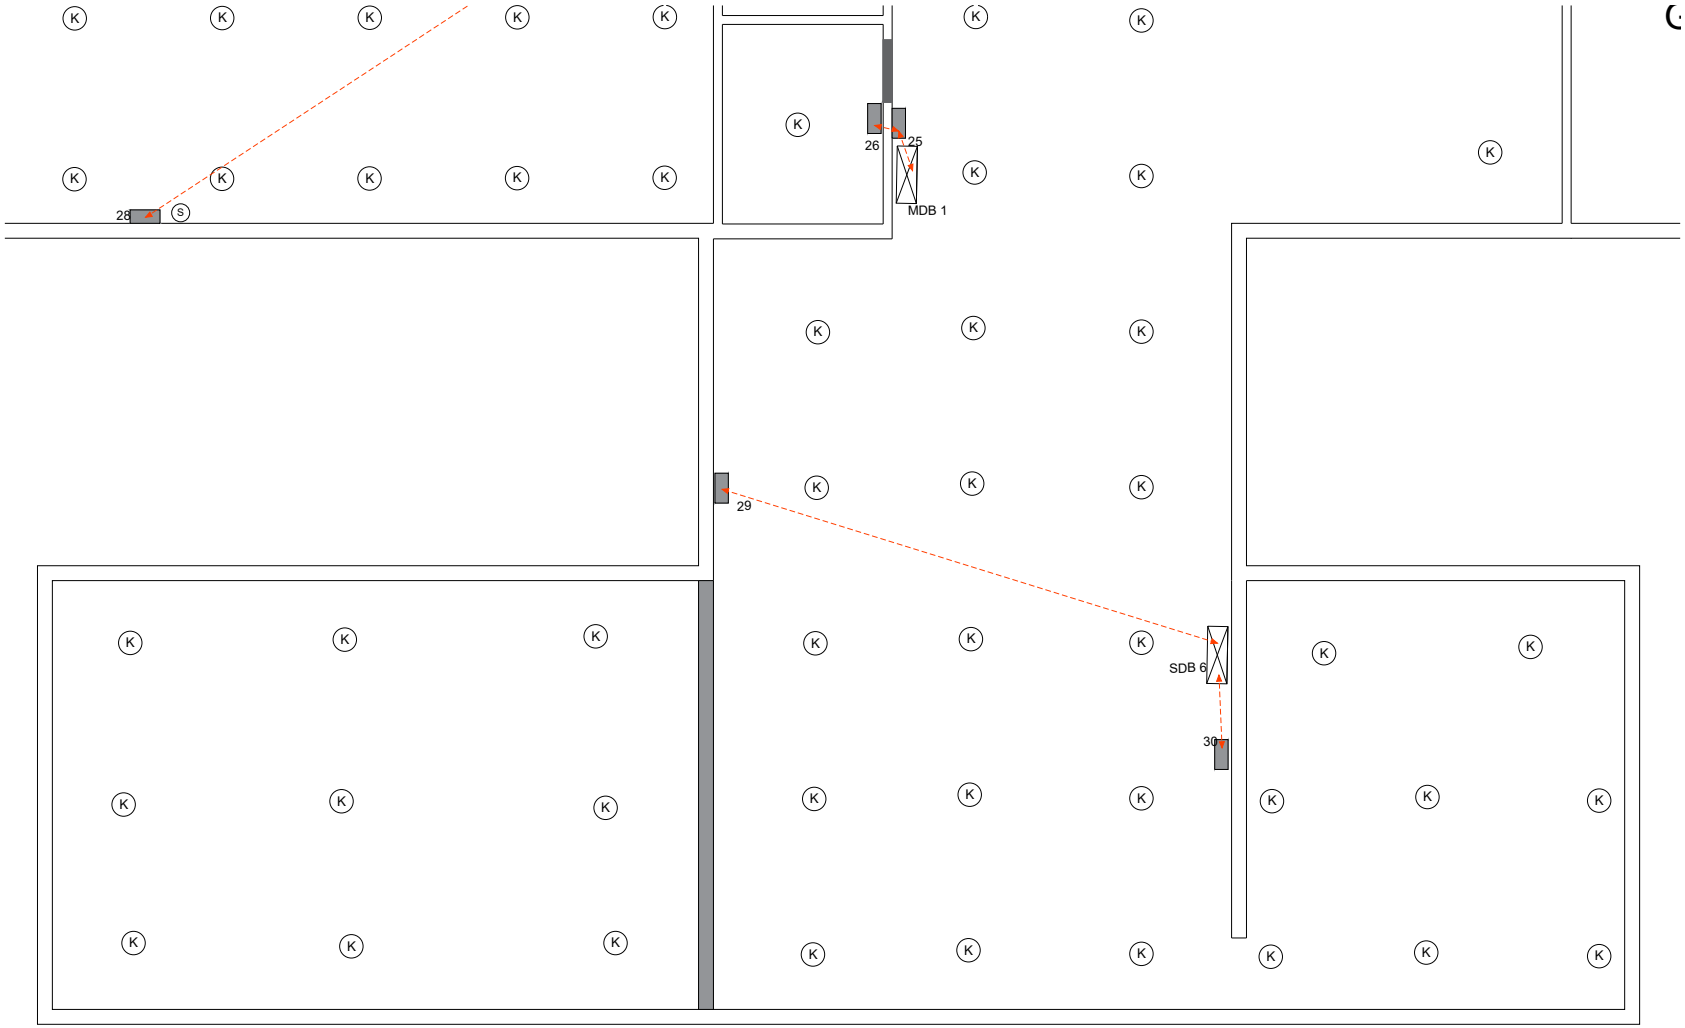


Conduit Layout :Layer 3 (SB Grouping and SB-SDB)(South side)

North

Legend

- S — 2 /3 Pin 5A Socket
- L — Light at Lintel Level
- F — Ceiling Fan
- Switch Board Concealed
- Distribution Board
- K — Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2

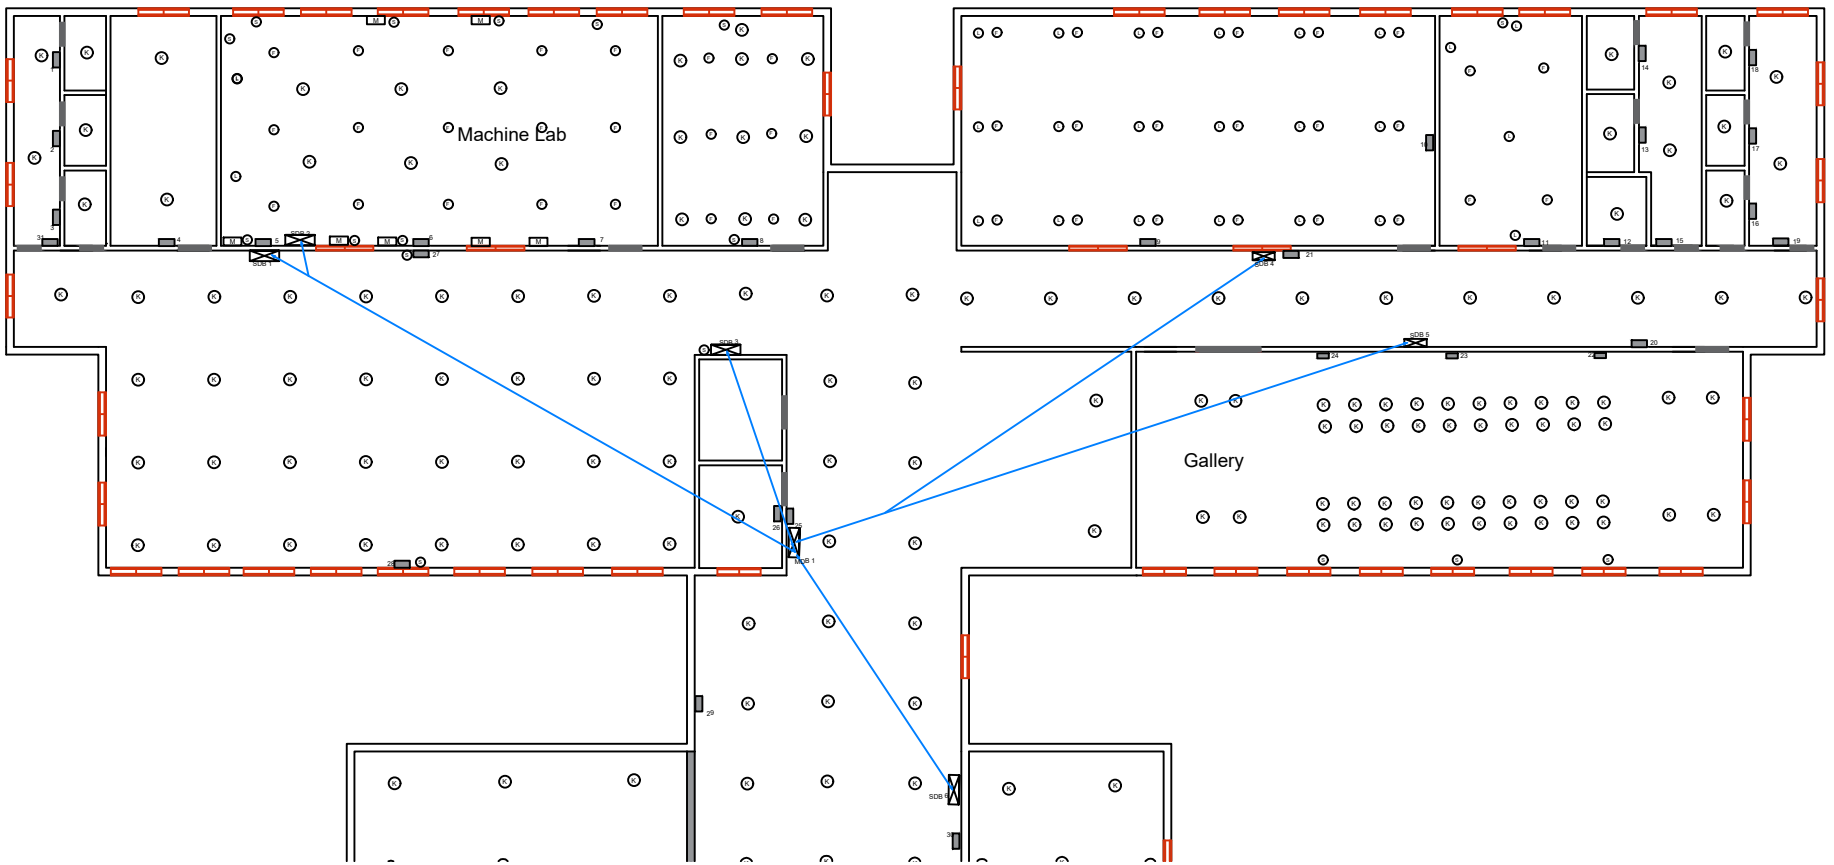

Conduit Layout :Layer 4 (SDB-MDB)


North

Legend

- 2 /3 Pin 5A Socket
- Light at Lintel Level
- Ceiling Fan
- Switch Board Concealed
- Distribution Board
- Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2

Conduit Layout :Layer 4 (SDB-MDB) (West side)

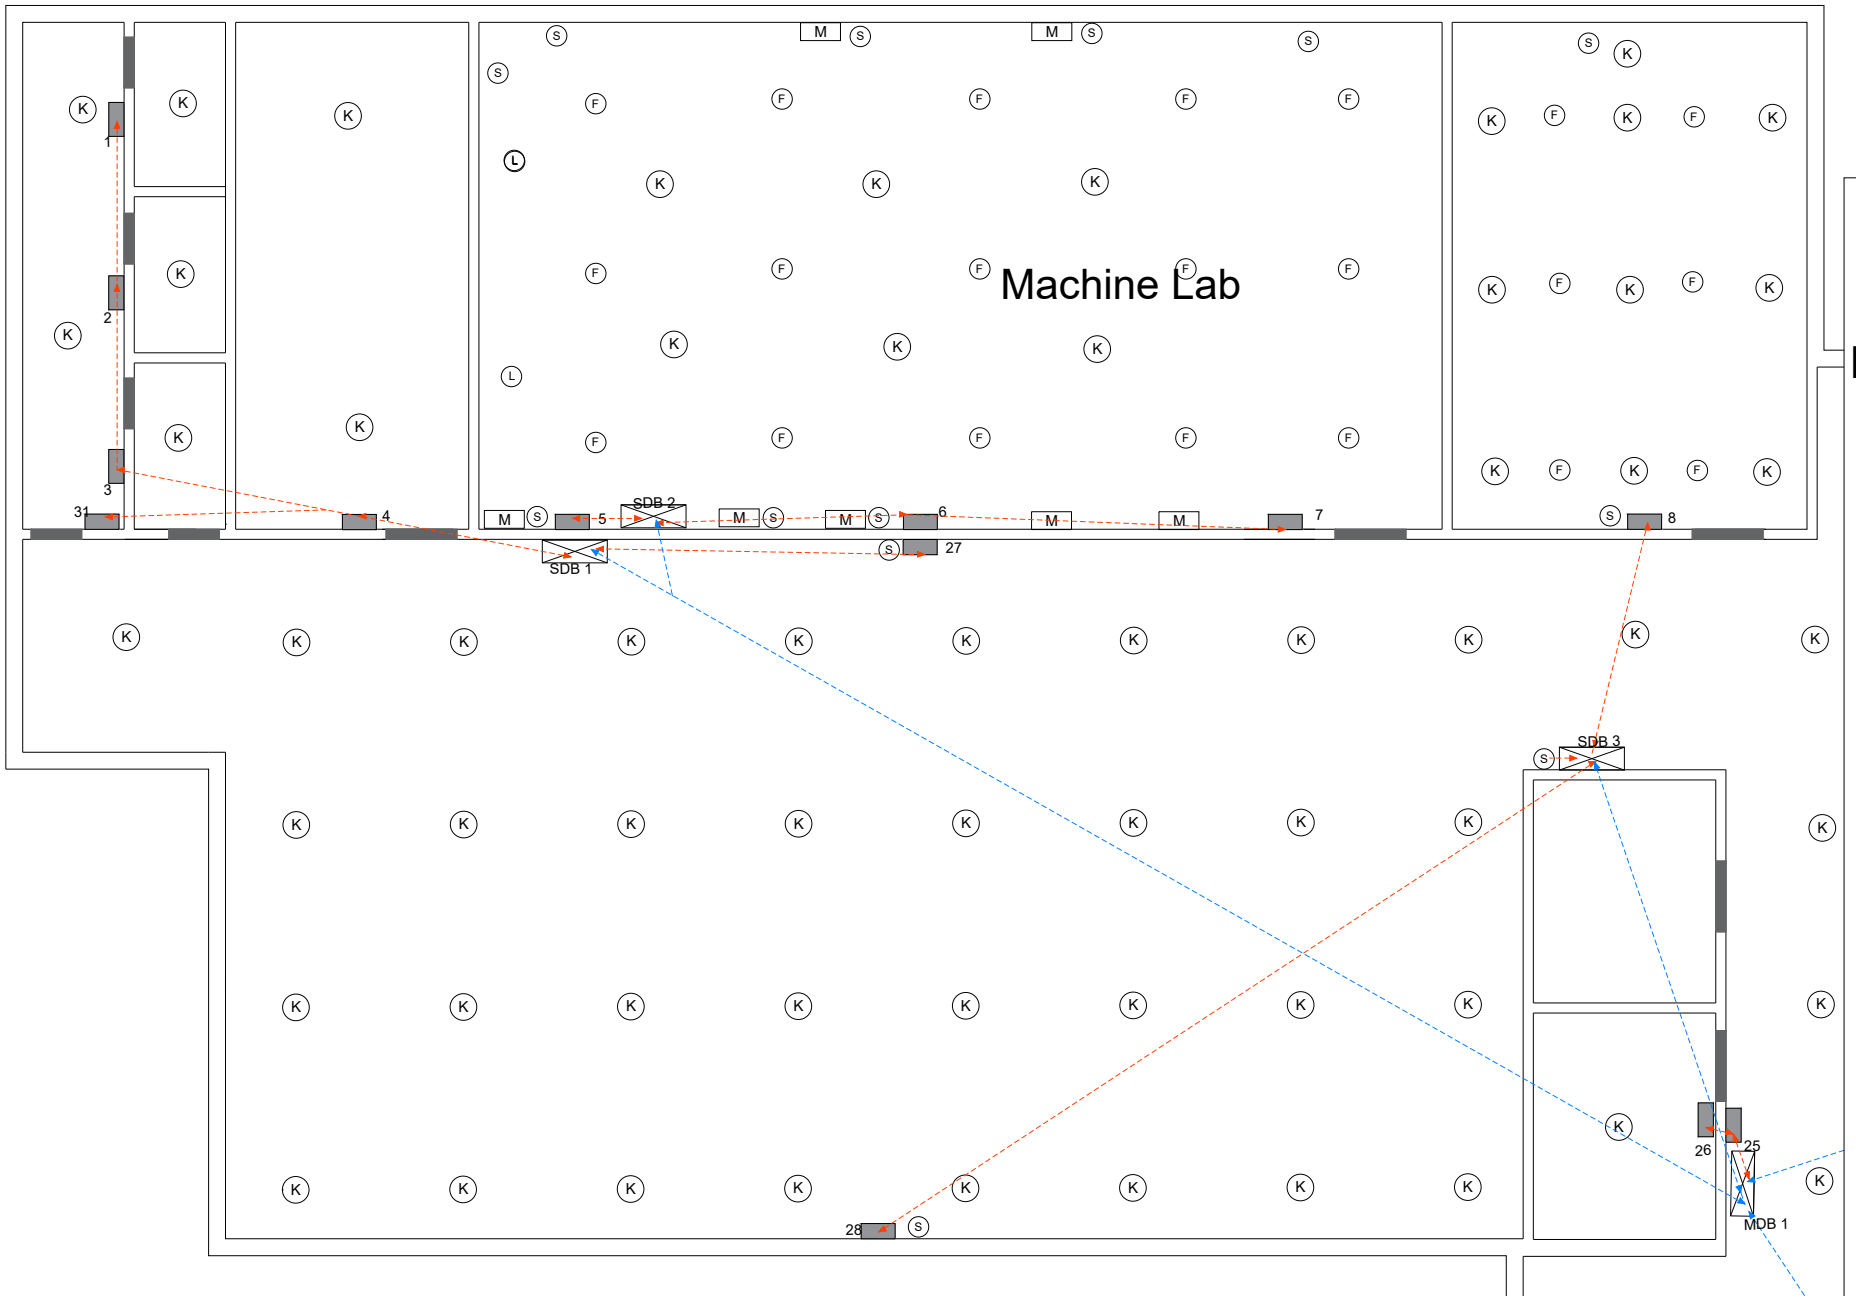


North

Legend

- S — 2 /3 Pin 5A Socket
- L — Light at Lintel Level
- F — Ceiling Fan
- Switch Board Concealed
- Distribution Board
- K — Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2

Conduit Layout :Layer 4(MDB-SDB) (East side)

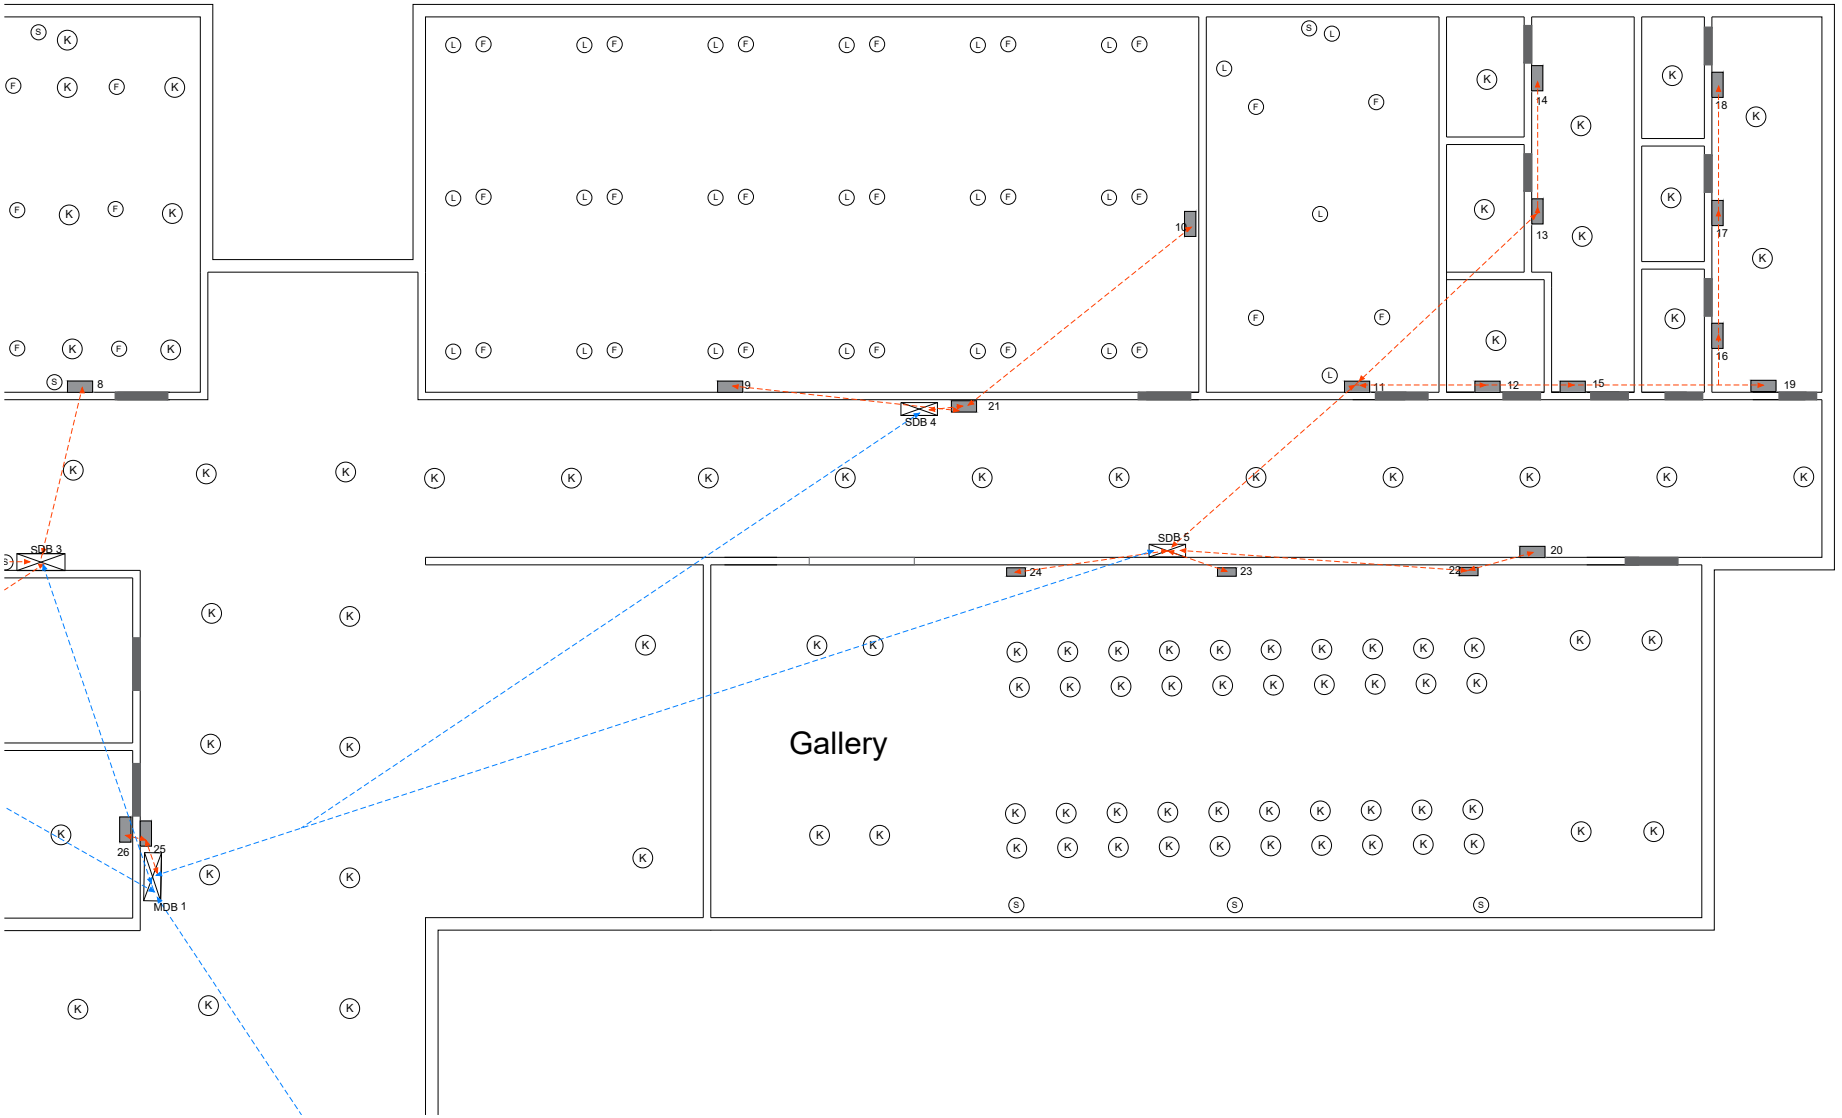


North

Legend

- S — 2 /3 Pin 5A Socket
- L — Light at Lintel Level
- F — Ceiling Fan
- Switch Board Concealed
- Distribution Board
- K — Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2

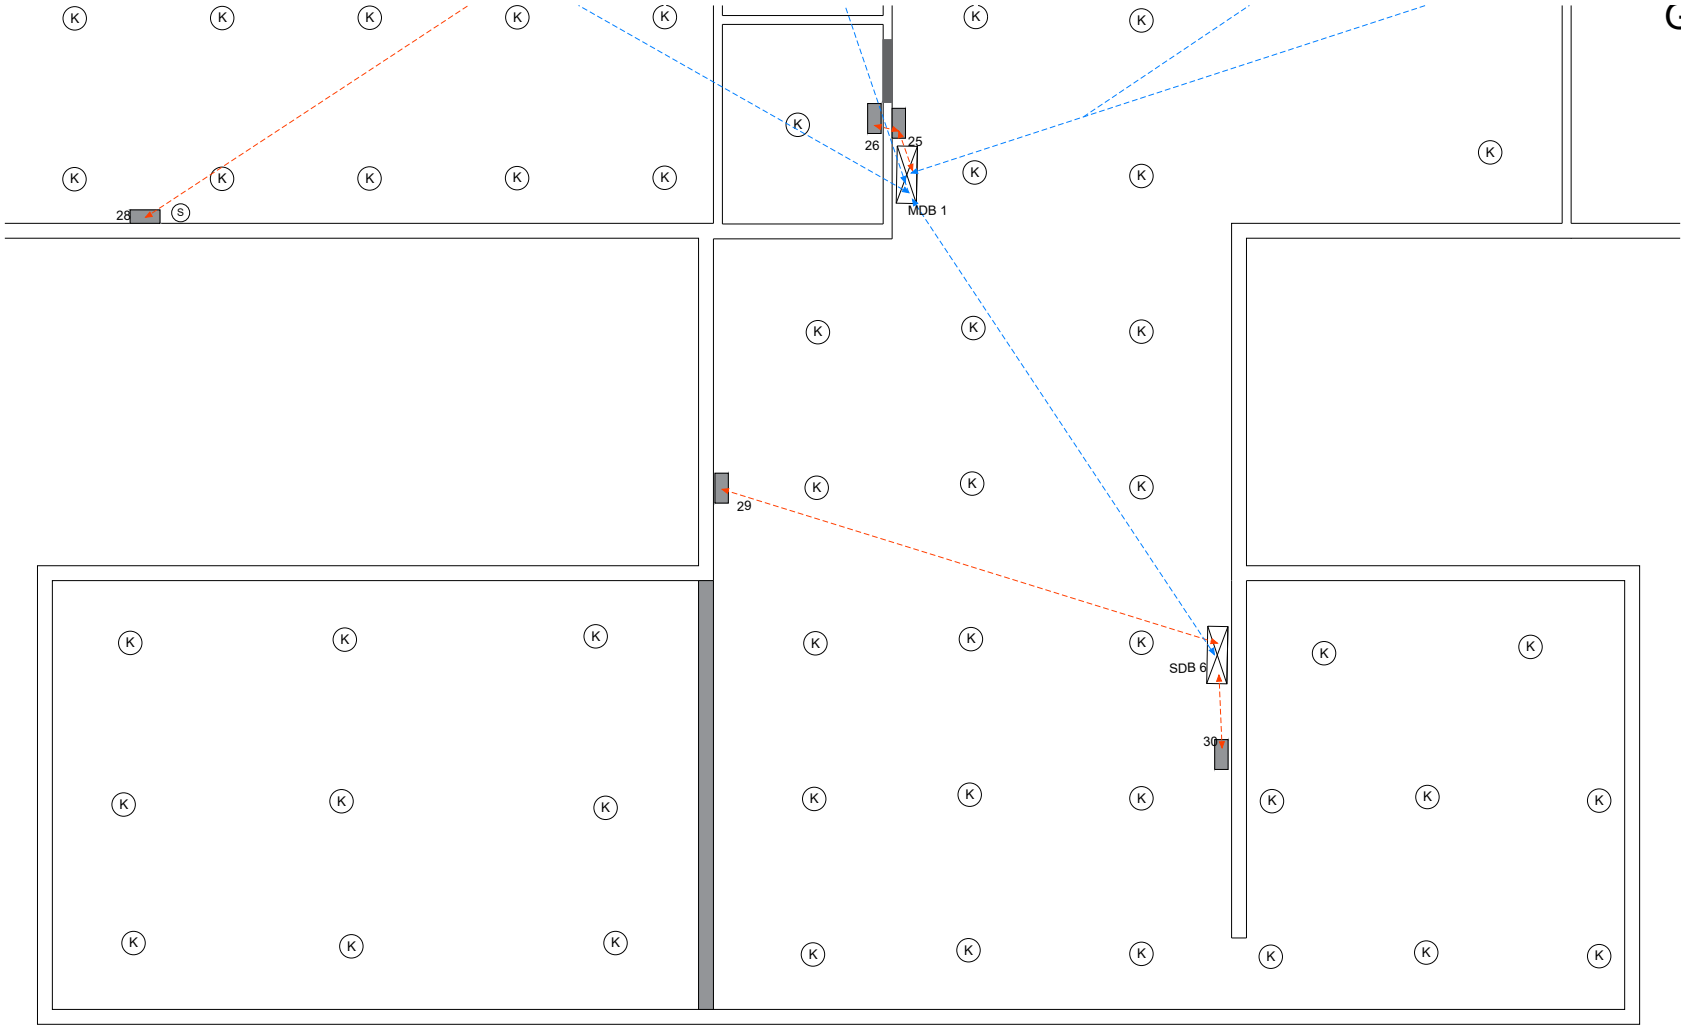

Conduit Layout :Layer 4(MDB-SDB):(South side)

North

Legend

- S — 2 /3 Pin 5A Socket
- L — Light at Lintel Level
- F — Ceiling Fan
- Switch Board Concealed
- Distribution Board
- K — Ceiling light type K

C1 = 2 x 1.5 mm^2
C2 = 4 x 1.5 mm^2
C3 = 6 x 1.5 mm^2
C4 = 8 x 1.5 mm^2
C5 = 10 x 1.5 mm^2
C6 = 12 x 1.5 mm^2