GATE Assignment 1

Adarsh Sai - AI20BTECH11001

Download all python codes from

Download latex-tikz codes from

1 PROBLEM(GATE 2021 EC Q4)

Consider a real-valued base-band signal $x(t)$, band limited to 10 kHz. The Nyquist rate for the signal $y(t) = x(t) x\left(1 + \frac{t}{2}\right)$ is

1) 15 kHz
2) 30 kHz
3) 60 kHz
4) 20 kHz

2 SOLUTION

Definition 2.1 (Dirac-delta impulse)**.**

$$\delta(t) = \begin{cases} \infty, & t = 0 \\ 0, & otherwise \end{cases} \qquad (2.0.1)$$

Lemma 2.1 (Shifting property of $\delta(t)$)**.** *If $g(t)$ is a continuous and finite function at $t = a$ then*

$$\int_{-\infty}^{\infty} \delta(t - a) g(t) dt = g(a) \qquad (2.0.2)$$

We also have

$$\int_{-\infty}^{\infty} \delta(t - a) \delta(t - b) dt = \delta(a - b) \qquad (2.0.3)$$

Theorem 2.2. *Fourier transform of shifted impulse is the complex exponential.*

$$G(f) = \mathcal{F}\{\delta(t - a)\} = e^{-i2\pi fa} \qquad (2.0.4)$$

Proof.

$$G(f) = \int_{-\infty}^{\infty} \delta(t - a) e^{-i2\pi ft} dt \qquad (2.0.5)$$

$$= e^{-i2\pi fa} \qquad (2.0.6)$$

□

Corollary 2.2.1. *Inverse Fourier Transform of the complex exponential must be the shifted impulse. So*

$$\mathcal{F}^{-1}\left\{e^{-2\pi fa}\right\} = \int_{-\infty}^{\infty} e^{-2\pi fa} e^{i2\pi ft} df \qquad (2.0.7)$$

$$= \int_{-\infty}^{\infty} e^{i2\pi f(t-a)} df \qquad (2.0.8)$$

$$= \int_{-\infty}^{\infty} e^{-i2\pi f(t-a)} df \qquad (2.0.9)$$

$$= \delta(t - a) \qquad (2.0.10)$$

Theorem 2.3. *The Fourier transform of $g(t) = e^{i2\pi at}$ is given by*

$$G(f) = \mathcal{F}\left\{e^{i2\pi at}\right\} = \delta(f - a) \qquad (2.0.11)$$

Proof.

$$G(f) = \int_{-\infty}^{\infty} e^{i2\pi at} e^{-i2\pi ft} dt \qquad (2.0.12)$$

$$= \int_{-\infty}^{\infty} e^{i2\pi t(a-f)} dt \qquad (2.0.13)$$

$$= \delta(f - a) \qquad (2.0.14)$$

□

Lemma 2.4 (Linearity of Fourier Transform)**.**

$$\mathcal{F}\{c_1 g(t) + c_2 h(t)\} = c_1 \mathcal{F}\{g(t)\} + c_2 \mathcal{F}\{h(t)\} \qquad (2.0.15)$$

Lemma 2.5. *Let $x(t)$ be a signal, its Fourier Transform be of the form*

$$G_x(f) = c_1 \delta(f - a_1 A) + c_2 \delta(f - a_2 A) + \dots \qquad (2.0.16)$$

where $c_i \in \mathbb{C}$ and $a_i \in \mathbb{R}$. Then the frequencies present in the signal are $a_j A$ where $a_j \in \mathbb{R}^+$

Let $x(t) = \cos(2\pi At)$, where $A = 10kHz$.

$$\cos(2\pi At) = \frac{e^{i2\pi At} + e^{-i2\pi At}}{2} \qquad (2.0.17)$$

The Fourier transform of $x(t)$

$$G_x(f) = \int_{-\infty}^{\infty} \frac{e^{i2\pi At} + e^{-i2\pi At}}{2} e^{-i2\pi ft} dt \quad (2.0.18)$$

$$= \frac{1}{2} \left[\int_{-\infty}^{\infty} e^{-i2\pi t(f-A)} dt + \int_{-\infty}^{\infty} e^{-i2\pi t(A+F)} \right] \quad (2.0.19)$$

$$= \frac{1}{2} [\delta(f-A) + \delta(f+A)] \quad (2.0.20)$$

$\therefore$ All the energy of the sinusoidal wave is entirely localized at the frequencies given by $|f| = A$.

$$y(t) = \cos(2\pi At) \cos\left(2\pi A\left(1 + \frac{t}{2}\right)\right) \quad (2.0.21)$$

$$= \frac{1}{2} (\cos(2\pi A + 3\pi At) + \cos(2\pi A - \pi At)) \quad (2.0.22)$$

$$= \frac{1}{2} (\cos(3\pi At) + \cos(\pi At)) \quad (2.0.23)$$

Fourier Transform of $y(t)$ is given by

$$G_y(f) = \frac{1}{4}\left[\delta\left(f - \frac{3A}{2}\right) + \delta\left(f + \frac{3A}{2}\right)\right] + \frac{1}{4}\left[\delta\left(f - \frac{A}{2}\right) + \delta\left(f + \frac{A}{2}\right)\right] \quad (2.0.24)$$

From lemma 2.5 we can conclude that the frequencies present in signal $y(t)$ are $\frac{A}{2}, \frac{3A}{2}$

Lemma 2.6. *Multiplication property of Fourier Transform*

$$\text{If } x(t) \overset{\mathcal{F}}{\rightleftharpoons} X(f) \quad (2.0.25)$$

$$y(t) \overset{\mathcal{F}}{\rightleftharpoons} Y(f) \quad (2.0.26)$$

Then

$$x(t)y(t) \overset{\mathcal{F}}{\rightleftharpoons} X(f) * Y(f) \quad (2.0.27)$$

where $*$ represents convolution

Lemma 2.7.

$$\delta(t - t_0) * g(t) = g(t - t_0) \quad (2.0.28)$$

Lemma 2.8. *Computing $G_y(f)$ using convolution*

$$x(t) = \cos(2\pi At) \quad (2.0.29)$$

$$x(t) \overset{\mathcal{F}}{\rightleftharpoons} X_1(f) = \frac{1}{2}[\delta(f-A) + \delta(f+A)] \quad (2.0.30)$$

$$x\left(1 + \frac{t}{2}\right) = \cos(\pi At) \quad (2.0.31)$$

$$x\left(1 + \frac{t}{2}\right) \overset{\mathcal{F}}{\rightleftharpoons} X_2(f) = \frac{1}{2}\left[\delta\left(f - \frac{A}{2}\right) + \delta\left(f + \frac{A}{2}\right)\right] \quad (2.0.32)$$

Using lemma 2.6

$$G_y(f) = X_1(f) * X_2(f) \quad (2.0.33)$$

$$= \left(\frac{1}{2}[\delta(f-A) + \delta(f+A)]\right) * X_2(f) \quad (2.0.34)$$

$$= \frac{1}{2}\{\delta(f-A) * X_2(f) + \delta(f+A) * X_2(f)\} \quad (2.0.35)$$

Using (2.0.28)

$$G_y(f) = \frac{1}{2}(X_2(f-A) + X_2(f+A)) \quad (2.0.36)$$

$$G_y(f) = \frac{1}{4}\left[\delta\left(f - \frac{3A}{2}\right) + \delta\left(f + \frac{3A}{2}\right)\right] + \frac{1}{4}\left[\delta\left(f - \frac{A}{2}\right) + \delta\left(f + \frac{A}{2}\right)\right] \quad (2.0.37)$$

$$x(t) = \cos(20k\pi t) \quad (2.0.38)$$

$$\text{bandwidth of } x(t) = 10kHz \quad (2.0.39)$$

$$x\left(1 + \frac{t}{2}\right) = \cos(20k\pi + 10k\pi t) \quad (2.0.40)$$

$$\text{bandwidth of } x\left(1 + \frac{t}{2}\right) = 5kHz \quad (2.0.41)$$

$$\text{from (2.0.23) } y(t) = \cos(30k\pi t) + \cos(10k\pi t) \quad (2.0.42)$$

$$\text{bandwidth of } y(t) = \frac{30}{2}kHz \quad (2.0.43)$$

$$= 15kHz \quad (2.0.44)$$

$$\text{Nyquist rate} = 2 \times \text{maximum frequency} \quad (2.0.45)$$
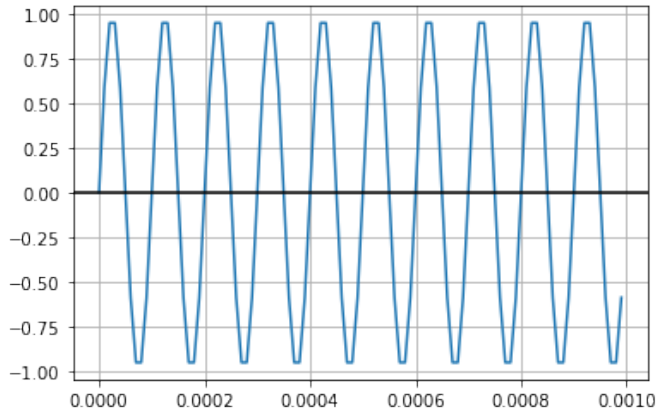
$$= 30kHz \quad (2.0.46)$$
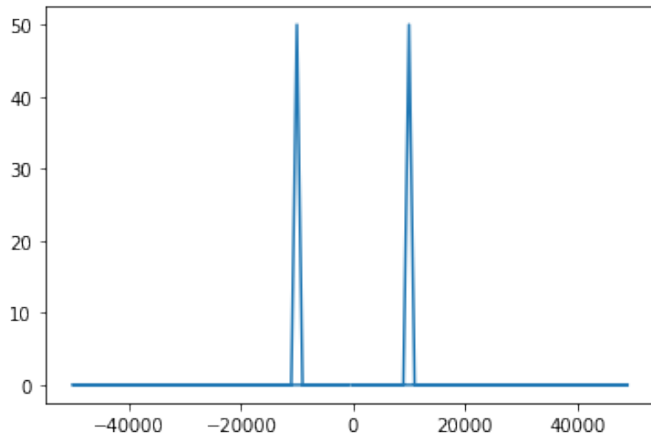
Fig. 4: $x(t)$:Sinusoidal signal with freq=10kHz

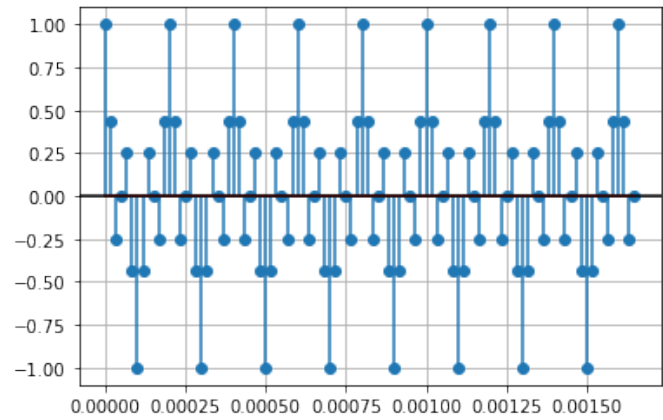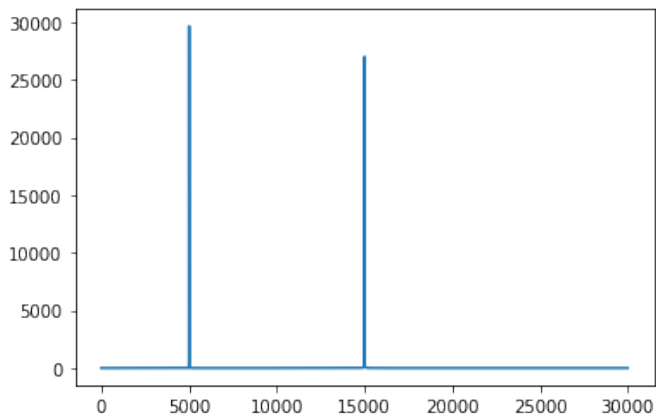Fig. 4: DFT of $x(t)$. *Bandwidth* = 10000

Fig. 4: stem plot of $y(t)$ sampled at 60kHz

Fig. 4: DFT of $y(t)$. *Bandwidth* = 15000