GATE Assignment 1

Adarsh Sai - AI20BTECH11001

Download all python codes from

```
https://github.com/Adarsh541/EE3900/blob/main/
    Gate1/codes/Gate1.py
```

Download latex-tikz codes from

```
https://github.com/Adarsh541/EE3900/blob/main/
    Gate1/Gate1.tex
```

1 Problem(GATE 2021 EC Q4)

Consider a real-valued base-band signal $x(t)$, band limited to 10 kHz. The Nyquist rate for the signal $y(t) = x(t)\,x\left(1 + \frac{t}{2}\right)$ is

1) 15 kHz
2) 30 kHz
3) 60 kHz
4) 20 kHz

2 Solution

Definition 2.1 (Dirac-delta impulse)**.**

$$\delta(t) = \begin{cases} \infty, & t = 0 \\ 0, & otherwise \end{cases} \tag{2.0.1}$$

Lemma 2.1 (Shifting property of $\delta(t)$)**.** *If $g(t)$ is a continuous and finite function at $t = a$ then*

$$\int_{-\infty}^{\infty} \delta(t-a)\, g(t)\, dt = g(a) \tag{2.0.2}$$

Theorem 2.2. *Fourier transform of shifted impulse is the complex exponential.*

$$G(f) = \mathcal{F}\{\delta(t-a)\} = e^{-i2\pi fa} \tag{2.0.3}$$

Proof.

$$G(f) = \int_{-\infty}^{\infty} \delta(t-a)\, e^{-i2\pi ft} dt \tag{2.0.4}$$

$$= e^{-i2\pi fa} \tag{2.0.5}$$

□

Corollary 2.2.1. *Inverse Fourier Transform of the complex exponential must be the shifted impulse. So*

$$\mathcal{F}^{-1}\left\{e^{-2\pi fa}\right\} = \int_{-\infty}^{\infty} e^{-2\pi fa} e^{i2\pi ft} df \tag{2.0.6}$$

$$= \int_{-\infty}^{\infty} e^{i2\pi f(t-a)} df \tag{2.0.7}$$

$$= \int_{-\infty}^{\infty} e^{-i2\pi f(t-a)} df \tag{2.0.8}$$

$$= \delta(t-a) \tag{2.0.9}$$

Theorem 2.3. *The Fourier transform of $g(t) = e^{i2\pi at}$ is given by*

$$G(f) = \mathcal{F}\left\{e^{i2\pi at}\right\} = \delta(f-a) \tag{2.0.10}$$

Proof.

$$G(f) = \int_{-\infty}^{\infty} e^{i2\pi at} e^{-i2\pi ft} dt \tag{2.0.11}$$

$$= \int_{-\infty}^{\infty} e^{i2\pi t(a-f)} dt \tag{2.0.12}$$

$$= \delta(f-a) \tag{2.0.13}$$

□

Lemma 2.4 (Linearity of Fourier Transform)**.**

$$\mathcal{F}\{c_1 g(t) + c_2 h(t)\} = c_1 \mathcal{F}\{g(t)\} + c_2 \mathcal{F}\{h(t)\} \tag{2.0.14}$$

Let $x(t) = \cos(2\pi At)$, where $A = 10kHz$.

$$\cos(2\pi At) = \frac{e^{i2\pi At} + e^{-i2\pi At}}{2} \tag{2.0.15}$$

The Fourier transform of $x(t)$ is given by

$$G_x(f) = \int_{-\infty}^{\infty} \frac{e^{i2\pi At} + e^{-i2\pi At}}{2} e^{-i2\pi ft} dt \tag{2.0.16}$$

$$= \frac{1}{2}\left[\int_{-\infty}^{\infty} e^{-i2\pi t(f-A)} dt + \int_{-\infty}^{\infty} e^{-i2\pi t(A+F)}\right] \tag{2.0.17}$$

$$= \frac{1}{2}\left[\delta(f-A) + \delta(f+A)\right] \tag{2.0.18}$$

$\therefore$ All the energy of the sinusoidal wave is entirely localized at the frequencies given by $|f| = A$.

$$y(t) = \cos(2\pi At)\cos\left(2\pi A\left(1+\frac{t}{2}\right)\right) \tag{2.0.19}$$

$$= \cos(2\pi A + 3\pi At) + \cos(2\pi A - \pi At) \tag{2.0.20}$$

$$= \cos(3\pi At) + \cos(\pi At) \tag{2.0.21}$$

Fourier Transform of $y(t)$ is given by

$$G_y(t) = \frac{1}{2}\left[\delta\left(f-\frac{3A}{2}\right)+\delta\left(f+\frac{3A}{2}\right)\right] + \frac{1}{2}\left[\delta\left(f-\frac{A}{2}\right)+\delta\left(f+\frac{A}{2}\right)\right] \tag{2.0.22}$$

The frequencies present in the signal $y(t)$ are $\frac{A}{2}, \frac{3A}{2}$

$$\text{bandwidth of } x(t) = 10kHz \tag{2.0.23}$$

$$\text{bandwidth of } x\left(1+\frac{t}{2}\right) = \frac{10}{2}kHz \tag{2.0.24}$$

$$= 5kHz \tag{2.0.25}$$

$$\text{bandwidth of } y(t) = (10+5)kHz \tag{2.0.26}$$

$$= 15kHz \tag{2.0.27}$$

$$\text{Nyquist rate} = 2 \times \text{maximum frequency} \tag{2.0.28}$$

$$= 30kHz \tag{2.0.29}$$

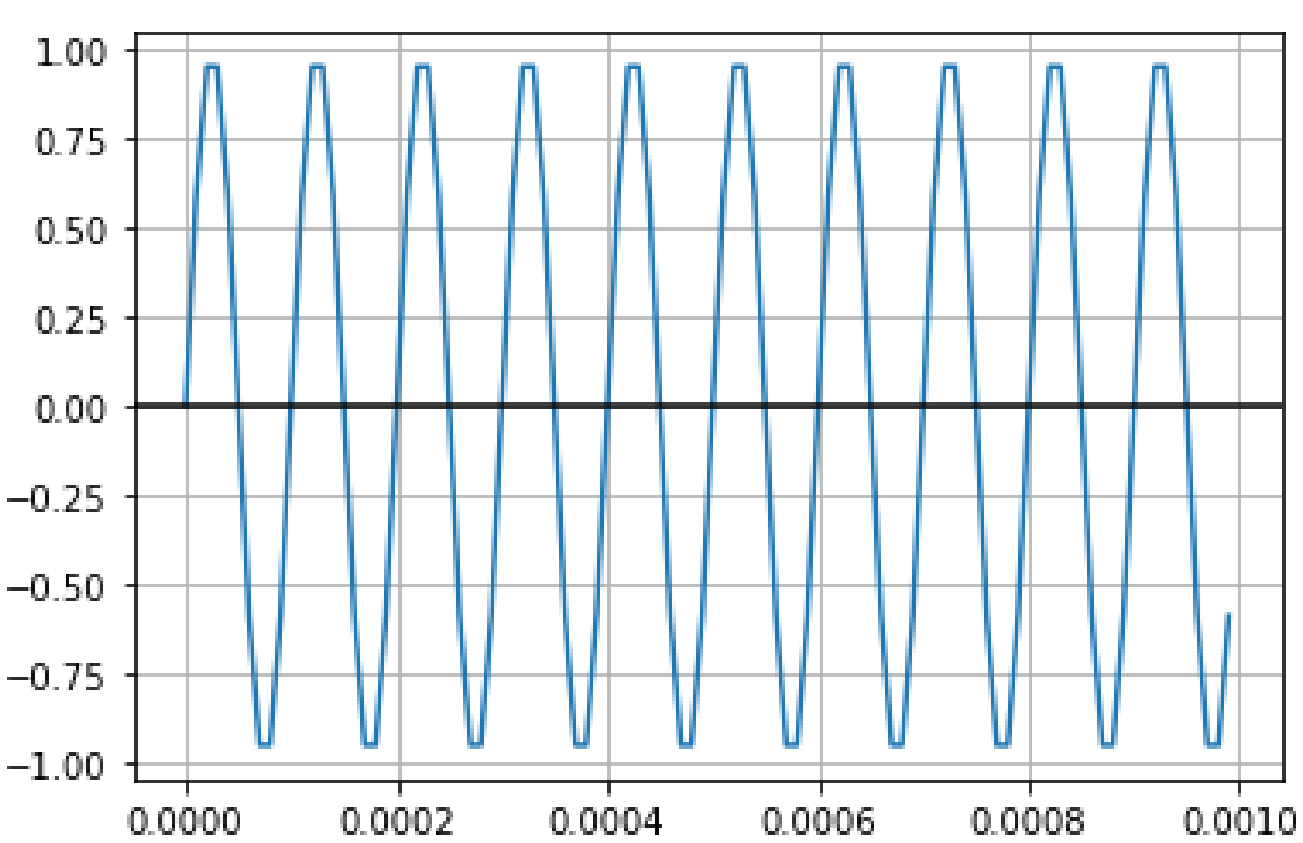

Fig. 4: $x(t)$:Sinusoidal signal with freq=10kHz

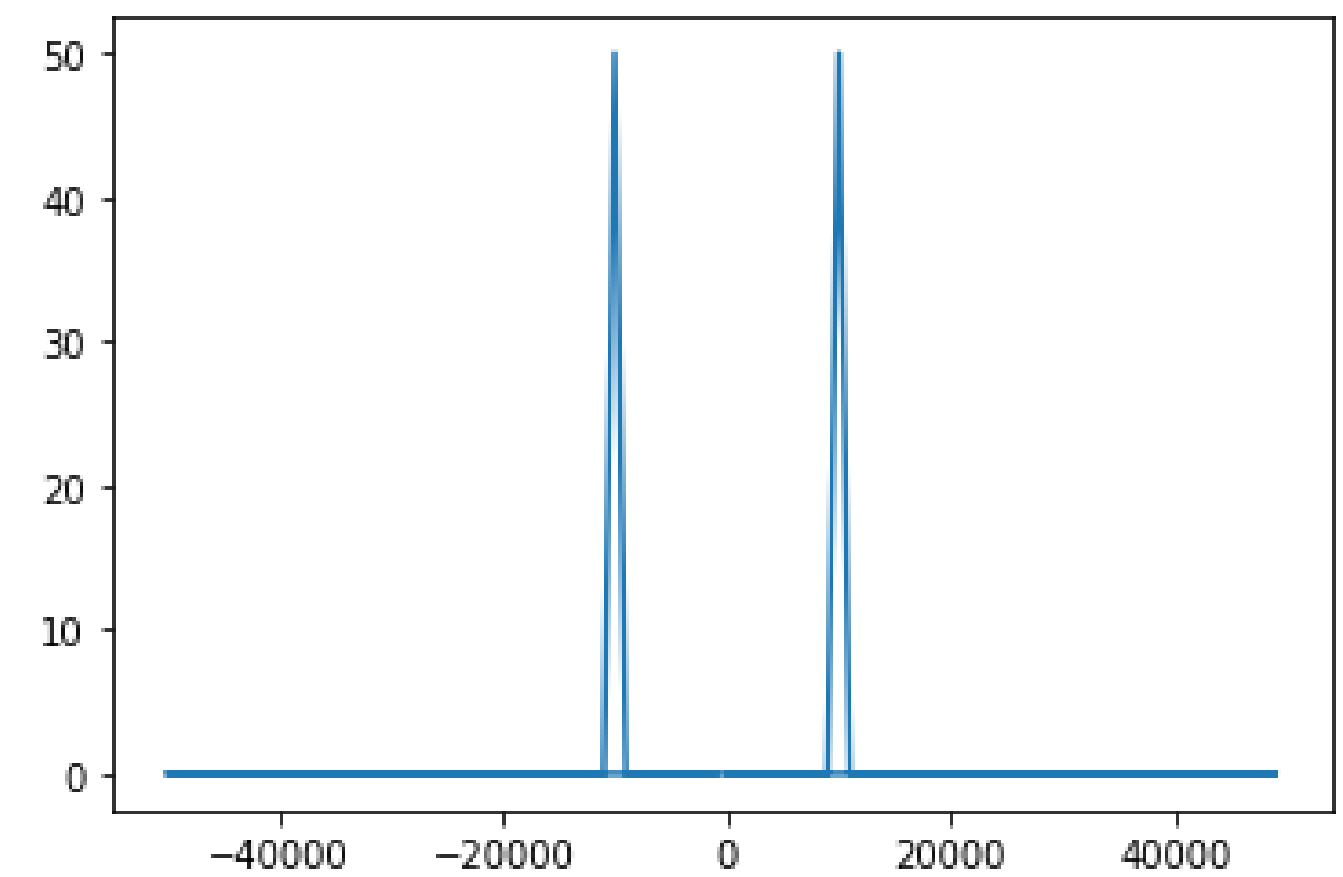

Fig. 4: DFT of $x(t)$

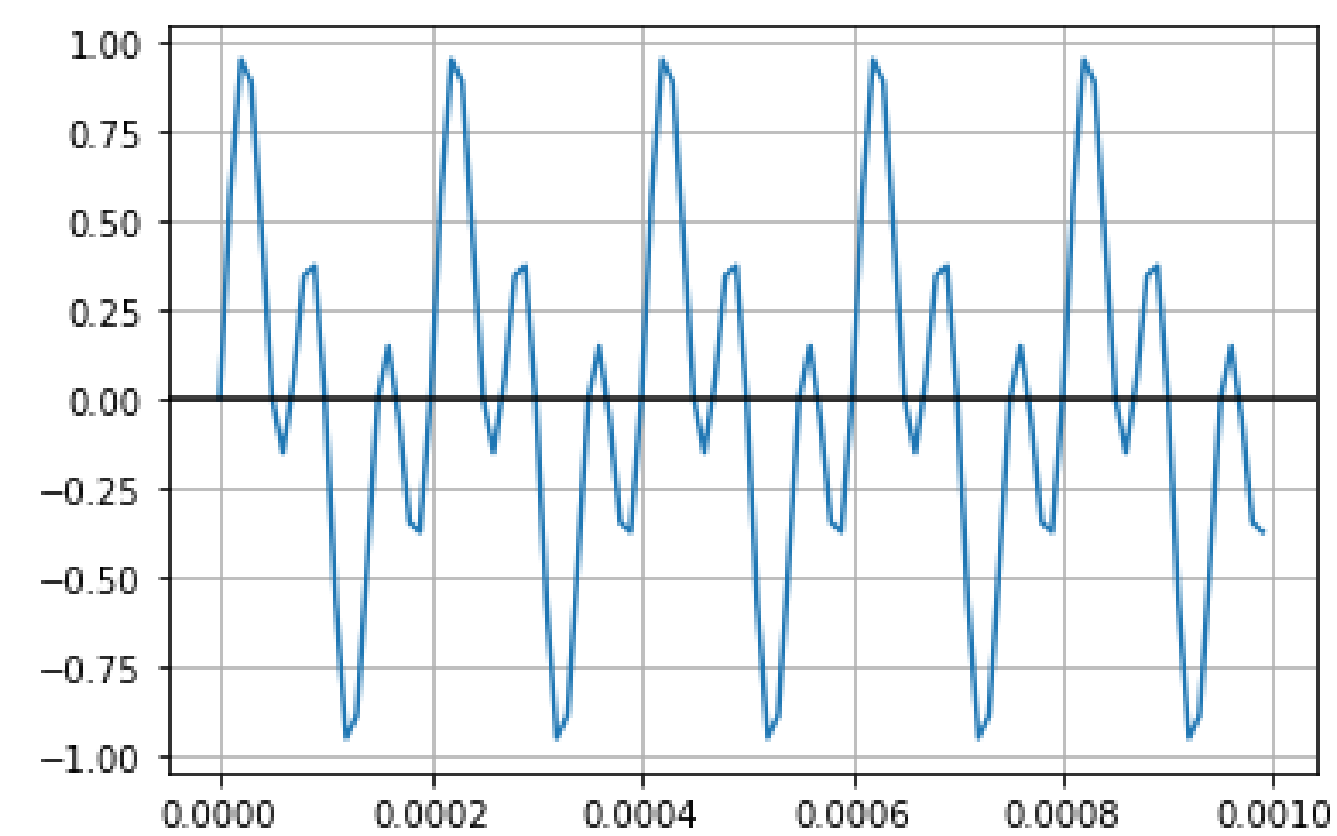

Fig. 4: $y(t)$

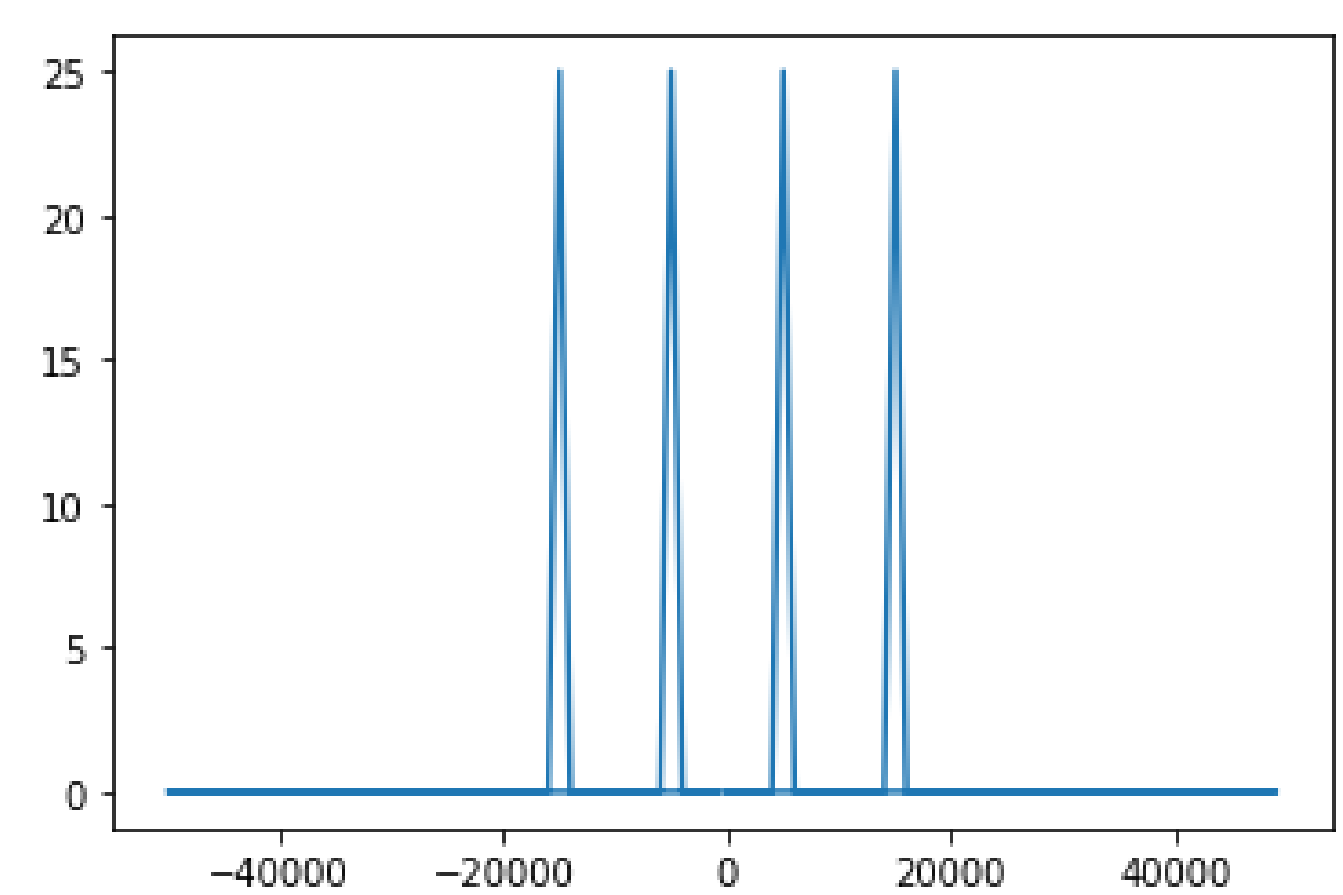

Fig. 4: DFT of $y(t)$