

# GATE Assignment 1

Adarsh Sai - AI20BTECH11001

Download all python codes from

<https://github.com/Adarsh541/EE3900/blob/main/Gate1/codes/Gate1.py>

Download latex-tikz codes from

<https://github.com/Adarsh541/EE3900/blob/main/Gate1/Gate1.tex>

## 1 PROBLEM(GATE 2021 EC Q4)

Consider a real-valued base-band signal  $x(t)$ , band limited to 10 kHz. The Nyquist rate for the signal  $y(t) = x(t) x\left(1 + \frac{t}{2}\right)$  is

- 1) 15 kHz
- 2) 30 kHz
- 3) 60 kHz
- 4) 20 kHz

## 2 SOLUTION

**Definition 2.1** (Dirac-delta impulse).

$$\delta(t) = \begin{cases} \infty, & t = 0 \\ 0, & \text{otherwise} \end{cases} \quad (2.0.1)$$

**Lemma 2.1** (Shifting property of  $\delta(t)$ ). If  $g(t)$  is a continuous and finite function at  $t = a$  then

$$\int_{-\infty}^{\infty} \delta(t - a) g(t) dt = g(a) \quad (2.0.2)$$

**Theorem 2.2.** Fourier transform of shifted impulse is the complex exponential.

$$G(f) = \mathcal{F}\{\delta(t - a)\} = e^{-i2\pi fa} \quad (2.0.3)$$

*Proof.*

$$G(f) = \int_{-\infty}^{\infty} \delta(t - a) e^{-i2\pi ft} dt \quad (2.0.4)$$

$$= e^{-i2\pi fa} \quad (2.0.5)$$

□

**Corollary 2.2.1.** Inverse Fourier Transform of the complex exponential must be the shifted impulse. So

$$\mathcal{F}^{-1}\{e^{-2\pi fa}\} = \int_{-\infty}^{\infty} e^{-2\pi fa} e^{i2\pi ft} df \quad (2.0.6)$$

$$= \int_{-\infty}^{\infty} e^{i2\pi f(t-a)} df \quad (2.0.7)$$

$$= \int_{-\infty}^{\infty} e^{-i2\pi f(t-a)} df \quad (2.0.8)$$

$$= \delta(t - a) \quad (2.0.9)$$

**Theorem 2.3.** The Fourier transform of  $g(t) = e^{i2\pi at}$  is given by

$$G(f) = \mathcal{F}\{e^{i2\pi at}\} = \delta(f - a) \quad (2.0.10)$$

*Proof.*

$$G(f) = \int_{-\infty}^{\infty} e^{i2\pi at} e^{-i2\pi ft} dt \quad (2.0.11)$$

$$= \int_{-\infty}^{\infty} e^{i2\pi t(a-f)} dt \quad (2.0.12)$$

$$= \delta(f - a) \quad (2.0.13)$$

□

**Lemma 2.4** (Linearity of Fourier Transform).

$$\mathcal{F}\{c_1 g(t) + c_2 h(t)\} = c_1 \mathcal{F}\{g(t)\} + c_2 \mathcal{F}\{h(t)\} \quad (2.0.14)$$

**Lemma 2.5.** Let  $x(t)$  be a signal, its Fourier Transform be of the form

$$G_x(f) = c_1 \delta(f - a_1 A) + c_2 \delta(f - a_2 A) + \dots \quad (2.0.15)$$

where  $c_i \in \mathbb{C}$  and  $a_i \in \mathbb{R}$ . Then the frequencies present in the signal are  $a_j A$  where  $a_j \in \mathbb{R}^+$

Let  $x(t) = \cos(2\pi At)$ , where  $A = 10\text{kHz}$ .

$$\cos(2\pi At) = \frac{e^{i2\pi At} + e^{-i2\pi At}}{2} \quad (2.0.16)$$

The Fourier transform of  $x(t)$

$$G_x(f) = \int_{-\infty}^{\infty} \frac{e^{i2\pi At} + e^{-i2\pi At}}{2} e^{-i2\pi ft} dt \quad (2.0.17)$$

$$= \frac{1}{2} \left[ \int_{-\infty}^{\infty} e^{-i2\pi t(f-A)} dt + \int_{-\infty}^{\infty} e^{-i2\pi t(A+F)} dt \right] \quad (2.0.18)$$

$$= \frac{1}{2} [\delta(f-A) + \delta(f+A)] \quad (2.0.19)$$

$\therefore$  All the energy of the sinusoidal wave is entirely localized at the frequencies given by  $|f| = A$ .

$$y(t) = \cos(2\pi At) \cos\left(2\pi A\left(1 + \frac{t}{2}\right)\right) \quad (2.0.20)$$

$$= \cos(2\pi A + 3\pi At) + \cos(2\pi A - \pi At) \quad (2.0.21)$$

$$= \cos(3\pi At) + \cos(\pi At) \quad (2.0.22)$$

Fourier Transform of  $y(t)$  is given by

$$G_y(f) = \frac{1}{2} \left[ \delta\left(f - \frac{3A}{2}\right) + \delta\left(f + \frac{3A}{2}\right) \right] + \frac{1}{2} \left[ \delta\left(f - \frac{A}{2}\right) + \delta\left(f + \frac{A}{2}\right) \right] \quad (2.0.23)$$

From lemma 2.5 we can conclude that the frequencies present in signal  $y(t)$  are  $\frac{A}{2}, \frac{3A}{2}$

$$x(t) = \cos(20k\pi t) \quad (2.0.24)$$

$$\text{bandwidth of } x(t) = 10kHz \quad (2.0.25)$$

$$x\left(1 + \frac{t}{2}\right) = \cos(20k\pi + 10k\pi t) \quad (2.0.26)$$

$$\text{bandwidth of } x\left(1 + \frac{t}{2}\right) = 5kHz \quad (2.0.27)$$

$$\text{from (2.0.22) } y(t) = \cos(30k\pi t) + \cos(10k\pi t) \quad (2.0.28)$$

$$\text{bandwidth of } y(t) = \frac{30}{2} kHz \quad (2.0.29)$$

$$= 15kHz \quad (2.0.30)$$

$$\text{Nyquist rate} = 2 \times \text{maximum frequency} \quad (2.0.31)$$

$$= 30kHz \quad (2.0.32)$$

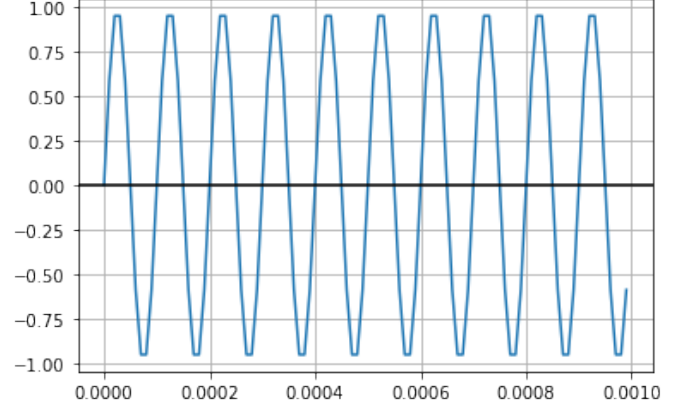


Fig. 4:  $x(t)$ : Sinusoidal signal with freq=10kHz

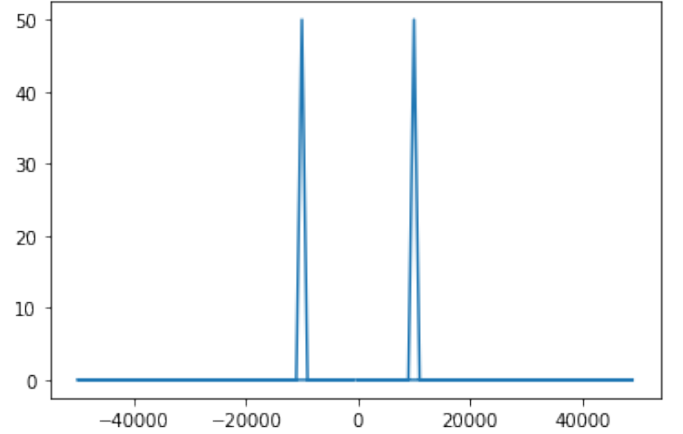


Fig. 4: DFT of  $x(t)$ . The energy of  $x(t)$  is localized at  $|f| = 10000$

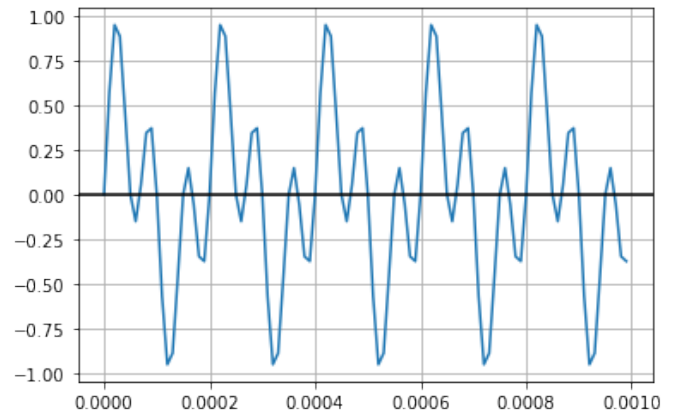


Fig. 4:  $y(t)$

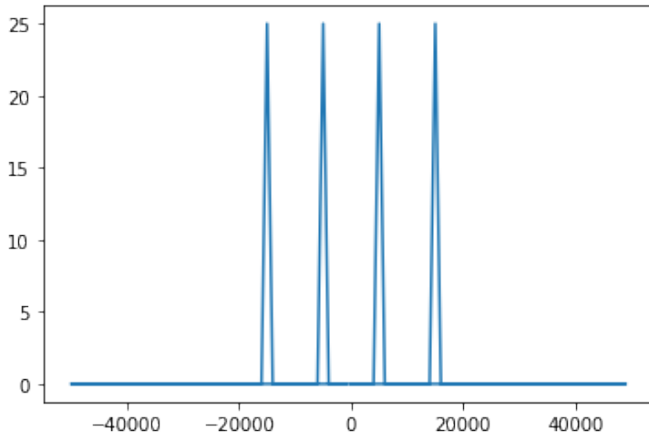


Fig. 4: DFT of  $y(t)$ . The energy of  $y(t)$  is localized at  $|f| = 15000, 5000$