


COMPUTATIONAL INFRASTRUCTURE FOR GEODYNAMICS (CIG)  
PRINCETON UNIVERSITY (USA)  
UNIVERSITY OF PAU, CNRS and INRIA (FRANCE)

# SPECFEM 2D

User Manual  
Version 6.2

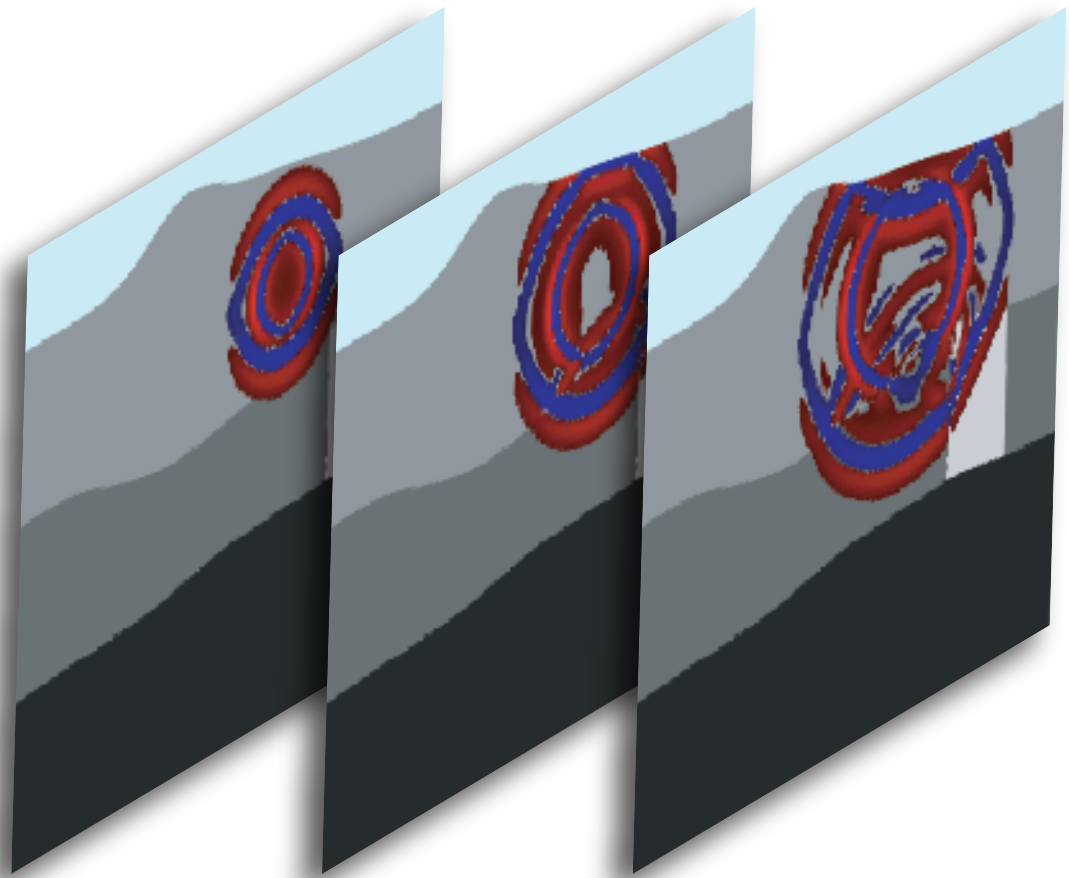

Paul Cristini  
Dimitri Komatitsch  
Jesús Labarta  
Nicolas Le Goff  
Pieyre Le Loher  
Roland Martin  
Christina Morency  
Daniel Peter  
Carl Tape  
Jeroen Tromp



# **SPECFEM2D**

## **User Manual**

© Princeton University (USA) and  
University of Pau / CNRS / INRIA (France)  
Version 6.2

May 20, 2012

## Authors

The SPECFEM2D package was first developed by Dimitri Komatitsch and Jean-Pierre Vilotte at IPG in Paris (France) from 1995 to 1997 and then by Dimitri Komatitsch at Harvard University (USA), Caltech (USA) and then University of Pau (France) from 1998 to 2005.

Since then it has been developed and maintained by a development team: in alphabetical order, Paul Cristini, Dimitri Komatitsch, Jesús Labarta, Nicolas Le Goff, Pieyre Le Loher, Qinya Liu, Roland Martin, Christina Morency, Daniel Peter, Carl Tape, Jeroen Tromp, Zhinan Xie... (add other developers here in the future, several are currently missing).

# Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
1.1	Citation . . . . .	4
1.2	Support . . . . .	4
<b>2</b>	<b>Getting Started</b>	<b>5</b>
2.1	Visualizing the subroutine calling tree of the source code . . . . .	6
<b>3</b>	<b>Mesh Generation</b>	<b>7</b>
3.1	How to use SPECfem2D . . . . .	7
3.2	How to use Gmsh to generate an external mesh . . . . .	9
3.3	Controlling the quality of an external mesh . . . . .	10
3.4	Controlling how the mesh samples the wave field . . . . .	10
<b>4</b>	<b>Running the Solver xspecfem2D</b>	<b>11</b>
4.1	How to run P-SV or SH (membrane) wave simulations . . . . .	13
4.2	How to use anisotropy . . . . .	14
4.3	How to use poroelasticity . . . . .	14
4.4	How to set plane waves as initial conditions . . . . .	16
<b>5</b>	<b>Adjoint Simulations</b>	<b>17</b>
5.1	How to obtain Finite Sensitivity Kernels . . . . .	17
<b>6</b>	<b>Oil and gas industry simulations</b>	<b>19</b>
<b>A</b>	<b>Troubleshooting</b>	<b>27</b>

# Chapter 1

## Introduction

SPECFEM2D facilitates 2D simulations of acoustic, (an)elastic, and poroelastic seismic wave propagation. With version 6.2, the 2D spectral-element solver accommodates regular and unstructured meshes, generated for example by Cubit (<http://cubit.sandia.gov>), Gmsh (<http://geuz.org/gmsh>) or GiD (<http://www.gid.cimne.upc.es>). Even mesh creation packages that generate triangles, for instance Delaunay-Voronoi triangulation codes, can be used because each triangle can then easily be decomposed into three quadrangles by linking the barycenter to the center of each edge; while this approach does not generate quadrangles of optimal quality, it can ease mesh creation in some situations and it has been shown that the spectral-element method can very accurately handle distorted mesh elements.

The solver has adjoint capabilities and can calculate finite-frequency sensitivity kernels for acoustic, (an)elastic, and poroelastic media. The package also considers 2D SH and P-SV wave propagation. Finally, the solver can run both in serial and in parallel. See SPECFEM2D (<http://www.geodynamics.org/cig/software/packages/seismo/specfem2d>) for the source code.

The SEM is a continuous Galerkin technique, which can easily be made discontinuous [Bernardi et al., 1994, Chaljub, 2000, Kopriva et al., 2002, Chaljub et al., 2003, Legay et al., 2005, Kopriva, 2006, Wilcox et al., 2010, Acosta Minolia and Kopriva, 2011]; it is then close to a particular case of the discontinuous Galerkin technique [Reed and Hill, 1973, Arnold, 1982, Falk and Richter, 1999, Hu et al., 1999, Cockburn et al., 2000, Giraldo et al., 2002, Rivière and Wheeler, 2003, Monk and Richter, 2005, Grote et al., 2006, Ainsworth et al., 2006, Bernacki et al., 2006, Dumbser and Käser, 2006, De Basabe et al., 2008, de la Puente et al., 2009, Wilcox et al., 2010, De Basabe and Sen, 2010, Étienne et al., 2010], with optimized efficiency because of its tensorized basis functions [Wilcox et al., 2010, Acosta Minolia and Kopriva, 2011]. In particular, it can accurately handle very distorted mesh elements [Oliveira and Seriani, 2011].

It has very good accuracy and convergence properties [Maday and Patera, 1989, Seriani and Priolo, 1994, Deville et al., 2002, Cohen, 2002, De Basabe and Sen, 2007, Seriani and Oliveira, 2008]. The spectral element approach admits spectral rates of convergence and allows exploiting *hp*-convergence schemes. It is also very well suited to parallel implementation on very large supercomputers [Komatitsch and Tromp, 2002, Komatitsch et al., 2003, Tsuboi et al., 2003, Komatitsch et al., 2008, Carrington et al., 2008, Komatitsch et al., 2010c] as well as on clusters of GPU accelerating graphics cards [Komatitsch et al., 2009, 2010a, Komatitsch, 2011]. Tensor products inside each element can be optimized to reach very high efficiency [Deville et al., 2002], and mesh point and element numbering can be optimized to reduce processor cache misses and improve cache reuse [Komatitsch et al., 2008]. The SEM can also handle triangular (in 2D) or tetrahedral (in 3D) elements [Wingate and Boyd, 1996, Taylor and Wingate, 2000, Komatitsch et al., 2001, Cohen, 2002, Mercier et al., 2006] as well as mixed meshes, although with increased cost and reduced accuracy in these elements, as in the discontinuous Galerkin method.

Note that in many geological models in the context of seismic wave propagation studies (except for instance for fault dynamic rupture studies, in which very high frequencies or supershear rupture need to be modeled near the fault, see e.g. Benjmama et al. [2007, 2009], de la Puente et al. [2009], Tago et al. [2010]) a continuous formulation is

sufficient because material property contrasts are not drastic and thus conforming mesh doubling bricks can efficiently handle mesh size variations [Komatitsch and Tromp, 2002, Komatitsch et al., 2004, Lee et al., 2008, 2009a,b].

For a detailed introduction to the SEM as applied to regional seismic wave propagation, please consult Komatitsch and Vilotte [1998], Komatitsch and Tromp [1999], Chaljub et al. [2007], Tromp et al. [2008] and in particular Komatitsch et al. [2004]. A detailed theoretical analysis of the dispersion and stability properties of the SEM is available in Cohen [2002], De Basabe and Sen [2007] and Seriani and Oliveira [2007].

The SEM was originally developed in computational fluid dynamics [Patera, 1984, Maday and Patera, 1989] and has been successfully adapted to address problems in seismic wave propagation. Early seismic wave propagation applications of the SEM, utilizing Legendre basis functions and a perfectly diagonal mass matrix, include Cohen et al. [1993], Komatitsch [1997], Faccioli et al. [1997], Casadei and Gabellini [1997], Komatitsch and Vilotte [1998] and Komatitsch and Tromp [1999], whereas applications involving Chebyshev basis functions and a nondiagonal mass matrix include Seriani and Priolo [1994], Priolo et al. [1994] and Seriani et al. [1995].

All SPECFEM2D software is written in Fortran90 with full portability in mind, and conforms strictly to the Fortran95 standard. It uses no obsolete or obsolescent features of Fortran77. The package uses parallel programming based upon the Message Passing Interface (MPI) [Gropp et al., 1994, Pacheco, 1997].

The next release of the code will include support for GPU graphics card acceleration [Komatitsch et al., 2009, 2010a, Michéa and Komatitsch, 2010, Komatitsch, 2011] as well as Convolutional or Auxiliary Differential Equation Perfectly Matched absorbing Layers (C-PML or ADE-PML) [Komatitsch and Martin, 2007, Martin et al., 2008b,c, Martin and Komatitsch, 2009, Martin et al., 2010].

## 1.1 Citation

If you use this code for your own research, please cite at least one article written by the developers of the package, for instance:

Tromp et al. [2008] or Vai et al. [1999], Lee et al. [2009a, 2008, 2009b], Komatitsch et al. [2010a,b, 2009], Liu et al. [2004], Chaljub et al. [2007], Komatitsch and Vilotte [1998], Komatitsch and Tromp [1999], Komatitsch et al. [2004], Morency and Tromp [2008] and/or other articles from (<http://web.univ-pau.fr/~dkomatil/publications.html>)

If you use the kernel capabilities of the code, please cite at least one article written by the developers of the package, for instance:

Tromp et al. [2008] or Liu and Tromp [2006], Morency et al. [2009]

If you use the SCOTCH / CUBIT non-structured capabilities, please also cite:  
Martin et al. [2008a]

The corresponding BibTeX entries may be found in file `doc/USER_MANUAL/bibliography.bib`.

## 1.2 Support

This material is based upon work supported by the USA National Science Foundation under Grants No. EAR-0406751 and EAR-0711177, by the French CNRS, French INRIA Sud-Ouest MAGIQUE-3D, French ANR NUMASIS under Grant No. ANR-05-CIGC-002, and European FP6 Marie Curie International Reintegration Grant No. MIRC-CT-2005-017461. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the authors and do not necessarily reflect the views of the USA National Science Foundation, CNRS, INRIA, ANR or the European Marie Curie program.

## Chapter 2

# Getting Started

The SPECSEM2D software package comes in a gzipped tar ball. In the directory in which you want to install the package, type

```
tar -zxvf SPECSEM2D_6.2.0.tar.gz
```

The directory `SPECSEM2D-6.2.0/` will then contain the source code. In the following, we will refer to this directory as the root directory `SPECSEM2D/`.

To configure the software for your system, run the `configure` shell script. This script will attempt to guess the appropriate configuration values for your system. However, at a minimum, it is recommended that you explicitly specify the appropriate command names for your Fortran90 compiler:

```
./configure FC=ifort
```

If you want to run in parallel, i.e., using more than one processor core, then you would type

```
./configure FC=ifort MPIFC=mpif90 --with-mpi
```

Before running the `configure` script, you should probably edit file `flags.guess` to make sure that it contains the best compiler options for your system. Known issues or things to check are:

**Intel ifort compiler** See if you need to add `-assume byterecl` for your machine.

**IBM compiler** See if you need to add `-qsave` or `-qnosave` for your machine.

**Mac OS** You will probably need to install `XCODE`. In addition, the `clock_gettime` routine, which is used by the SCOTCH library that we use, does not exist in Mac OS. You will need to replace it with `clock_get_time` if you want to use SCOTCH.

The SPECSEM2D software package relies on the SCOTCH library to partition meshes. The SCOTCH library [Pellegrini and Roman, 1996] provides efficient static mapping, graph and mesh partitioning routines. SCOTCH is a free software package developed by François Pellegrini et al. from LaBRI and INRIA in Bordeaux, France, downloadable from the web page <https://gforge.inria.fr/projects/scotch/>. It is more recent than METIS, actively maintained and performs better in many cases. A recent version of its source code is provided in directory `scotch_5.1.11/`. In case no SCOTCH libraries can be found on the system, the configuration will bundle this version for compilation. The path to an existing SCOTCH installation can be set explicitly with the option `--with-scotch-dir`. Just as an example:

```
./configure FC=ifort MPIFC=mpif90 --with-mpi --with-scotch-dir=/opt/scotch
```

If you use the Intel ifort compiler to compile the code, we recommend that you use the Intel icc C compiler to compile Scotch, i.e., use:

```
./configure CC=icc FC=ifort MPIFC=mpif90
```

For further details about the installation of SCOTCH, go to subdirectory `scotch_5.1.11/` and read `INSTALL.txt`. You may want to download more recent versions of SCOTCH in the future from ([http://www.labri.fr/perso/pelegrin/scotch/scotch\\_en.html](http://www.labri.fr/perso/pelegrin/scotch/scotch_en.html)) . Support for the METIS graph partitioner has been discontinued because SCOTCH is more recent and performs better.

Edit the `Makefile` for more specific modifications. Especially, there are several options available :

-`DUSE_MPI` compiles with use of an MPI library.

-`DUSE_SCOTCH` enables use of graph partitioner SCOTCH.

After these steps, go back to the main directory of SPECFEM2D/ and type

```
make
```

to create all executables which will be placed into the folder `./bin/`.

If you run very large meshes on a relatively small number of processors, the memory size needed on each processor might become greater than 2 gigabytes, which is the upper limit for 32-bit addressing. In this case, on some compilers you may need to add `"-mcmodel=medium"` or `"-mcmodel=medium -shared-intel"` to the compiler options of `CFLAGS`, `FCFLAGS` and `LDFlags` otherwise the compiler will display an error message (for instance `"relocation truncated to fit: R_X86_64_PC32 against .bss"` or something similar); on an IBM machine with the `xlf` and `xlc` compilers, using `-q64` is usually sufficient.

## 2.1 Visualizing the subroutine calling tree of the source code

Packages such as `doxywizard` can be used to visualize the subroutine calling tree of the source code. `Doxywizard` is a GUI front-end for configuring and running `doxygen`.



## Chapter 3

# Mesh Generation

### 3.1 How to use SPECFEM2D



Figure 3.1: Schematic workflow for a SPECFEM2D simulation. The executable `xmeshfem2D` creates the GLL mesh points and assigns specific model parameters. The executable `xspecfem2D` solves the seismic wave propagation.

To run the mesher, please follow these steps:

- edit the input file `DATA/Par_file` which describes the simulation. It contains comments and should be almost self-explanatory, if you need more details we do not have a manual for the 2D version but you can find useful information in the manuals of the 3D versions, since many parameters and the general philosophy is similar. They are available at (<http://geodynamics.org/wsvn/cig/seismo/3D>) in subdirectories `USER_MANUAL/`. To create acoustic (fluid) regions, just set the S wave speed to zero and the code will see that these elements are fluid and switch to the right equations there automatically, and automatically match them with the solid regions
- if you are using an external mesher (like GID or CUBIT), you should set `read_external_mesh` to `.true.:`  
**mesh\_file** is the file describing the mesh : first line is the number of elements, then a list of 4 nodes (quadrilaterals only) forming each elements on each line.  
**nodes\_coords\_file** is the file containing the coordinates (x and z) of each nodes : number of nodes on the first line, then coordinates x and z on each line.

**materials\_file** is the number of the material for every elements : an integer ranging from 1 to nbmodels on each line.

**free\_surface\_file** is the file describing the edges forming the acoustic free surface : number of edges on the first line, then on each line number of the element, number of nodes forming the free surface (1 for a point, 2 for an edge), the nodes forming the free surface for this element. If you do not want free surface, just put 0 on the first line.

**absorbing\_surface\_file** is the file describing the edges forming the absorbing boundaries : the format is the same as the **free\_surface\_file**.

**tangential\_detection\_curve\_file** contains points describing the envelope, used for **source\_normal\_to\_surface** and **rec\_normal\_to\_surface**. Should be fine grained, and ordained clockwise. Number of points on the first line, then (x,z) coordinates on each line.

- if you have compiled with MPI, you must specify the number of processes.

Then type

```
./bin/xmeshfem2D
```

to create the mesh (which will be stored in directory **OUTPUT\_FILES/**). **xmeshfem2D** is serial; it will output several files called **Database??????**, one for each process.

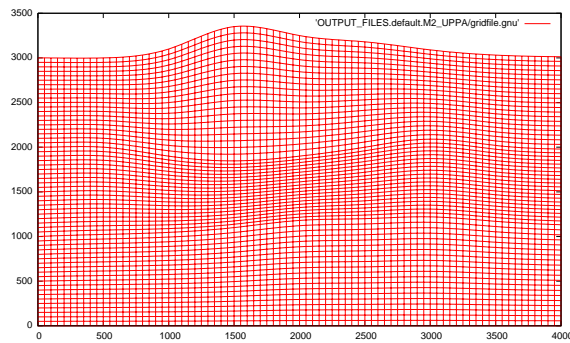


Figure 3.2: Example of a grid file generated by **xmeshfem2D** and visualized with **gnuplot** (within **gnuplot**, type `'plot "OUTPUT_FILES/gridfile.gnu" w l'`).

Regarding mesh point numbering in the files created by the mesher, we use the classical convention of 4-node and 9-node finite elements:

```

4 . . . . 7 . . . . 3
.           eta      .
.           |        .
8           9--xi    6
.           .        .
.           .        .
.           .        .
1 . . . . 5 . . . . 2
```

the local coordinate system being  $\xi$  and  $\eta$  (**xi** and **eta**). Note that this convention is used to describe the geometry only. In the solver the wave field is then described based on high-order Lagrange interpolants at Gauss-Lobatto-Legendre points, as is classical in spectral-element methods.

## 3.2 How to use Gmsh to generate an external mesh

Gmsh<sup>1</sup> is a 3D finite element grid generator which can be used for the generation of quadrangle and hexahedral meshes. It is therefore a good candidate for generating meshes which can be processed by SPECFEM2D. Only two modules of Gmsh are of interest for the SPECFEM2D users : the geometry and the mesh modules. An example is given in directory `EXAMPLES/Gmsh_example` which illustrates the generation of an external mesh using these two modules. The model, which is considered, consists of a homogeneous square containing two circles filled with a different material.

The geometry is generated by loading file `SqrCirc.geo` into Gmsh. The end of the `.geo` file contains several lines which are required in order to define the sides of the box and the media. This is done using the following conventions :

```
Physical Line("Top") = {1}; line corresponding to the top of the box
Physical Line("Left") = {2}; line corresponding to the left side of the box
Physical Line("Bottom") = {3}; line corresponding to the bottom of the box
Physical Line("Right") = {4}; line corresponding to the right side of the box
Physical Surface("M1") = {10}; surrounding medium
Physical Surface("M2") = {11, 12}; interior of the two circles
```

For instance, if you want to fill the two circles with two different materials, you will have to write :

```
Physical Surface("M1") = {10}; surrounding medium
Physical Surface("M2") = {11}; interior of the big circle
Physical Surface("M3") = {12}; interior of the small circle
```

and, consequently, you will have to define a new medium numbered 3 in the `Par_file`.

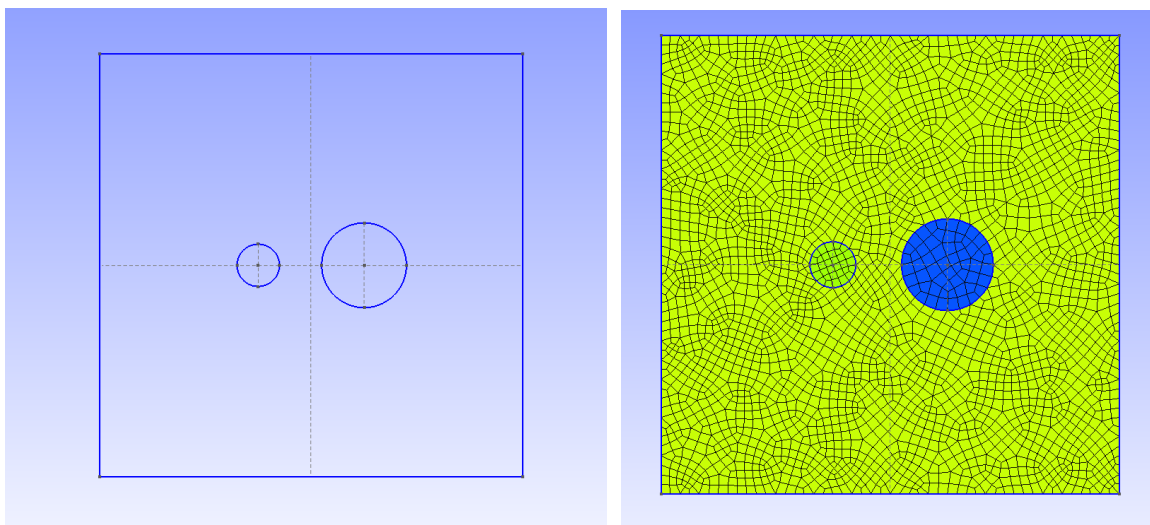


Figure 3.3: Geometry and mesh of the two circle model generated with Gmsh

Then, a 2D mesh can be created and saved after selecting the appropriate options in Gmsh : All quads in Subdivision algorithm and 1 or 2 in Element order whether you want a 4 or 9 node mesh. This operation will generate a `SqrCirc.msh` file which must be processed to get all the files required by SPECFEM2D when using an external mesh (see previous section). This is done by running a python script called `LibGmsh2Specfem.py`, located in directory `UTILS/Gmsh`:

```
python LibGmsh2Specfem.py SqrCirc -t A -b A -r A -l A
```

Where the options `-t`, `-b`, `-r` and `-l` represent the different sides of the model (top, bottom, right and left) and can take the values `A` or `F` if the corresponding side is respectively absorbing or free. All boundaries are absorbing by default. The connections of the generated filenames to the filenames indicated in the previous section are :

<sup>1</sup>freely available at the following address : <http://www.geuz.org/gmsh/>

- Mesh\_SqrCirc is the **mesh\_file**
- Material\_SqrCirc is the **material\_file**
- Nodes\_SqrCirc is the **nodes\_coords\_file**
- Surf\_abs\_SqrCirc is the **absorbing\_surface\_file**
- Surf\_free\_SqrCirc is the **free\_surface\_file**

In addition, four files like `free_surface_file` corresponding to the sides of the model are generated.

### 3.3 Controlling the quality of an external mesh

To examine the quality of the elements in your externally build mesh, type

```
./bin/xcheck_quality_external_mesh
```

(and answer "3" to the first question asked). This code will tell you which element in the whole mesh has the worst quality (maximum skewness, i.e. maximum deformation of the element angles) and it should be enough to modify this element with the external software package used for the meshing, and to repeat the operation until the maximum skewness of the whole mesh is less or equal to about 0.75 (above is dangerous: from 0.75 to 0.80 could still work, but if there is a single element above 0.80 the mesh should be improved).

The code also shows a histogram of 20 classes of skewness which tells how many element are above the skewness = 0.75, and to which percentage of the total this amounts. To see this histogram, you could type:

```
gnuplot plot_mesh_quality_histogram.gnu
```

This tool is useful to estimate the mesh quality and to see it evolve along the successive corrections.

### 3.4 Controlling how the mesh samples the wave field

To examine (using Gnuplot) how the mesh samples the wave field, type

```
gnuplot plot_points_per_wavelength_histogram.gnu
```

and also check the following histogram printed on the screen or in the output file:

```

histogram of min number of points per S wavelength (P wavelength in
acoustic regions)
(too small: poor resolution of calculations - too big = wasting
memory and CPU time)
(threshold value is around 4.5 points per wavelength in elastic media
and 5.5 in acoustic media)
```

If you see that you have a significant number of mesh elements below the threshold indicated, then your simulations will not be accurate and you should create a denser mesh. Conversely, if you have a significant number of mesh elements above the threshold indicated, the mesh your created is too dense, it will be extremely accurate but the simulations will be slow; using a coarser mesh would be sufficient and would lead to faster simulations.

## Chapter 4

# Running the Solver xspecfem2D

To run the solver, type:

```
./bin/xspecfem2D
```

to run the main solver (use `mpirun` or equivalent if you compiled with parallel support). This will output the seismograms and snapshots of the wave fronts at different time steps in directory `OUTPUT_FILES/`. To visualize them, type `"gs OUTPUT_FILES/vect*.ps"` to see the Postscript files (in which the wave field is represented with small arrows, fluid/solid matching interfaces with a thick pink line, and absorbing edges with a thick green line) and `"gimp OUTPUT_FILES/image*.gif"` to see the color snapshot showing a pixelized image of one of the two components of the wave field (or pressure, depending on what you have selected for the output in `DATA/Par_file`).



Figure 4.1: Wavefield snapshots of the default example generated by `xspecfem2D` when parameter `output_color_image` is set to `.true.`. To create smaller (subsampled) images you can change parameter `factor_subsample_image = 1` to a higher value in file `setup/constants.h` and recompile the whole code using `make all`. This can be useful in the case of very large models.

Please consider these following points, when running the solver:

- the `DATA/Par_file` given with the code works fine, you can use it without any modification to test the code
- the seismograms `OUTPUT_FILES/*.sem*` are simple ASCII files with two columns: time in the first column and amplitude in the second, therefore they can be visualized with any tool you like, for instance `"gnuplot"`
- if you set flag `assign_external_model` to `.true.` in `DATA/Par_file`, the velocity and density model that is given at the end of `DATA/Par_file` is then ignored and overwritten by the external velocity and density model that you define yourself in `define_external_model.f90`
- when compiling with Intel ifort, use `"-assume byterecl"` option to create binary PNM images displaying the wave field

- we do not have PML absorbing conditions implemented in the fluid/solid code yet. We use (older and less efficient) paraxial Clayton-Engquist or Sommerfeld equations instead. This is only by lack of time, we have a developer who is currently implementing PML but the code is not fully ready. For now, since the paraxial conditions are less efficient, please use a larger model
- there are a few useful scripts and Fortran routines in directory UTILS/.
- if you find bugs (or if you have comments or suggestions) please send an email to cig-seismo AT geodynam-ics.org and the developers will try to fix them and send you an updated version
- you can find a Fortran code to compute the analytical solution for simple media that we use as a reference in benchmarks in many of our articles at (<http://www.spice-rtn.org/library/software/EX2DDIR>). That code is described in: Berg et al. [1994]

The SOURCE file located in the DATA/ directory should be edited in the following way:

**source\_surf** Set this flag to `.true.` to force the source to be located at the surface of the model, otherwise the source will be placed inside the medium

**xs** source location x in meters

**zs** source location z in meters

**source\_type** Set this value equal to 1 for elastic forces or acoustic pressure, set this to 2 for moment tensor sources.

**time\_function\_type** Choose a source-time function: set this value to 1 to use a Ricker, 2 the first derivative, 3 a Gaussian, 4 a Dirac or 5 a Heaviside source-time function.

**f0** Set this to the dominant frequency of the source. For point-source simulations using a Heaviside source-time function (`time_function_type "5"`), we recommend setting the source frequency parameter `f0` equal to a high value, which corresponds to simulating a step source-time function, i.e., a moment-rate function that is a delta function.

The `half_duration` of a source is obtained by  $1/f0$ . If the code will use a Gaussian source-time function (`time_function_type "3"`) (i.e., a signal with a shape similar to a ‘smoothed triangle’, as explained in Komatitsch and Tromp [2002] and shown in Fig 4.2), the source-time function uses a half-width of `half_duration`. We prefer to run the solver with `half_duration` set to zero and convolve the resulting synthetic seismograms in post-processing after the run, because this way it is easy to use a variety of source-time functions. Komatitsch and Tromp [2002] determined that the noise generated in the simulation by using a step source time function may be safely filtered out afterward based upon a convolution with the desired source time function and/or low-pass filtering. Use the serial code `convolve_source_timefunction.f90` and the script `convolve_source_timefunction.csh` for this purpose, or alternatively use signal-processing software packages such as SAC ([www.llnl.gov/sac](http://www.llnl.gov/sac)). Type

```
make convolve_source_timefunction
```

to compile the code and then set the parameter `hdur` in `convolve_source_timefunction.csh` to the desired half-duration.

**t0** For single sources, we recommend to set the time shift parameter `t0` equal to 0.0. The time shift parameter would simply apply an overall time shift to the synthetics (according to the time shift of the first source), something that can be done in the post-processing. This time shift parameter can be non-zero when using multiple sources.

**angleforce** Angle of the source (for a force only)

**Mxx,Mzz,Mxz** Moment tensor components (valid only for moment tensor sources, `source_type "2"`). Note that the units for the components of a moment tensor source are different in SPECFEM2D and in SPECFEM3D:

**SPECFEM3D:** in SPECFEM3D the moment tensor components are in `dyne*cm`



Figure 4.2: Comparison of the shape of a triangle and the Gaussian function actually used.

**SPECFEM2D:** in SPECFEM2D the moment tensor components are in  $N \cdot m$

**factor** amplification factor

Note, the zero time of the simulation corresponds to the center of the triangle/Gaussian, or the centroid time of the earthquake. The start time of the simulation is  $t = -1.2 * \text{half duration} + t_0$  (the factor 1.2 is to make sure the moment rate function is very close to zero when starting the simulation; Heaviside functions use a factor 2.0), the half duration is obtained by  $1/f_0$ . If you prefer, you can fix this start time by setting the parameter `USER_T0` in the `constants.h` file to a positive, non-zero value. The simulation in that case would start at a starting time equal to  $-\text{USER\_T0}$ .

### Caution

See file `todo_list_please_dont_remove.txt` for a list of known bugs, problems, or missing options.

### Coupled Simulations

The code supports acoustic/elastic, acoustic/poroelastic, elastic/poroelastic, and acoustic,elastic/poroelastic simulations.

Elastic/poroelastic coupling supports anisotropy, but not attenuation for the elastic material.

## 4.1 How to run P-SV or SH (membrane) wave simulations

For elastic materials, you have these additional options:

**P-SV:** To run a P-SV waves calculation propagating in the x-z plane, set `p_sv = .true.` in the `Par_file`.

**SH:** To run a SH (membrane) waves calculation traveling in the x-z plane with a y-component of motion, set `p_sv = .false.`

This feature is only implemented for elastic materials and sensitivity kernels can be calculated (see Tape et al. [2007] for details on membrane surface waves).

A useful Python script called `SEM_save_dir.py`, written by Paul Cristini from Laboratoire de Mécanique et d'Acoustique, CNRS, Marseille, France, is provided. It allows one to automatically save all the parameters and results of a given simulation.

## 4.2 How to use anisotropy

Following Carcione et al. [1988], we use the classical reduced Voigt notation [Helbig, 1994, Carcione, 2007]:

The constitutive relation of a heterogeneous anisotropic and elastic solid is expressed by the generalized Hooke's law, which can be written as

$$\sigma_{ij} = c_{ijkl} \varepsilon_{kl}, \quad i, j, k, l = 1, \dots, 3,$$

where  $t$  is the time,  $\mathbf{x}$  is the position vector,  $\sigma_{ij}(\mathbf{x}, t)$  and  $\varepsilon_{ij}(\mathbf{x}, t)$  are the Cartesian components of the stress and strain tensors respectively, and  $c_{ijkl}(\mathbf{x})$  are the components of a fourth-order tensor called the elasticities of the medium. The Einstein convention for repeated indices is used.

To express the stress-strain relation for a transversely isotropic medium we introduce a shortened matrix notation commonly used in the literature. With this convention, pairs of subscripts concerning the elasticities are replaced by a single number according to the following correspondence:

$$\begin{aligned} (11) \rightarrow 1, \quad (22) \rightarrow 2, \quad (33) \rightarrow 3, \quad (23) = (32) \rightarrow 4, \\ (31) = (13) \rightarrow 5, \quad (12) = (21) \rightarrow 6. \end{aligned}$$

and the following convention for the stress-strain relationship in the 2D P-SV case:

In this work we consider wave propagation in a two-dimensional medium. Denoting  $x$  and  $z$  as the horizontal and vertical coordinates respectively, the stress-strain relation can be written as

$$\begin{bmatrix} \sigma_{xx} \\ \sigma_{zz} \\ \sigma_{xz} \end{bmatrix} = \begin{bmatrix} c_{11} & c_{13} & 0 \\ c_{13} & c_{33} & 0 \\ 0 & 0 & c_{44} \end{bmatrix} \begin{bmatrix} \varepsilon_{xx} \\ \varepsilon_{zz} \\ 2\varepsilon_{xz} \end{bmatrix}$$

Thus we have:

```
! implement anisotropy in 2D
sigma_xx = c11*dux_dx + c15*(duz_dx + dux_dz) + c13*duz_dz
sigma_zz = c13*dux_dx + c35*(duz_dx + dux_dz) + c33*duz_dz
sigma_xz = c15*dux_dx + c55*(duz_dx + dux_dz) + c35*duz_dz
```

where the notations are for instance  $\text{duz\_dx} = d(Uz) / dx$ .

## 4.3 How to use poroelasticity

Check the following new inputs in `Par_file`:

In section **"# geometry of model and mesh description"**:

`TURN_VISCATTENUATION_ON`, `Q0`, and `FREQ0` deal with viscous damping in a poroelastic medium. `Q0` is the quality factor set at the central frequency `FREQ0`. For more details see Morency and Tromp [2008].

In section **"# time step parameters"**:

`SIMULATION_TYPE` defines the type of simulations

- (1) forward simulation
- (2) adjoint method and kernels calculation

In section **"# source parameters"**:

The code now support multi sources. `NSOURCE` is the number of source. Parameters of the sources are displayed in the file `SOURCE`, which must be in the directory `DATA/`. The components of a moment tensor source must be given in N.m, not in dyne.cm as in the `DATA/CMTSOLUTION` source file of the 3D version of the code.

In section **"# receiver line parameters for seismograms"**:

`SAVE_FORWARD` determines if the last frame of a forward simulation is saved (`.true.`) or not (`.false.`)



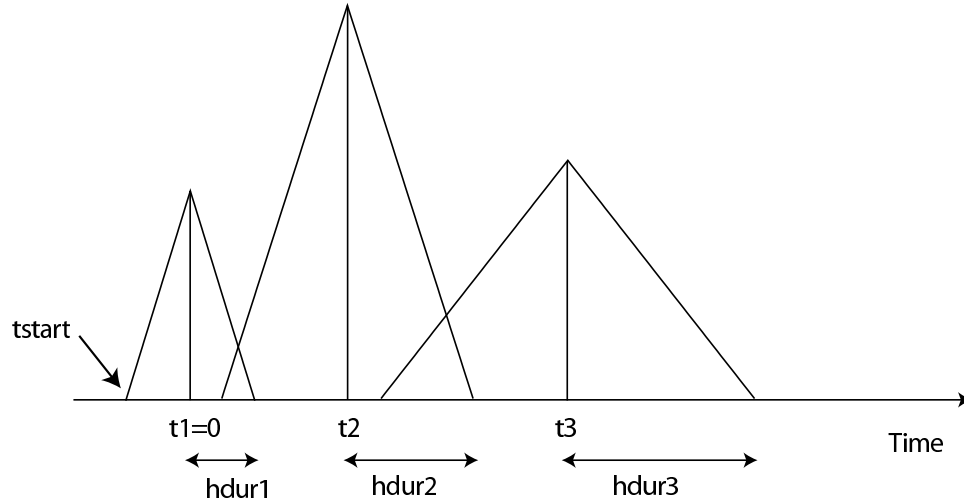


Figure 4.3: Example of timing for three sources. The center of the first source triangle is defined to be time zero. Note that this is NOT in general the hypocentral time, or the start time of the source (marked as *tstart*). The time shift parameter  $t_0$  in the *SOURCE* file would be  $t_1(=0)$ ,  $t_2$ ,  $t_3$  in this case, and the half-duration parameter, resp.  $f_0$ , would be  $hdur1=1/f_0_1$ ,  $hdur2=1/f_0_2$ ,  $hdur3=1/f_0_3$  for the sources 1, 2, 3 respectively.

In section "**# define models....**":

There are three possible types of models:

I: (model\_number 1 rho Vp Vs 0 0 QKappa Qmu 0 0 0 0 0) or

II: (model\_number 2 rho c11 c13 c15 c33 c35 c55 0 0 0 0 0) or

III: (model\_number 3 rhos rhof phi c kxx kxz kzz Ks Kf Kfr etaf mufr Qmu).

For isotropic elastic/acoustic material use I and set Vs to zero to make a given model acoustic, for anisotropic elastic use II, and for isotropic poroelastic material use III. The mesh can contain acoustic, elastic, and poroelastic models simultaneously.  $\rho_s$  = solid density

$\rho_f$  = fluid density

$\phi$  = porosity

$\tau$  = tortuosity

$\text{perm}_{xx}$  = xx component of permeability tensor

$\text{perm}_{xz}$  = xz, zx components of permeability tensor

$\text{perm}_{zz}$  = zz component of permeability tensor

$\kappa_s$  = solid bulk modulus

$\kappa_f$  = fluid bulk modulus

$\kappa_{fr}$  = frame bulk modulus

$\eta_f$  = fluid viscosity

$\mu_{fr}$  = frame shear modulus

$Q\mu$  = shear quality factor

Note: for the poroelastic case,  $\mu_s$  is irrelevant. For details on the poroelastic theory see Morency and Tromp [2008].

`get_poroelastic_velocities.f90` allows to compute  $cpI$ ,  $cpII$ , and  $cs$  function of the source dominant frequency. Notice that for this calculation we use  $\text{perm}_{xx}$  and the dominant frequency of the first source,  $f_0(1)$ . Caution if you use several sources with different frequencies and if you consider anisotropic permeability.

## 4.4 How to set plane waves as initial conditions

To simulate propagation of incoming plane waves in the simulation domain, initial conditions based on analytical formulae of plane waves in homogenous model need to be set. No additional body or boundary forces are required. To set up this scenario:

Par\_file:

- switch on `initialfield = .true.`
- at this point setting `add_bielak_condition` does not seem to help with absorbing boundaries, therefore, it should be turned off.

SOURCE:

- `zs` has to be the same as the height of the simulation domain defined in `interfacesfile`.
- `xs` is the x-coordinate of the intersection of the initial plane wave front with the free surface.
- `source_type = 1` for a plane P wave, 2 for a plane SV wave, 3 for a Rayleigh wave.
- `angleforce` can be negative to indicate a plane wave incident from the right (instead of the left)

## Chapter 5

# Adjoint Simulations

### 5.1 How to obtain Finite Sensitivity Kernels

1. Run a forward simulation:

```
=> SIMULATION_TYPE = 1
=> SAVE_FORWARD = .true.
=> seismotype = 1 (we need to save the displacement fields to later on derive the adjoint source. Note: if
the user forgets it, the program corrects it when reading the proper SIMULATION_TYPE and SAVE_FORWARD
combination and a warning message appears in the output file)
```

Important output files (for example, for the elastic case, P-SV waves):

```
absorb_elastic_bottom*****.bin
absorb_elastic_left*****.bin
absorb_elastic_right*****.bin
absorb_elastic_top*****.bin
lastframe_elastic*****.bin
S****.AA.BXX.semd
S****.AA.BXZ.semd
```

2. Define the adjoint source:

Use `adj_seismogram.f90`  
Edit to update `NSTEP`, `nrec`, `t0`, `deltat`, and the position of the cut to pick any given phase if needed (`tstart`, `tend`), add the right number of stations, and put one component of the source to zero if needed. The output files of `adj_seismogram.f90` are `S****.AA.BXX.adj` and `S****.AA.BXZ.adj`, for P-SV waves (and `S****.AA.BXY.adj`, for SH (membrane) waves). Note that you will need these three files (`S****.AA.BXX.adj`, `S****.AA.BXY.adj` and `S****.AA.BXZ.adj`) to be present in the SEM/ directory together with the `absorb_elastic_****.bin` and `lastframe_elastic.bin` files to be read when running the adjoint simulation.

3. Run the adjoint simulation:

Make sure that the adjoint source files absorbing boundaries and last frame files are in the `OUTPUT_FILES/` directory.  

```
=> SIMULATION_TYPE = 2
=> SAVE_FORWARD = .false.
```

Output files (for example for the elastic case):

```
snapshot_rho_kappa_mu*****
snapshot_rho_alpha_beta*****
```

which are the primary moduli kernels and the phase velocities kernels respectively, in ascii format and at the local level, that is as "kernels(i,j,spec)".

### Remarks about adjoint runs and solving inverse problems

SPECFEM2D can produce the gradient of the misfit function for a tomographic inversion, but options for using the gradient within an iterative inversion are left to the user (e.g., conjugate-gradient, steepest descent). The plan is to include some examples in the future.

The algorithm is simple:

1. calculate the forward wave field  $s(x, t)$
2. calculate the adjoint wave field  $s^\dagger(x, t)$
3. calculate their interaction  $s(x, t) \cdot s^\dagger(x, T - t)$  (these symbolic, temporal and spatial derivatives should be included)
4. integrate the interactions, which is summation in the code.

That is all. Step 3 has some tricks in implementation, but which can be skipped by regular users.

If you look into SPECFEM2D, besides "rho\_ac\_kl" and "rho\_el\_kl", there are more variables such as "kappa\_ac\_kl" and "rho\_el\_kl" etc. "rho" denotes density  $\rho$  ("kappa" for bulk modulus  $\kappa$  etc.), "ac" denotes acoustic ("el" for elastic), "kl" means kernel (and you may find "k" as well, which is the interaction at each time step, i.e., before doing time integration).

### Caution

Please note that

- at the moment, adjoint simulations do not support anisotropy, attenuation, and viscous damping.
- you will need `S****.AA.BXX.adj`, `S****.AA.BXY.adj` and `S****.AA.BXZ.adj` to be present in directory `SEM/` even if you are just running an acoustic or poroelastic adjoint simulation.  
`S****.AA.BXX.adj` is the only relevant component for an acoustic case.  
`S****.AA.BXX.adj` and `S****.AA.BXZ.adj` are the only relevant components for a poroelastic case.

## Chapter 6

# Oil and gas industry simulations

The SPECFEM2D package provides compatibilities in industrial (oil and gas industry) types of simulations. These features include importing Seismic Unix (SU) format wavespeed models into SPECFEM2D, outputting seismograms also in SU format with a few key parameters defined in the trace headers and reading adjoint sources in SU format etc. There is one example given in EXAMPLES/INDUSTRIAL\_FORMAT, which you can follow.

We also changed the relationship between adjoint potential and adjoint displacement in fluid region (the relationship between forward potential and forward displacement remains the same as previously defined). The new definition is critical when there are adjoint sources (in other words, receivers) in the acoustic domain, and is the direct consequence of the optimization problem.

$$\begin{aligned} \mathbf{s} &\equiv \frac{1}{\rho} \nabla \phi \\ p &\equiv -\kappa(\nabla \cdot \mathbf{s}) = -\partial_t^2 \phi \\ \partial_t^2 \mathbf{s}^\dagger &\equiv -\frac{1}{\rho} \nabla \phi^\dagger \\ p^\dagger &\equiv -\kappa(\nabla \cdot \mathbf{s}^\dagger) = \phi^\dagger \end{aligned}$$

# Acknowledgments

The Gauss-Lobatto-Legendre subroutines in `gll_library.f90` are based in part on software libraries from the Massachusetts Institute of Technology, Department of Mechanical Engineering (Cambridge, Massachusetts, USA). The non-structured global numbering software was provided by Paul F. Fischer (Brown University, Providence, Rhode Island, USA, now at Argonne National Laboratory, USA).

Please e-mail your feedback, questions, comments, and suggestions to Jeroen Tromp (`jtromp-AT-princeton.edu`) or to the CIG Computational Seismology Mailing List (`cig-seismo@geodynamics.org`).

# Copyright

Main authors: Dimitri Komatitsch and Jeroen Tromp

Princeton University, USA, and University of Pau / CNRS / INRIA, France

© Princeton University and University of Pau / CNRS / INRIA, January 2011

# Bibliography

- C. A. Acosta Minolia and D. A. Kopriva. Discontinuous Galerkin spectral element approximations on moving meshes. *J. Comput. Phys.*, 230(5):1876–1902, 2011. doi: 10.1016/j.jcp.2010.11.038.
- M. Ainsworth, P. Monk, and W. Muniz. Dispersive and dissipative properties of discontinuous Galerkin finite element methods for the second-order wave equation. *Journal of Scientific Computing*, 27(1):5–40, 2006. doi: 10.1007/s10915-005-9044-x.
- D. N. Arnold. An interior penalty finite element method with discontinuous elements. *SIAM Journal on Numerical Analysis*, 19(4):742–760, 1982. doi: 10.1137/0719052.
- M. Benjemaa, N. Glinsky-Olivier, V. M. Cruz-Atienza, J. Virieux, and S. Piperno. Dynamic non-planar crack rupture by a finite volume method. *Geophys. J. Int.*, 171(1):271–285, 2007. doi: 10.1111/j.1365-246X.2006.03500.x.
- M. Benjemaa, N. Glinsky-Olivier, V. M. Cruz-Atienza, and J. Virieux. 3D dynamic rupture simulation by a finite volume method. *Geophys. J. Int.*, 178(1):541–560, 2009. doi: 10.1111/j.1365-246X.2009.04088.x.
- P. Berg, F. If, P. Nielsen, and O. Skovegaard. Analytic reference solutions. In K. Helbig, editor, *Modeling the Earth for oil exploration, Final report of the CEC's GEOSCIENCE I Program 1990-1993*, pages 421–427. Pergamon Press, Oxford, United Kingdom, 1994.
- M. Bernacki, S. Lanteri, and S. Piperno. Time-domain parallel simulation of heterogeneous wave propagation on unstructured grids using explicit, nondiffusive, discontinuous Galerkin methods. *J. Comput. Acoust.*, 14(1):57–81, 2006.
- C. Bernardi, Y. Maday, and A. T. Patera. A new nonconforming approach to domain decomposition: the Mortar element method. In H. Brezis and J. L. Lions, editors, *Nonlinear partial differential equations and their applications*, Séminaires du Collège de France, pages 13–51, Paris, 1994. Pitman.
- J. M. Carcione. *Wave fields in real media: Theory and numerical simulation of wave propagation in anisotropic, anelastic, porous and electromagnetic media*. Elsevier Science, Amsterdam, The Netherlands, second edition, 2007.
- J. M. Carcione, D. Kosloff, and R. Kosloff. Wave propagation simulation in an elastic anisotropic (transversely isotropic) solid. *Q. J. Mech. Appl. Math.*, 41(3):319–345, 1988.
- L. Carrington, D. Komatitsch, M. Laurenzano, M. Tikir, D. Michéa, N. Le Goff, A. Snively, and J. Tromp. High-frequency simulations of global seismic wave propagation using SPECSEM3D\_GLOBE on 62 thousand processor cores. *Proceedings of the ACM/IEEE Supercomputing SC'2008 conference*, pages 1–11, 2008. doi: 10.1145/1413370.1413432. Article #60, Gordon Bell Prize finalist article.
- F. Casadei and E. Gabellini. Implementation of a 3D coupled Spectral Element solver for wave propagation and soil-structure interaction simulations. Technical report, European Commission Joint Research Center Report EUR17730EN, Ispra, Italy, 1997.
- E. Chaljub. *Modélisation numérique de la propagation d'ondes sismiques en géométrie sphérique : application à la sismologie globale (Numerical modeling of the propagation of seismic waves in spherical geometry: application to global seismology)*. PhD thesis, Université Paris VII Denis Diderot, Paris, France, 2000.



- E. Chaljub, Y. Capdeville, and J. P. Vilotte. Solving elastodynamics in a fluid-solid heterogeneous sphere: a parallel spectral-element approximation on non-conforming grids. *J. Comput. Phys.*, 187(2):457–491, 2003.
- E. Chaljub, D. Komatitsch, J. P. Vilotte, Y. Capdeville, B. Valette, and G. Festa. Spectral element analysis in seismology. In R.-S. Wu and V. Maupin, editors, *Advances in wave propagation in heterogeneous media*, volume 48 of *Advances in Geophysics*, pages 365–419. Elsevier - Academic Press, London, UK, 2007.
- B. Cockburn, G. E. Karniadakis, and C.-W. Shu. *Discontinuous Galerkin Methods: Theory, Computation and Applications*. Springer, Heidelberg, Germany, 2000.
- G. Cohen. *Higher-order numerical methods for transient wave equations*. Springer-Verlag, Berlin, Germany, 2002.
- G. Cohen, P. Joly, and N. Tordjman. Construction and analysis of higher-order finite elements with mass lumping for the wave equation. In R. Kleinman, editor, *Proceedings of the second international conference on mathematical and numerical aspects of wave propagation*, pages 152–160. SIAM, Philadelphia, Pennsylvania, USA, 1993.
- J. D. De Basabe and M. K. Sen. Grid dispersion and stability criteria of some common finite-element methods for acoustic and elastic wave equations. *Geophysics*, 72(6):T81–T95, 2007. doi: 10.1190/1.2785046.
- J. D. De Basabe and M. K. Sen. Stability of the high-order finite elements for acoustic or elastic wave propagation with high-order time stepping. *Geophys. J. Int.*, 181(1):577–590, 2010. doi: 10.1111/j.1365-246X.2010.04536.x.
- J. D. De Basabe, M. K. Sen, and M. F. Wheeler. The interior penalty discontinuous Galerkin method for elastic wave propagation: grid dispersion. *Geophys. J. Int.*, 175(1):83–93, 2008. doi: 10.1111/j.1365-246X.2008.03915.x.
- J. de la Puente, J. P. Ampuero, and M. Käser. Dynamic rupture modeling on unstructured meshes using a discontinuous Galerkin method. *J. Geophys. Res.*, 114:B10302, 2009. doi: 10.1029/2008JB006271.
- M. O. Deville, P. F. Fischer, and E. H. Mund. *High-Order Methods for Incompressible Fluid Flow*. Cambridge University Press, Cambridge, United Kingdom, 2002.
- M. Dumbser and M. Käser. An arbitrary high-order discontinuous Galerkin method for elastic waves on unstructured meshes-II. The three-dimensional isotropic case. *Geophys. J. Int.*, 167(1):319–336, 2006. doi: 10.1111/j.1365-246X.2006.03120.x.
- V. Étienne, E. Chaljub, J. Virieux, and N. Glinsky. An hp-adaptive discontinuous Galerkin finite-element method for 3-D elastic wave modelling. *Geophys. J. Int.*, 183(2):941–962, 2010. doi: 10.1111/j.1365-246X.2010.04764.x.
- E. Faccioli, F. Maggio, R. Paolucci, and A. Quarteroni. 2D and 3D elastic wave propagation by a pseudo-spectral domain decomposition method. *J. Seismol.*, 1:237–251, 1997.
- R. S. Falk and G. R. Richter. Explicit finite element methods for symmetric hyperbolic equations. *SIAM Journal on Numerical Analysis*, 36(3):935–952, 1999. doi: 10.1137/S0036142997329463.
- F. X. Giraldo, J. S. Hesthaven, and T. Warburton. Nodal high-order discontinuous Galerkin methods for the spherical shallow water equations. *J. Comput. Phys.*, 181(2):499–525, 2002. doi: 10.1006/jcph.2002.7139.
- W. Gropp, E. Lusk, and A. Skjellum. *Using MPI, portable parallel programming with the Message-Passing Interface*. MIT Press, Cambridge, USA, 1994.
- M. J. Grote, A. Schneebeli, and D. Schötzau. Discontinuous Galerkin finite element method for the wave equation. *SIAM Journal on Numerical Analysis*, 44(6):2408–2431, 2006. doi: 10.1137/05063194X.
- K. Helbig. Foundations of anisotropy for exploration seismics. In K. Helbig and S. Treitel, editors, *Handbook of Geophysical exploration, section I: Seismic exploration*, volume 22. Pergamon, Oxford, England, 1994.
- F. Q. Hu, M. Y. Hussaini, and P. Rasetarinera. An analysis of the discontinuous Galerkin method for wave propagation problems. *J. Comput. Phys.*, 151(2):921–946, 1999. doi: 10.1006/jcph.1999.6227.
- D. Komatitsch. Fluid-solid coupling on a cluster of GPU graphics cards for seismic wave propagation. *C. R. Acad. Sci., Ser. IIb Mec.*, 339:125–135, 2011. doi: 10.1016/j.crme.2010.11.007.

- D. Komatitsch. *Méthodes spectrales et éléments spectraux pour l'équation de l'élastodynamique 2D et 3D en milieu hétérogène (Spectral and spectral-element methods for the 2D and 3D elastodynamics equations in heterogeneous media)*. PhD thesis, Institut de Physique du Globe, Paris, France, May 1997. 187 pages.
- D. Komatitsch and R. Martin. An unsplit convolutional Perfectly Matched Layer improved at grazing incidence for the seismic wave equation. *Geophysics*, 72(5):SM155–SM167, 2007. doi: 10.1190/1.2757586.
- D. Komatitsch and J. Tromp. Spectral-element simulations of global seismic wave propagation-I. Validation. *Geophys. J. Int.*, 149(2):390–412, 2002. doi: 10.1046/j.1365-246X.2002.01653.x.
- D. Komatitsch and J. Tromp. Introduction to the spectral-element method for 3-D seismic wave propagation. *Geophys. J. Int.*, 139(3):806–822, 1999. doi: 10.1046/j.1365-246x.1999.00967.x.
- D. Komatitsch and J. P. Vilotte. The spectral-element method: an efficient tool to simulate the seismic response of 2D and 3D geological structures. *Bull. Seismol. Soc. Am.*, 88(2):368–392, 1998.
- D. Komatitsch, R. Martin, J. Tromp, M. A. Taylor, and B. A. Wingate. Wave propagation in 2-D elastic media using a spectral element method with triangles and quadrangles. *J. Comput. Acoust.*, 9(2):703–718, 2001. doi: 10.1142/S0218396X01000796.
- D. Komatitsch, S. Tsuboi, C. Ji, and J. Tromp. A 14.6 billion degrees of freedom, 5 teraflops, 2.5 terabyte earthquake simulation on the Earth Simulator. *Proceedings of the ACM/IEEE Supercomputing SC'2003 conference*, pages 4–11, 2003. doi: 10.1109/SC.2003.10023. Gordon Bell Prize winner article.
- D. Komatitsch, Q. Liu, J. Tromp, P. Süß, C. Stidham, and J. H. Shaw. Simulations of ground motion in the Los Angeles basin based upon the spectral-element method. *Bull. Seismol. Soc. Am.*, 94(1):187–206, 2004. doi: 10.1785/0120030077.
- D. Komatitsch, J. Labarta, and D. Michéa. A simulation of seismic wave propagation at high resolution in the inner core of the Earth on 2166 processors of MareNostrum. *Lecture Notes in Computer Science*, 5336:364–377, 2008.
- D. Komatitsch, D. Michéa, and G. Erlebacher. Porting a high-order finite-element earthquake modeling application to NVIDIA graphics cards using CUDA. *Journal of Parallel and Distributed Computing*, 69(5):451–460, 2009. doi: 10.1016/j.jpdc.2009.01.006.
- D. Komatitsch, G. Erlebacher, D. Göddeke, and D. Michéa. High-order finite-element seismic wave propagation modeling with MPI on a large GPU cluster. *J. Comput. Phys.*, 229(20):7692–7714, 2010a. doi: 10.1016/j.jcp.2010.06.024.
- D. Komatitsch, D. Göddeke, G. Erlebacher, and D. Michéa. Modeling the propagation of elastic waves using spectral elements on a cluster of 192 GPUs. *Computer Science Research and Development*, 25(1-2):75–82, 2010b. doi: 10.1007/s00450-010-0109-1.
- D. Komatitsch, L. P. Vinnik, and S. Chevrot. SHdiff/SVdiff splitting in an isotropic Earth. *J. Geophys. Res.*, 115(B7): B07312, 2010c. doi: 10.1029/2009JB006795.
- D. A. Kopriva. Metric identities and the discontinuous spectral element method on curvilinear meshes. *Journal of Scientific Computing*, 26(3):301–327, 2006. doi: 10.1007/s10915-005-9070-8.
- D. A. Kopriva, S. L. Woodruff, and M. Y. Hussaini. Computation of electromagnetic scattering with a non-conforming discontinuous spectral element method. *Int. J. Numer. Meth. Eng.*, 53(1):105–122, 2002. doi: 10.1002/nme.394.
- S. J. Lee, H. W. Chen, Q. Liu, D. Komatitsch, B. S. Huang, and J. Tromp. Three-dimensional simulations of seismic wave propagation in the Taipei basin with realistic topography based upon the spectral-element method. *Bull. Seismol. Soc. Am.*, 98(1):253–264, 2008. doi: 10.1785/0120070033.
- S. J. Lee, Y. C. Chan, D. Komatitsch, B. S. Huang, and J. Tromp. Effects of realistic surface topography on seismic ground motion in the Yangminshan region of Taiwan based upon the spectral-element method and LiDAR DTM. *Bull. Seismol. Soc. Am.*, 99(2A):681–693, 2009a. doi: 10.1785/0120080264.

- S. J. Lee, D. Komatitsch, B. S. Huang, and J. Tromp. Effects of topography on seismic wave propagation: An example from northern Taiwan. *Bull. Seismol. Soc. Am.*, 99(1):314–325, 2009b. doi: 10.1785/0120080020.
- A. Legay, H. W. Wang, and T. Belytschko. Strong and weak arbitrary discontinuities in spectral finite elements. *Int. J. Numer. Meth. Eng.*, 64(8):991–1008, 2005. doi: 10.1002/nme.1388.
- Q. Liu and J. Tromp. Finite-frequency kernels based on adjoint methods. *Bull. Seismol. Soc. Am.*, 96(6):2383–2397, 2006. doi: 10.1785/0120060041.
- Q. Liu, J. Polet, D. Komatitsch, and J. Tromp. Spectral-element moment tensor inversions for earthquakes in Southern California. *Bull. Seismol. Soc. Am.*, 94(5):1748–1761, 2004. doi: 10.1785/012004038.
- Y. Maday and A. T. Patera. Spectral-element methods for the incompressible Navier-Stokes equations. In *State of the art survey in computational mechanics*, pages 71–143, 1989. A. K. Noor and J. T. Oden editors.
- R. Martin and D. Komatitsch. An unsplit convolutional perfectly matched layer technique improved at grazing incidence for the viscoelastic wave equation. *Geophys. J. Int.*, 179(1):333–344, 2009. doi: 10.1111/j.1365-246X.2009.04278.x.
- R. Martin, D. Komatitsch, C. Blitz, and N. Le Goff. Simulation of seismic wave propagation in an asteroid based upon an unstructured MPI spectral-element method: blocking and non-blocking communication strategies. *Lecture Notes in Computer Science*, 5336:350–363, 2008a.
- R. Martin, D. Komatitsch, and A. Ezziani. An unsplit convolutional perfectly matched layer improved at grazing incidence for seismic wave equation in poroelastic media. *Geophysics*, 73(4):T51–T61, 2008b. doi: 10.1190/1.2939484.
- R. Martin, D. Komatitsch, and S. D. Gedney. A variational formulation of a stabilized unsplit convolutional perfectly matched layer for the isotropic or anisotropic seismic wave equation. *Comput. Model. Eng. Sci.*, 37(3):274–304, 2008c.
- R. Martin, D. Komatitsch, S. D. Gedney, and E. Bruthiaux. A high-order time and space formulation of the unsplit perfectly matched layer for the seismic wave equation using Auxiliary Differential Equations (ADE-PML). *Comput. Model. Eng. Sci.*, 56(1):17–42, 2010.
- E. D. Mercerat, J. P. Vilotte, and F. J. Sánchez-Sesma. Triangular spectral-element simulation of two-dimensional elastic wave propagation using unstructured triangular grids. *Geophys. J. Int.*, 166(2):679–698, 2006.
- D. Michéa and D. Komatitsch. Accelerating a 3D finite-difference wave propagation code using GPU graphics cards. *Geophys. J. Int.*, 182(1):389–402, 2010. doi: 10.1111/j.1365-246X.2010.04616.x.
- P. Monk and G. R. Richter. A discontinuous Galerkin method for linear symmetric hyperbolic systems in inhomogeneous media. *Journal of Scientific Computing*, 22-23(1-3):443–477, 2005. doi: 10.1007/s10915-004-4132-5.
- C. Morency and J. Tromp. Spectral-element simulations of wave propagation in poroelastic media. *Geophys. J. Int.*, 175:301–345, 2008.
- C. Morency, Y. Luo, and J. Tromp. Finite-frequency kernels for wave propagation in porous media based upon adjoint methods. *Geophys. J. Int.*, 2009. doi: 10.1111/j.1365-246X.2009.04332.
- S. P. Oliveira and G. Seriani. Effect of element distortion on the numerical dispersion of spectral element methods. *Communications in Computational Physics*, 9(4):937–958, 2011.
- P. S. Pacheco. *Parallel programming with MPI*. Morgan Kaufmann Press, San Francisco, 1997.
- A. T. Patera. A spectral element method for fluid dynamics: laminar flow in a channel expansion. *J. Comput. Phys.*, 54:468–488, 1984.
- F. Pellegrini and J. Roman. SCOTCH: A software package for static mapping by dual recursive bipartitioning of process and architecture graphs. *Lecture Notes in Computer Science*, 1067:493–498, 1996.

- E. Priolo, J. M. Carcione, and G. Seriani. Numerical simulation of interface waves by high-order spectral modeling techniques. *J. Acoust. Soc. Am.*, 95(2):681–693, 1994.
- W. H. Reed and T. R. Hill. Triangular mesh methods for the neutron transport equation. Technical Report LA-UR-73-479, Los Alamos Scientific Laboratory, Los Alamos, USA, 1973.
- B. Rivière and M. F. Wheeler. Discontinuous finite element methods for acoustic and elastic wave problems. *Contemporary Mathematics*, 329:271–282, 2003.
- G. Seriani and S. P. Oliveira. Optimal blended spectral-element operators for acoustic wave modeling. *Geophysics*, 72(5):SM95–SM106, 2007. doi: 10.1190/1.2750715.
- G. Seriani and S. P. Oliveira. Dispersion analysis of spectral-element methods for elastic wave propagation. *Wave Motion*, 45:729–744, 2008. doi: 10.1016/j.wavemoti.2007.11.007.
- G. Seriani and E. Priolo. A spectral element method for acoustic wave simulation in heterogeneous media. *Finite Elements in Analysis and Design*, 16:337–348, 1994.
- G. Seriani, E. Priolo, and A. Pregarz. Modelling waves in anisotropic media by a spectral element method. In G. Cohen, editor, *Proceedings of the third international conference on mathematical and numerical aspects of wave propagation*, pages 289–298. SIAM, Philadelphia, PA, 1995.
- J. Tago, V. M. Cruz-Atienza, V. Étienne, J. Virieux, M. Benjemma, and F. J. Sánchez-Sesma. 3D dynamic rupture with anelastic wave propagation using an hp-adaptive Discontinuous Galerkin method. In *Abstract S51A-1915 presented at 2010 AGU Fall Meeting*, San Francisco, California, USA, December 2010. [www.agu.org/meetings/fm10/waisfm10.html](http://www.agu.org/meetings/fm10/waisfm10.html).
- C. Tape, Q. Liu, and J. Tromp. Finite-frequency tomography using adjoint methods - Methodology and examples using membrane surface waves. *Geophys. J. Int.*, 168(3):1105–1129, 2007. doi: 10.1111/j.1365-246X.2006.03191.x.
- M. A. Taylor and B. A. Wingate. A generalized diagonal mass matrix spectral element method for non-quadrilateral elements. *Appl. Num. Math.*, 33:259–265, 2000.
- J. Tromp, D. Komatitsch, and Q. Liu. Spectral-element and adjoint methods in seismology. *Communications in Computational Physics*, 3(1):1–32, 2008.
- S. Tsuboi, D. Komatitsch, C. Ji, and J. Tromp. Spectral-element simulations of the November 3, 2002, Denali, Alaska earthquake on the Earth Simulator. *Phys. Earth Planet. In.*, 139(3-4):305–313, 2003. doi: 10.1016/j.pepi.2003.09.012.
- R. Vai, J. M. Castillo-Covarrubias, F. J. Sánchez-Sesma, D. Komatitsch, and J. P. Vilotte. Elastic wave propagation in an irregularly layered medium. *Soil Dynamics and Earthquake Engineering*, 18(1):11–18, 1999. doi: 10.1016/S0267-7261(98)00027-X.
- L. C. Wilcox, G. Stadler, C. Burstedde, and O. Ghattas. A high-order discontinuous Galerkin method for wave propagation through coupled elastic-acoustic media. *J. Comput. Phys.*, 229(24):9373–9396, 2010. doi: 10.1016/j.jcp.2010.09.008.
- B. A. Wingate and J. P. Boyd. Spectral element methods on triangles for geophysical fluid dynamics problems. In A. V. Ilin and L. R. Scott, editors, *Proceedings of the Third International Conference on Spectral and High-order Methods*, pages 305–314, Houston, Texas, 1996. Houston J. Mathematics.

# Appendix A

## Troubleshooting

### FAQ

Regarding the structure of some of the database files :

**Question:** Can anyone tell me what the columns of the SPECfem2D boundary condition files in SPECfem2D/DATA/Mesh\_canyon are?

SPECfem2D/DATA/Mesh\_canyon/canyon\_absorbing\_surface\_file  
SPECfem2D/DATA/Mesh\_canyon/canyon\_free\_surface\_file

**Answer:** canyon\_absorbing\_surface\_file refers to parameters related to the absorbing conditions:  
The first number (180) is the number of absorbing elements (nelemabs in the code). Then the columns are:  
column 1 = the element number  
column 2 = the number of nodes of this element that form the absorbing surface  
column 3 = the first node  
column 4 = the second node

canyon\_free\_surface\_file refers to the elements of the free surface (relevant for enforcing free surface condition for acoustic media): The first number (160) is the number of elements of the free surface. Then the columns are (similar to the absorbing case):  
column 1 = the element number  
column 2 = the number of nodes of this element that form the absorbing surface  
column 3 = the first node  
column 4 = the second node

Concerning the free surface description file, nodes/edges pertaining to elastic elements are discarded when the file is read (if for whatever reason it was simpler to include all the nodes/edges on one side of a studied area and that there are among them some elements that are elastic elements, only the nodes/edges of acoustic elements are kept).

These files are opened and read in meshfem2D.F90 using subroutines read\_abs\_surface() and read\_acoustic\_surface(), which are in part\_unstruct.F90