Buck Converter DC 4.5-30V to 0.8-30V 12A Adjustable Step Down Car Power Supply Voltage

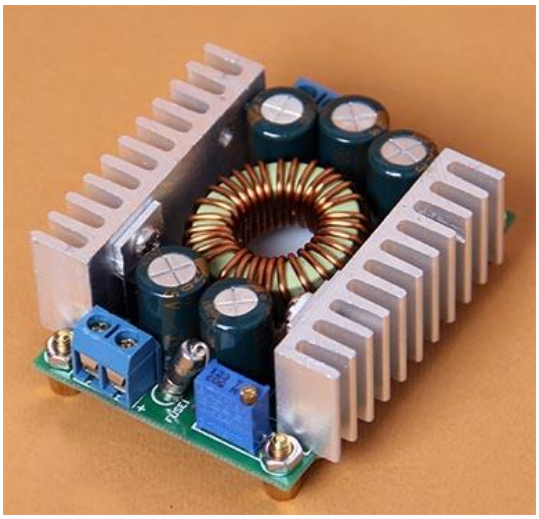

Specifications:

- Module properties: non-isolated step-down module (BUCK)
- Input Voltage: 4.5-30V
- Power: 100W
- Output Voltage: 0.8-30V
- Output Current: 0-12A, 100W (if enhance heat sink, can reach 200W)
- Operating temperature: -40°C to +85°C
- Working frequency: 300 KHz
- Conversion efficiency: up to 95%
- Short circuit protection: YES (the Limit current is 14A)
- Over-temperature protection: Yes (Over-temperature automatically shut down the output)
- Input reverse polarity protection: None (please install diode at input port)
- Wiring: Connection: V-IN input, V-OUT output
- Size: 61 x 44 mm

Testing for reference:

- Input 12V, Output 5V/10A, Efficiency 81%
- Input 12V, Output 5V/6A, Efficiency 86%
- Input 24V, Output 12V/8A, Efficiency 91%
- Input 24V, Output 19V/6A, Efficiency 94%

Application:

It is for voltage step down application. For example battery, power transformers, DIY adjustable voltage regulator. 24V car power laptop power supply. 12v to 3.3V, 12V to 5V, 24V to 5V, 24V to 12V etc.

Made in China