


Purchased 2022 on Amazon
Model discontinued as of 2026,
nearest model by Xtar is VP4C?

XTAR®



VC4 Plus
Type-C LCD Li-ion/Ni-MH
Battery Charger

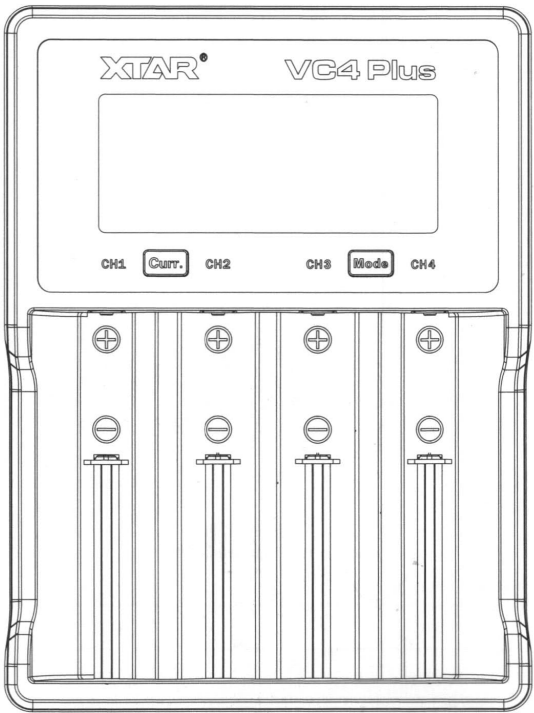

Danger Min = 2.80v

English-VC4 Plus
Type-C LCD Li-ion/Ni-MH Battery Charger

Introduction
Max 3A for single slot, capacity grading and storing available, with colorful LCD screen, more clearly shows charging information. And it has five optional charging currents (3A/2A/1A/0.5A/0.25A).

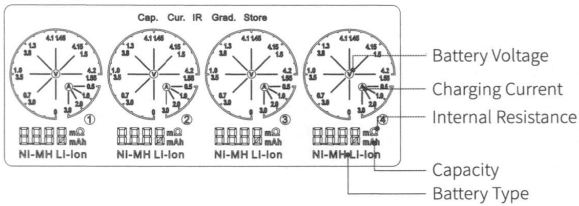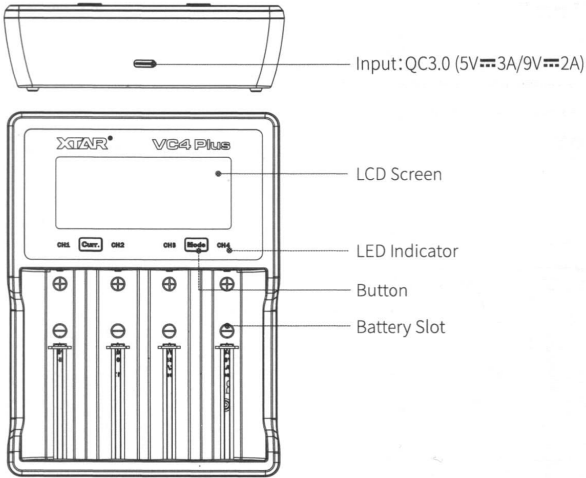

Apply to:
3.6V/3.7V Li-ion/IMR/INR/ICR
10440/14500/14650/16340/17335/17500/17670/18350/18490/18500/18650/18700/20700
21700/22650/25500/26650/32650
1.2V Ni-MH/Ni-CD
AAAA / AAA / AA / A / SC / C / D
Note: Can charge protected 21700 batteries.

Specification

Model	VC4 Plus
Input	QC3.0 (5V ≡3A/9V ≡2A)
Constant Current	3Ax1 / 2Ax2 / 1Ax4 / 0.5Ax4
Cut-Off Voltage	4.2±0.05V / 1.45±0.1V
Cut-Off Current	≤120mA
Operating Temperature	0-40°C

English
Deutsch
Français
Lingua Italiana
中文
Español
Ελληνικά
Türkçe
Русский
日本語
Polski

Shenzhen XTAR Electronics Co., Ltd

Address: 5th Floor, No.77 Xinhe Rd, Shangmugu,
Pinghu Area, Longgang District, Shenzhen,
Guangdong, China 518111
Tel/Fax: (+86)755-25507076
Email: info@xtar.cc
Website: www.xtar.cc



Facebook



WeChat

Operation

I. The Charge Function

Connect power supply and insert batteries, it will automatically start charging.

II. OV Activation Function

When batteries are inserted, they will be detected and activated automatically. Batteries that are unable to be activated will be identified as broken batteries, and the display will show "Err", the indicator will be green.

III. Button Functions

In charging mode

- Press "Mode" button to switch the display of Cur.(current), Cap.(capacity), and IR (internal resistance).
- Press "Curr." button to switch charging current, 3A/2A/1A/0.5A/0.25A. (It's a cycle switching, which means that the charging current will return to the initial one after a circle.)

Long press "Mode" button to switch modes among charging mode, grading mode("Grad.") and storing mode("Store")

IV. LCD Display

1. In charging mode

- If it shows "Cap.", after the battery is fully charged, the screen will show "FULL" and capacity recurrently.
 - If it shows "Cur.", after the battery is fully charged, the screen will show "FULL" and current recurrently.
 - If it shows "IR", after the battery is fully charged, the screen will show "FULL" and battery's internal resistance recurrently.
2. In grading mode, the charger will charge the battery, after fully-charged the battery, it will discharge. After finished discharging, the charger will fully charge the battery again.
- When charging, "CHG" will be shown on the screen.
 - When it finished grading, the screen will show "donE" and grading capacity recurrently.
3. In storing mode, it will charge the batteries with voltage lower than 3.7V/1.2V and discharge the batteries with voltage above 3.7V/1.2V.
- When charging, it shows "CHG" and battery voltage; when discharging, it shows "dCHG" and battery voltage.
 - When finished storing process, it shows "donE" and battery voltage recurrently.

V. Fast Charging Function

1. When you use QC3.0 adapter, insert one battery, if its internal resistance is low enough, it will be 3A charging at most. And 2Ax2 for two batteries, 1Ax3 or 1Ax4 for 3 or 4 batteries.
2. If the adapter doesn't support QC3.0 fast charging, the current will be 2Ax1 for single battery, 1Ax2 for two batteries, 0.5Ax3 or 0.5Ax4 for 3 or 4 batteries

VI. Turning off brightness

After 1 minute without any operation, the screen will enter the low brightness mode automatically. Long press "Curr." can also turn off the backlight.

Indicator Color Meaning

Green: standby/fully charged/grading or storing finished.

Red: self-examining/charging/activating.

No Light: power supply unconnected.

Warranty

Please take the product (with warranty number) and receipt to local dealer to get after-sales service.

- 15 days free replacement.
- 24 months free repair. If problems occur after 24 months, we will offer free repair service but charge for parts used. The dealer will inform you the repair fee before repair.
- Lifetime technical support will be offered.

Note:

1. Artificial damage is not included in the warranty.
2. If there is any question, please contact our after-sales email address: service@xtar.cc.

Anti-Fake

1. Scratch the anti-counterfeiting label on the package to get an 18-digit number.
2. Input the number into the query page on www.xtar.cc (Contact Us - Anti-fake).

Warning

1. When the power supply is insufficient, the charger will reduce the charging current correspondingly.
2. Do not charge unsuitable batteries with the charger.
3. Keep the charger away from humidity, water, and excessive dust.
4. Children should use the charger accompanied by an adult.
5. Do not disassemble or use the charger if it is damaged.
6. For more and updated info, please visit www.xtar.cc.

Youtube walkthru of similar model, VC4L <https://www.youtube.com/watch?v=5LbLmyezCCA>



