# Homework for Module 3 Part 1

Quiz, 9 questions

1 point

1.
(Difficulty: $\star$) Write out the phase of the complex numbers $a_1 = 1 - \mathrm{j}$ and $a_2 = -1 - \mathrm{j}$.

Express the phase in degrees and separate the two phases by a single white space. Each phase should be a number in the range $[-180, 180]$.

Enter answer here

---

1 point

2.
(Difficulty: $\star$) Let $W_N^k = e^{-\mathrm{j}\frac{2\pi}{N}k}$ and $N > 1$. Then $W_N^{N/2}$ is equal to...

- -1
- 1
- $-\mathrm{j}$
- $e^{-\mathrm{j}(2\pi/N)+N}$

---

1 point

3.
(Difficulty: $\star$) Which of the following signals (continuous- and discrete-time) are periodic signals?

Note that $t \in \mathbb{R}$ and $n \in \mathbb{Z}$.

- [ ] $x[n] = (-1)^n$.
- [ ] $x[n] = e^{-\mathrm{j}2\pi f_0 n}$, where $f_0 = \log(3)$.
- [ ] $x[n] = 1$.
- [ ] $x(t) = t - \text{floor}(t)$.
- [ ] $x(t) = (t + 2\pi)^2$.

---

2 points

4.
(Difficulty: $\star\star\star$) Choose the correct statements from the choices below.

- [ ] 

Consider the length-$N$ signal $x[n] = \cos(\frac{2\pi}{N}Ln + \phi)$, where $N$ is even and $L = N/2$. Then

$$X[k] = \begin{cases} \frac{N}{2}e^{j\phi} & \text{for } k = L \\ 0 & \text{otherwise} \end{cases}$$



- [ ] Consider the length-$N$ signal $x[n] = (-1)^n$ with $N$ even. Then $X[k] = 0$ for all $k$ except $k = N/2$
- [ ] If we apply the DFT twice to a signal $x[n]$, we obtain the signal itself scaled by $N$, i.e. $Nx[n]$.

1 point

5.

(Difficulty: ⋆) Consider the Fourier basis $\{\mathbf{w}^k\}_{k=0,...,N-1}$, where $\mathbf{w}^k[n] = e^{-j\frac{2\pi}{N}nk}$ for $0 \le n \le N-1$.

Select the correct statement below.

- The elements of the basis are orthonormal:

$$\langle \mathbf{w}^i, \mathbf{w}^j \rangle = \begin{cases} 1 & \text{for } i = j \\ 0 & \text{otherwise.} \end{cases}$$

- The orthogonality of the vectors depends on the length $N$ of the elements of the basis.
- The elements of the basis are orthogonal:

$$\langle \mathbf{w}^i, \mathbf{w}^j \rangle = \begin{cases} N & \text{for } i = j \\ 0 & \text{otherwise.} \end{cases}$$

1 point

6.

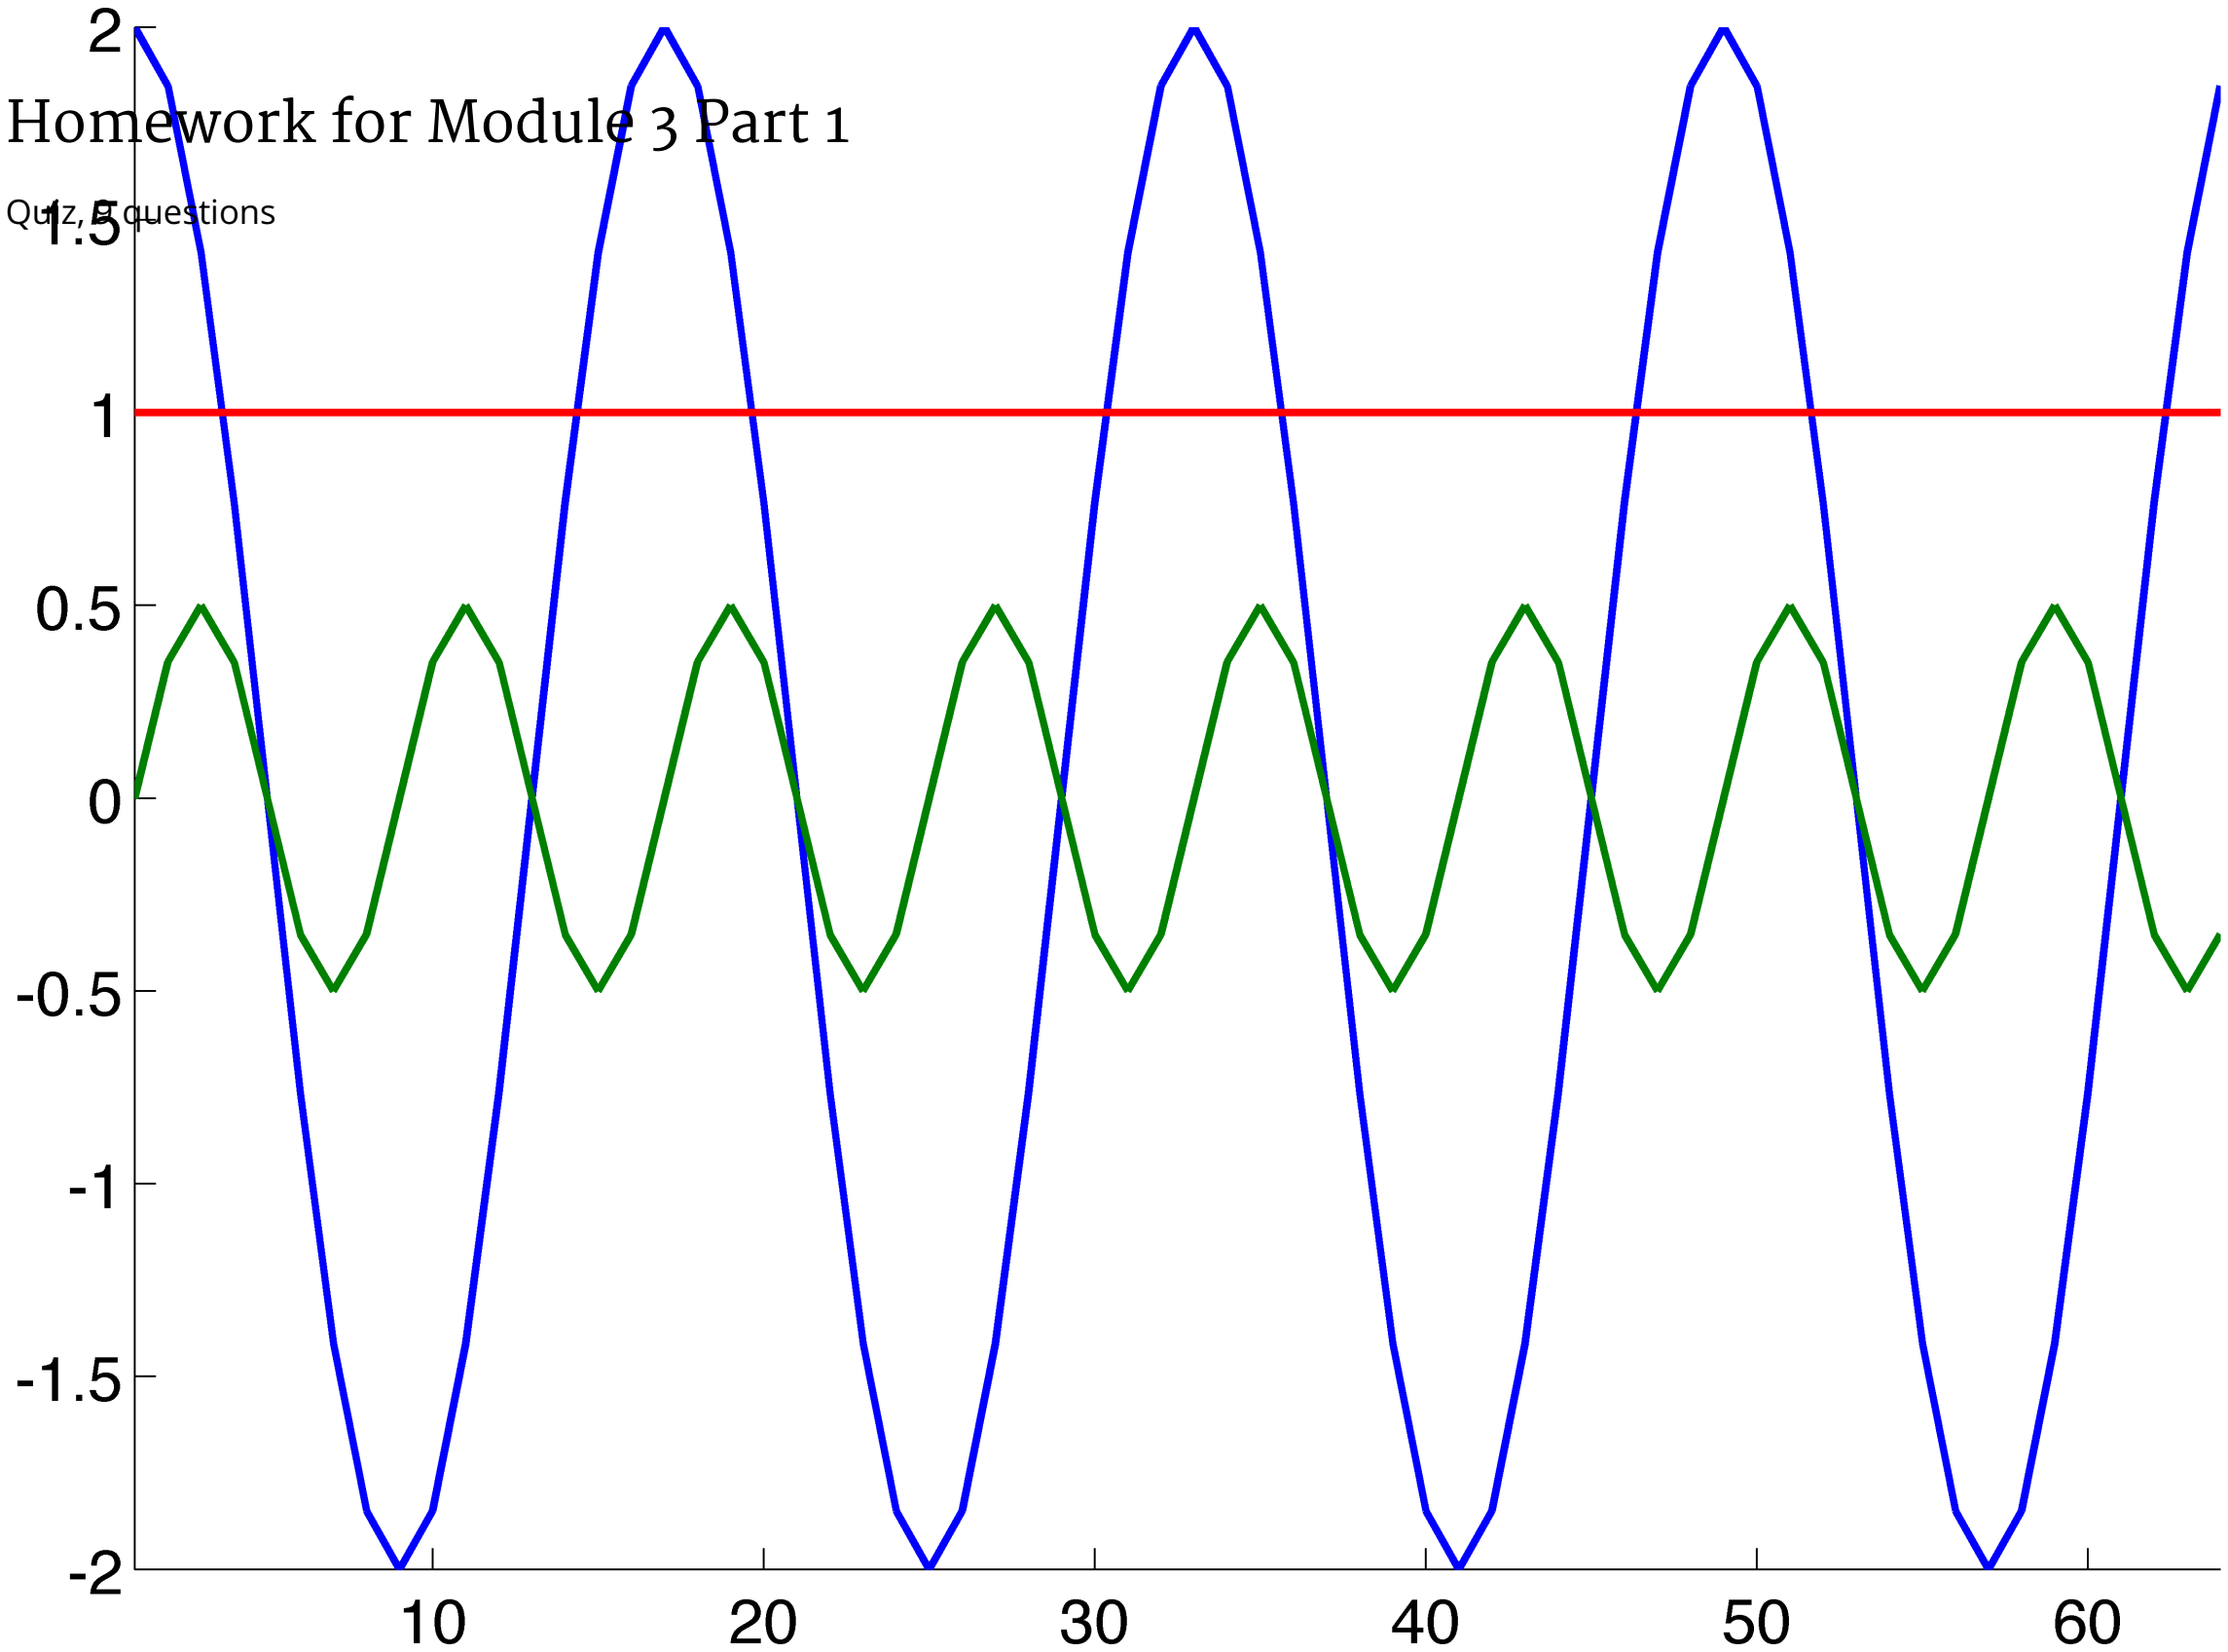


# Homework for Module 3 Part 1

Quiz, 8 questions

(Difficulty: ★★) Consider the three sinusoids of length $N = 64$ as illustrated in the above figure; note that the signal values are shown from $n = 0$ to $n = 63$.

Call $y_1[n]$ the blue signal, $y_2[n]$ the green and $y_3[n]$ the red. Further, define $x[n] = y_1[n] + y_2[n] + y_3[n]$.

Choose the correct statements from the list below. Note that the capital letters indicate the DFT vectors.

- [ ] $$Y_2[k] = \begin{cases} 16j & \text{for } k = 8 \\ 16j & \text{for } k = 56 \\ 0 & \text{otherwise} \end{cases}$$

- [ ] $$Y_3[k] = \begin{cases} 32 & \text{for } k = 0 \\ 32 & \text{for } k = 64 \\ 0 & \text{otherwise} \end{cases}$$

- [ ] $$Y_1[k] = \begin{cases} N & \text{for } k = 4, 60 \\ 0 & \text{otherwise} \end{cases}$$

- [ ] $\|x\|_2^2 = \|X\|_2^2 = 12800$

---

1 point

7.

(Difficulty: $\star\star\star$) Consider the length-$N$ signal



$$x[n] = \cos\left(2\pi \frac{L}{M} n\right)$$

where $M$ and $L$ are integer parameter with $0 < L \leq N-1, 0 < M \leq N$.

Choose the correct statements among the choices below.

- [ ] The DFT $X[k]$ has two elements different from zero if $N = M$ and $N \neq 2L$.
- [ ] Consider the circularly shifted signal $y[n] = x[(n-D) \mod N]$. In the Fourier domain, the two DFTs related by a modulation factor: $Y[k] = X[k]e^{-j2\pi k \frac{D}{N}}$.
- [ ] In general, it will be easier to compute the norm of the signal $\|\mathbf{x}\|_2$ in the Fourier domain, using the Parseval's Identity.
- [ ] If $M = N$ and $2L < N$, the signal has exactly $L$ periods for $0 \leq n < N$

---

1 point

8.
(Difficulty: $\star$) Consider an orthogonal basis $\{\phi_i\}_{i=0,...,N-1}$ for $\mathbb{R}^N$. Select the statements that hold for any vector $\mathbf{x} \in \mathbb{R}^N$.

- [ ] $\|\mathbf{x}\|_2^2 = \frac{1}{P}\sum_{i=0}^{N-1} |\langle x, \phi_i \rangle|^2$ if and only if $\|\phi_i\|_2^2 = P\ \forall i$.
- [ ] $\|\mathbf{x}\|_2^2 = \sum_{i=0}^{N-1} |\langle x, \phi_i \rangle|^2$.
- [ ] $\|\mathbf{x}\|_2^2 = \sum_{i=0}^{N-1} |\langle x, \phi_i \rangle|^2$ if and only if $\|\phi_i\|_2 = 1\ \forall i$.
- [ ] $\|\mathbf{x}\|_2^2 = \frac{1}{P}\sum_{i=0}^{N-1} |\langle x, \phi_i \rangle|^2$

  if and only if $\|\phi_i\|_2 = P\ \forall i$.

---

1 point

9.
(Difficulty: $\star\star$) Pick the correct sentence(s) among the following ones regarding the DFT $\mathbf{X}$ of a signal $\mathbf{x}$ of length $N$, where $N$ is odd.

Remember the following definitions for an arbitrary signal (asterisk denotes conjugation):

hermitian-symmetry: $x[0]$ real and $x[n] = x[N-n]^*$ for $n = 1, \ldots, N-1$.

hermitian-antisymmetry: $x[0] = 0$ and $x[n] = -x[N-n]^*$ for $n = 1, \ldots, N-1$.

- [ ] If the signal $\mathbf{x}$ is hermitian-symmetric, then the DFT $\mathbf{X}$ is also hermitian-symmetric.
- [ ] If the signal $\mathbf{x}$ is hermitian-symmetric, then its DFT is real.
- [ ] If the signal $\mathbf{x}$ is purely real, then the DFT $\mathbf{X}$ is purely imaginary.
- [ ] If the signal $\mathbf{x}$ is hermitian antisymmetric, then its DFT $\mathbf{X}$ is purely imaginary.

# Homework for Module 3 Part 1

Quiz, 9 questions

I, **Mark R. Lytell**, understand that submitting work that isn't my own may result in permanent failure of this course or deactivation of my Coursera account.

Learn more about Coursera's Honor Code

Submit Quiz