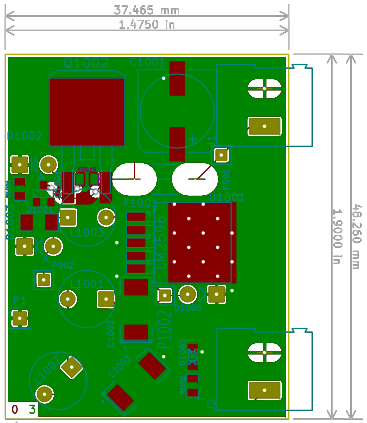

4 layer board stackup is as follows:
0 is top min 1 oz copper (1.4 mil)
min 5.7 mil prepreg FR4
1 is GND min 0.5 oz copper (0.7 mil)
min 47 mil core FR4
2 is PWR min 0.5 oz copper (0.7 mil)
min 5.7 mil prepreg FR4
3 is bottom min 1 oz copper (1.4 mil)

http://rusefi.com/		
Sheet: File: frankenso-PWR-Supply.kicad_pcb		
Title: frankenso-PWR-Supply		
Size: A	Date: 2017-02-13	Rev: R0.1
KiCad E.D.A. kicad 4.0.5		Id: 1/1