6502 Instruction Set

HI																
							LO-NIBBLE									
	–0	–1	–2	–3	–4	–5	–6	–7	–8	–9	–A	–B	–C	–D	–E	–I
0–	BRK impl	ORA X,ind	–––	–––	–––	ORA zpg	ASL zpg	–––	PHP impl	ORA #	ASL A	–––	–––	ORA abs	ASL abs	–––
1–	BPL rel	ORA ind,Y	–––	–––	–––	ORA zpg,X	ASL zpg,X	–––	CLC impl	ORA abs,Y	–––	–––	–––	ORA abs,X	ASL abs,X	–––
2–	JSR abs	AND X,ind	–––	–––	BIT zpg	AND zpg	ROL zpg	–––	PLP impl	AND #	ROL A	–––	BIT abs	AND abs	ROL abs	–––
3–	BMI rel	AND ind,Y	–––	–––	–––	AND zpg,X	ROL zpg,X	–––	SEC impl	AND abs,Y	–––	–––	–––	AND abs,X	ROL abs,X	–––
4–	RTI impl	EOR X,ind	–––	–––	–––	EOR zpg	LSR zpg	–––	PHA impl	EOR #	LSR A	–––	JMP abs	EOR abs	LSR abs	–––
5–	BVC rel	EOR ind,Y	–––	–––	–––	EOR zpg,X	LSR zpg,X	–––	CLI impl	EOR abs,Y	–––	–––	–––	EOR abs,X	LSR abs,X	–––
6–	RTS impl	ADC X,ind	–––	–––	–––	ADC zpg	ROR zpg	–––	PLA impl	ADC #	ROR A	–––	JMP ind	ADC abs	ROR abs	–––
7–	BVS rel	ADC ind,Y	–––	–––	–––	ADC zpg,X	ROR zpg,X	–––	SEI impl	ADC abs,Y	–––	–––	–––	ADC abs,X	ROR abs,X	–––
8–	–––	STA X,ind	–––	–––	STY zpg	STA zpg	STX zpg	–––	DEY impl	–––	TXA impl	–––	STY abs	STA abs	STX abs	
9–	BCC rel	STA ind,Y	–––	–––	STY zpg,X	STA zpg,X	STX zpg,Y	–––	TYA impl	STA abs,Y	TXS impl	–––	–––	STA abs,X	–––	–––
A–	LDY #	LDA X,ind	LDX #	–––	LDY zpg	LDA zpg	LDX zpg	–––	TAY impl	LDA #	TAX impl	–––	LDY abs	LDA abs	LDX abs	–––
B–	BCS rel	LDA ind,Y	–––	–––	LDY zpg,X	LDA zpg,X	LDX zpg,Y	–––	CLV impl	LDA abs,Y	TSX impl	–––	LDY abs,X	LDA abs,X	LDX abs,Y	–––
C–	CPY #	CMP X,ind	–––	–––	CPY zpg	CMP zpg	DEC zpg	–––	INY impl	CMP #	DEX impl	–––	CPY abs	CMP abs	DEC abs	–––
D–	BNE rel	CMP ind,Y	–––	–––	–––	CMP zpg,X	DEC zpg,X	–––	CLD impl	CMP abs,Y	–––	–––	–––	CMP abs,X	DEC abs,X	–––
E–	CPX #	SBC X,ind	–––	–––	CPX zpg	SBC zpg	INC zpg	–––	INX impl	SBC #	NOP impl	–––	CPX abs	SBC abs	INC abs	–––
F–	BEQ rel	SBC ind,Y	–––	–––	–––	SBC zpg,X	INC zpg,X	–––	SED impl	SBC abs,Y	–––	–––	–––	SBC abs,X	INC abs,X	–––

View: ● standard set only ○ illegal opcodes (NMOS) ○ WDC extensions (65C02)

Description

Address Modes

A   .... Accumulator   OPC A   *operand is AC (implied single byte instruction)*

```
abs    .... absolute            OPC $LLHH     operand is address $HHLL *

abs,X  .... absolute, X-indexed  OPC $LLHH,X   operand is address; effective address is address incremented by X with carry **

abs,Y  .... absolute, Y-indexed  OPC $LLHH,Y   operand is address; effective address is address incremented by Y with carry **

#      .... immediate           OPC #$BB      operand is byte BB

impl   .... implied             OPC           operand implied

ind    .... indirect            OPC ($LLHH)   operand is address; effective address is contents of word at address: C.w($HHLL)

X,ind  .... X-indexed, indirect  OPC ($LL,X)   operand is zeropage address; effective address is word in (LL + X, LL + X + 1), inc. without carry: C.w($00LL + X

ind,Y  .... indirect, Y-indexed  OPC ($LL),Y   operand is zeropage address; effective address is word in (LL, LL + 1) incremented by Y with carry: C.w($00LL) +

rel    .... relative            OPC $BB       branch target is PC + signed offset BB ***

zpg    .... zeropage            OPC $LL       operand is zeropage address (hi-byte is zero, address = $00LL)

zpg,X  .... zeropage, X-indexed  OPC $LL,X     operand is zeropage address; effective address is address incremented by X without carry **

zpg,Y  .... zeropage, Y-indexed  OPC $LL,Y     operand is zeropage address; effective address is address incremented by Y without carry **
```

```
*    16-bit address words are little endian, lo(w)-byte first, followed by the hi(gh)-byte.
     (An assembler will use a human readable, big-endian notation as in $HHLL.)

**   The available 16-bit address space is conceived as consisting of pages of 256 bytes each, with
     address hi-bytes representing the page index. An increment with carry may affect the hi-byte
     and may thus result in a crossing of page boundaries, adding an extra cycle to the execution.
     Increments without carry do not affect the hi-byte of an address and no page transitions do occur.
     Generally, increments of 16-bit addresses include a carry, increments of zeropage addresses don't.
     Notably this is not related in any way to the state of the carry flag in the status register.

***  Branch offsets are signed 8-bit values, -128 ... +127, negative offsets in two's complement.
     Page transitions may occur and add an extra cycle to the exucution.
```

**Extended Address Modes (WDC 65C02)**

```
(zpg)   .... zeropage indirect         OPC $LL,X      operand is zeropage address; effective address is the word in (LL, LL + 1

(abs,X) .... absolute indexed indirect  JMP ($LLHH,X)  operand is base address for indirect lookup;
                                                       effective address is word in ($HHLL + X, $HHLL + 1 + X)
```

Instructions by Name

ADC .... add with carry
AND .... and (with accumulator)
ASL .... arithmetic shift left
BCC .... branch on carry clear
BCS .... branch on carry set
BEQ .... branch on equal (zero set)
BIT .... bit test
BMI .... branch on minus (negative set)

```
BNE .... branch on not equal (zero clear)
BPL .... branch on plus (negative clear)
BRK .... break / interrupt
BVC .... branch on overflow clear
BVS .... branch on overflow set
CLC .... clear carry
CLD .... clear decimal
CLI .... clear interrupt disable
CLV .... clear overflow
CMP .... compare (with accumulator)
CPX .... compare with X
CPY .... compare with Y
DEC .... decrement
DEX .... decrement X
DEY .... decrement Y
EOR .... exclusive or (with accumulator)
INC .... increment
INX .... increment X
INY .... increment Y
JMP .... jump
JSR .... jump subroutine
LDA .... load accumulator
LDX .... load X
LDY .... load Y
LSR .... logical shift right
NOP .... no operation
ORA .... or with accumulator
PHA .... push accumulator
PHP .... push processor status (SR)
PLA .... pull accumulator
PLP .... pull processor status (SR)
ROL .... rotate left
ROR .... rotate right
RTI .... return from interrupt
RTS .... return from subroutine
SBC .... subtract with carry
SEC .... set carry
SED .... set decimal
SEI .... set interrupt disable
```

STA .... store accumulator

STX .... store X

STY .... store Y

TAX .... transfer accumulator to X

TAY .... transfer accumulator to Y

TSX .... transfer stack pointer to X

TXA .... transfer X to accumulator

TXS .... transfer X to stack pointer

TYA .... transfer Y to accumulator
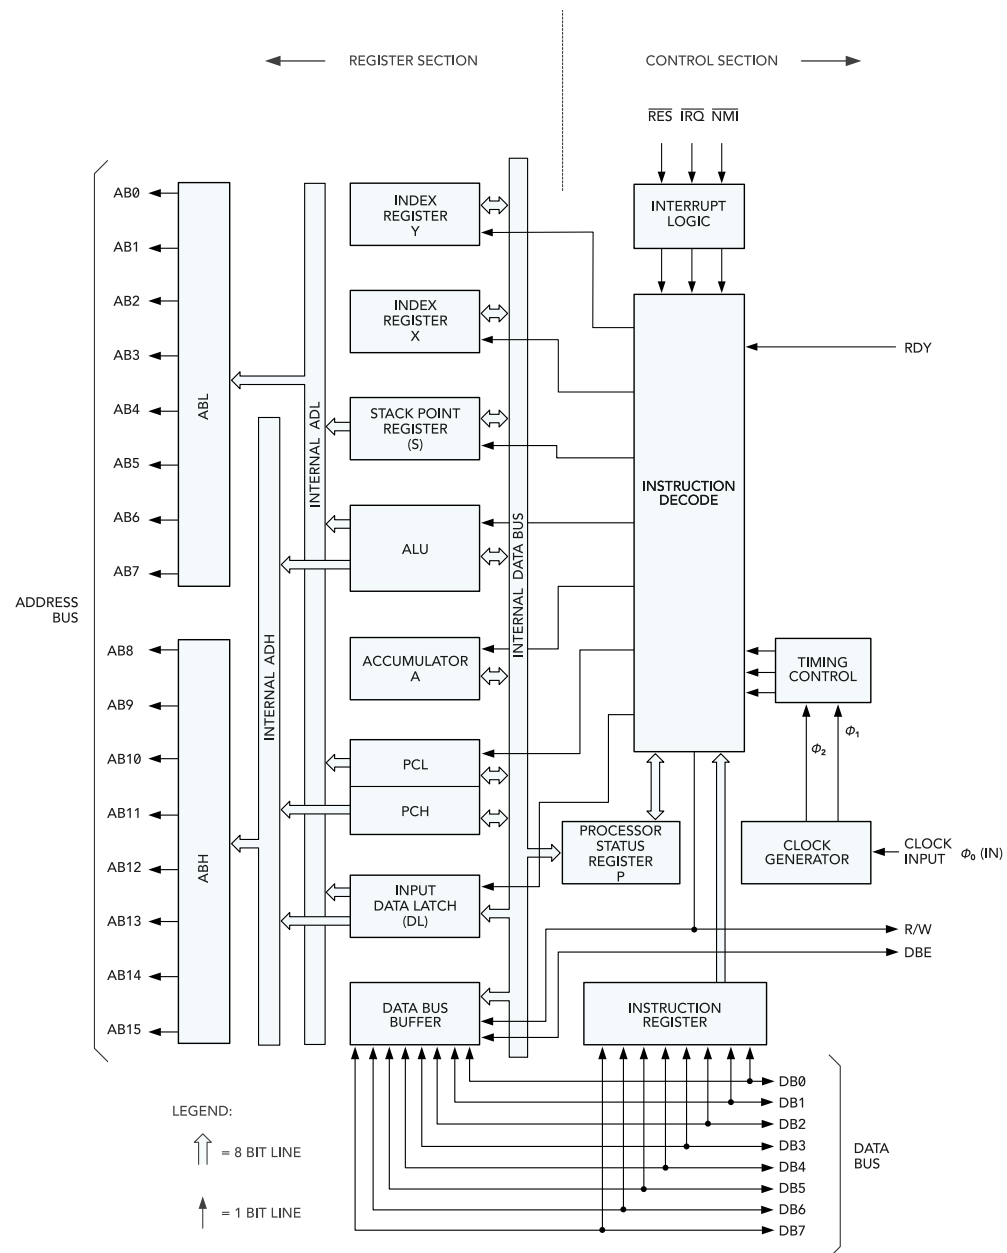
Block diagram of the NMOS 6502 CPU.
After (6501 specifics omitted):
MCS6502 Microcomputer Family Hardware Manual; Jannuary 1976.
MOS Technology, Inc., Norristown/PA, 1976.

Registers

```
  PC .... program counter         (16 bit)
  AC .... accumulator              (8 bit)
  X  .... X register               (8 bit)
  Y  .... Y register               (8 bit)
  SR .... status register [NV-BDIZC]  (8 bit)
  SP .... stack pointer            (8 bit)
```

Note: The status register (SR) is also known as the P register,
the accumulator (AC) as just A, the stack pointer (SP) as S, and
X and Y registers as XR and YR, respectively.

Contemporary machine language monitors (here, Commodore PET) show
them typically like,

```
  B*
      PC  IRQ  SR AC XR YR SP
  .;  0401 E62E 32 04 5E 00 F8
  .
```

("IRQ" is not a register, but the interrupt request vector, see below.)

- The **accumulator** is the main rgister of the 6502. Its content
  is typically used by the arithmetic logic unit (ALU) for the
  first operand and results are deposited in the accumulator
  again. Thus its name, as results accumulate in this register.
  Most arithmetic and logical operations interact with this
  register.

- The **X** and **Y** registers are auxiliary registers. Like the
  accumulator, they can be loaded directly with values, both
  immediatedly (as literal constants) or from memory.
  Additionally, they can be incremented and decremented, and
  their contents may be transferred to and from the acuumulator.
  Their main purpose is the use as index registers, where their
  contents is added to a base memory location, before any values
  are either stored to or retrieved from the resulting address,
  which is known as the *effective address*. This is commonly used
  for loops and table lookups at a given index, hence the name.
  (See address modes, below.)

- The **program counter** keeps track of the memory location holding
  the current instruction code. Its contents is automatically
  stepped up as the program is executed and is modified by
  branch and jump operations. As it must be able to address the
  full 16-bit address range of 64K bytes, it's the only 16-bit
  register of the 6502.

- The **stack pointer** points to the current *top of stack* (or rather, to its bottom, as the stack grows top-down.) The *processor stack* is located on memory page #1 ($0100–$01FF), a 256 bytes *last-in-first-out* (LIFO) stack, which enables subroutines and also serves as a quick intermediate storage. As a 8-bit register, the stack pointer holds just the low-byte of this address (the offset from $0100.) Be aware that this will just wrap around, in case that the stack underflows.

- The **status register** holds the status of the processor, consisting of flags reflecting results of previous operations, configuration flags, like disabeling (blocking) interrupts or setting up binary encoded decimal mode (BCD), and the carry flag, which enables multi-byte arithmetics.

Status Register Flags (bit 7 to bit 0)

```
N .... Negative
V .... Overflow
– .... ignored
B .... Break
D .... Decimal (use BCD for arithmetics)
I .... Interrupt (IRQ disable)
Z .... Zero
C .... Carry
```

- The **zero flag** (Z) indicates a value of all zero bits and the **negative flag** (N) indicates the presence of a set sign bit in bit-position 7. These flags are always updated, whenever a value is transferred to a CPU register (A,X,Y) and as a result of any logical ALU operations. The Z and N flags are also updated by increment and decrement operations acting on a memory location.

- The **carry flag** (C) flag is used as a buffer and as a borrow in arithmetic operations. Any comparisons will update this additionally to the Z and N flags, as do shift and rotate operations.

- All arithmetic operations update the Z, N, C and V flags.

- The **overflow flag** (V) indicates overflow with signed binary arithmetics. As a signed byte represents a range of –128 to +127, an overflow can never occur when the operands are of opposite sign, since the result will never exceed this range.

Thus, overflow may only occur, if both operands are of the same sign. Then, the result must be also of the same sign. Otherwise, overflow is detected and the overflow flag is set. (I.e., both operands have a zero in the sign position at bit 7, but bit 7 of the result is 1, or, both operands have the sign-bit set, but the result is positive.)

- The **decimal flag** (D) sets the ALU to binary coded decimal (BCD) mode for additions and subtractions (ADC, SBC).

- The **interrupt inhibit flag** (I) blocks any maskable interrupt requests (IRQ).

- The **break flag** (B) is not an actual flag implemented in a register, and rather appears only, when the status register is pushed onto or pulled from the stack. When pushed, it will be 1 when transfered by a BRK or PHP instruction, and zero otherwise (i.e., when pushed by a hardware interrupt). When pulled into the status register (by PLP or on RTI), it will be ignored.
  In other words, the break flag will be inserted, whenever the status register is transferred to the stack by software (BRK or PHP), and will be zero, when transferred by hardware. Since there is no actual slot for the break flag, it will be always ignored, when retrieved (PLP or RTI). The break flag is not accessed by the CPU at anytime and there is no internal representation. Its purpose is more for patching, to discern an interrupt caused by a BRK instruction from a normal interrupt initiated by hardware.

- Any of these flags (but the break flag) may be set or cleared by dedicated instructions. Moreover, there are branch instructions to conditionally divert the control flow depending on the respective state of the Z, N, C or V flag.

Processor Stack

LIFO, top-down, 8 bit range, 0x0100 – 0x01FF

Bytes, Words, Addressing

8 bit bytes, 16 bit words in lobyte-hibyte representation (Little-Endian).
16 bit address range, operands follow instruction codes.

Signed values are two's complement, sign in bit 7 (most significant bit).
(%11111111 = $FF = –1, %10000000 = $80 = –128, %01111111 = $7F = +127)
Signed binary and binary coded decimal (BCD) arithmetic modes.

System Vectors

$FFFA, $FFFB ... NMI (Non-Maskable Interrupt) vector, 16-bit (LB, HB)
$FFFC, $FFFD ... RES (Reset) vector, 16-bit (LB, HB)
$FFFE, $FFFF ... IRQ (Interrupt Request) vector, 16-bit (LB, HB)

Start/Reset Operations

An active-low reset line allows to hold the processor in a known disabled
state, while the system is initialized. As the reset line goes high, the
processor performs a start sequence of 7 cycles, at the end of which the
program counter (PC) is read from the address provided in the 16-bit reset
vector at $FFFC (LB-HB). Then, at the eighth cycle, the processor transfers
control by performing a JMP to the provided address.
Any other initializations are left to the thus executed program. (Notably,
instructions exist for the initialization and loading of all registers, but
for the program counter, which is provided by the reset vector at $FFFC.)

Instructions by Type

- **Transfer Instructions**

  Load, store, interregister transfer

  LDA .... load accumulator

  LDX .... load X

  LDY .... load Y

  STA .... store accumulator

  STX .... store X

  STY .... store Y

  TAX .... transfer accumulator to X

  TAY .... transfer accumulator to Y

  TSX .... transfer stack pointer to X

  TXA .... transfer X to accumulator

  TXS .... transfer X to stack pointer

  TYA .... transfer Y to accumulator

- **Stack Instructions**

  These instructions transfer the accumulator or status register
  (flags) to and from the stack. The processor stack is a last-in-
  first-out (LIFO) stack of 256 bytes length, implemented at addresses
  $0100 – $01FF. The stack grows down as new values are pushed onto it
  with the current insertion point maintained in the stack pointer
  register.
  (When a byte is pushed onto the stack, it will be stored in the
  address indicated by the value currently in the stack pointer, which
  will be then decremented by 1. Conversely, when a value is pulled
  from the stack, the stack pointer is incremented. The stack pointer
  is accessible by the TSX and TXS instructions.)

  PHA .... push accumulator

  PHP .... push processor status register (with break flag set)

  PLA .... pull accumulator

  PLP .... pull processor status register

- **Decrements & Increments**

  DEC .... decrement (memory)

  DEX .... decrement X

  DEY .... decrement Y

  INC .... increment (memory)

  INX .... increment X

  INY .... increment Y

- **Arithmetic Operations**

  ADC .... add with carry (prepare by CLC)

  SBC .... subtract with carry (prepare by SEC)

  See the Primer of 6502 Arithmetic Instructions below for details.

- **Logical Operations**

  AND .... and (with accumulator)

  EOR .... exclusive or (with accumulator)

  ORA .... (inclusive) or with accumulator

- **Shift & Rotate Instructions**

  All shift and rotate instructions preserve the bit shifted out in
  the carry flag.

ASL .... arithmetic shift left (shifts in a zero bit on the right)

LSR .... logical shift right (shifts in a zero bit on the left)

ROL .... rotate left (shifts in carry bit on the right)

ROR .... rotate right (shifts in zero bit on the left)

- **Flag Instructions**

  CLC .... clear carry

  CLD .... clear decimal (BCD arithmetics disabled)

  CLI .... clear interrupt disable

  CLV .... clear overflow

  SEC .... set carry

  SED .... set decimal (BCD arithmetics enabled)

  SEI .... set interrupt disable

- **Comparisons**

  Generally, comparison instructions subtract the operand from the
  given register without affecting that register. Flags are still set
  as with a normal subtraction and thus the relation of the two values
  becomes accessible by the Zero, Carry and Negative flags.
  (See the branch instructions below for how to evaluate flags.)

Relation R − Op	Z	C	N
Register < Operand	0	0	sign bit of result
Register = Operand	1	1	0
Register > Operand	0	1	sign bit of result

  CMP .... compare (with accumulator)

  CPX .... compare with X

  CPY .... compare with Y

- **Conditional Branch Instructions**

  Branch targets are relative, signed 8-bit address offsets.
  (An offset of zero corresponds to the immediately following address.
  While it is perfectly feasible to calculate offsets by hand, more
  often these are computed by an assembler program from absoulte
  addresses or labels. In the latter case, branch instructions may
  look more like absolute address mode instructions, while taking in
  actuality just a relative offset as a single-byte operand.)

BCC .... branch on carry clear

BCS .... branch on carry set

BEQ .... branch on equal   (zero flag set)

BMI .... branch on minus   (negative flag set)

BNE .... branch on not equal   (zero flag clear)

BPL .... branch on plus   (negative flag clear)

BVC .... branch on overflow clear

BVS .... branch on overflow set

- **Jumps & Subroutines**

  JSR and RTS affect the stack as the return address is pushed onto or
  pulled from the stack, respectively.
  (JSR will first push the high-byte of the return address [PC+2] onto
  the stack, then the low-byte. The stack will then contain, seen from
  the bottom or from the most recently added byte, [PC+2]-L [PC+2]-H.)

  JMP .... jump

  JSR .... jump subroutine

  RTS .... return from subroutine

- **Interrupts**

  A hardware interrupt (maskable IRQ and non-maskable NMI), will cause
  the processor to put first the address currently in the program
  counter onto the stack (in HB-LB order), followed by the value of
  the status register. (The stack will now contain, seen from the
  bottom or from the most recently added byte, SR PC-L PC-H with the
  stack pointer pointing to the address below the stored contents of
  status register.) Then, the processor will divert its control flow
  to the address provided in the two word-size interrupt vectors at
  $FFFA (IRQ) and $FFFE (NMI).
  A set interrupt disable flag will inhibit the execution of an IRQ,
  but not of a NMI, which will be executed anyways.
  The break instruction (BRK) behaves like a NMI, but will push the
  value of PC+2 onto the stack to be used as the return address. Also,
  as with any software initiated transfer of the status register to
  the stack, the break flag will be found set on the respective value
  pushed onto the stack. Then, control is transferred to the address
  in the NMI-vector at $FFFE.
  In any way, the interrupt disable flag is set to inhibit any further
  IRQ as control is transferred to the interrupt handler specified by
  the respective interrupt vector.

  The RTI instruction restores the status register from the stack and
  behaves otherwise like the JSR instruction. (The break flag is

always ignored as the status is read from the stack, as it isn't a
real processor flag anyway.)

BRK .... break / software interrupt
RTI .... return from interrupt

See the section [Jump Vectors and Stack Operations](#) below for
operational details.

- **Other**

  BIT .... bit test (accumulator & memory)
  NOP .... no operation

6502 Address Modes in Detail

(This section, especially the diagrams included, is heavily inspired
by the Acorn Atom manual "[Atomic Theory and Practice](#)" by David
Johnson Davies, Acorn Computers Limited, 2nd ed. 1980, p 118–121.)

- **Implied Addressing**

  These instructions act directly on one or more registers or flags
  internal to the CPU. Therefor, these instructions are principally
  single-byte instructions, lacking an explicit operand. The operand
  is implied, as it is already provided by the very instruction.

  Instructions targeting exclusively the contents of the accumulator
  may or may not be denoted by using an explicit "A" as the operand,
  depending on the flavor of syntax. (This may be regarded as a
  special address mode of its own, but it is really a special case of
  an implied instruction. It is still a single-byte instruction and no
  operand is provided in machine language.)

  Mnemonic Examples:

  CLC .... clear the carry flag
  ROL A .... rotate contents of accumulator left by one position
  ROL .... same as above, implicit notation (A implied)
  TXA .... transfer contents of X-register to the accumulator
 PHA .... push the contents of the accumulator to the stack
  RTS .... return from subroutine (by pulling PC from stack)

  Mind that some of these instructions, while simple in appearance,
  may be quite complex operations, like "PHA", which involves the
  accumulator, the stack pointer and memory access.

- **Immediate Addressing**

  Here, a literal operand is given immediately after the instruction.
  The operand is always an 8-bit value and the total instruction
  length is always 2 bytes. In memory, the operand is a single byte
  following immediately after the instruction code. In assembler, the
  mode is usually indicated by a "#" prefix adjacent to the operand.

  ```
  Mnemonic      Instruction

  LDA #7        A9  07
                    |
                    v
                A:  07
  ```

  Mnemonic Examples:

  load the literal hexidecimal value "$7" into the accumulator

  ADC #$A0 .... add the literal hexidecimal value "$A0" to the accumulator

  CPX #$32 .... compare the X-register to the literal hexidecimal value "$32"

- **Absolute Addressing**

  Absolute addressing modes provides the 16-bit address of a memory
  location, the contents of which used as the operand to the
  instruction. In machine language, the address is provided in two
  bytes immediately after the instruction (making these 3-byte
  instructions) in low-byte, high-byte order (LLHH) or little-endian.
  In assembler, conventional numbers (HHLL order or big-endian words)
  are used to provide the address.

  Absolute addresses are also used for the jump instructions JMP and
  JSR to provide the address for the next instruction to continue with
  in the control flow.

  ```
  Mnemonic       Instruction        Data

  LDA $3010      AD  10  30    $3010:  34
                                        |
                                        v
                               A:  34
  ```
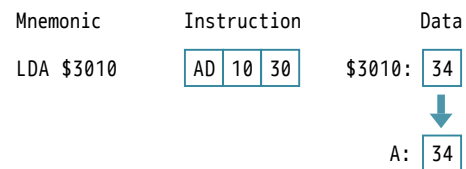
  Mnemonic Examples:

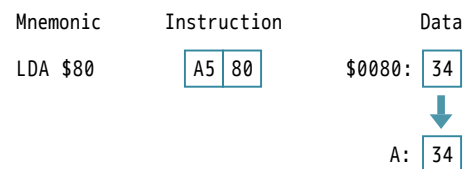 LDA $3010 ... load the contents of address "$3010" into the accumulator

  ROL $08A0 ... rotate the contents of address "$08A0" left by one position

  JMP $4000 ... jump to (continue with) location "$4000"

- **Zero-Page Addressing**

  The 16-bit address space available to the 6502 is thought to consist
  of 256 "pages" of 256 memory locations each ($00…$FF). In this model
  the high-byte of an address gives the page number and the low-byte a
  location inside this page. The very first of these pages, where the
  high-byte is zero (addresses $0000…$00FF), is somewhat special.

  The zero-page address mode is similar to absolute address mode, but
  these instructions use only a single byte for the operand, the low-
  byte, while the high-byte is assumed to be zero by definition.
  Therefore, these instructions have a total length of just two bytes
  (one less than absolute mode) and take one CPU cycle less to
  execute, as there is one byte less to fetch.

  ```
  Mnemonic       Instruction          Data

  LDA $80        | A5 | 80 |    $0080: | 34 |

                                          |
                                          v

                                 A: | 34 |
  ```

  Mnemonic Examples:

  LDA $80 ..... load the contents of address "$0080" into the accumulator

  BIT $A2 ..... perform bit-test with the contents of address "$00A2"

  ASL $9A ..... arithmetic shift left of the contents of location "$009A"

  (One way to think of the zero-page is as a page of 256 additional
  registers, somewhat slower than the internal registers, but with
  zero-page instructions also faster executing than "normal"
  instructions. The zero-page has a few more tricks up its sleeve,
  making these addresses perform more like real registers, see below.)

- **Indexed Addressing: Absolute,X and Absolute,Y**

  Indexed addressing adds the contents of either the X-register or the
  Y-register to the provided address to give the *effective address*,
  which provides the operand.

  These instructions are usefull to e.g., load values from tables or
  to write to a continuous segment of memory in a loop. The most basic
  forms are "absolute,X" and "absolute,X", where either the X- or the
  Y-register, respectively, is added to a given base address. As the
  base address is a 16-bit value, these are generally 3-byte
  instructions. Since there is an additional operation to perform to
  determine the effective address, these instructions are one cycle
  slower than those using absolute addressing mode.*

```
Mnemonic        Instruction         Data

LDA $3120,X     BD 20 31

                            + = $3132: 78

                X:  12

                                  A:  78
```
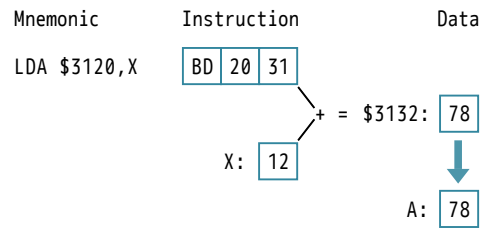
Mnemonic Examples:

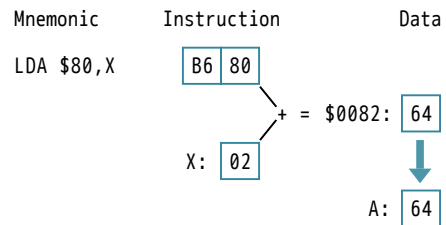 LDA $3120,X ... load the contents of address "$3120 + X" into A
 LDX $8240,Y ... load the contents of address "$8240 + Y" into X
 INC $1400,X ... increment the contents of address "$1400 + X"

*) If the addition of the contents of the index register effects in
a change of the high-byte given by the base address so that the
effective address is on the next memory page, the additional
operation to increment the high-byte takes another CPU cycle. This
is also known as a crossing of page boundaries.

- **Indexed Addressing: Zero-Page,X (and Zero-Page,Y)**

  As with absolute addressing, there is also a zero-page mode for
  indexed addressing. However, this is generally only available with
  the X-register. (The only exception to this is LDX, which has an
  indexed zero-page mode utilizing the Y-register.)
  As we have already seen with normal zero-page mode, these
  instructions are one byte less in total length (two bytes) and take
  one CPU cycle less than instructions in absolute indexed mode.

  Unlike absolute indexed instructions with 16-bit base addresses,
  zero-page indexed instructions never affect the high-byte of the
  effective address, which will simply wrap around in the zero-page,
  and there is no penalty for crossing any page boundaries.

```
Mnemonic        Instruction         Data

LDA $80,X       B6 80

                          + = $0082: 64

                X:  02

                                A:  64
```

Mnemonic Examples:

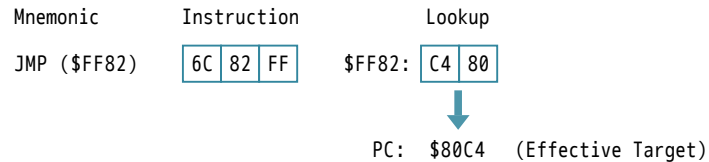 LDA $80,X ... load the contents of address "$0080 + X" into A

```
LSR $82,X ... shift the contents of address "$0082 + X" left
LDX $60,Y ... load the contents of address "$0060 + Y" into X
```

- **Indirect Addressing**

  This mode looks up a given address and uses the contents of this
  address and the next one (in LLHH little-endian order) as the
  effective address. In its basic form, this mode is available for the
  JMP instruction only. (Its generally use is jump vectors and jump
  tables.)
  Like the absolute JMP instruction it uses a 16-bit address (3 bytes
  in total), but takes two additional CPU cycles to execute, since
  there are two additional bytes to fetch for the lookup of the
  effective jump target.

  Generally, indirect addressing is denoted by putting the lookup
  address in parenthesis.

  ```
  Mnemonic        Instruction         Lookup

  JMP ($FF82)    6C 82 FF      $FF82: C4 80

                                   PC:  $80C4   (Effective Target)
  ```

  Mnemonic Example:

  ```
  JMP ($FF82) ... jump to address given in locations "$FF82" and "$FF83"
  ```

- **Pre-Indexed Indirect, "(Zero-Page,X)"**

  Indexed indirect address modes are generally available only for
  instructions supplying an operand to the accumulator (LDA, STA, ADC,
  SBC, AND, ORA, EOR, etc). The placement of the index register inside
  or outside of the parenthesis indicating the address lookup will
  give you clue what these instructions are doing.

  Pre-indexed indirect address mode is only available in combination
  with the X-register. It works much like the "zero-page,X" mode, but,
  after the X-register has been added to the base address, instead of
  directly accessing this, an additional lookup is performed, reading
  the contents of resulting address and the next one (in LLHH little-
  endian order), in order to determine the effective address.

  Like with "zero-page,X" mode, the total instruction length is 2
  bytes, but there are two additional CPU cycles in order to fetch the
  effective 16-bit address. As "zero-page,X" mode, a lookup address
```

will never overflow into the next page, but will simply wrap around
in the zero-page.

These instructions are useful, whenever we want to loop over a table
of pointers to disperse addresses, or where we want to apply the
same operation to various addresses, which we have stored as a table
in the zero-page.

```
   Mnemonic       Instruction          Lookup           Data

  LDA ($70,X)     A1  70

                              + = $0075:  23  30     $3023:  A5

                  X:  05
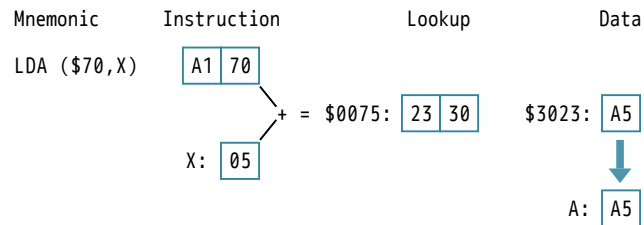
                                                     A:  A5
```

Mnemonic Examples:

    LDA ($70,X) ... load the contents of the location given in addresses
                    "$0070+X" and "$0070+1+X" into A

    STA ($A2,X) ... store the contents of A in the location given in
                    addresses "$00A2+X" and "$00A3+X"

    EOR ($BA,X) ... perform an exlusive OR of the contents of A and the contents
                    of the location given in addresses "$00BA+X" and "$00BB+X"

- **Post-Indexed Indirect, "(Zero-Page),Y"**

  Post-indexed indirect addressing is only available in combination
  with the Y-register. As indicated by the indexing term ",Y" being
  appended to the outside of the parenthesis indicating the indirect
  lookup, here, a pointer is first read (from the given zero-page
  address) and resolved and only then the contents of the Y-register
  is added to this to give the effective address.

  Like with "zero-page,Y" mode, the total instruction length is 2
  bytes, but there it takes an additional CPU cycles to resolve and
  index the 16-bit pointer. As with "absolute,X" mode, the effective
  address may overflow into the next page, in the case of which the
  execution uses an extra CPU cycle.

  These instructions are useful, wherever we want to perform lookups
  on varying bases addresses or whenever we want to loop over tables,
  the base address of which we have stored in the zero-page.

```
Mnemonic      Instruction      Lookup           Data

LDA ($70),Y    [B1][70]    $0070: [43][35]

                                        + = $3553: [23]

                            Y: [10]
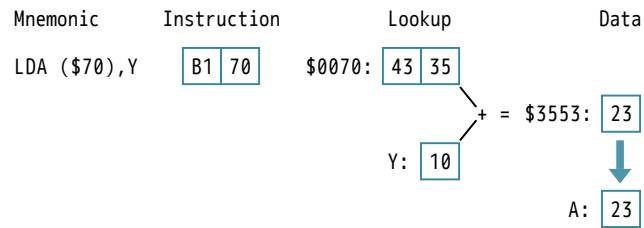
                                          A: [23]
```

Mnemonic Examples:

LDA ($70),Y ... add the contents of the Y-register to the pointer provided in
                "$0070" and "$0071" and load the contents of this address into A

STA ($A2),Y ... store the contents of A in the location given by the pointer
                in "$00A2" and "$00A3" plus the contents of the Y-register

EOR ($BA),Y ... perform an exlusive OR of the contents of A and the address
                given by the addition of Y to the pointer in "$00BA" and "$00BB"

- **Relative Addressing (Conditional Branching)**

This final address mode is exlusive to conditional branch
instructions, which branch in the execution path depending on the
state of a given CPU flag. Here, the instruction provides only a
relative offset, which is added to the contents of the program
counter (PC) as it points to the immediate next instruction. The
relative offset is a signed single byte value in two's complement
encoding (giving a range of −128…+127), which allows for branching
up to half a page forwards and backwards.
On the one hand, this makes these instructions compact, fast and
relocatable at the same time. On the other hand, we have to mind
that our branch target is no farther away than half a memory page.

Generally, an assembler will take care of this and we only have to
provide the target address, not having to worry about relative
addressing.

These instructions are always of 2 bytes length and perform in 2 CPU
cycles, if the branch is not taken (the condition resolving to
'false'), and 3 cycles, if the branch is taken (when the condition
is true). If a branch is taken and the target is on a different
page, this adds another CPU cycle (4 in total).

```
  PC           Mnemonic      Instruction           Target

$1000        BEQ $1005     [F0][03]
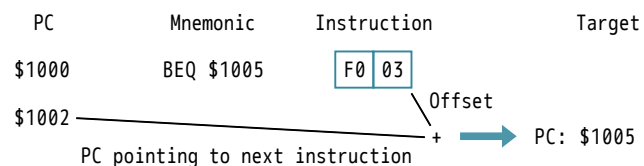
                                    \ Offset
$1002 ─────────────────────────
                                    + ──▶  PC: $1005
        PC pointing to next instruction
```

Mnemonic Examples:

(Examples are provided in usual assembler format. Mind how these
look much like instructions in absolute address mode.)

BEQ $1005 ... branch to location "$1005", if the zero flag is set.
              if the current address is $1000, this will give an offset of $03.

BCS $08C4 ... branch to location "$08C4", if the carry flag is set.
              if the current address is $08D4, this will give an offset of $EE (−$12).

BCC $084A ... branch to location "$084A", if the carry flag is clear.

Vendor

MOS Technology, 1975

Image: Wikimedia Commons.

6502 Instructions in Detail

ADC   Add Memory to Accumulator with Carry

    A + M + C -> A, C   N Z C I D V
                                     + + + - - +

    addressing   assembler   opc bytes cycles
    ----
    immediate   ADC #oper   69   2   2
    zeropage   ADC oper   65   2   3
    zeropage,X   ADC oper,X   75   2   4
    absolute   ADC oper   6D   3   4
    absolute,X   ADC oper,X   7D   3   4*
    absolute,Y   ADC oper,Y   79   3   4*
    (indirect,X) ADC (oper,X) 61   2   6
    (indirect),Y ADC (oper),Y 71   2   5*

AND   AND Memory with Accumulator

    A AND M -> A   N Z C I D V
                                     + + - - - -

```
           addressing     assembler     opc   bytes  cycles
           --------------------------------------------------
           immediate     AND #oper      29     2       2
           zeropage      AND oper       25     2       3
           zeropage,X    AND oper,X     35     2       4
           absolute      AND oper       2D     3       4
           absolute,X    AND oper,X     3D     3       4*
           absolute,Y    AND oper,Y     39     3       4*
           (indirect,X)  AND (oper,X)   21     2       6
           (indirect),Y  AND (oper),Y   31     2       5*
```

ASL Shift Left One Bit (Memory or Accumulator)

```
     C <- [76543210] <- 0          N Z C I D V
                                   + + + - - -
```

```
           addressing     assembler     opc   bytes  cycles
           --------------------------------------------------
           accumulator   ASL A          0A     1       2
           zeropage      ASL oper       06     2       5
           zeropage,X    ASL oper,X     16     2       6
           absolute      ASL oper       0E     3       6
           absolute,X    ASL oper,X     1E     3       7
```

BCC Branch on Carry Clear

```
     branch on C = 0               N Z C I D V
                                   - - - - - -
```

```
           addressing     assembler     opc   bytes  cycles
           --------------------------------------------------
           relative      BCC oper       90     2       2**
```

BCS Branch on Carry Set

```
     branch on C = 1               N Z C I D V
                                   - - - - - -
```

```
           addressing     assembler     opc   bytes  cycles
           --------------------------------------------------
           relative      BCS oper       B0     2       2**
```

BEQ Branch on Result Zero

```
     branch on Z = 1               N Z C I D V
                                   - - - - - -
```

```
           addressing     assembler     opc   bytes  cycles
           --------------------------------------------------
           relative      BEQ oper       F0     2       2**
```

BIT Test Bits in Memory with Accumulator

bits 7 and 6 of operand are transfered to bit 7 and 6 of SR (N,V);
the zero-flag is set according to the result of the operand AND
the accumulator (set, if the result is zero, unset otherwise).
This allows a quick check of a few bits at once without affecting
any of the registers, other than the status register (SR).

→ Further details.

```
A AND M -> Z, M7 -> N, M6 -> V     N Z C I D V
                                   M7 + - - - M6
```

addressing	assembler	opc	bytes	cycles
zeropage	BIT oper	24	2	3
absolute	BIT oper	2C	3	4

BMI Branch on Result Minus

```
branch on N = 1                  N Z C I D V
                                 - - - - - -
```

addressing	assembler	opc	bytes	cycles
relative	BMI oper	30	2	2**

BNE Branch on Result not Zero

```
branch on Z = 0                  N Z C I D V
                                 - - - - - -
```

addressing	assembler	opc	bytes	cycles
relative	BNE oper	D0	2	2**

BPL Branch on Result Plus

```
branch on N = 0                  N Z C I D V
                                 - - - - - -
```

addressing	assembler	opc	bytes	cycles
relative	BPL oper	10	2	2**

BRK Force Break

BRK initiates a software interrupt similar to a hardware
interrupt (IRQ). The return address pushed to the stack is
PC+2, providing an extra byte of spacing for a break mark
(identifying a reason for the break.)
The status register will be pushed to the stack with the break
flag set to 1. However, when retrieved during RTI or by a PLP
instruction, the break flag will be ignored.
The interrupt disable flag is not set automatically.

→ Further details.

```
        interrupt,                N Z C I D V
        push PC+2, push SR         - - - 1 - -


        addressing    assembler    opc   bytes  cycles
        --------------------------------------------------
        implied       BRK          00    1      7


BVC   Branch on Overflow Clear

        branch on V = 0           N Z C I D V
                                  - - - - - -


        addressing    assembler    opc   bytes  cycles
        --------------------------------------------------
        relative      BVC oper     50    2      2**


BVS   Branch on Overflow Set

        branch on V = 1           N Z C I D V
                                  - - - - - -


        addressing    assembler    opc   bytes  cycles
        --------------------------------------------------
        relative      BVS oper     70    2      2**


CLC   Clear Carry Flag

        0 -> C                    N Z C I D V
                                  - - 0 - - -


        addressing    assembler    opc   bytes  cycles
        --------------------------------------------------
        implied       CLC          18    1      2


CLD   Clear Decimal Mode

        0 -> D                    N Z C I D V
                                  - - - - 0 -


        addressing    assembler    opc   bytes  cycles
        --------------------------------------------------
        implied       CLD          D8    1      2


CLI   Clear Interrupt Disable Bit

        0 -> I                    N Z C I D V
                                  - - - 0 - -


        addressing    assembler    opc   bytes  cycles
        --------------------------------------------------
        implied       CLI          58    1      2


CLV   Clear Overflow Flag

        N Z C I D V
```

```
        0 -> V                           - - - - - 0

        addressing    assembler    opc  bytes cycles
        --------------------------------------------
        implied       CLV          B8   1     2


CMP  Compare Memory with Accumulator

        A - M                            N Z C I D V
                                         + + + - - -

        addressing    assembler    opc  bytes cycles
        --------------------------------------------
        immediate     CMP #oper    C9   2     2
        zeropage      CMP oper     C5   2     3
        zeropage,X    CMP oper,X   D5   2     4
        absolute      CMP oper     CD   3     4
        absolute,X    CMP oper,X   DD   3     4*
        absolute,Y    CMP oper,Y   D9   3     4*
        (indirect,X)  CMP (oper,X) C1   2     6
        (indirect),Y  CMP (oper),Y D1   2     5*


CPX  Compare Memory and Index X

        X - M                            N Z C I D V
                                         + + + - - -

        addressing    assembler    opc  bytes cycles
        --------------------------------------------
        immediate     CPX #oper    E0   2     2
        zeropage      CPX oper     E4   2     3
        absolute      CPX oper     EC   3     4


CPY  Compare Memory and Index Y

        Y - M                            N Z C I D V
                                         + + + - - -

        addressing    assembler    opc  bytes cycles
        --------------------------------------------
        immediate     CPY #oper    C0   2     2
        zeropage      CPY oper     C4   2     3
        absolute      CPY oper     CC   3     4


DEC  Decrement Memory by One

        M - 1 -> M                       N Z C I D V
                                         + + - - - -

        addressing    assembler    opc  bytes cycles
        --------------------------------------------
        zeropage      DEC oper     C6   2     5
        zeropage,X    DEC oper,X   D6   2     6
        absolute      DEC oper     CE   3     6
        absolute,X    DEC oper,X   DE   3     7
```

```
DEX   Decrement Index X by One

      X - 1 -> X                      N Z C I D V
                                      + + - - - -


      addressing    assembler    opc   bytes cycles
      --------------------------------------------------
      implied       DEX          CA    1     2


DEY   Decrement Index Y by One

      Y - 1 -> Y                      N Z C I D V
                                      + + - - - -


      addressing    assembler    opc   bytes cycles
      --------------------------------------------------
      implied       DEY          88    1     2


EOR   Exclusive-OR Memory with Accumulator

      A EOR M -> A                    N Z C I D V
                                      + + - - - -


      addressing    assembler    opc   bytes cycles
      --------------------------------------------------
      immediate     EOR #oper    49    2     2
      zeropage      EOR oper     45    2     3
      zeropage,X    EOR oper,X   55    2     4
      absolute      EOR oper     4D    3     4
      absolute,X    EOR oper,X   5D    3     4*
      absolute,Y    EOR oper,Y   59    3     4*
      (indirect,X)  EOR (oper,X) 41    2     6
      (indirect),Y  EOR (oper),Y 51    2     5*


INC   Increment Memory by One

      M + 1 -> M                      N Z C I D V
                                      + + - - - -


      addressing    assembler    opc   bytes cycles
      --------------------------------------------------
      zeropage      INC oper     E6    2     5
      zeropage,X    INC oper,X   F6    2     6
      absolute      INC oper     EE    3     6
      absolute,X    INC oper,X   FE    3     7


INX   Increment Index X by One

      X + 1 -> X                      N Z C I D V
                                      + + - - - -


      addressing    assembler    opc   bytes cycles
      --------------------------------------------------
      implied       INX          E8    1     2
```

```
INY   Increment Index Y by One

      Y + 1 -> Y                      N Z C I D V
                                      + + - - - -


      addressing    assembler     opc  bytes cycles
      --------------------------------------------
      implied       INY           C8    1      2


JMP   Jump to New Location

      operand 1st byte -> PCL         N Z C I D V
      operand 2nd byte -> PCH         - - - - - -


      addressing    assembler     opc  bytes cycles
      --------------------------------------------
      absolute      JMP oper      4C    3      3
      indirect      JMP (oper)    6C    3      5


JSR   Jump to New Location Saving Return Address

      push (PC+2),                    N Z C I D V
      operand 1st byte -> PCL         - - - - - -
      operand 2nd byte -> PCH


      addressing    assembler     opc  bytes cycles
      --------------------------------------------
      absolute      JSR oper      20    3      6


LDA   Load Accumulator with Memory

      M -> A                          N Z C I D V
                                      + + - - - -


      addressing    assembler     opc  bytes cycles
      --------------------------------------------
      immediate     LDA #oper     A9    2      2
      zeropage      LDA oper      A5    2      3
      zeropage,X    LDA oper,X    B5    2      4
      absolute      LDA oper      AD    3      4
      absolute,X    LDA oper,X    BD    3      4*
      absolute,Y    LDA oper,Y    B9    3      4*
      (indirect,X)  LDA (oper,X)  A1    2      6
      (indirect),Y  LDA (oper),Y  B1    2      5*


LDX   Load Index X with Memory

      M -> X                          N Z C I D V
                                      + + - - - -


      addressing    assembler     opc  bytes cycles
      --------------------------------------------
      immediate     LDX #oper     A2    2      2
      zeropage      LDX oper      A6    2      3
      zeropage,Y    LDX oper,Y    B6    2      4
```

```
         absolute       LDX oper       AE    3       4
         absolute,Y     LDX oper,Y     BE    3       4*


LDY  Load Index Y with Memory

     M -> Y                            N Z C I D V
                                       + + - - - -


     addressing     assembler      opc   bytes cycles
     --------------------------------------------------
     immediate      LDY #oper      A0    2       2
     zeropage       LDY oper       A4    2       3
     zeropage,X     LDY oper,X     B4    2       4
     absolute       LDY oper       AC    3       4
     absolute,X     LDY oper,X     BC    3       4*


LSR  Shift One Bit Right (Memory or Accumulator)

     0 -> [76543210] -> C             N Z C I D V
                                      0 + + - - -


     addressing     assembler      opc   bytes cycles
     --------------------------------------------------
     accumulator    LSR A          4A    1       2
     zeropage       LSR oper       46    2       5
     zeropage,X     LSR oper,X     56    2       6
     absolute       LSR oper       4E    3       6
     absolute,X     LSR oper,X     5E    3       7


NOP  No Operation

     ---                              N Z C I D V
                                      - - - - - -


     addressing     assembler      opc   bytes cycles
     --------------------------------------------------
     implied        NOP            EA    1       2


ORA  OR Memory with Accumulator

     A OR M -> A                      N Z C I D V
                                      + + - - - -


     addressing     assembler      opc   bytes cycles
     --------------------------------------------------
     immediate      ORA #oper      09    2       2
     zeropage       ORA oper       05    2       3
     zeropage,X     ORA oper,X     15    2       4
     absolute       ORA oper       0D    3       4
     absolute,X     ORA oper,X     1D    3       4*
     absolute,Y     ORA oper,Y     19    3       4*
     (indirect,X)   ORA (oper,X)   01    2       6
     (indirect),Y   ORA (oper),Y   11    2       5*
```

```
PHA   Push Accumulator on Stack

      push A                          N Z C I D V
                                      - - - - - -


      addressing    assembler     opc  bytes cycles
      ----------------------------------------------
      implied       PHA           48    1     3


PHP   Push Processor Status on Stack

      The status register will be pushed with the break
      flag and bit 5 set to 1.

      push SR                         N Z C I D V
                                      - - - - - -


      addressing    assembler     opc  bytes cycles
      ----------------------------------------------
      implied       PHP           08    1     3


PLA   Pull Accumulator from Stack

      pull A                          N Z C I D V
                                      + + - - - -


      addressing    assembler     opc  bytes cycles
      ----------------------------------------------
      implied       PLA           68    1     4


PLP   Pull Processor Status from Stack

      The status register will be pulled with the break
      flag and bit 5 ignored.

      pull SR                         N Z C I D V
                                       from stack


      addressing    assembler     opc  bytes cycles
      ----------------------------------------------
      implied       PLP           28    1     4


ROL   Rotate One Bit Left (Memory or Accumulator)

      C <- [76543210] <- C            N Z C I D V
                                      + + + - - -


      addressing    assembler     opc  bytes cycles
      ----------------------------------------------
      accumulator   ROL A         2A    1     2
      zeropage      ROL oper      26    2     5
      zeropage,X    ROL oper,X    36    2     6
      absolute      ROL oper      2E    3     6
      absolute,X    ROL oper,X    3E    3     7
```

```
ROR   Rotate One Bit Right (Memory or Accumulator)

      C -> [76543210] -> C          N Z C I D V
                                    + + + - - -


      addressing    assembler     opc   bytes cycles
      --------------------------------------------------
      accumulator   ROR A         6A    1     2
      zeropage      ROR oper      66    2     5
      zeropage,X    ROR oper,X    76    2     6
      absolute      ROR oper      6E    3     6
      absolute,X    ROR oper,X    7E    3     7


RTI   Return from Interrupt

      The status register is pulled with the break flag
      and bit 5 ignored. Then PC is pulled from the stack.

      pull SR, pull PC              N Z C I D V
                                     from stack


      addressing    assembler     opc   bytes cycles
      --------------------------------------------------
      implied       RTI           40    1     6


RTS   Return from Subroutine

      pull PC, PC+1 -> PC           N Z C I D V
                                    - - - - - -


      addressing    assembler     opc   bytes cycles
      --------------------------------------------------
      implied       RTS           60    1     6


SBC   Subtract Memory from Accumulator with Borrow

      A - M - C̅ -> A                N Z C I D V
                                    + + + - - +


      addressing    assembler     opc   bytes cycles
      --------------------------------------------------
      immediate     SBC #oper     E9    2     2
      zeropage      SBC oper      E5    2     3
      zeropage,X    SBC oper,X    F5    2     4
      absolute      SBC oper      ED    3     4
      absolute,X    SBC oper,X    FD    3     4*
      absolute,Y    SBC oper,Y    F9    3     4*
      (indirect,X)  SBC (oper,X)  E1    2     6
      (indirect),Y  SBC (oper),Y  F1    2     5*


SEC   Set Carry Flag

      1 -> C                        N Z C I D V
                                    - - 1 - - -
```

```
       addressing   assembler    opc  bytes cycles
       --------------------------------------------
       implied      SEC          38   1     2


SED  Set Decimal Flag

       1 -> D                          N Z C I D V
                                       - - - - 1 -


       addressing   assembler    opc  bytes cycles
       --------------------------------------------
       implied      SED          F8   1     2


SEI  Set Interrupt Disable Status

       1 -> I                          N Z C I D V
                                       - - - 1 - -


       addressing   assembler    opc  bytes cycles
       --------------------------------------------
       implied      SEI          78   1     2


STA  Store Accumulator in Memory

       A -> M                          N Z C I D V
                                       - - - - - -


       addressing   assembler    opc  bytes cycles
       --------------------------------------------
       zeropage     STA oper     85   2     3
       zeropage,X   STA oper,X   95   2     4
       absolute     STA oper     8D   3     4
       absolute,X   STA oper,X   9D   3     5
       absolute,Y   STA oper,Y   99   3     5
       (indirect,X) STA (oper,X) 81   2     6
       (indirect),Y STA (oper),Y 91   2     6


STX  Store Index X in Memory

       X -> M                          N Z C I D V
                                       - - - - - -


       addressing   assembler    opc  bytes cycles
       --------------------------------------------
       zeropage     STX oper     86   2     3
       zeropage,Y   STX oper,Y   96   2     4
       absolute     STX oper     8E   3     4


STY  Sore Index Y in Memory

       Y -> M                          N Z C I D V
                                       - - - - - -


       addressing   assembler    opc  bytes cycles
       --------------------------------------------
```

```
          -------------------------------------------------
          zeropage      STY oper      84     2       3
          zeropage,X    STY oper,X    94     2       4
          absolute      STY oper      8C     3       4


TAX   Transfer Accumulator to Index X

      A -> X                          N Z C I D V
                                      + + - - - -


      addressing    assembler    opc  bytes cycles
      implied       TAX          AA    1      2


TAY   Transfer Accumulator to Index Y

      A -> Y                          N Z C I D V
                                      + + - - - -


      addressing    assembler    opc  bytes cycles
      implied       TAY          A8    1      2


TSX   Transfer Stack Pointer to Index X

      SP -> X                         N Z C I D V
                                      + + - - - -


      addressing    assembler    opc  bytes cycles
      implied       TSX          BA    1      2


TXA   Transfer Index X to Accumulator

      X -> A                          N Z C I D V
                                      + + - - - -


      addressing    assembler    opc  bytes cycles
      implied       TXA          8A    1      2


TXS   Transfer Index X to Stack Register

      X -> SP                         N Z C I D V
                                      - - - - - -


      addressing    assembler    opc  bytes cycles
      implied       TXS          9A    1      2


TYA   Transfer Index Y to Accumulator

      Y -> A                          N Z C I D V
                                      + + - - - -
```

addressing	assembler	opc	bytes	cycles
implied	TYA	98	1	2

 *   add 1 to cycles if page boundary is crossed

 ** add 1 to cycles if branch occurs on same page
     add 2 to cycles if branch occurs to different page

Legend to Flags: + ... modified
                  – .... not modified
                  1 .... set
                  0 .... cleared
                  M6 .... memory bit 6
                  M7 .... memory bit 7

Note on assembler syntax:
Some assemblers employ "OPC *oper" or a ".b" extension to the mneomonic for
forced zeropage addressing.

Note on **Read–Modify–Write instructions** *(NMOS 6502 only)*:
Some instructions, like EOR, ASL, ROL, DEC, INC, etc., fetch a value from memory
to modify it and to write the modified value back to the originating address.
The original NMOS 6502 switches immediately into write mode after the read of
the value, resulting in the unmodified value being written back to the address
(while the value is modified in the next cycle), before the modified value is
finally written to the destination.
Normally, this should be of no concern, but it may cause issues when writing to
a device attached to the address bus that may trigger some action on any write
operation, as this address will be strobed twice (once for the intermediate,
unmodified write–back operation and a second time when writing the modified
value.)
This does not apply to the CMOS variants of the 6502.

Implementation Specific Details

The following sections cover traits specific to the implementation, like the
original NMOS version and variants by MOS Technology or the CMOS version by
Western Design Center (WDC).

"Illegal" Opcodes and Undocumented Instructions

The following instructions are undocumented are not guaranteed to work.
Some are highly unstable, some may even start two asynchronous threads
competing in race condition with the winner determined by such miniscule
factors as temperature or minor differences in the production series, at other
times, the outcome depends on the exact values involved and the chip series.

Use with care and at your own risk.

Please mind that this section applies to the original NMOS version of the 6502
by MOS Technology (and its variants, like the 6507 or 6510) only, but not to
the later CMOS versions, like the W65C02S by Western Design Center (WDC). The
latter either use these opcodes to implement extensions to the standard NMOS
instruction set or will execute a NOP for any instruction codes still
undefined.

There are several mnemonics for various opcodes. Here, they are (mostly) the
same as those used by the ACME and DASM assemblers with known synonyms provided
in parentheses:

- ALR (ASR)
- ANC
- ANC (ANC2)
- ANE (XAA)
- ARR
- DCP (DCM)
- ISC (ISB, INS)
- LAS (LAR)
- LAX
- LXA (LAX immediate)
- RLA
- RRA
- SAX (AXS, AAX)
- SBX (AXS, SAX)
- SHA (AHX, AXA)
- SHX (A11, SXA, XAS)
- SHY (A11, SYA, SAY)
- SLO (ASO)
- SRE (LSE)
- TAS (XAS, SHS)
- USBC (SBC)
- NOPs (including DOP, TOP)
- JAM (KIL, HLT)

"Illegal" Opcodes in Details

Legend to markers used in the instruction details:

 *   add 1 to cycles if page boundary is crossed

 †   unstable

 †† highly unstable

ALR (ASR)

    AND oper + LSR

    A AND oper, 0 -> [76543210] -> C

                            N Z C I D V
                            + + + - - -

    addressing   assembler   opc   bytes cycles
    ----
    immediate   ALR #oper   4B   2   2

ANC

    AND oper + set C as ASL

    A AND oper, bit(7) -> C

                            N Z C I D V
                            + + + - - -

    addressing   assembler   opc   bytes cycles
    ----
    immediate   ANC #oper   0B   2   2

ANC (ANC2)

    AND oper + set C as ROL

    effectively the same as instr. 0B

    A AND oper, bit(7) -> C

                            N Z C I D V
                            + + + - - -

    addressing   assembler   opc   bytes cycles
    ----
    immediate   ANC #oper   2B   2   2

ANE (XAA)

    * OR X + AND oper

    Highly unstable, do not use.

    A base value in A is determined based on the contets of A
    and a constant, which may be typically $00, $ff, $ee, etc.
    The value of this constant depends on temerature, the chip
    series, and maybe other factors, as well.

In order to eliminate these uncertaincies from the
equation, use either 0 as the operand or a value of $FF in
the accumulator.

(A OR CONST) AND X AND oper -> A

```
                              N Z C I D V
                              + + - - - -
```

addressing	assembler	opc	bytes	cycles
immediate	ANE #oper	8B	2	2 ††

ARR

AND oper + ROR

This operation involves the adder:
V-flag is set according to (A AND oper) + oper
The carry is not set, but bit 7 (sign) is exchanged with
the carry

A AND oper, C -> [76543210] -> C

```
                              N Z C I D V
                              + + + - - +
```

addressing	assembler	opc	bytes	cycles
immediate	ARR #oper	6B	2	2

DCP (DCM)

DEC oper + CMP oper

M - 1 -> M, A - M

Decrements the operand and then compares the result to the
accumulator.

```
                              N Z C I D V
                              + + + - - -
```

addressing	assembler	opc	bytes	cycles
zeropage	DCP oper	C7	2	5
zeropage,X	DCP oper,X	D7	2	6
absolute	DCP oper	CF	3	6
absolute,X	DCP oper,X	DF	3	7
absolute,Y	DCP oper,Y	DB	3	7
(indirect,X)	DCP (oper,X)	C3	2	8
(indirect),Y	DCP (oper),Y	D3	2	8

ISC (ISB, INS)

INC oper + SBC oper

M + 1 -> M, A - M - $\overline{C}$ -> A

```
                              N Z C I D V
                              + + + - - +

        addressing    assembler     opc  bytes cycles
        --------------------------------------------
        zeropage      ISC oper      E7   2     5
        zeropage,X    ISC oper,X    F7   2     6
        absolute      ISC oper      EF   3     6
        absolute,X    ISC oper,X    FF   3     7
        absolute,Y    ISC oper,Y    FB   3     7
        (indirect,X)  ISC (oper,X)  E3   2     8
        (indirect),Y  ISC (oper),Y  F3   2     8


LAS (LAR)

        LDA/TSX oper

        M AND SP -> A, X, SP

                              N Z C I D V
                              + + - - - -

        addressing    assembler     opc  bytes cycles
        --------------------------------------------
        absolute,Y    LAS oper,Y    BB   3      4*


LAX

        LDA oper + LDX oper

        M -> A -> X

                              N Z C I D V
                              + + - - - -

        addressing    assembler     opc  bytes cycles
        --------------------------------------------
        zeropage      LAX oper      A7   2     3
        zeropage,Y    LAX oper,Y    B7   2     4
        absolute      LAX oper      AF   3     4
        absolute,Y    LAX oper,Y    BF   3     4*
        (indirect,X)  LAX (oper,X)  A3   2     6
        (indirect),Y  LAX (oper),Y  B3   2     5*


LXA (LAX immediate)

        Store * AND oper in A and X

        Highly unstable, involves a 'magic' constant, see ANE

        (A OR CONST) AND oper -> A -> X

                              N Z C I D V
                              + + - - - -

        addressing    assembler     opc  bytes cycles
        ---------------------------------------------
        immediate     LXA #oper     AB   2     2  ††
```

```
RLA

     ROL oper + AND oper

     M = C <- [76543210] <- C, A AND M -> A
                                   N Z C I D V
                                   + + + - - -

     addressing      assembler      opc   bytes cycles
     --------------------------------------------------
     zeropage        RLA oper       27    2      5
     zeropage,X      RLA oper,X     37    2      6
     absolute        RLA oper       2F    3      6
     absolute,X      RLA oper,X     3F    3      7
     absolute,Y      RLA oper,Y     3B    3      7
     (indirect,X)    RLA (oper,X)   23    2      8
     (indirect),Y    RLA (oper),Y   33    2      8


RRA

     ROR oper + ADC oper

     M = C -> [76543210] -> C, A + M + C -> A, C
                                   N Z C I D V
                                   + + + - - +

     addressing      assembler      opc   bytes cycles
     --------------------------------------------------
     zeropage        RRA oper       67    2      5
     zeropage,X      RRA oper,X     77    2      6
     absolute        RRA oper       6F    3      6
     absolute,X      RRA oper,X     7F    3      7
     absolute,Y      RRA oper,Y     7B    3      7
     (indirect,X)    RRA (oper,X)   63    2      8
     (indirect),Y    RRA (oper),Y   73    2      8


SAX (AXS, AAX)

     A and X are put on the bus at the same time (resulting
     effectively in an AND operation) and stored in M

     A AND X -> M
                                   N Z C I D V
                                   - - - - - -

     addressing      assembler      opc   bytes cycles
     --------------------------------------------------
     zeropage        SAX oper       87    2      3
     zeropage,Y      SAX oper,Y     97    2      4
     absolute        SAX oper       8F    3      4
     (indirect,X)    SAX (oper,X)   83    2      6


SBX (AXS, SAX)

     CMP and DEX at once, sets flags like CMP
```

```
      (A AND X) - oper -> X

                                N Z C I D V
                                + + + - - -

      addressing    assembler    opc  bytes cycles
      --------------------------------------------
      immediate     SBX #oper    CB    2      2


SHA (AHX, AXA)

      Stores A AND X AND (high-byte of addr. + 1) at addr.

      unstable: sometimes 'AND (H+1)' is dropped, page boundary
      crossings may not work (with the high-byte of the value
      used as the high-byte of the address)

      A AND X AND (H+1) -> M

                                N Z C I D V
                                - - - - - -

      addressing    assembler    opc  bytes cycles
      --------------------------------------------
      absolute,Y    SHA oper,Y   9F    3      5  †
      (indirect),Y  SHA (oper),Y 93    2      6  †


SHX (A11, SXA, XAS)

      Stores X AND (high-byte of addr. + 1) at addr.

      unstable: sometimes 'AND (H+1)' is dropped, page boundary
      crossings may not work (with the high-byte of the value
      used as the high-byte of the address)

      X AND (H+1) -> M

                                N Z C I D V
                                - - - - - -

      addressing    assembler    opc  bytes cycles
      --------------------------------------------
      absolute,Y    SHX oper,Y   9E    3      5  †


SHY (A11, SYA, SAY)

      Stores Y AND (high-byte of addr. + 1) at addr.

      unstable: sometimes 'AND (H+1)' is dropped, page boundary
      crossings may not work (with the high-byte of the value
      used as the high-byte of the address)

      Y AND (H+1) -> M

                                N Z C I D V
                                - - - - - -

      addressing    assembler    opc  bytes cycles
      --------------------------------------------
      absolute,X    SHY oper,X   9C    3      5  †
```

```
SLO (ASO)

    ASL oper + ORA oper

    M = C <- [76543210] <- 0, A OR M -> A
                                N Z C I D V
                                + + + - - -

    addressing    assembler    opc  bytes cycles
    --------------------------------------------
    zeropage      SLO oper      07   2      5
    zeropage,X    SLO oper,X    17   2      6
    absolute      SLO oper      0F   3      6
    absolute,X    SLO oper,X    1F   3      7
    absolute,Y    SLO oper,Y    1B   3      7
    (indirect,X)  SLO (oper,X)  03   2      8
    (indirect),Y  SLO (oper),Y  13   2      8


SRE (LSE)

    LSR oper + EOR oper

    M = 0 -> [76543210] -> C, A EOR M -> A
                                N Z C I D V
                                + + + - - -

    addressing    assembler    opc  bytes cycles
    --------------------------------------------
    zeropage      SRE oper      47   2      5
    zeropage,X    SRE oper,X    57   2      6
    absolute      SRE oper      4F   3      6
    absolute,X    SRE oper,X    5F   3      7
    absolute,Y    SRE oper,Y    5B   3      7
    (indirect,X)  SRE (oper,X)  43   2      8
    (indirect),Y  SRE (oper),Y  53   2      8


TAS (XAS, SHS)

    Puts A AND X in SP and stores A AND X AND (high-byte of
    addr. + 1) at addr.

    unstable: sometimes 'AND (H+1)' is dropped, page boundary
    crossings may not work (with the high-byte of the value
    used as the high-byte of the address)

    A AND X -> SP, A AND X AND (H+1) -> M
                                N Z C I D V
                                - - - - - -

    addressing    assembler    opc  bytes cycles
    --------------------------------------------
    absolute,Y    TAS oper,Y    9B   3      5 †


USBC (SBC)
```

```
       SBC oper + NOP

       effectively same as normal SBC immediate, instr. E9.

       A - M - C̅ -> A
                                   N Z C I D V
                                   + + + - - +

       addressing      assembler      opc  bytes cycles
       --------------------------------------------------
       immediate      USBC #oper     EB    2       2


NOPs (including DOP, TOP)

       Instructions effecting in 'no operations' in various
       address modes. Operands are ignored.

                                   N Z C I D V
                                   - - - - - -


       opc   addressing    bytes   cycles
       ------------------------------------------
       1A    implied        1        2
       3A    implied        1        2
       5A    implied        1        2
       7A    implied        1        2
       DA    implied        1        2
       FA    implied        1        2
       80    immediate      2        2
       82    immediate      2        2
       89    immediate      2        2
       C2    immediate      2        2
       E2    immediate      2        2
       04    zeropage       2        3
       44    zeropage       2        3
       64    zeropage       2        3
       14    zeropage,X     2        4
       34    zeropage,X     2        4
       54    zeropage,X     2        4
       74    zeropage,X     2        4
       D4    zeropage,X     2        4
       F4    zeropage,X     2        4
       0C    absolute       3        4
       1C    absolute,X     3        4*
       3C    absolute,X     3        4*
       5C    absolute,X     3        4*
       7C    absolute,X     3        4*
       DC    absolute,X     3        4*
       FC    absolute,X     3        4*


JAM (KIL, HLT)

       These instructions freeze the CPU.
```

The processor will be trapped infinitely in T1 phase with
$FF on the data bus. — Reset required.

Instruction codes: 02, 12, 22, 32, 42, 52, 62, 72, 92, B2, D2, F2

Have a look at this <u>table of the instruction layout</u> in order to see how most of these
"illegal" instructions are a result of executing both instructions at *c=1* and *c=2* in
a given slot (same column, rows immediately above) at once.
Where *c* is the lowest two bits of the instruction code. E.g., "SAX abs", instruction
code $8F, binary 10001**11**, is "STA abs", 100011**01** ($8D) and "STX abs", 100011**10** ($8E).

Rev. A 6502 (Pre-June 1976) "ROR Bug"

Famously, the Rev. A 6502 as delivered from September 1975 to June 1976 had a
"ROR bug". However, the "ROR" instruction isn't only missing from the original
documentation, as it turns out, the chip is actually <u>missing crucial control lines</u>,
which would have been required to make this instruction work. The instruction is
simply not implemented and it wasn't even part of the design. (This was actually
added on popular demand in Rev. B, as rumor has it, demand by Steve Wozniak. Even,
if not true, this makes for a good story. And how could there be a page on the 6502
without mentioning "Woz" once?) So, for all means, "ROR" is an undocumented or
"illegal" instruction on the Rev. A 6502.

And this is how ROR behaves on these Rev. A chips, much like ASL: it shifts all bits
to the left, shifting in a zero bit at the LSB side, but, unlike ASL, it does not
shift the high-bit into the carry. (So there are no connections to the carry at all.)

ROR Rev. A (pre-June 1976)

    As ASL, but does not update the carry.

    N and Z flags are set correctly for the operation
    performed.

    [76543210] <- 0

                          N Z C I D V
                          + + - - - -

    addressing   assembler   opc   bytes cycles
    ----
    accumulator   ROR A   6A   1   2
    zeropage   ROR oper   66   2   5
    zeropage,X   ROR oper,X   76   2   6
    absolute   ROR oper   6E   3   6
    absolute,X   ROR oper,X   7E   3   7

Western Design Center (WDC) W65C02(S) Extensions

The W65C02 features 69 instructions and 16 address modes (one of them a stack mode, which was previously considered as implied) and static CMOS ciruitry. There are two new address modes and 14 new instructions, as well as a few behavioral changes.

(The G65**SC**02 by GTE Microcircuits is similar to W65C02 but doesn't implement any of the new instructions for bit manipulation.)

Additional Address Modes (W65C02)

The W65C02 adds the following address modes:

- **zeropage indirect**, (zeropage): OPC ($LL)
  operand is zeropage address; effective address is the word in (LL, LL + 1).

  This mode provides zeropage indirection without indexing, similar to *"pre-indexed indirect"* (*'(zero-page,X)'*) and *"post-indexed indirect"* (*'(zero-page),Y'*) with the indexing register set to zero. This mode extends accumulator instructions, like ADC, AND, CMP, EOR, LDA, ORA, SBC, STA.

- **absolute indexed indirect**, (absolute,X): OPC ($LLHH,X)
  operand is base address for indirect lookup;
  effective address is word in ($HHLL + X, $HHLL + 1 + X).

  This address mode is available for the JMP instruction only. This is similar to an indirect JMP instruction, but the X register is added to the absolute operand before the address lookup.

Instructions with Additional Address Modes (W65C02)

ADC Add Memory to Accumulator with Carry

```
    A + (ZPG) + C -> A, C          N Z C I D V
                                   + + + - - +

    addressing     assembler    opc  bytes cycles
    --------------------------------------------------
    (zeropage)    ADC (oper)    72    2       5
```

AND AND Memory with Accumulator

```
    A AND (ZPG) -> A               N Z C I D V
                                   + + - - - -
```

addressing	assembler	opc	bytes	cycles
(zeropage)	AND (oper)	32	2	5

BIT Test Bits in Memory with Accumulator

```
A AND M -> Z, M7 -> N, M6 -> V    N Z C I D V
                                  M7 + - - - M6
```

addressing	assembler	opc	bytes	cycles
immediate	BIT #oper	89	3	2
absolute,X	BIT oper,X	3C	3	4*
zeropage	BIT oper	24	2	3
zeropage,X	BIT oper,X	34	2	4

CMP Compare Memory with Accumulator

```
A - (ZPG)                         N Z C I D V
                                  + + + - - -
```

addressing	assembler	opc	bytes	cycles
(zeropage)	CMP (oper)	D2	2	5

DEC Decrement by One (Accumulator)

```
A - 1 -> A                        N Z C I D V
                                  + + - - - -
```

addressing	assembler	opc	bytes	cycles
accumulator	DEC A	3A	1	2

EOR Exclusive-OR Memory with Accumulator

```
A EOR (ZPG) -> A                  N Z C I D V
                                  + + - - - -
```

addressing	assembler	opc	bytes	cycles
(zeropage)	EOR (oper)	52	2	5

INC Increment by One (Accumulator)

```
A + 1 -> A                        N Z C I D V
                                  + + - - - -
```

addressing	assembler	opc	bytes	cycles
accumulator	INC A	1A	1	2

JMP Jump to New Location

```
      (operand + X) 1st byte -> PCL      N Z C I D V
      (operand + X) 2nd byte -> PCH      - - - - - -


      addressing     assembler     opc  bytes cycles
      --------------------------------------------------
      (absolute,X)   JMP (oper,X)  7C    3      6

      Note: The 2004 datasheet lists this (erroneously)
      with 5 cycles (and also as implemented on the
      original NMOS 6502).


LDA  Load Accumulator with Memory

      (ZPG) -> A                    N Z C I D V
                                    + + - - - -


      addressing     assembler     opc  bytes cycles
      --------------------------------------------------
      (zeropage)     LDA (oper)    B2    2      5


ORA  OR Memory with Accumulator

      A OR (ZPG) -> A               N Z C I D V
                                    + + - - - -


      addressing     assembler     opc  bytes cycles
      --------------------------------------------------
      (zeropage)     ORA (oper)    12    2      5


SBC  Subtract Memory from Accumulator with Borrow

      A - (ZPG) - C̄ -> A            N Z C I D V
                                    + + + - - +


      addressing     assembler     opc  bytes cycles
      --------------------------------------------------
      (zeropage)     SBC (oper)    F2    2      5


STA  Store Accumulator in Memory

      A -> (ZPG)                    N Z C I D V
                                    - - - - - -


      addressing     assembler     opc  bytes cycles
      --------------------------------------------------
      (zeropage)     SBC (oper)    92    2      5



   *  add 1 to cycles if page boundary is crossed
```

Additional Instructions (W65C02)

Note: The bit manipulating instructions BBR, BBS, RMB and SMB were
"grandfathered" in from the Rockwell R6500/11/12/15 instruction set.
They are present on the W65C02S, but are missing in early versions
of the W65C02.

BBR Branch on Bit Reset***

     This branch instruction tests a given bit of
     the accumulator and branches, if this bit is
     not set. This is an entire family of eight
     instructions in total, testing one of bits #0
     to #7 each. Individual mnemonics designate the
     tested bit, as in BBRn, where n = 0..7.
     As with all branch instructions, the address
     mode is relative, taking a signed single-byte
     offset as operand.

     branch on A$_n$ = 0   N Z C I D V
                                         - - - - - -

bit tested	assembler	opc	bytes	cycles
0 [-------0]	BBR0 oper	0F	2	5**
1 [------0-]	BBR1 oper	1F	2	5**
2 [-----0--]	BBR2 oper	2F	2	5**
3 [----0---]	BBR3 oper	3F	2	5**
4 [---0----]	BBR4 oper	4F	2	5**
5 [--0-----]	BBR5 oper	5F	2	5**
6 [-0------]	BBR6 oper	6F	2	5**
7 [0-------]	BBR7 oper	7F	2	5**

BBS Branch on Bit Set***

     Similar to BBR, but branches on bit n set.
     Individual mnemonics designate the tested bit,
     as in BBSn, where n = 0..7.
     As with all branch instructions, the address
     mode is relative, taking a signed single-byte
     offset as operand.

     branch on A$_n$ = 1   N Z C I D V
                                         - - - - - -

bit tested	assembler	opc	bytes	cycles
0 [-------1]	BBS0 oper	8F	2	5**
1 [------1-]	BBS1 oper	9F	2	5**
2 [-----1--]	BBS2 oper	AF	2	5**
3 [----1---]	BBS3 oper	BF	2	5**
4 [---1----]	BBS4 oper	CF	2	5**

```
      5 [--1-----]  BBS5 oper    DF    2       5**
      6 [-1------]  BBS6 oper    EF    2       5**
      7 [1-------]  BBS7 oper    FF    2       5**


BRA  Branch Always

     Similar to other branch instructions, but
     branches unconditionally.
     Equivalent to a relative jump.

     PC+2 + operand -> PC            N Z C I D V
                                     - - - - - -


     addressing    assembler    opc  bytes cycles
     --------------------------------------------
     relative      BRA oper     80    2      3*


PHX  Push X Register on Stack

     push X                         N Z C I D V
                                    - - - - - -


     addressing    assembler    opc  bytes cycles
     --------------------------------------------
     stack/implied PHX          DA    1      3


PHY  Push Y Register on Stack

     push Y                         N Z C I D V
                                    - - - - - -


     addressing    assembler    opc  bytes cycles
     --------------------------------------------
     stack/implied PHY          5A    1      3


PLX  Pull X Register from Stack

     pull X                         N Z C I D V
                                    + + - - - -


     addressing    assembler    opc  bytes cycles
     --------------------------------------------
     implied       PLA          FA    1      4


PLY  Pull Y Register from Stack

     pull Y                         N Z C I D V
                                    + + - - - -


     addressing    assembler    opc  bytes cycles
     --------------------------------------------
     implied       PLA          7A    1      4
```

RMB Reset Memory Bit***

Resets a bit in memory at the given zeropage
location. This is an entire family of eight
instructions in total, resetting one of bits #0
to #7 each. Individual mnemonics designate the
bit to be reset, as in RMBn, where n = 0..7.
The operand is always a zeropage address.

```
0 -> M_n                        N Z C I D V
                                - - - - - -
```

bit reset	assembler	opc	bytes	cycles
0 [-------0]	RMB0 zpg	07	2	5
1 [------0-]	RMB1 zpg	17	2	5
2 [-----0--]	RMB2 zpg	27	2	5
3 [----0---]	RMB3 zpg	37	2	5
4 [---0----]	RMB4 zpg	47	2	5
5 [--0-----]	RMB5 zpg	57	2	5
6 [-0------]	RMB6 zpg	67	2	5
7 [0-------]	RMB7 zpg	77	2	5

SMB Set Memory Bit***

Similar to RMB, but sets the respective bit.
This is an entire family of eight instructions
in total, setting one of bits #0to #7 each.
Individual mnemonics designate the bit to be
set, as in SMBn, where n = 0..7.
The operand is always a zeropage address.

```
1 -> M_n                        N Z C I D V
                                - - - - - -
```

bit set	assembler	opc	bytes	cycles
0 [-------1]	SMB0 zpg	87	2	5
1 [------1-]	SMB1 zpg	97	2	5
2 [-----1--]	SMB2 zpg	A7	2	5
3 [----1---]	SMB3 zpg	B7	2	5
4 [---1----]	SMB4 zpg	C7	2	5
5 [--1-----]	SMB5 zpg	D7	2	5
6 [-1------]	SMB6 zpg	E7	2	5
7 [1-------]	SMB7 zpg	F7	2	5

STP Stop Mode

Stops and sets the signal on pin PHI2 to high.
A reset signal will "wake up" the processor quickly.

```
        stop the clock (sleep)          N Z C I D V
                                         - - - - - -


        addressing    assembler     opc   bytes cycles
        --------------------------------------------------
        implied       STP           DB    1      3


STZ  Store Zero in Memory

        0 -> M                          N Z C I D V
                                         - - - - - -


        addressing    assembler     opc   bytes cycles
        --------------------------------------------------
        zeropage      STZ oper      64    2      3
        zeropage,X    STZ oper,X    74    2      4
        absolute      STZ oper      9C    3      4
        absolute,X    STZ oper,X    9E    3      4*


TRB  Test and Reset Memory Bit***

        This instruction first ANDs the contents of the given
        memory location with the contents of the accumulator (A)
        and sets the Z flag accordingly to the result, much
        like the BIT instruction. Then, the contents of the
        memory location is ANDed with the compliment of the
        mask in A, and then written back, thus clearing the
        bit(s) set in A.
        In other words, TRB clears the bits set in A in the
        specified location and sets Z, if any of these bits
        were set, otherwise resetting Z.

        A AND M -> Z, ¬A AND M -> M      N Z C I D V
                                         - + - - - -


        addressing    assembler     opc   bytes cycles
        --------------------------------------------------
        absolute      TRB oper      1C    3      6
        zeropage      TRB oper      14    2      5


TSB  Test and Set Memory Bit***

        Similar to TRB, but sets the bits according to the bit
        mask in A.
        TSB sets the bits set in A in the specified location
        and sets Z, if any of these bits were previously set,
        otherwise resetting Z.

        A AND M -> Z, A OR M -> M        N Z C I D V
                                         - + - - - -


        addressing    assembler     opc   bytes cycles
        --------------------------------------------------
        absolute      TRB oper      0C    3      6
```

```
         zeropage      TRB oper      04    2       5


WAI  Wait for Interrupt

      Stops and pulls the signal on pin RDY to low.
      The processor goes into a low-power mode,
      similar to STP, until an IRQ or NMI signal is
      encountered to "wake it up" again.

      stop and wait for sIRQ/sNMI      N Z C I D V
                                       - - - - - -


      addressing    assembler    opc  bytes cycles
      --------------------------------------------
      implied       WAI          CB    1       3



 *   add 1 to cycles if page boundary is crossed

 **  add 1 to cycles if branch occurs on same page
     add 2 to cycles if branch occurs to different page

 *** Instructions for bit manipulation not present on the G65SC02.
     Early versions of the W65C02 implement TRB and TSB only.
     Instructions BBR, BBS, RMB and SMB on the W65C02S are as on
     the Rockwell R6500/11/12/15 family.
```

Additional NOPs, "Reserved for Future Use" (W65C02)

There are no undefined opcodes on the W65C02.
Opcodes not in use are marked as "reserved for future use" and execute
as NOPs. These additional NOPs come at various byte sizes and cycle
times, here listed by their respective instruction codes (W65C02S):

- **NOP** 1 byte, 1 cycle:
  ```
  -------------------------------------------
  03, 13, 23, 33, 43, 53, 63, 73,
  83, 93, A3, B3, C3, D3, E3, F3,
  0B, 1B, 2B, 3B, 4B, 5B, 6B, 7B,
  8B, 9B, AB, BB, EB, FB
  ```

- **NOP** 2 bytes, 2 cycles:
  ```
  -------------------------------------------
  02, 22, 42, 62, 82, C2, E2
  ```

- **NOP** 2 bytes, 3 cycles:
  ```
  -------------------------------------------
  44
  ```

- **NOP** 2 bytes, 4 cycles:
  ```
  -------------------------------------------
  54, F4, F4
  ```

- **NOP** 3 bytes, 4 cycles:
  ```
  -------------------------------------------
  DC, FC
  ```

- **NOP** 3 bytes, 8 cycles:
  ```
  -------------------------------------------
  5C
  ```

Modified Cycle Times (W65C02)

- **Cycle Penalty for BCD Arithmetics**
  For instructions ADC and SBC, the negative flag (N), the overflow flag (V)
  and the zero flag (Z) are now set correctly for decimal mode. However, this
  comes at the general cost of an extra cycle for these instructions, for any
  BCD arithmetics.
  Add 1 to any cycle times stated if the processor is currently in decimal
  mode (D flag = 1).

- **Read-Modify-Write Instructions with Absolute Indexed Addresses**
  execute in one cycle less when remaining at the same memory page.

- **Indirect Jumps on Page Boundaries**
  Indirect JMP instructions with a look-up address low-byte of $FF (as in
  $11FF) now execute as expected, but there's an extra cycle added to the
  exuction time when address bytes are on different memory pages.

Behavioral Changes

- Modified reset and interrupt sequence: the decimal flag is now reset (D=0)
  and the processor set to binary mode.
- No undefinded opcodes (all unused instruction codes execute as NOPs,
  instead).
- For ADC and SBC N, V, and Z flags are set correctly in decimal mode, but
  there is now an extra 1-cycle penalty for decimal mode with certain
  instructions.
- Indexed addressing across page boundaries now results in an extra read of
  the last instruction byte, instead of the extra read of an invalid address
  (NMOS).

- Indirect jumps, fetching the address from the last byte of a page now fetch the high-byte correctly from the next page. (E.g., "JMP ($11FF)" will fetch the low-byte of the effective address from $11FF and the high-byte from $1200. The NMOS version didn't increment the high-byte of the fetch address in these cases.) An extra cycle is added in these cases.

- Read-modify-write instructions do not write back the initial value to the address (as with the NMOS 6502), but perform a dummy read instead. So there are now two read cycles and one write cycle, while there were two write and one read cycle on the NMOS 6502. (Caveat: for indexed addressing, this dummy read is performed on the base address before indexing.)

- Read-modify-write instructions with absolute indexed addresses that do not cross page boundaries perform now in one cycle less (6 instead of 7 on the NMOS CPU).

- BRK instruction are fully executed before any interrupt. (On the NMOS version, if an interrupt occured while a BRK instruction was fetching the interupt vector, this would be overwritten and the interrupt executed, instead.)

- The signal on the RDY pin is now bidrectional. While it was just an input on the NMOS version, it is now also pulled low by the WAI instruction.

Rockwell R65000/11 •/12 •/15 Extensions

While the Rockwell R6500 family is very similar to the MOS 6502, types /11, /12, and /15 add four instructions for bit manipulation, which were later included in the WDC instruction set.
(Hence, these instructions are the same on the respective Rockwell and WDC processors.)

Rockwell R6500 family processors also add additional interrupts, registers and ports for I/O communication, counters, and respective control registers. These are accessed and controlled by reserved addresses and have no impact on the instruction set.
(See the respective datasheets for details.)

Additional Instructions (Rockwel R6500/11 /12 /15)

BBR Branch on Bit Reset

    This branch instruction tests a given bit of
    the accumulator and branches, if this bit is

not set. This is an entire family of eight
instructions in total, testing one of bits #0
to #7 each. Individual mnemonics designate the
tested bit, as in BBR*n*, where *n* = 0..7.
As with all branch instructions, the address
mode is relative, taking a signed single-byte
offset as operand.

branch on A$_n$ = 0   N Z C I D V
                                       - - - - - -

bit tested	assembler	opc	bytes	cycles
0 [-------0]	BBR0 oper	0F	2	5**
1 [------0-]	BBR1 oper	1F	2	5**
2 [-----0--]	BBR2 oper	2F	2	5**
3 [----0---]	BBR3 oper	3F	2	5**
4 [---0----]	BBR4 oper	4F	2	5**
5 [--0-----]	BBR5 oper	5F	2	5**
6 [-0------]	BBR6 oper	6F	2	5**
7 [0-------]	BBR7 oper	7F	2	5**

BBS Branch on Bit Set

    Similar to BBR, but branches on bit *n* set.
    Individual mnemonics designate the tested bit,
    as in BBS*n*, where *n* = 0..7.
    As with all branch instructions, the address
    mode is relative, taking a signed single-byte
    offset as operand.

branch on A$_n$ = 1   N Z C I D V
                                       - - - - - -

bit tested	assembler	opc	bytes	cycles
0 [-------1]	BBS0 oper	8F	2	5**
1 [------1-]	BBS1 oper	9F	2	5**
2 [-----1--]	BBS2 oper	AF	2	5**
3 [----1---]	BBS3 oper	BF	2	5**
4 [---1----]	BBS4 oper	CF	2	5**
5 [--1-----]	BBS5 oper	DF	2	5**
6 [-1------]	BBS6 oper	EF	2	5**
7 [1-------]	BBS7 oper	FF	2	5**

RMB Reset Memory Bit

    Resets a bit in memory at the given zeropage
    location. This is an entire family of eight
    instructions in total, resetting one of bits #0

to #7 each. Individual mnemonics designate the
bit to be reset, as in RMBn, where n = 0..7.
The operand is always a zeropage address.

```
0 -> M                          N Z C I D V
     n                          - - - - - -
```

bit reset	assembler	opc	bytes	cycles
0 [-------0]	RMB0 zpg	07	2	5
1 [------0-]	RMB1 zpg	17	2	5
2 [-----0--]	RMB2 zpg	27	2	5
3 [----0---]	RMB3 zpg	37	2	5
4 [---0----]	RMB4 zpg	47	2	5
5 [--0-----]	RMB5 zpg	57	2	5
6 [-0------]	RMB6 zpg	67	2	5
7 [0-------]	RMB7 zpg	77	2	5

SMB Set Memory Bit

Similar to RMB, but sets the respective bit.
This is an entire family of eight instructions
in total, setting one of bits #0to #7 each.
Individual mnemonics designate the bit to be
set, as in SMBn, where n = 0..7.
The operand is always a zeropage address.

```
1 -> M                          N Z C I D V
     n                          - - - - - -
```

bit set	assembler	opc	bytes	cycles
0 [-------1]	SMB0 zpg	87	2	5
1 [------1-]	SMB1 zpg	97	2	5
2 [-----1--]	SMB2 zpg	A7	2	5
3 [----1---]	SMB3 zpg	B7	2	5
4 [---1----]	SMB4 zpg	C7	2	5
5 [--1-----]	SMB5 zpg	D7	2	5
6 [-1------]	SMB6 zpg	E7	2	5
7 [1-------]	SMB7 zpg	F7	2	5

```
 *   add 1 to cycles if page boundary is crossed

**   add 1 to cycles if branch occurs on same page
     add 2 to cycles if branch occurs to different page
```

Pragmatics of Comparisons and the BIT Instruction

Compare Instructions

The 6502 MPU features three basic compare instructions in various address modes:

```
 Instruction    Comparison
 ---------------------------------------------------------
 CMP            Accumulator and operand
 CPX            X register and operand
 CPY            Y register and operand
```

The various compare instructions subtract the operand from the respective register
(as if the carry was set) without setting the result in the accumulator (rather,
leaving its content unchanged) and adjust the N, Z, and C flags as with any ordinary
subtraction.
Flags will be set as follows:

```
 Relation             Z    C    N
 ------------------------------------------------------------------
 register < operand   0    0    sign-bit of result
 register = operand   1    1    0
 register > operand   0    1    sign-bit of result
```

Meaning, we may dertermine the derivative relation *"greater than or equal"* (gte) by
checking just the carry flag (using instruction BCS):

```
 Relation             Z    C    N
 ------------------------------------------------------------------
 register ≥ operand   x    1    sign-bit of result
```

(For why the carry flag is set this way, see the notes on subtraction, below.)

Mind that the negative flag is not significant and all conditions may be evaluated
by checking the carry and/or zero flag(s).

The BIT Instruction

The BIT instruction may be the most obscure instruction of the 6502:
While other instruction serve a very clear purpose, like transferring values or
performing basic arithmetic or logical operations, this one serves a rather
specialized purpose, but it does so in a very general way.
This purpose is bit testing.

Generally, testing of a particular bit is achieved by masking (isolating) this
bit (or multiple bits) by an AND operation and then checking the zero flag (Z) by
a BNE or BEQ instruction. This, however, destroys the contents of the accumulator.
This is, where the BIT instruction comes in: much like the comparisons perform a
subtraction without setting the result, the BIT instruction performs a logical AND
without setting the result, but still reflects the result in the state of the zero
flag (Z). Which allows for the same checks using the BNE or BEQ instructions,
without affecting the contents of the accumulator.

Since the sign-bit is often used as a flag, testing this is also covered by the BIT
instruction, which additionally to setting the zero flag also transfers bits 7 and 6
of the operand into the corresponding bits of the status register — which happen to
be the negative (N) and overflow (V) flags. Therefore, bits 7 and 6 of the operand
may be tested independently using the BMI/BPL and BVS/BVC instructions.

```
  accumulator        operand
 [76543210]  AND  [76543210]  == 0?
                      ↓↓           ↓
                      NV           Z
```

An interesting use of the BIT instruction may be observed in MS/Commodore BASIC:

```
            ;a condition has been previously evaluated
            ;by setting the carry, now set a flag…

            BCS SETFLAG      ;set a flag in location "FLAG"
             (...)

  SETFLAG   ROR FLAG         ;rotate carry into sign position
                             ;previous sign-bit now in bit 6
            BIT FLAG         ;bit 6 (prev. sign) into overflow flag (V)
            BVS ABORT        ;was the flag set already?
             (...)           ;no: adjust to condition…
            JMP CONTINUE     ;done, continue with task…
  ABORT      (...)           ;flag set twice, abort the operation…
```

Notably, this is easily modified to check the state of 'FLAG' first:

```
            BCS SETFLAG      ;set a flag…
             (...)
```

```
SETFLAG    BIT FLAG        ;sign-bit into negative flag (N)
           BMI ABORT       ;is the flag set already?
           ROR FLAG        ;no: rotate carry into sign position
                           ;(carry is left untouched by BIT)
            (...)          ;adjust to condition…
           JMP CONTINUE    ;done
ABORT       (...)          ;flag already set, abort…
```

In both cases, we don't care about the AND operation and its result in the zero
flag (Z), but only about the bit transfer into the V or N flag, respectively.

A Primer of 6502 Arithmetic Operations

The 6502 processor features two basic arithmetic instructions, ADC, *ADd with Carry*,
and SBC, *SuBtract with Carry*. As the names suggest, these provide addition and
subtraction for single byte operands and results. However, operations are not
limited to a single byte range, which is where the carry flag comes in, providing
the means for a single-bit carry (or borrow), to combine operations over several
bytes.

In order to accomplish this, the carry is included in each of these operations:
for additions, it is added (much like another operand); for subtractions, which are
just an addition using the inverse of the operand (complement value of the operand),
the role of the carry is inverted, as well.
Therefore, it is crucial to set up the carry appropriatly: fo additions, the carry
has to be initially cleared (using CLC), while for subtractions, it must be initally
set (using SEC — more on SBC below).

```
           ;ADC: A = A + M + C
CLC        ;clear carry in preparation
LDA #2     ;load 2 into the accumulator
ADD #3     ;add 3 -> now 5 in accumulator

           ;SBC: A = A - M - C̅   ("C̅": "not carry")
SEC        ;set carry in preparation
LDA #15    ;load 15 into the accumulator
SBC #8     ;subtract 8 -> now 7 in accumulator
```

Note: Here, we used immediate mode, indicated by the prefix "#" before the operand,
  to directly load a literal value. If there is no such "#" prefix, we generally

mean to use the value stored at the address, which is given by the operand. As
  we will see in the next example.)

To combine this for 16-bit values (2 bytes each), we simply chain the instructions
for the next bytes to operate on, but this time without setting or clearing the carry.

Supposing the following locations for storing 16-bit values:

```
                      low-byte  high-byte

  first argument ....  $1000     $1001

  second argument ...  $1002     $1003

  result ...........   $1004     $1005
```

we perform a 16-bit addition by:

```
  CLC            ;prepare carry for addition
  LDA $1000      ;load value at address $1000 into A (low byte of first argument)
  ADC $1002      ;add low byte of second argument at $1002
  STA $1004      ;store low byte of result at $1004
  LDA $1001      ;load high byte of first argument
  ADC $1003      ;add high byte of second argument
  STA $1005      ;store high byte of result (result in $1004 and $1005)
```

and, conversely, for a 16-bit subtraction:

```
  SEC            ;prepare carry for subtraction
  LDA $1000      ;load value at address $1000 into A (low byte of first argument)
  SBC $1002      ;subtract low byte of second argument at $1002
  STA $1004      ;store low byte of result at $1004
  LDA $1001      ;load high byte of first argument
  SBC $1003      ;subtract high byte of second argument
  STA $1005      ;store high byte of result (result in $1004 and $1005)
```

Note: Another, important preparatory step is to set the processor into binary
  mode by use of the CLD *(CLear Decimal flag)* instruction. (Compare the section
  on decimal mode below.) This has to be done only once.

Signed Values

Operations for unsigned and signed values are principally the same, the only
difference being in how we interpret the values. Generally, the 6502 uses what
is known as *two's complement* to represent negative values.

(In earlier computers,something known as ones' complement was used, where we
simply flip all bits to their opposite state to represent a negative value.
While simple, this came with a few drawbacks, like an additional value of
negative zero, which are overcome by two's complement.)

In two's complement representation, we simply flip all the bits in a byte to
their opposite (the same as an XOR by $FF) and then add 1 to this.

E.g., to represent -4:,
(We here use "$" to indicate a hexadecimal number and "%" for binary notation.
A dot is used to separate the high- and low-nibble, i.e. group of 4 bits.)

```
      %0000.0100     4
  XOR %1111.1111   255
  -------------
      %1111.1011    complement (all bits flipped)
    +           1
  -------------
      %1111.1100    -4, two's complement
```

Thus, in a single byte, we may represent values in the range

```
  from  -128  (%1000.0000 or $80)
  to    +127  (%0111.1111 or $7F)
```

A notable feature is that the highest value bit (first bit from the left) will
always be 1 for a negative value and always be 0 for a positive one, for which
it is also known as the *sign bit*. Whenever we interpret a value as a signed
number, a set sign bit indicates a negative value.
This works just the same for larger values, e.g., for a signed 16-bit value:

```
  -512  =  %1111.1110.0000.0000  =  $FE $00
  -516  =  %1111.1101.1111.1100  =  $FD $FC (mind how the +1 step carries over)
```

Notably, the binary operations are still the same as with unsigned values and
provide the expected results:

```
   dec     binary     hex

   100    %0110.0100   $64
 + -24    %1110.1000   $E8
```

```
    -----------------------
      76   %0100.1100   $4C  (+ carry)
```

Note: We may now see how SBC actually works, by adding *ones' complement* of
  the operand to the accumulator. If we add 1 from the carry to the result,
  this effectively results in a subtraction in *two's complement* (the inverse
  of the operand + 1). If the carry happens to be zero, the result falls
  short by 1 in terms of two's complement, which is equivalent to adding 1
  to the operand before the subtraction. Thus, the carry either provides
  the correction required for a valid two's complement representation or,
  if missing, results in a subtraction including a binary borrow.

FLags with ADC and SBC

Besides the carry flag (C), which allows us to chain multi-byte operations, the
CPU sets the following flags on the result of an arithmetic operation:

```
  zero flag (Z) ........ set if the result is zero, else unset
  negative flag (N)  ... the N flag always reflects the sign bit of the result
  overflow flag (V)  ... indicates overflow in signed operations
```

The latter may require explanation: how is signed overflow different from
the carry flag? The overflow flag is about a certain ambiguity of the sign bit
and the negative flag in signed context: if operands are of the same sign, the
case may occure, where the sign bit flips (as indicated by a change of the
negative flag), while the result is still of the same sign. This condition is
indicated by the overflow flag. Notably, such an overflow can never occur, when
the operands are of opposite signs.

E.g., adding positive $40 to positive $40:

```
                acc.      acc.      flags
                hex      binary    NVDIZC


  LDA #$40     $40    %0100.0000   000000
  ADC #$40     $80    %1000.0000   110000
```

Here, the change of the sign bit is unrelated to the actual value in the
accumulator, it is merely a consequence of carry propagation from bit 6 to
bit 7, the sign bit. Since both operands are positive, the result must be
positive, as well.
The overflow flag (V) is of interest in signed context only and has no meaning
in unsigned context.

Decimal Mode (BCD)

Besides binary arithmetic, the 6502 processor supports a second mode, binary coded decimal (BCD), where each byte, rather than representing a range of 0…255, represents two decimal digits packed into a single byte. For this, a byte is thought divided into two sections of 4 bits, the high- and the low-nibble. Only values from 0…9 are used for each nibble and a byte can represent a range of a 2-digit decimal value only, as in 0…99.
E.g.,

```
 dec     binary     hex

  14    %0001.0100   $14
  98    %1001.1000   $98
```

Mind how this intuitively translates to hexadecimal notation, where figures A…F are never used.

Whether or not the processor is in decimal mode is determined by the decimal flag (D). If it is set (using SED) the processor will use BCD arithmetic.
If it is cleared (using CLD), the processor is in binary mode.
Decimal mode only affects instructions ADC and SBC (but not INC or DEC.)

Examples:

```
  SED
  CLC
  LDA #$12
  ADC #$44   ;accumulator now holds $56


  SED
  CLC
  LDA #$28
  ADC #$14   ;accumulator now holds $42
```

Mind that BCD mode is always unsigned:

```
          acc. NVDIZC
  SED
  SEC
  LDA #0     $00  001011
  SBC #1     $99  101000
```

The carry flag and the zero flag work in decimal mode as expected.
The negative flag is set similar to binary mode (and of questionable value.)

The overflow flag has no meaning in decimal mode.

Multi-byte operations are just as in decimal mode: We first prepare the carry and then chain operations of the individual bytes in increasing value order, starting with the lowest value pair.

(It may be important to note that Western Design Center (WDC) version of the processor, the 65C02, always clears the decimal flag when it enters an interrupt, while the original NMOS version of the 6502 does not.)

6502 Jump Vectors and Stack Operations

The 256 bytes processor stack of the 6502 is located at $0100 ... $01FF in memory, growing down from top to bottom.

There are three 2-byte address locations at the very top end of the 64K address space serving as jump vectors for reset/startup and interrupt operations:

```
  $FFFA, $FFFB ... NMI (Non-Maskable Interrupt) vector
  $FFFC, $FFFD ... RES (Reset) vector
  $FFFE, $FFFF ... IRQ (Interrupt Request) vector
```

As an interrupt occurs, any instruction currently processed is completed first. Only then, the value of the program counter (PC) is put in high-low order onto the stack, followed by the value currently in the status register, and control will be transferred to the address location found in the respective interrupt vector. The registers stored on the stack are recovered at the end of an interrupt routine, as control is transferred back to the interrupted code by the RTI instruction.

```
       ┌─────────────┬─────────────┐
       │   ADDRESS   │   MEMORY    │
       ├──────┬──────┼──────┬──────┤
       │ ADH  │ ADL  │MNEMONIC│OP CODE│ ◄── LOW MEMORY
       ├──────┴──────┴──────┴──────┤
       │                           │
  0  1   0  E                        ◄--- SP AFTER IRQ OR NMI
  0  1   0  F    STATUS       •           BUT BEFORE RTI
  0  1   1  0    PCL          02
  0  1   1  1    PCH          03     ◄─── SP BEFORE IRQ OR NMI
  0  1   1  2                              AND AFTER RTI

                               ⟩ STACK

  0  3   0  0                        ◄─── PC AT TIME OF IRQ OR
PC ──►                                    NMI · THIS INSTRUCTION
  0  3   0  1                              WILL COMPLETE BEFORE
  0  3   0  2                              INTERRUPT IS SERVICED
                                    ◄─── PC AFTER RTI


  0  4   0  5      •                 INTERRUPT SERVICE
  0  4   0  6      •                 MAIN BODY
  0  4   0  7    R T I        40     RETURN FROM
                                     INTERRUPT


  F  F   F  A    A D L               ⟩ NMI VECTOR
  F  F   F  B    A D H
  F  F   F  C    A D L               ⟩ RES VECTOR
  F  F   F  D    A D H
  F  F   F  E    A D L        05     ⟩ IRQ VECTOR
  F  F   F  F    A D H        04
                                    ◄── HIGH MEMORY
```

IRQ, NMI, RTI, BRK OPERATION

(Reset after: MCS6502 Instruction Set Summary, MOS Technology, Inc.)

Similarly, as a JSR instruction is encountered, PC is dumped onto the stack
and recovered by the RTS instruction. (Here, the value stored is actually the
address *before* the location, the program will eventually return to. Thus, the
effective return address is PC+1.)

```
                ┌─────────────┬──────────────┐
                │   ADDRESS   │    MEMORY    │
                ├──────┬──────┼────────┬─────┤
                │ ADH  │ ADL  │MNEMONIC│OP CODE│  ◄──── LOW MEMORY
                │      │      │        │     │
                │ 0  1 │ 0  E │        │     │  ◄─ ─ SP AFTER JSR BUT BEFORE
                │ 0  1 │ 0  F │  PCL   │ 02  │        RETURN (RTS)
                │ 0  1 │ 1  0 │  PCH   │ 03  │  ◄──── SP BEFORE JSR AND AFTER
                │ 0  1 │ 1  1 │        │     │        RETURN (RTS) FROM
                │      │      │        │ STACK│        SUBROUTINE
                │  ≋   │  ≋   │   ≋    │  ≋  │
  PC ───►       │ 0  3 │ 0  0 │  JSR   │ 20  │  JUMP TO SUBROUTINE
                │ 0  3 │ 0  1 │  ADL   │ 05  │
                │ 0  3 │ 0  2 │  ADH   │ 04  │
                │ 0  3 │ 0  3 │        │     │  RETURN FROM SUBROUTINE TO
                │      │      │        │     │  THIS LOCATION
                │  ≋   │  ≋   │   ≋    │  ≋  │
                │ 0  4 │ 0  5 │   •    │     │  SUBROUTINE MAIN
                │ 0  4 │ 0  6 │   •    │     │  BODY
                │ 0  4 │ 0  7 │   •    │     │
                │ 0  4 │ 0  8 │  RTS   │ 60  │  RETURN FROM SUBROUTINE
                │      │      │        │     │
                └──────┴──────┴────────┴─────┘  ◄──── HIGH MEMORY
```

JSR, RTS OPERATION

(Reset after: MCS6502 Instruction Set Summary, MOS Technology, Inc.)

Curious Interrupt Behavior

- If the instruction was a taken branch instruction with 3
  cycles execution time (without crossing page boundaries), the
  interrupt will trigger only after an extra CPU cycle.

- On the NMOS6502, an NMI hardware interrupt occuring at the
  start of a BRK intruction will hijack the BRK instruction,
  meanining, the BRK instruction will be executed as normal, but
  the NMI vector will be used instead of the IRQ vector.

- The 65C02 will clear the decimal flag on any interrupts (and
  BRK).

The Break Flag and the Stack

Interrupts and stack operations involving the status register (or P register)
are the only instances, the break flag appears (namely on the stack).
It has no representation in the CPU and can't be accessed by any instruction.

- The break flag will be set to on (1), whenever the transfer was caused by
  software (BRK or PHP).
- The break flag will be set to zero (0), whenever the transfer was caused
  by a hardware interrupt.
- The break flag will be masked and cleared (0), whenever transferred from
  the stack to the status register, either by PLP or during a return from
  interrupt (RTI).

Therefore, it's somewhat difficult to inspect the break flag in order to
discern a software interrupt (BRK) from a hardware interrupt (NMI or IRQ) and
the mechanism is seldom used. Accessing a break mark put in the extra byte
following a BRK instruction is even more cumbersome and probably involves
indexed zeropage operations.

Bit 5 (unused) of the status register will be set to 1, whenever the
register is pushed to the stack. Bits 5 and 4 will always be ignored, when
transferred to the status register.

E.g.,

1)

```
      SR: N V - B D I Z C
          0 0 - - 0 0 1 1

 PHP  ->  0 0 1 1 0 0 1 1  =  $33

 PLP  <-  0 0 - - 0 0 1 1  =  $03

but:

 PLA  <-  0 0 1 1 0 0 1 1  =  $33
```

2)

```
    LDA #$32 ;00110010

    PHA  ->  0 0 1 1 0 0 1 0  =  $32

    PLP  <-  0 0 - - 0 0 1 0  =  $02
```

3)

```
    LDA #$C0
    PHA  ->  1 1 0 0 0 0 0 0  =  $C0
    LDA #$08
    PHA  ->  0 0 0 0 1 0 0 0  =  $08
    LDA #$12
    PHA  ->  0 0 0 1 0 0 1 0  =  $12

    RTI
         SR: 0 0 - - 0 0 1 0  =  $02
         PC: $C008
```

Mind that most emulators are displaying the status register (SR or P) in the
state as it would be currently pushed to the stack, with bits 4 and 5 on, adding
a bias of $30 to the register value. Here, we chose to rather omit this virtual
presence of these bits, since there isn't really a slot for them in the hardware.

6502 Instruction Layout

The 6502 instruction table is laid out according to a pattern *a-b-c,* where
a and *b* are an octal number each, followed by a group of two binary digits *c,*
as in the bit-vector *"aaabbbcc".*

a	a	a	b	b	b	c	c

```
  bit   7 6 5 4 3 2 1 0
        (0…7)   (0…7) (0…3)
```

Example:
All ROR instructions share *a* = 3 and *c* = 2 (3*b*2) with the address mode in *b*.
At the same time, all instructions addressing the zero-page share *b* = 1 (*a*1*c*).
abc = 312 => (3 << 5 | 1 << 2 | 2) = %011.001.10 = $66 "ROR zpg".

Notably, there are no legal opcodes defined where *c* = 3, accounting for the
empty columns in the usual, hexadecimal view of the instruction table.
(For compactness empty rows where *c* = 3 are omitted from the tables below.)

The following table lists the instruction set, rows sorted by *c*, then *a.*

Generally, instructions of a kind are typically found in rows as a combination
of *a* and *c*, and address modes are in columns *b*.
However, there are a few exception to this rule, namely, where bits 0 of both
c and *b* are low (*c* = 0, 2; *b* = 0, 2, 4, 6) and combinations of *c* and *b* select
a group of related operations. (E.g., c=0 ∧ b=4: branch, c=0 ∧ b=6: set flag)

c	a	b 0	1	2	3	4	5	6	7
0	0	$00 BRK impl		$08 PHP impl		$10 BPL rel		$18 CLC impl	
	1	$20 JSR abs	$24 BIT zpg	$28 PLP impl	$2C BIT abs	$30 BMI rel		$38 SEC impl	
	2	$40 RTI impl		$48 PHA impl	$4C JMP abs	$50 BVC rel		$58 CLI impl	
	3	$60 RTS impl		$68 PLA impl	$6C JMP ind	$70 BVS rel		$78 SEI impl	
	4		$84 STY zpg	$88 DEY impl	$8C STY abs	$90 BCC rel	$94 STY zpg,X	$98 TYA impl	
	5	$A0 LDY #	$A4 LDY zpg	$A8 TAY impl	$AC LDY abs	$B0 BCS rel	$B4 LDY zpg,X	$B8 CLV impl	$BC LDY abs,X
	6	$C0 CPY #	$C4 CPY zpg	$C8 INY impl	$CC CPY abs	$D0 BNE rel		$D8 CLD impl	
	7	$E0 CPX #	$E4 CPX zpg	$E8 INX impl	$EC CPX abs	$F0 BEQ rel		$F8 SED impl	
1	0	$01 ORA X,ind	$05 ORA zpg	$09 ORA #	$0D ORA abs	$11 ORA ind,Y	$15 ORA zpg,X	$19 ORA abs,Y	$1D ORA abs,X
	1	$21 AND X,ind	$25 AND zpg	$29 AND #	$2D AND abs	$31 AND ind,Y	$35 AND zpg,X	$39 AND abs,Y	$3D AND abs,X
	2	$41 EOR X,ind	$45 EOR zpg	$49 EOR #	$4D EOR abs	$51 EOR ind,Y	$55 EOR zpg,X	$59 EOR abs,Y	$5D EOR abs,X
	3	$61 ADC X,ind	$65 ADC zpg	$69 ADC #	$6D ADC abs	$71 ADC ind,Y	$75 ADC zpg,X	$79 ADC abs,Y	$7D ADC abs,X
	4	$81 STA X,ind	$85 STA zpg		$8D STA abs	$91 STA ind,Y	$95 STA zpg,X	$99 STA abs,Y	$9D STA abs,X
	5	$A1 LDA X,ind	$A5 LDA zpg	$A9 LDA #	$AD LDA abs	$B1 LDA ind,Y	$B5 LDA zpg,X	$B9 LDA abs,Y	$BD LDA abs,X
	6	$C1 CMP X,ind	$C5 CMP zpg	$C9 CMP #	$CD CMP abs	$D1 CMP ind,Y	$D5 CMP zpg,X	$D9 CMP abs,Y	$DD CMP abs,X
	7	$E1 SBC X,ind	$E5 SBC zpg	$E9 SBC #	$ED SBC abs	$F1 SBC ind,Y	$F5 SBC zpg,X	$F9 SBC abs,Y	$FD SBC abs,X
2	0		$06 ASL zpg	$0A ASL A	$0E ASL abs		$16 ASL zpg,X		$1E ASL abs,X
	1		$26 ROL zpg	$2A ROL A	$2E ROL abs		$36 ROL zpg,X		$3E ROL abs,X
	2		$46 LSR zpg	$4A LSR A	$4E LSR abs		$56 LSR zpg,X		$5E LSR abs,X
	3		$66 ROR zpg	$6A ROR A	$6E ROR abs		$76 ROR zpg,X		$7E ROR abs,X

c	a	0		1		2		3		4	5		6		7	
								b								
4				$86	STX zpg	$8A	TXA impl	$8E	STX abs		$96	STX zpg,Y	$9A	TXS impl		
5		$A2	LDX #	$A6	LDX zpg	$AA	TAX impl	$AE	LDX abs		$B6	LDX zpg,Y	$BA	TSX impl	$BE	LDX abs,Y
6				$C6	DEC zpg	$CA	DEX impl	$CE	DEC abs		$D6	DEC zpg,X			$DE	DEC abs,X
7				$E6	INC zpg	$EA	NOP impl	$EE	INC abs		$F6	INC zpg,X			$FE	INC abs,X

Note: The operand of instructions like "ASL A" is often depicted as implied, as well.
Mind that, for any practical reasons, the two notations are interchangeable for any
instructions involving the accumulator. — However, there are subtle differences.

A rotated view, rows as combinations of *c* and *b,* and columns as *a*:

c	b	a 0		1		2		3		4		5		6		7	
0	0	$00	BRK impl	$20	JSR abs	$40	RTI impl	$60	RTS impl			$A0	LDY #	$C0	CPY #	$E0	CPX #
	1			$24	BIT zpg					$84	STY zpg	$A4	LDY zpg	$C4	CPY zpg	$E4	CPX zpg
	2	$08	PHP impl	$28	PLP impl	$48	PHA impl	$68	PLA impl	$88	DEY impl	$A8	TAY impl	$C8	INY impl	$E8	INX impl
	3			$2C	BIT abs	$4C	JMP abs	$6C	JMP ind	$8C	STY abs	$AC	LDY abs	$CC	CPY abs	$EC	CPX abs
	4	$10	BPL rel	$30	BMI rel	$50	BVC rel	$70	BVS rel	$90	BCC rel	$B0	BCS rel	$D0	BNE rel	$F0	BEQ rel
	5									$94	STY zpg,X	$B4	LDY zpg,X				
	6	$18	CLC impl	$38	SEC impl	$58	CLI impl	$78	SEI impl	$98	TYA impl	$B8	CLV impl	$D8	CLD impl	$F8	SED impl
	7											$BC	LDY abs,X				
1	0	$01	ORA X,ind	$21	AND X,ind	$41	EOR X,ind	$61	ADC X,ind	$81	STA X,ind	$A1	LDA X,ind	$C1	CMP X,ind	$E1	SBC X,ind
	1	$05	ORA zpg	$25	AND zpg	$45	EOR zpg	$65	ADC zpg	$85	STA zpg	$A5	LDA zpg	$C5	CMP zpg	$E5	SBC zpg
	2	$09	ORA #	$29	AND #	$49	EOR #	$69	ADC #			$A9	LDA #	$C9	CMP #	$E9	SBC #
	3	$0D	ORA abs	$2D	AND abs	$4D	EOR abs	$6D	ADC abs	$8D	STA abs	$AD	LDA abs	$CD	CMP abs	$ED	SBC abs
	4	$11	ORA ind,Y	$31	AND ind,Y	$51	EOR ind,Y	$71	ADC ind,Y	$91	STA ind,Y	$B1	LDA ind,Y	$D1	CMP ind,Y	$F1	SBC ind,Y
	5	$15	ORA zpg,X	$35	AND zpg,X	$55	EOR zpg,X	$75	ADC zpg,X	$95	STA zpg,X	$B5	LDA zpg,X	$D5	CMP zpg,X	$F5	SBC zpg,X
	6	$19	ORA abs,Y	$39	AND abs,Y	$59	EOR abs,Y	$79	ADC abs,Y	$99	STA abs,Y	$B9	LDA abs,Y	$D9	CMP abs,Y	$F9	SBC abs,Y

c	b		0		1		2		3		4		5		6		7
	7	$1D	ORA abs,X	$3D	AND abs,X	$5D	EOR abs,X	$7D	ADC abs,X	$9D	STA abs,X	$BD	LDA abs,X	$DD	CMP abs,X	$FD	SBC abs,X
	0											$A2	LDX #				
	1	$06	ASL zpg	$26	ROL zpg	$46	LSR zpg	$66	ROR zpg	$86	STX zpg	$A6	LDX zpg	$C6	DEC zpg	$E6	INC zpg
	2	$0A	ASL A	$2A	ROL A	$4A	LSR A	$6A	ROR A	$8A	TXA impl	$AA	TAX impl	$CA	DEX impl	$EA	NOP impl
	3	$0E	ASL abs	$2E	ROL abs	$4E	LSR abs	$6E	ROR abs	$8E	STX abs	$AE	LDX abs	$CE	DEC abs	$EE	INC abs
2	4																
	5	$16	ASL zpg,X	$36	ROL zpg,X	$56	LSR zpg,X	$76	ROR zpg,X	$96	STX zpg,Y	$B6	LDX zpg,Y	$D6	DEC zpg,X	$F6	INC zpg,X
	6											$9A	TXS impl	$BA	TSX impl		
	7	$1E	ASL abs,X	$3E	ROL abs,X	$5E	LSR abs,X	$7E	ROR abs,X			$BE	LDX abs,Y	$DE	DEC abs,X	$FE	INC abs,X

Finally, a more complex view, the instruction set listed by rows as
combinations of *a* and *c,* and *b* in columns:

Address modes are either a property of *b* (even columns) or combinations
of *b* and *c* (odd columns with aspecific row-index modulus 3; i.e., every
third row in a given column). In those latter columns, first and third
rows (*c* = 0 and *c* = 2) refer to the same kind of general operation.

Load, store and transfer instructions as well as comparisons are typically
found in the lower half of the table, while most of the arithmetical and
logical operations as well as stack and jump instructions are found in the
upper half. (However, mind the exception of SBC as a "mirror" of ADC.)

a	c		0		1		2		3		4		5		6		7
	0	$00	BRK impl			$08	PHP impl			$10	BPL rel			$18	CLC impl		
0	1	$01	ORA X,ind	$05	ORA zpg	$09	ORA #	$0D	ORA abs	$11	ORA ind,Y	$15	ORA zpg,X	$19	ORA abs,Y	$1D	ORA abs,X
	2			$06	ASL zpg	$0A	ASL A	$0E	ASL abs			$16	ASL zpg,X			$1E	ASL abs,X
1	0	$20	JSR abs	$24	BIT zpg	$28	PLP impl	$2C	BIT abs	$30	BMI rel			$38	SEC impl		
	1	$21	AND X,ind	$25	AND zpg	$29	AND #	$2D	AND abs	$31	AND ind,Y	$35	AND zpg,X	$39	AND abs,Y	$3D	AND abs,X

a	c	0	1	2	3	4	5	6	7
	2		$26 ROL zpg	$2A ROL A	$2E ROL abs		$36 ROL zpg,X		$3E ROL abs,X
	0	$40 RTI impl		$48 PHA impl	$4C JMP abs	$50 BVC rel	$58 CLI impl		
2	1	$41 EOR X,ind	$45 EOR zpg	$49 EOR #	$4D EOR abs	$51 EOR ind,Y	$55 EOR zpg,X	$59 EOR abs,Y	$5D EOR abs,X
	2		$46 LSR zpg	$4A LSR A	$4E LSR abs		$56 LSR zpg,X		$5E LSR abs,X
	0	$60 RTS impl		$68 PLA impl	$6C JMP ind	$70 BVS rel	$78 SEI impl		
3	1	$61 ADC X,ind	$65 ADC zpg	$69 ADC #	$6D ADC abs	$71 ADC ind,Y	$75 ADC zpg,X	$79 ADC abs,Y	$7D ADC abs,X
	2		$66 ROR zpg	$6A ROR A	$6E ROR abs		$76 ROR zpg,X		$7E ROR abs,X
	0		$84 STY zpg	$88 DEY impl	$8C STY abs	$90 BCC rel	$94 STY zpg,X	$98 TYA impl	
4	1	$81 STA X,ind	$85 STA zpg		$8D STA abs	$91 STA ind,Y	$95 STA zpg,X	$99 STA abs,Y	$9D STA abs,X
	2		$86 STX zpg	$8A TXA impl	$8E STX abs		$96 STX zpg,Y	$9A TXS impl	
	0	$A0 LDY #	$A4 LDY zpg	$A8 TAY impl	$AC LDY abs	$B0 BCS rel	$B4 LDY zpg,X	$B8 CLV impl	$BC LDY abs,X
5	1	$A1 LDA X,ind	$A5 LDA zpg	$A9 LDA #	$AD LDA abs	$B1 LDA ind,Y	$B5 LDA zpg,X	$B9 LDA abs,Y	$BD LDA abs,X
	2	$A2 LDX #	$A6 LDX zpg	$AA TAX impl	$AE LDX abs		$B6 LDX zpg,Y	$BA TSX impl	$BE LDX abs,Y
	0	$C0 CPY #	$C4 CPY zpg	$C8 INY impl	$CC CPY abs	$D0 BNE rel	$D8 CLD impl		
6	1	$C1 CMP X,ind	$C5 CMP zpg	$C9 CMP #	$CD CMP abs	$D1 CMP ind,Y	$D5 CMP zpg,X	$D9 CMP abs,Y	$DD CMP abs,X
	2		$C6 DEC zpg	$CA DEX impl	$CE DEC abs		$D6 DEC zpg,X		$DE DEC abs,X
	0	$E0 CPX #	$E4 CPX zpg	$E8 INX impl	$EC CPX abs	$F0 BEQ rel	$F8 SED impl		
7	1	$E1 SBC X,ind	$E5 SBC zpg	$E9 SBC #	$ED SBC abs	$F1 SBC ind,Y	$F5 SBC zpg,X	$F9 SBC abs,Y	$FD SBC abs,X
	2		$E6 INC zpg	$EA NOP impl	$EE INC abs		$F6 INC zpg,X		$FE INC abs,X

"Illegal" Opcodes Revisited

So, how do the "illegal" opcodes fit into this decoding scheme?
Let's have a look — "illegals" are shown on grey background.

The first view — rows by *c* and *a* and columns as *b* — reveals a strict relation
beetween address modes and columns:

c	a	b								
		0	1	2	3	4	5	6	7
0	0	$00 BRK impl	$04 NOP zpg	$08 PHP impl	$0C NOP abs	$10 BPL rel	$14 NOP zpg,X	$18 CLC impl	$1C NOP abs,X
	1	$20 JSR abs	$24 BIT zpg	$28 PLP impl	$2C BIT abs	$30 BMI rel	$34 NOP zpg,X	$38 SEC impl	$3C NOP abs,X
	2	$40 RTI impl	$44 NOP zpg	$48 PHA impl	$4C JMP abs	$50 BVC rel	$54 NOP zpg,X	$58 CLI impl	$5C NOP abs,X
	3	$60 RTS impl	$64 NOP zpg	$68 PLA impl	$6C JMP ind	$70 BVS rel	$74 NOP zpg,X	$78 SEI impl	$7C NOP abs,X
	4	$80 NOP #	$84 STY zpg	$88 DEY impl	$8C STY abs	$90 BCC rel	$94 STY zpg,X	$98 TYA impl	$9C SHY abs,X
	5	$A0 LDY #	$A4 LDY zpg	$A8 TAY impl	$AC LDY abs	$B0 BCS rel	$B4 LDY zpg,X	$B8 CLV impl	$BC LDY abs,X
	6	$C0 CPY #	$C4 CPY zpg	$C8 INY impl	$CC CPY abs	$D0 BNE rel	$D4 NOP zpg,X	$D8 CLD impl	$DC NOP abs,X
	7	$E0 CPX #	$E4 CPX zpg	$E8 INX impl	$EC CPX abs	$F0 BEQ rel	$F4 NOP zpg,X	$F8 SED impl	$FC NOP abs,X
1	0	$01 ORA X,ind	$05 ORA zpg	$09 ORA #	$0D ORA abs	$11 ORA ind,Y	$15 ORA zpg,X	$19 ORA abs,Y	$1D ORA abs,X
	1	$21 AND X,ind	$25 AND zpg	$29 AND #	$2D AND abs	$31 AND ind,Y	$35 AND zpg,X	$39 AND abs,Y	$3D AND abs,X
	2	$41 EOR X,ind	$45 EOR zpg	$49 EOR #	$4D EOR abs	$51 EOR ind,Y	$55 EOR zpg,X	$59 EOR abs,Y	$5D EOR abs,X
	3	$61 ADC X,ind	$65 ADC zpg	$69 ADC #	$6D ADC abs	$71 ADC ind,Y	$75 ADC zpg,X	$79 ADC abs,Y	$7D ADC abs,X
	4	$81 STA X,ind	$85 STA zpg	$89 NOP #	$8D STA abs	$91 STA ind,Y	$95 STA zpg,X	$99 STA abs,Y	$9D STA abs,X
	5	$A1 LDA X,ind	$A5 LDA zpg	$A9 LDA #	$AD LDA abs	$B1 LDA ind,Y	$B5 LDA zpg,X	$B9 LDA abs,Y	$BD LDA abs,X
	6	$C1 CMP X,ind	$C5 CMP zpg	$C9 CMP #	$CD CMP abs	$D1 CMP ind,Y	$D5 CMP zpg,X	$D9 CMP abs,Y	$DD CMP abs,X
	7	$E1 SBC X,ind	$E5 SBC zpg	$E9 SBC #	$ED SBC abs	$F1 SBC ind,Y	$F5 SBC zpg,X	$F9 SBC abs,Y	$FD SBC abs,X
2	0	$02 JAM	$06 ASL zpg	$0A ASL A	$0E ASL abs	$12 JAM	$16 ASL zpg,X	$1A NOP impl	$1E ASL abs,X
	1	$22 JAM	$26 ROL zpg	$2A ROL A	$2E ROL abs	$32 JAM	$36 ROL zpg,X	$3A NOP impl	$3E ROL abs,X
	2	$42 JAM	$46 LSR zpg	$4A LSR A	$4E LSR abs	$52 JAM	$56 LSR zpg,X	$5A NOP impl	$5E LSR abs,X
	3	$62 JAM	$66 ROR zpg	$6A ROR A	$6E ROR abs	$72 JAM	$76 ROR zpg,X	$7A NOP impl	$7E ROR abs,X
	4	$82 NOP #	$86 STX zpg	$8A TXA impl	$8E STX abs	$92 JAM	$96 STX zpg,Y	$9A TXS impl	$9E SHX abs,Y
	5	$A2 LDX #	$A6 LDX zpg	$AA TAX impl	$AE LDX abs	$B2 JAM	$B6 LDX zpg,Y	$BA TSX impl	$BE LDX abs,Y
	6	$C2 NOP #	$C6 DEC zpg	$CA DEX impl	$CE DEC abs	$D2 JAM	$D6 DEC zpg,X	$DA NOP impl	$DE DEC abs,X
	7	$E2 NOP #	$E6 INC zpg	$EA NOP impl	$EE INC abs	$F2 JAM	$F6 INC zpg,X	$FA NOP impl	$FE INC abs,X
3	0	$03 SLO X,ind	$07 SLO zpg	$0B ANC #	$0F SLO abs	$13 SLO ind,Y	$17 SLO zpg,X	$1B SLO abs,Y	$1F SLO abs,X

c	a		b														
			0		**1**		**2**		**3**		**4**		**5**		**6**		**7**
	1		$23 RLA X,ind		$27 RLA zpg		$2B ANC #		$2F RLA abs		$33 RLA ind,Y		$37 RLA zpg,X		$3B RLA abs,Y		$3F RLA abs,X
	2		$43 SRE X,ind		$47 SRE zpg		$4B ALR #		$4F SRE abs		$53 SRE ind,Y		$57 SRE zpg,X		$5B SRE abs,Y		$5F SRE abs,X
	3		$63 RRA X,ind		$67 RRA zpg		$6B ARR #		$6F RRA abs		$73 RRA ind,Y		$77 RRA zpg,X		$7B RRA abs,Y		$7F RRA abs,X
	4		$83 SAX X,ind		$87 SAX zpg		$8B ANE #		$8F SAX abs		$93 SHA ind,Y		$97 SAX zpg,Y		$9B TAS abs,Y		$9F SHA abs,Y
	5		$A3 LAX X,ind		$A7 LAX zpg		$AB LXA #		$AF LAX abs		$B3 LAX ind,Y		$B7 LAX zpg,Y		$BB LAS abs,Y		$BF LAX abs,Y
	6		$C3 DCP X,ind		$C7 DCP zpg		$CB SBX #		$CF DCP abs		$D3 DCP ind,Y		$D7 DCP zpg,X		$DB DCP abs,Y		$DF DCP abs,X
	7		$E3 ISC X,ind		$E7 ISC zpg		$EB USBC #		$EF ISC abs		$F3 ISC ind,Y		$F7 ISC zpg,X		$FB ISC abs,Y		$FF ISC abs,X

And, again, as a rotated view, rows as combinations of *c* and *b,* and columns as *a*.
We may observe a close relationship between the legal and the undocumented
instructions in the vertical (quarter-)segements of each column.

c	b		a														
			0		**1**		**2**		**3**		**4**		**5**		**6**		**7**
0	**0**		$00 BRK impl		$20 JSR abs		$40 RTI impl		$60 RTS impl		$80 NOP #		$A0 LDY #		$C0 CPY #		$E0 CPX #
	1		$04 NOP zpg		$24 BIT zpg		$44 NOP zpg		$64 NOP zpg		$84 STY zpg		$A4 LDY zpg		$C4 CPY zpg		$E4 CPX zpg
	2		$08 PHP impl		$28 PLP impl		$48 PHA impl		$68 PLA impl		$88 DEY impl		$A8 TAY impl		$C8 INY impl		$E8 INX impl
	3		$0C NOP abs		$2C BIT abs		$4C JMP abs		$6C JMP ind		$8C STY abs		$AC LDY abs		$CC CPY abs		$EC CPX abs
	4		$10 BPL rel		$30 BMI rel		$50 BVC rel		$70 BVS rel		$90 BCC rel		$B0 BCS rel		$D0 BNE rel		$F0 BEQ rel
	5		$14 NOP zpg,X		$34 NOP zpg,X		$54 NOP zpg,X		$74 NOP zpg,X		$94 STY zpg,X		$B4 LDY zpg,X		$D4 NOP zpg,X		$F4 NOP zpg,X
	6		$18 CLC impl		$38 SEC impl		$58 CLI impl		$78 SEI impl		$98 TYA impl		$B8 CLV impl		$D8 CLD impl		$F8 SED impl
	7		$1C NOP abs,X		$3C NOP abs,X		$5C NOP abs,X		$7C NOP abs,X		$9C SHY abs,X		$BC LDY abs,X		$DC NOP abs,X		$FC NOP abs,X
1	**0**		$01 ORA X,ind		$21 AND X,ind		$41 EOR X,ind		$61 ADC X,ind		$81 STA X,ind		$A1 LDA X,ind		$C1 CMP X,ind		$E1 SBC X,ind
	1		$05 ORA zpg		$25 AND zpg		$45 EOR zpg		$65 ADC zpg		$85 STA zpg		$A5 LDA zpg		$C5 CMP zpg		$E5 SBC zpg
	2		$09 ORA #		$29 AND #		$49 EOR #		$69 ADC #		$89 NOP #		$A9 LDA #		$C9 CMP #		$E9 SBC #
	3		$0D ORA abs		$2D AND abs		$4D EOR abs		$6D ADC abs		$8D STA abs		$AD LDA abs		$CD CMP abs		$ED SBC abs
	4		$11 ORA ind,Y		$31 AND ind,Y		$51 EOR ind,Y		$71 ADC ind,Y		$91 STA ind,Y		$B1 LDA ind,Y		$D1 CMP ind,Y		$F1 SBC ind,Y

c	b	a=0	a=1	a=2	a=3	a=4	a=5	a=6	a=7
2	5	$15 ORA zpg,X	$35 AND zpg,X	$55 EOR zpg,X	$75 ADC zpg,X	$95 STA zpg,X	$B5 LDA zpg,X	$D5 CMP zpg,X	$F5 SBC zpg,X
	6	$19 ORA abs,Y	$39 AND abs,Y	$59 EOR abs,Y	$79 ADC abs,Y	$99 STA abs,Y	$B9 LDA abs,Y	$D9 CMP abs,Y	$F9 SBC abs,Y
	7	$1D ORA abs,X	$3D AND abs,X	$5D EOR abs,X	$7D ADC abs,X	$9D STA abs,X	$BD LDA abs,X	$DD CMP abs,X	$FD SBC abs,X
	0	$02 JAM	$22 JAM	$42 JAM	$62 JAM	$82 NOP #	$A2 LDX #	$C2 NOP #	$E2 NOP #
	1	$06 ASL zpg	$26 ROL zpg	$46 LSR zpg	$66 ROR zpg	$86 STX zpg	$A6 LDX zpg	$C6 DEC zpg	$E6 INC zpg
	2	$0A ASL A	$2A ROL A	$4A LSR A	$6A ROR A	$8A TXA impl	$AA TAX impl	$CA DEX impl	$EA NOP impl
	3	$0E ASL abs	$2E ROL abs	$4E LSR abs	$6E ROR abs	$8E STX abs	$AE LDX abs	$CE DEC abs	$EE INC abs
	4	$12 JAM	$32 JAM	$52 JAM	$72 JAM	$92 JAM	$B2 JAM	$D2 JAM	$F2 JAM
	5	$16 ASL zpg,X	$36 ROL zpg,X	$56 LSR zpg,X	$76 ROR zpg,X	$96 STX zpg,Y	$B6 LDX zpg,Y	$D6 DEC zpg,X	$F6 INC zpg,X
	6	$1A NOP impl	$3A NOP impl	$5A NOP impl	$7A NOP impl	$9A TXS impl	$BA TSX impl	$DA NOP impl	$FA NOP impl
	7	$1E ASL abs,X	$3E ROL abs,X	$5E LSR abs,X	$7E ROR abs,X	$9E SHX abs,Y	$BE LDX abs,Y	$DE DEC abs,X	$FE INC abs,X
3	0	$03 SLO X,ind	$23 RLA X,ind	$43 SRE X,ind	$63 RRA X,ind	$83 SAX X,ind	$A3 LAX X,ind	$C3 DCP X,ind	$E3 ISC X,ind
	1	$07 SLO zpg	$27 RLA zpg	$47 SRE zpg	$67 RRA zpg	$87 SAX zpg	$A7 LAX zpg	$C7 DCP zpg	$E7 ISC zpg
	2	$0B ANC #	$2B ANC #	$4B ALR #	$6B ARR #	$8B ANE #	$AB LXA #	$CB SBX #	$EB USBC #
	3	$0F SLO abs	$2F RLA abs	$4F SRE abs	$6F RRA abs	$8F SAX abs	$AF LAX abs	$CF DCP abs	$EF ISC abs
	4	$13 SLO ind,Y	$33 RLA ind,Y	$53 SRE ind,Y	$73 RRA ind,Y	$93 SHA ind,Y	$B3 LAX ind,Y	$D3 DCP ind,Y	$F3 ISC ind,Y
	5	$17 SLO zpg,X	$37 RLA zpg,X	$57 SRE zpg,X	$77 RRA zpg,X	$97 SAX zpg,Y	$B7 LAX zpg,Y	$D7 DCP zpg,X	$F7 ISC zpg,X
	6	$1B SLO abs,Y	$3B RLA abs,Y	$5B SRE abs,Y	$7B RRA abs,Y	$9B TAS abs,Y	$BB LAS abs,Y	$DB DCP abs,Y	$FB ISC abs,Y
	7	$1F SLO abs,X	$3F RLA abs,X	$5F SRE abs,X	$7F RRA abs,X	$9F SHA abs,Y	$BF LAX abs,Y	$DF DCP abs,X	$FF ISC abs,X

And, finally, in a third view, we may observe how each of the rows of "illegal" instructions at c = 3 inherits behavior from the two rows with c = 1 and c = 2 immediately above, combining the operations of these instructions with the address mode of the respective instruction at c = 1.
(Mind that in binary 3 is the combination of 2 and 1, bits 0 and 1 both set.)

We may further observe that additional NOPs result from non-effective or non-sensical combinations of operations and address modes, e.g., instr. $89, which would be "STA #", storing the contents of the accumulator in the operand.

Some other instructions, typically combinations involving indirect indexed addressing, fail over unresolved timing issues entirely, resulting in a "JAM".

(We me also observe that there is indeed a difference in accumulator mode — as in "OPC A" — and immediate addressing. E.g., $6A, "ROR A", is a valid instruction, while instruction $7A, "ROR implied", is a NOP.
We may also note how "ROR X,ind" at $62 and "ROR ind,Y" at $72 fail entirely and result in a JAM.)

a	c	0	1	2	3	b 4	5	6	7
0	0	$00 BRK impl	$04 NOP zpg	$08 PHP impl	$0C NOP abs	$10 BPL rel	$14 NOP zpg,X	$18 CLC impl	$1C NOP abs,X
	1	$01 ORA X,ind	$05 ORA zpg	$09 ORA #	$0D ORA abs	$11 ORA ind,Y	$15 ORA zpg,X	$19 ORA abs,Y	$1D ORA abs,X
	2	$02 JAM	$06 ASL zpg	$0A ASL A	$0E ASL abs	$12 JAM	$16 ASL zpg,X	$1A NOP impl	$1E ASL abs,X
	3	$03 SLO X,ind	$07 SLO zpg	$0B ANC #	$0F SLO abs	$13 SLO ind,Y	$17 SLO zpg,X	$1B SLO abs,Y	$1F SLO abs,X
1	0	$20 JSR abs	$24 BIT zpg	$28 PLP impl	$2C BIT abs	$30 BMI rel	$34 NOP zpg,X	$38 SEC impl	$3C NOP abs,X
	1	$21 AND X,ind	$25 AND zpg	$29 AND #	$2D AND abs	$31 AND ind,Y	$35 AND zpg,X	$39 AND abs,Y	$3D AND abs,X
	2	$22 JAM	$26 ROL zpg	$2A ROL A	$2E ROL abs	$32 JAM	$36 ROL zpg,X	$3A NOP impl	$3E ROL abs,X
	3	$23 RLA X,ind	$27 RLA zpg	$2B ANC #	$2F RLA abs	$33 RLA ind,Y	$37 RLA zpg,X	$3B RLA abs,Y	$3F RLA abs,X
2	0	$40 RTI impl	$44 NOP zpg	$48 PHA impl	$4C JMP abs	$50 BVC rel	$54 NOP zpg,X	$58 CLI impl	$5C NOP abs,X
	1	$41 EOR X,ind	$45 EOR zpg	$49 EOR #	$4D EOR abs	$51 EOR ind,Y	$55 EOR zpg,X	$59 EOR abs,Y	$5D EOR abs,X
	2	$42 JAM	$46 LSR zpg	$4A LSR A	$4E LSR abs	$52 JAM	$56 LSR zpg,X	$5A NOP impl	$5E LSR abs,X
	3	$43 SRE X,ind	$47 SRE zpg	$4B ALR #	$4F SRE abs	$53 SRE ind,Y	$57 SRE zpg,X	$5B SRE abs,Y	$5F SRE abs,X
3	0	$60 RTS impl	$64 NOP zpg	$68 PLA impl	$6C JMP ind	$70 BVS rel	$74 NOP zpg,X	$78 SEI impl	$7C NOP abs,X
	1	$61 ADC X,ind	$65 ADC zpg	$69 ADC #	$6D ADC abs	$71 ADC ind,Y	$75 ADC zpg,X	$79 ADC abs,Y	$7D ADC abs,X
	2	$62 JAM	$66 ROR zpg	$6A ROR A	$6E ROR abs	$72 JAM	$76 ROR zpg,X	$7A NOP impl	$7E ROR abs,X
	3	$63 RRA X,ind	$67 RRA zpg	$6B ARR #	$6F RRA abs	$73 RRA ind,Y	$77 RRA zpg,X	$7B RRA abs,Y	$7F RRA abs,X
4	0	$80 NOP #	$84 STY zpg	$88 DEY impl	$8C STY abs	$90 BCC rel	$94 STY zpg,X	$98 TYA impl	$9C SHY abs,X
	1	$81 STA X,ind	$85 STA zpg	$89 NOP #	$8D STA abs	$91 STA ind,Y	$95 STA zpg,X	$99 STA abs,Y	$9D STA abs,X
	2	$82 NOP #	$86 STX zpg	$8A TXA impl	$8E STX abs	$92 JAM	$96 STX zpg,Y	$9A TXS impl	$9E SHX abs,Y

	a	c	b							
			0	**1**	**2**	**3**	**4**	**5**	**6**	**7**
		3	$83 SAX X,ind	$87 SAX zpg	$8B ANE #	$8F SAX abs	$93 SHA ind,Y	$97 SAX zpg,Y	$9B TAS abs,Y	$9F SHA abs,Y
		0	$A0 LDY #	$A4 LDY zpg	$A8 TAY impl	$AC LDY abs	$B0 BCS rel	$B4 LDY zpg,X	$B8 CLV impl	$BC LDY abs,X
		1	$A1 LDA X,ind	$A5 LDA zpg	$A9 LDA #	$AD LDA abs	$B1 LDA ind,Y	$B5 LDA zpg,X	$B9 LDA abs,Y	$BD LDA abs,X
	5	2	$A2 LDX #	$A6 LDX zpg	$AA TAX impl	$AE LDX abs	$B2 JAM	$B6 LDX zpg,Y	$BA TSX impl	$BE LDX abs,Y
		3	$A3 LAX X,ind	$A7 LAX zpg	$AB LXA #	$AF LAX abs	$B3 LAX ind,Y	$B7 LAX zpg,Y	$BB LAS abs,Y	$BF LAX abs,Y
		0	$C0 CPY #	$C4 CPY zpg	$C8 INY impl	$CC CPY abs	$D0 BNE rel	$D4 NOP zpg,X	$D8 CLD impl	$DC NOP abs,X
		1	$C1 CMP X,ind	$C5 CMP zpg	$C9 CMP #	$CD CMP abs	$D1 CMP ind,Y	$D5 CMP zpg,X	$D9 CMP abs,Y	$DD CMP abs,X
	6	2	$C2 NOP #	$C6 DEC zpg	$CA DEX impl	$CE DEC abs	$D2 JAM	$D6 DEC zpg,X	$DA NOP impl	$DE DEC abs,X
		3	$C3 DCP X,ind	$C7 DCP zpg	$CB SBX #	$CF DCP abs	$D3 DCP ind,Y	$D7 DCP zpg,X	$DB DCP abs,Y	$DF DCP abs,X
		0	$E0 CPX #	$E4 CPX zpg	$E8 INX impl	$EC CPX abs	$F0 BEQ rel	$F4 NOP zpg,X	$F8 SED impl	$FC NOP abs,X
		1	$E1 SBC X,ind	$E5 SBC zpg	$E9 SBC #	$ED SBC abs	$F1 SBC ind,Y	$F5 SBC zpg,X	$F9 SBC abs,Y	$FD SBC abs,X
	7	2	$E2 NOP #	$E6 INC zpg	$EA NOP impl	$EE INC abs	$F2 JAM	$F6 INC zpg,X	$FA NOP impl	$FE INC abs,X
		3	$E3 ISC X,ind	$E7 ISC zpg	$EB USBC #	$EF ISC abs	$F3 ISC ind,Y	$F7 ISC zpg,X	$FB ISC abs,Y	$FF ISC abs,X

As a final observation, the two highly unstable instructions "ANE" (XAA) and "LXA" (LAX immediate) involving a "magic constant" are both combinations of an accumulator operation and an inter-register transfer between the accumulator and the X register:

```
  $8B (a=5, c=3, b=2): ANE # = STA # (NOP) + TXA
  (A OR CONST) AND X AND oper -> A

  $AB (a=4, c=3, b=2): LXA # = LDA # + TAX
  (A OR CONST) AND oper -> A -> X
```

In the case of ANE, the contents of the accumulator is put on the internal data lines at the same time as the contents of the X-register, while there's also the operand read for the immediate operation, with the result transferred to the accumulator.

In the case of LXA, the immediate operand and the contents of the accumulator are competing for the imput lines, while the result will be transferred to both the accumulator and the X register.

The outcome of these competing, noisy conditions depends on the production series of the chip, and maybe even on environmental conditions. This effects in an OR-ing of the accumulator with the "magic constant" combined with an AND-ing of the competing inputs. The final transfer to the target register(s) then seems to work as may be expected.

(This AND-ing of competing values susggests that the 6502 is working internally in active negative logic, where all data lines are first set to high and then cleared for any zero bits. This also suggests that the "magic constant" stands merely for a partial transfer of the contents of the accumulator.)

Much of this also applies to "TAS" (XAS, SHS), $9B, but here the extra cycles for indexed addressing seem to contribute to the conflict being resolved without this "magic constant". However, TAS is still unstable.

Simlarly the peculiar group involving the high-byte of the provided address + 1 (as in "H+1") — SHA (AHX, AXA), SHX (A11, SXA, XAS), SHY (A11, SYA, SAY) — involves a conflict of an attempt to store the accumulator and another register being put on the data lines at the same time, and the operations required to determine the target address for for indexed addressing. Again, the competing values are AND-ed and the instructions are unstable.

We may also observe that SHY is really the unimplemented instruction "STY abs,X" and SHX is "STX abs,Y" with SHA being the combination of "LDA abs,X" and SHX.

We may conclude that these "illegal opcodes" or "undocumented instructions" are really a text-book example of undefined behavior for undefined input patterns. Generally speaking, for any instructions xxxxxx11 *(c=3)* both instructions at xxxxxx01 *(c=1)* and xxxxxx10 *(c=2)* are started in a thread, with competing ouput values on the internal data lines AND-ed. For some combinations, this results in a fragile race condition, while others are showing mostly stable behavior. The addressing mode is generally determined by that of the instruction at *c=1*.

(It may be interesting that is doesn't matter, if any of the two threads jams, as long as the timing for the other thread resolves. So there is no "JAM" instruction at *c=3*.)

Pinout

- **6502 (NMOS)**

Pin	Signal		Pin	Signal
1	Vss		40	$\overline{RES}$
2	RDY		39	Φ_2 (OUT)
3	Φ_1 (OUT)		38	S.O.
4	$\overline{IRQ}$		37	Φ_0 (IN)
5	N.C.		36	N.C.
6	$\overline{NMI}$		35	N.C.
7	SYNC		34	R/W
8	Vcc		33	D0
9	A0		32	D1
10	A1		31	D2
11	A2		30	D3
12	A3		29	D4
13	A4		28	D5
14	A5		27	D6
15	A6		26	D7
16	A7		25	A15
17	A8		24	A14
18	A9		23	A13
19	A10		22	A12
20	A11		21	Vss

MCS6502

Vcc	supply voltage (+5 V DC ± 5%, +7 V max.)
Vss	logical ground
$\Phi_{0\cdots2}$	clock
A0 ⋯ A15	address bus
D0 ⋯ D7	data bus
R/W	read/write
RDY	ready
S.O.	set overflow (future I/O interface)
SYNC	sync (goes high on opcode fetch phase)
$\overline{IRQ}$	interrupt request (active low)

NMI	non maskable interrupt (active low)
RES	reset (active low)
N.C.	no connection

After: MCS6500 Microcomputer Family Hardware Manual. MOS Technology, Inc., 1976.

- **WDC 65C02S (40 Pin PDIP)**

Left Pin	#		#	Right Pin
VBP	1		40	$\overline{RES}$
RDY	2		39	Φ_2 (OUT)
Φ_1 (OUT)	3		38	$\overline{S.O.}$
$\overline{IRQ}$	4		37	Φ_2 (IN)
ML	5		36	BE
$\overline{NMI}$	6		35	N.C.
SYNC	7		34	R/W
VDD	8		33	D0
A0	9		32	D1
A1	10	W65C02S	31	D2
A2	11		30	D3
A3	12		29	D4
A4	13		28	D5
A5	14		27	D6
A6	15		26	D7
A7	16		25	A15
A8	17		24	A14
A9	18		23	A13
A10	19		22	A12
A11	20		21	Vss

VDD	positive supply voltage
Vss	logical ground
$\Phi_{1...2}$	clock

A0 ⋯ A15	address bus
D0 ⋯ D7	data bus
BE	bus enable
R/W	read/write
RDY	ready (bidirectional)
S.O.	set overflow (active low)
IRQ	interrupt request (active low)
NMI	non maskable interrupt (active low)
RES	reset (active low)
VBP	vector pull
N.C.	no connection

Based on: W65C02S 8—bit Microprocessor Datasheet. The Western Design Center, Inc., 2022.

The 65xx—Family:

```
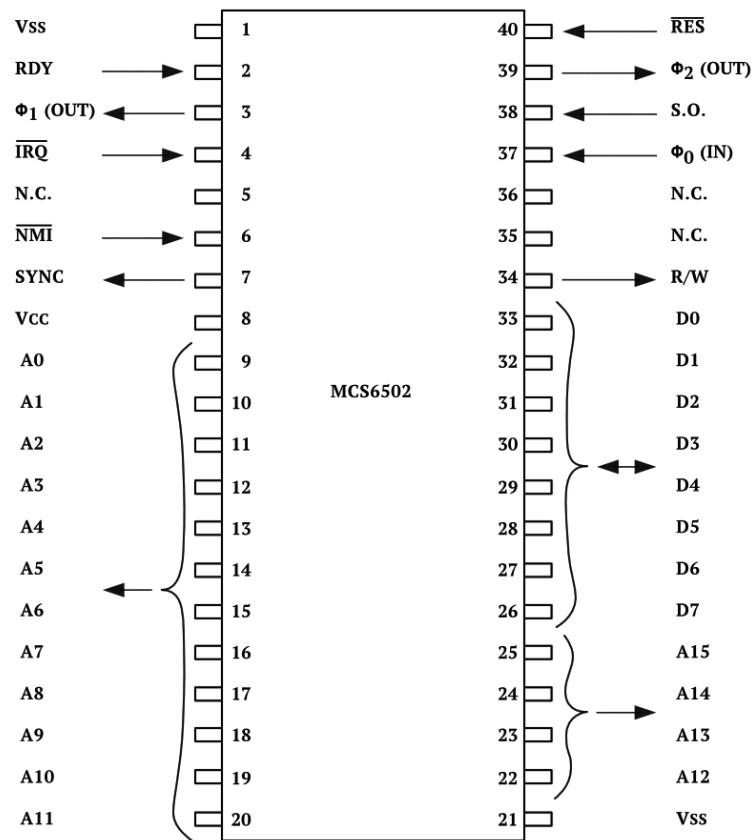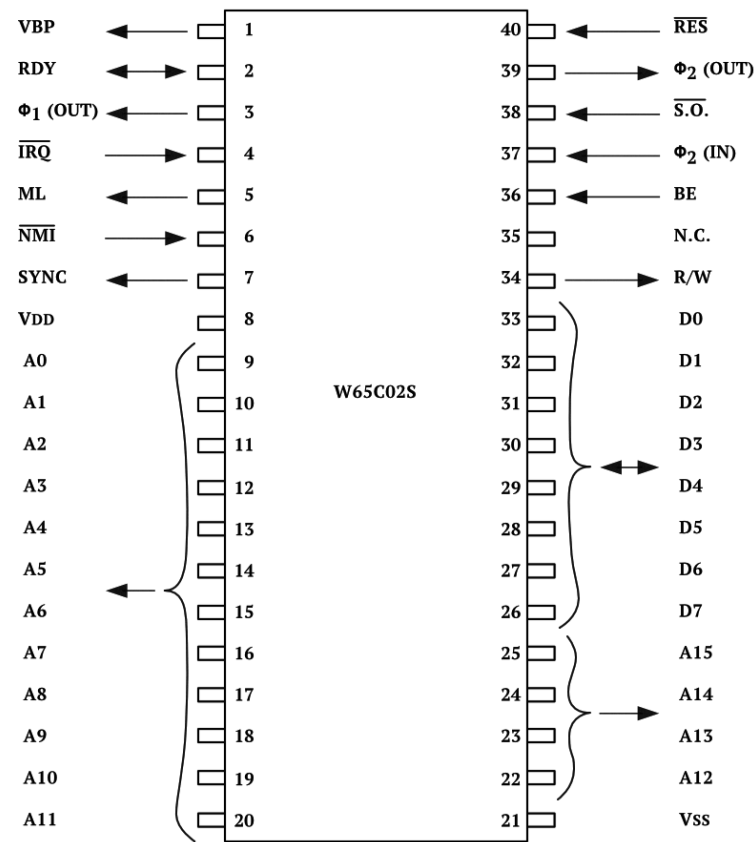Type                Features, Comments
------------------------------------------------------------------------------------------------------------------
6502                NMOS, 16 bit address bus, 8 bit data bus
6502A               accelerated version of 6502
6502C               accelerated version of 6502, additional halt pin, CMOS
65C02               WDC version, additional instructions and address modes, up to 14MHz
6503, 6505, 6506    12 bit address bus [4 KiB]
6504                13 bit address bus [8 KiB], no NMI
6507                13 bit address bus [8 KiB], no interrupt lines
6509                20 bit address bus [1 MiB] by bankswitching
6510                as 6502 with additional 6 bit I/O—port
6511                integrated micro controler with I/O—port, serial interface, and RAM (Rockwell)
65F11               as 6511, integrated FORTH interpreter
7501                as 6502, HMOS
8500                as 6510, CMOS
8502                as 6510 with switchable 2 MHz option, 7 bit I/O—port
65816 (65C816)      16 bit registers and ALU, 24 bit address bus [16 MiB], up to 24 MHz (Western Design Center)
65802 (65C802)      as 65816, pin compatible to 6502, 64 KiB address bus, up to 16 MHz
```

Site Notes

For a simple overview of the instruction set in near-text format, see [see here](#).

Disclaimer

Errors excepted. The information is provided for free and AS IS, therefore without any warranty; without even the implied warranty of merchantability or fitness for a particular purpose.

See also the "Virtual 6502" suite of online-programs

>> [Virtual 6502](#) (6502/6510 emulator)

>> [6502 Assembler](#)

>> [6502 Disassembler](#)

External Links

>> [6502.org](#) — the 6502 microprocessor resource

>> [visual6502.org](#) — visual transistor-level simulation of the 6502 CPU

>> [The Western Design Center, Inc.](#) — designers of the 6502 (still thriving)

Presented by [mass:werk](#).