





# Front View



#### **Features**

- Front ventilation for superior cooling
- · Front access dual USB ports
- 3 x 4028 fans for CPU cooling
- Short-depth design for space critical application
- Equipped with 250W power supply

### **Rear View**



### **Specifications**

Dimensions (W x D x H)	mm : 427 x 381 x 44.4				
	inches : 16.8 x 15 x 1.75				
Industry Standard	EIA-RS310D				
Material	Heavy-duty preplated SPGC cold-rolled steel				
Color	Front Panel : Black				
Cooling	Standard 3 x 40x28mm fans				
Power Supply	Standard 250W single PSU				
Expansion Slot	1 full height via riser card				
Front Panel	System power on/off, system reset and 2 x USB ports				
LED Indicators	Power LED, HDD LED, LAN 1, LAN 2, alert LED				
System Board	Up to 12"(W) x 9.6"(D) ATX compliant MB				
Drive Bays	Internal		3.5"	2	
			2.5"	2 (7mm SSD)	

Storage Temperature	0°C(32°F) ~ 50°C(122°F)			
Humidity	5%~95% non-condensing			
Gross Weight	(w/ PSU; w/o Rail)	kgs : 7		
Gross Weight	(W/ F30, W/O Rail)	lbs : 15.4		
Packaging Dimensions	(44 - 5 - 11)	mm : 548 x 574 x 173		
	(W x D x H)	inches : 21.6 x 22.6 x 6.8		
Cubic Feet	1.9			
	20'	500		
Container Load Quantity	40'	1025		
	40' H	1235		
Mounting	Options	20"		








## **Top View**



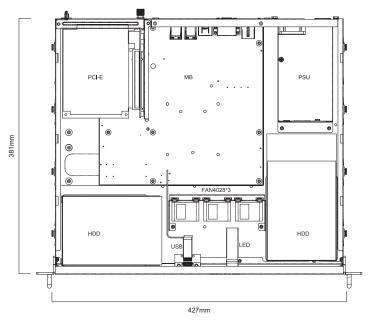

(Power supply is optional. Motherboard is not included.)

# **Ordering Information**

SKU Number Description		Description
	XE1-1E001-01	1U, up to 12"(W) x 9.6"(D) ATX, Internal: 2x 3.5", 2x 2.5" 7mm, Front: 2x USB 3.0, 3x 4028mm fan, 1x full-height add-on slot, 250W single power supply, w/o rail, w/o riser, black
	XE1-1E001-02	1U, up to 12"(W) x 9.6"(D) ATX, Internal: 2x 3.5", 2x 2.5" 7mm, Front: 2x USB 3.0, 3x 4028mm fan, 1x full-height add-on slot, 250W single power supply, w/o rail, 1x PCle x8 riser, black
	XE1-1E001-04	1U, up to 12"(W) x 9.6"(D) ATX, Internal: 2x 3.5", 2x 2.5" 7mm, Front: 2x USB 3.0, 3x 4028mm fan, 1x full-height add-on slot, w/o power supply, w/o rail, w/o riser, black