

1. Description


1.1. Project

Project Name	PFSDTR-F4
Board Name	STM32F4DISCOVERY
Generated with:	STM32CubeMX 4.17.0
Date	12/13/2016

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F407/417
MCU name	STM32F407VGTx
MCU Package	LQFP100
MCU Pin number	100

2. Pinout Configuration

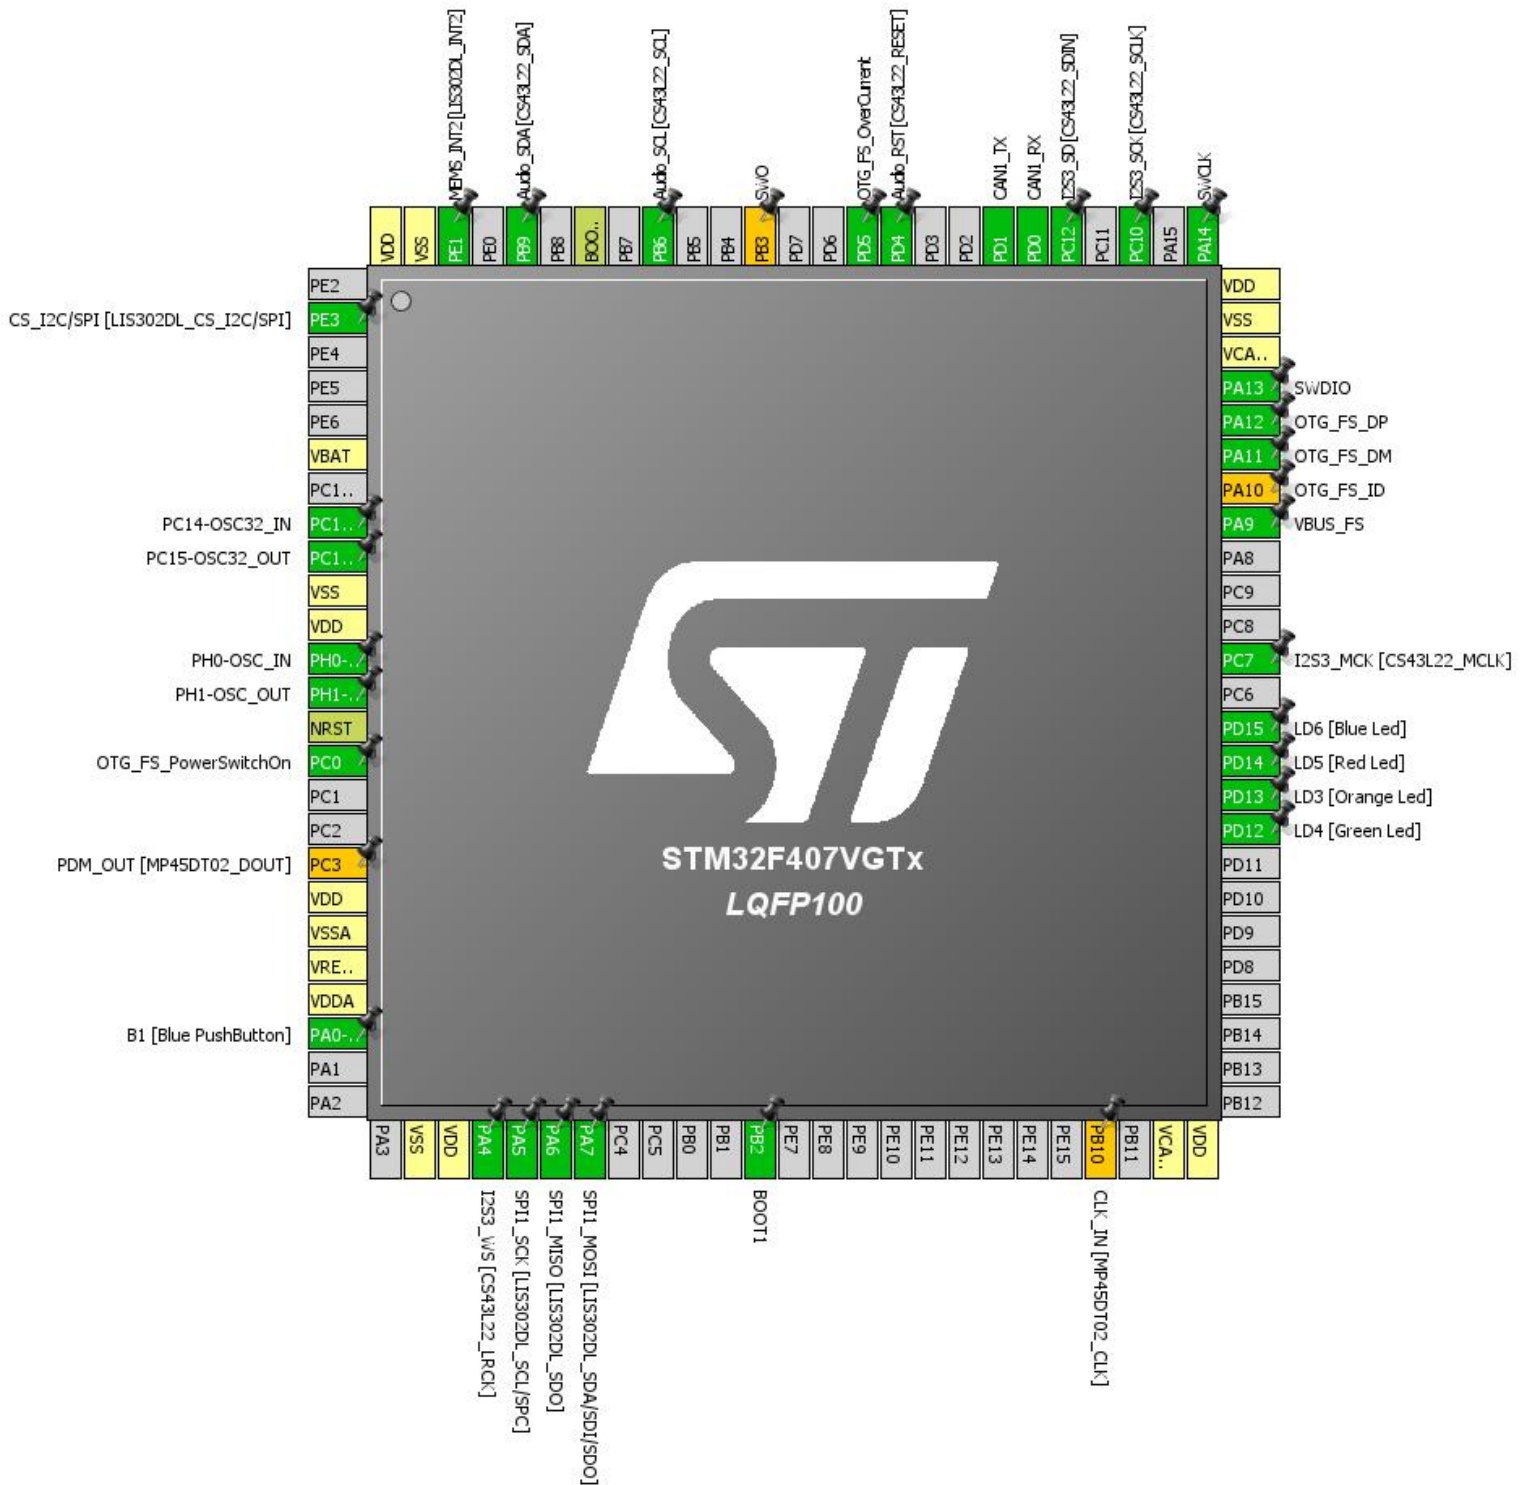

3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
2	PE3 *	I/O	GPIO_Output	CS_I2C/SPI [LIS302DL_CS_I2C/SPI]
6	VBAT	Power		
8	PC14-OSC32_IN	I/O	RCC_OSC32_IN	PC14-OSC32_IN
9	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	PC15-OSC32_OUT
10	VSS	Power		
11	VDD	Power		
12	PH0-OSC_IN	I/O	RCC_OSC_IN	PH0-OSC_IN
13	PH1-OSC_OUT	I/O	RCC_OSC_OUT	PH1-OSC_OUT
14	NRST	Reset		
15	PC0 *	I/O	GPIO_Output	OTG_FS_PowerSwitchOn
18	PC3 **	I/O	I2S2_SD	PDM_OUT [MP45DT02_DOUT]
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0-WKUP	I/O	GPIO_EXTI0	B1 [Blue PushButton]
27	VSS	Power		
28	VDD	Power		
29	PA4	I/O	I2S3_WS	I2S3_WS [CS43L22_LRCK]
30	PA5	I/O	SPI1_SCK	SPI1_SCK [LIS302DL_SCL/SPC]
31	PA6	I/O	SPI1_MISO	SPI1_MISO [LIS302DL_SDO]
32	PA7	I/O	SPI1_MOSI	SPI1_MOSI [LIS302DL_SDA/SDI/SDO]
37	PB2 *	I/O	GPIO_Input	BOOT1
47	PB10 **	I/O	I2S2_CK	CLK_IN [MP45DT02_CLK]
49	VCAP_1	Power		
50	VDD	Power		
59	PD12 *	I/O	GPIO_Output	LD4 [Green Led]
60	PD13 *	I/O	GPIO_Output	LD3 [Orange Led]
61	PD14 *	I/O	GPIO_Output	LD5 [Red Led]
62	PD15 *	I/O	GPIO_Output	LD6 [Blue Led]
64	PC7	I/O	I2S3_MCK	I2S3_MCK [CS43L22_MCLK]

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
68	PA9	I/O	USB_OTG_FS_VBUS	VBUS_FS
69	PA10 **	I/O	USB_OTG_FS_ID	OTG_FS_ID
70	PA11	I/O	USB_OTG_FS_DM	OTG_FS_DM
71	PA12	I/O	USB_OTG_FS_DP	OTG_FS_DP
72	PA13	I/O	SYS_JTMS-SWDIO	SWDIO
73	VCAP_2	Power		
74	VSS	Power		
75	VDD	Power		
76	PA14	I/O	SYS_JTCK-SWCLK	SWCLK
78	PC10	I/O	I2S3_CK	I2S3_SCK [CS43L22_SCLK]
80	PC12	I/O	I2S3_SD	I2S3_SD [CS43L22_SDIN]
81	PD0	I/O	CAN1_RX	
82	PD1	I/O	CAN1_TX	
85	PD4 *	I/O	GPIO_Output	Audio_RST [CS43L22_RESET]
86	PD5 *	I/O	GPIO_Input	OTG_FS_OverCurrent
89	PB3 **	I/O	SYS_JTDO-SWO	SWO
92	PB6	I/O	I2C1_SCL	Audio_SCL [CS43L22_SCL]
94	BOOT0	Boot		
96	PB9	I/O	I2C1_SDA	Audio_SDA [CS43L22_SDA]
98	PE1	I/O	GPIO_EXTI1	MEMS_INT2 [LIS302DL_INT2]
99	VSS	Power		
100	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

5. IPs and Middleware Configuration

5.1. CAN1

mode: Mode

5.1.1. Parameter Settings:

Bit Timings Parameters:

Prescaler (for Time Quantum)	16
Time Quantum	380.95238095238096 *
Time Quanta in Bit Segment 1	1 Time
Time Quanta in Bit Segment 2	1 Time
Time for one Bit	1142 *
ReSynchronization Jump Width	1 Time

Basic Parameters:

Time Triggered Communication Mode	Disable
Automatic Bus-Off Management	Disable
Automatic Wake-Up Mode	Disable
No-Automatic Retransmission	Disable
Receive Fifo Locked Mode	Disable
Transmit Fifo Priority	Disable

Advanced Parameters:

Operating Mode	Normal
----------------	--------

5.2. I2C1

I2C: I2C

5.2.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled

Primary slave address	0
General Call address detection	Disabled

5.3. I2S3

Mode: Half-Duplex Master

mode: Master Clock Output

5.3.1. Parameter Settings:

Generic Parameters:

Transmission Mode	Mode Master Transmit
Communication Standard	I2S Philips
Data and Frame Format	16 Bits Data on 16 Bits Frame
Selected Audio Frequency	96 KHz *
Real Audio Frequency	93.75 KHz *
Error between Selected and Real	-2.34 % *

Clock Parameters:

Clock Source	I2S PLL Clock
Clock Polarity	Low

5.4. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

5.4.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale

Power Regulator Voltage Scale 1

5.5. SPI1

Mode: Full-Duplex Master

5.5.1. Parameter Settings:

Basic Parameters:

Frame Format

Motorola

Data Size

8 Bits

First Bit

MSB First

Clock Parameters:

Prescaler (for Baud Rate)

2

Baud Rate

42.0 MBits/s *

Clock Polarity (CPOL)

Low

Clock Phase (CPHA)

1 Edge

Advanced Parameters:

CRC Calculation

Disabled

NSS Signal Type

Software

5.6. SYS

Debug: Serial Wire

Timebase Source: TIM4

5.7. USB_OTG_FS

Mode: Host_Only

mode: Activate_VBUS

5.7.1. Parameter Settings:

Speed

Host Full Speed 12MBit/s

Enable internal IP DMA

Disabled

5.8. FREERTOS

mode: Enabled

5.8.1. Config parameters:

Versions:

CMSIS-RTOS version	1.02
FreeRTOS version	8.2.3

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	7
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Disabled
USE_COUNTING_SEMAPHORES	Disabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
TOTAL_HEAP_SIZE	15360
Memory Management scheme	heap_4
USE_ALTERNATIVE_API	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Enabled *
CHECK_FOR_STACK_OVERFLOW	Option1 *

Run time and task stats gathering related definitions:

USE_TRACE_FACILITY	Enabled
GENERATE_RUN_TIME_STATS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
-----------------	----------

MAX_CO_ROUTINE_PRIORITIES 2

Software timer definitions:

USE_TIMERS Disabled
 TIMER_TASK_PRIORITY 2
 TIMER_QUEUE_LENGTH 10
 TIMER_TASK_STACK_DEPTH 256

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY 15
 LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY 5

5.8.2. Include parameters:

Include definitions:

vTaskPrioritySet Enabled
 uxTaskPriorityGet Enabled
 vTaskDelete Enabled
 vTaskCleanUpResources Disabled
 vTaskSuspend Enabled
 vTaskDelayUntil **Enabled ***
 vTaskDelay Enabled
 xTaskGetSchedulerState Enabled
 xTaskResumeFromISR Enabled
 xQueueGetMutexHolder Disabled
 xSemaphoreGetMutexHolder Disabled
 pcTaskGetTaskName **Enabled ***
 uxTaskGetStackHighWaterMark Disabled
 xTaskGetCurrentTaskHandle Disabled
 eTaskGetState Disabled
 xEventGroupSetBitFromISR Disabled
 xTimerPendFunctionCall Disabled

5.9. USB_HOST

Class for FS IP: Communication Host Class (Virtual Port Com)

5.9.1. Parameter Settings:

Host Configuration:

USBH_MAX_NUM_ENDPOINTS (Maximum number of endpoints) 2
 USBH_MAX_NUM_INTERFACES (Maximun number of interfaces) 2

USBH_MAX_NUM_SUPPORTED_CLASS (Maximun number of supported class)	1
USBH_MAX_NUM_CONFIGURATION (Maximun number of supported configuration)	1
USBH_KEEP_CFG_DESCRIPTOR (Keep the configuration into RAM)	Enabled
USBH_MAX_SIZE_CONFIGURATION (Maximun size in bytes for the Configuration Descriptor)	256
USBH_MAX_DATA_BUFFER (Maximun size of temporary data)	512
USBH_DEBUG_LEVEL (USBH Debug Level)	0: No debug message
CMSIS_RTOS:	
USBH_USE_OS (Enable the support of an RTOS)	Enabled
USBH_PROCESS_PRIO (The CMSIS-RTOS osPriority value specifies the priority for the USB Host thread)	priority: normal (default)
USBH_PROCESS_STACK_SIZE (The CMSIS-RTOS stack size requirements in words)	128

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
CAN1	PD0	CAN1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PD1	CAN1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull-up	Low	Audio_SCL [CS43L22_SCL]
	PB9	I2C1_SDA	Alternate Function Open Drain	Pull-up	Low	Audio_SDA [CS43L22_SDA]
I2S3	PA4	I2S3_WS	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_WS [CS43L22_LRCK]
	PC7	I2S3_MCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_MCK [CS43L22_MCLK]
	PC10	I2S3_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_SCK [CS43L22_SCLK]
	PC12	I2S3_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_SD [CS43L22_SDIN]
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	PC14-OSC32_IN
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	PC15-OSC32_OUT
	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	PH0-OSC_IN
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	PH1-OSC_OUT
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI1_SCK [LIS302DL_SCL/SPC]
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI1_MISO [LIS302DL_SDO]
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Low	SPI1_MOSI [LIS302DL_SDA/SDI/SDO]
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	SWDIO
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	SWCLK
USB_OTG_FS	PA9	USB_OTG_FS_VBUS	Input mode	No pull-up and no pull-down	n/a	VBUS_FS
	PA11	USB_OTG_FS_	Alternate Function Push Pull	No pull-up and no pull-down	Low	OTG_FS_DM

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
Single Mapped Signals		DM				
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	Low	OTG_FS_DP
	PC3	I2S2_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	PDM_OUT [MP45DT02_DOUT]
	PB10	I2S2_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	CLK_IN [MP45DT02_CLK]
	PA10	USB_OTG_FS_ID	Alternate Function Push Pull	No pull-up and no pull-down	Low	OTG_FS_ID
GPIO	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
	PE3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	CS_I2C/SPI [LIS302DL_CS_I2C/SPI]
	PC0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	OTG_FS_PowerSwitchOn
	PA0-WKUP	GPIO_EXTI0	External Event Mode with Rising edge trigger detection *	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PB2	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	BOOT1
	PD12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD4 [Green Led]
	PD13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD3 [Orange Led]
	PD14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD5 [Red Led]
	PD15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD6 [Blue Led]
	PD4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	Audio_RST [CS43L22_RESET]
	PD5	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	OTG_FS_OverCurrent
	PE1	GPIO_EXTI1	External Event Mode with Rising edge trigger detection *	No pull-up and no pull-down	n/a	MEMS_INT2 [LIS302DL_INT2]

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
CAN1 TX interrupts	true	5	0
CAN1 RX0 interrupts	true	5	0
CAN1 RX1 interrupt	true	5	0
CAN1 SCE interrupt	true	5	0
TIM4 global interrupt	true	0	0
USB On The Go FS global interrupt	true	5	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
SPI1 global interrupt	unused		
SPI3 global interrupt	unused		
FPU global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F407/417
MCU	STM32F407VGTx
Datasheet	022152_Rev7

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Project

8.1. Project Settings

Name	Value
Project Name	PFSDTR-F4
Project Folder	/home/ale/.Ac6/SystemWorkbench/workspace/PFSDTR-F4
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F4 V1.13.1

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No