

1. Description


1.1. Project

Project Name	FatFS
Board Name	STM32F3DISCOVERY
Generated with:	STM32CubeMX 4.14.0
Date	06/06/2016

1.2. MCU

MCU Series	STM32F3
MCU Line	STM32F303
MCU name	STM32F303VCTx
MCU Package	LQFP100
MCU Pin number	100

2. Pinout Configuration

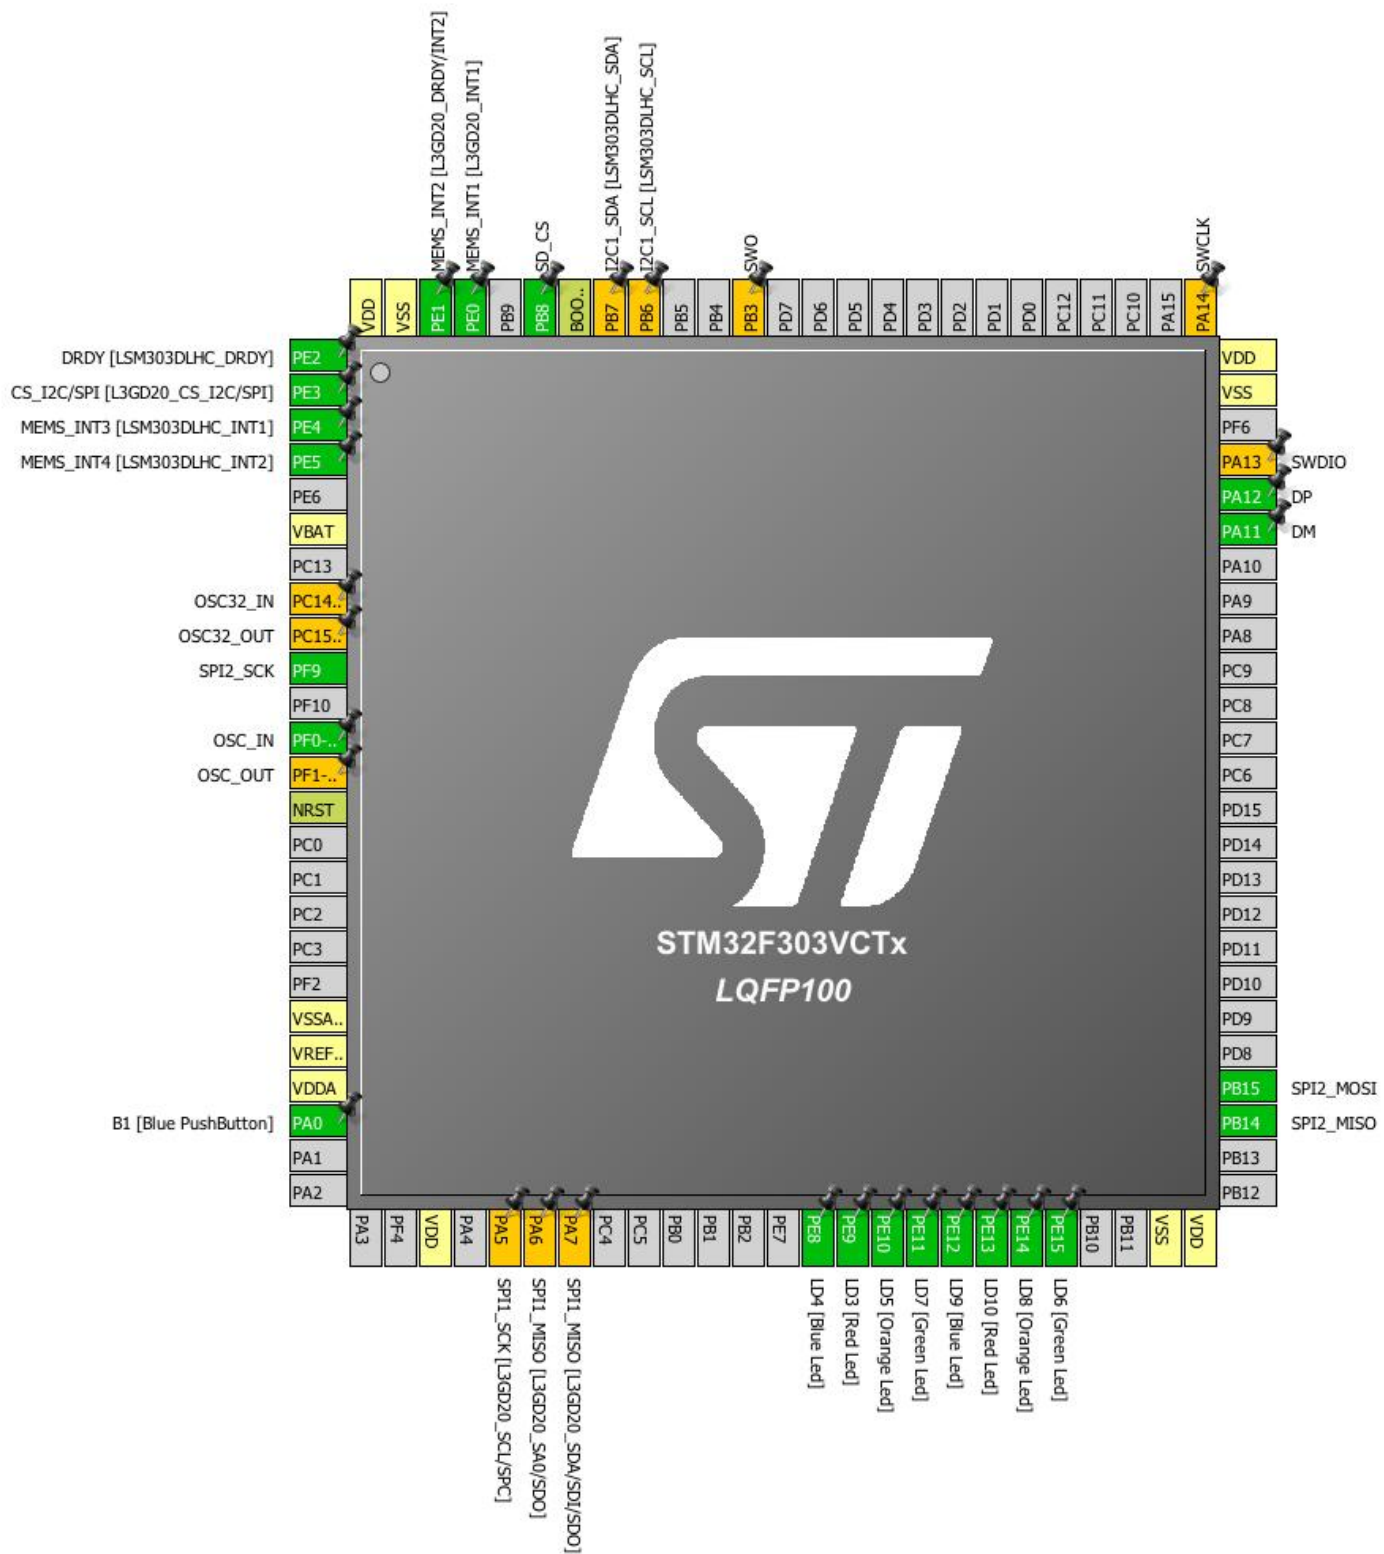

3. Pins Configuration


Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	PE2	I/O	GPIO_EXTI2	DRDY [LSM303DLHC_DRDY]
2	PE3 *	I/O	GPIO_Output	CS_I2C/SPI [L3GD20_CS_I2C/SPI]
3	PE4	I/O	GPIO_EXTI4	MEMS_INT3 [LSM303DLHC_INT1]
4	PE5	I/O	GPIO_EXTI5	MEMS_INT4 [LSM303DLHC_INT2]
6	VBAT	Power		
8	PC14-OSC32_IN **	I/O	RCC_OSC32_IN	OSC32_IN
9	PC15-OSC32_OUT **	I/O	RCC_OSC32_OUT	OSC32_OUT
10	PF9	I/O	SPI2_SCK	
12	PF0-OSC_IN	I/O	RCC_OSC_IN	OSC_IN
13	PF1-OSC_OUT **	I/O	RCC_OSC_OUT	OSC_OUT
14	NRST	Reset		
20	VSSA/VREF-	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0 *	I/O	GPIO_Input	B1 [Blue PushButton]
28	VDD	Power		
30	PA5 **	I/O	SPI1_SCK	SPI1_SCK [L3GD20_SCL/SPC]
31	PA6 **	I/O	SPI1_MISO	SPI1_MISO [L3GD20_SA0/SDO]
32	PA7 **	I/O	SPI1_MOSI	SPI1_MISO [L3GD20_SDA/SDI/SDO]
39	PE8 *	I/O	GPIO_Output	LD4 [Blue Led]
40	PE9 *	I/O	GPIO_Output	LD3 [Red Led]
41	PE10 *	I/O	GPIO_Output	LD5 [Orange Led]
42	PE11 *	I/O	GPIO_Output	LD7 [Green Led]
43	PE12 *	I/O	GPIO_Output	LD9 [Blue Led]
44	PE13 *	I/O	GPIO_Output	LD10 [Red Led]
45	PE14 *	I/O	GPIO_Output	LD8 [Orange Led]
46	PE15 *	I/O	GPIO_Output	LD6 [Green Led]
49	VSS	Power		
50	VDD	Power		
53	PB14	I/O	SPI2_MISO	

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
54	PB15	I/O	SPI2_MOSI	
70	PA11	I/O	USB_DM	DM
71	PA12	I/O	USB_DP	DP
72	PA13 **	I/O	SYS_JTMS-SWDIO	SWDIO
74	VSS	Power		
75	VDD	Power		
76	PA14 **	I/O	SYS_JTCK-SWCLK	SWCLK
89	PB3 **	I/O	SYS_JTDO-TRACESWO	SWO
92	PB6 **	I/O	I2C1_SCL	I2C1_SCL [LSM303DLHC_SCL]
93	PB7 **	I/O	I2C1_SDA	I2C1_SDA [LSM303DLHC_SDA]
94	BOOT0	Boot		
95	PB8 *	I/O	GPIO_Output	SD_CS
97	PE0	I/O	GPIO_EXTI0	MEMS_INT1 [L3GD20_INT1]
98	PE1	I/O	GPIO_EXTI1	MEMS_INT2 [L3GD20_DRDY/INT2]
99	VSS	Power		
100	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

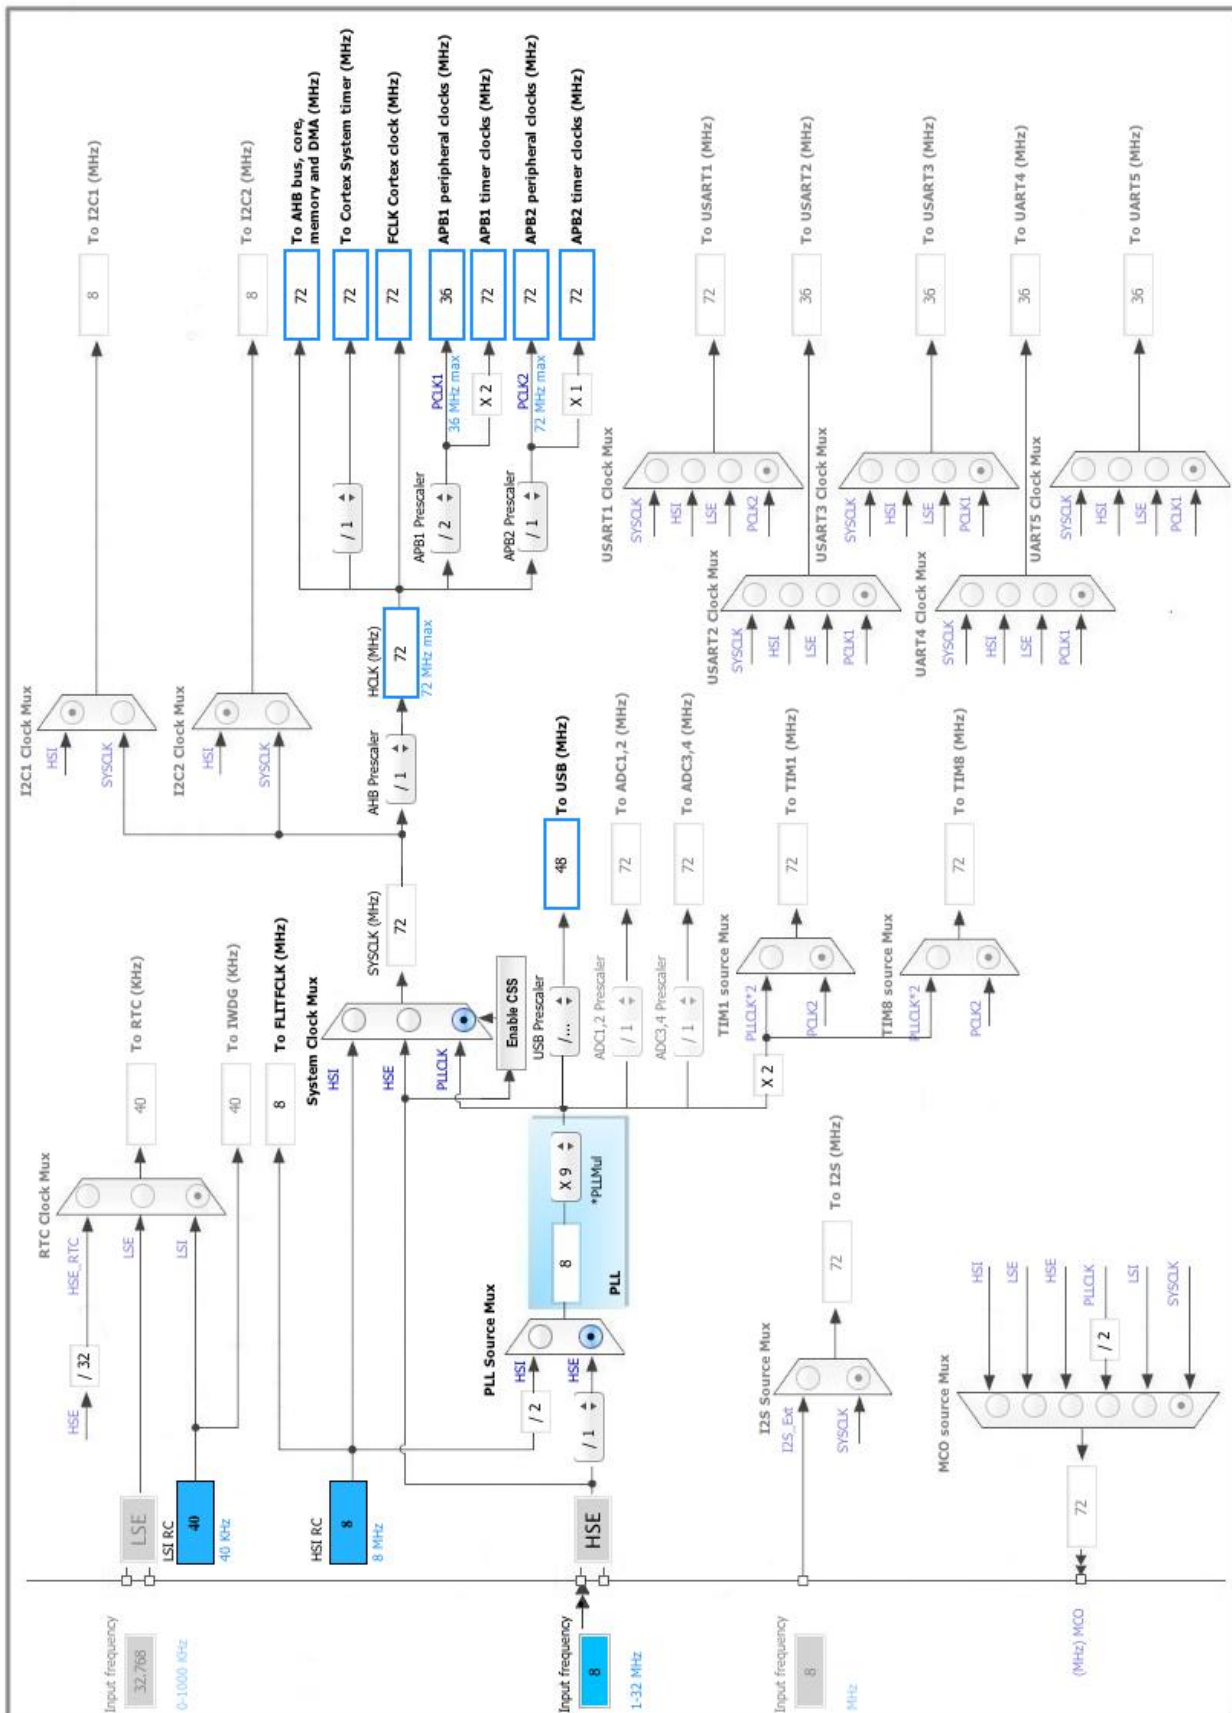

5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): BYPASS Clock Source

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
-----------------------	----

5.2. SPI2

Mode: Full-Duplex Master

5.2.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits *
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	18.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

5.3. SYS

Timebase Source: SysTick

5.4. USB

mode: Device (FS)

5.4.1. Parameter Settings:

Basic Parameters:

Speed	Full Speed 12MBit/s
Endpoint 0 Max Packet size	64 Bytes
Physical interface	Internal Phy

Power Parameters:

Low Power	Disabled
Battery Charging	Disabled

5.5. FATFS

mode: User-defined

5.5.1. Set Defines:

Version:

FATFS version	R0.11
---------------	-------

Function Parameters:

FS_TINY (Tiny mode)	Disabled
FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FORWARD (Forward function)	Disabled
USE_LABEL (Volume label functions)	Disabled
USE_FASTSEEK (Fast seek function)	Enabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Latin 1 (Windows)
USE_LFN (Use Long Filename)	Disabled
MAX_LFN (Max Long Filename)	255

LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled
USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_NORTC (Timestamp feature)	Dynamic timestamp
NORTC_YEAR (Year for timestamp)	2015
NORTC_MON (Month for timestamp)	6
NORTC_MDAY (Day for timestamp)	4
WORD_ACCESS (Platform dependent access option)	Byte access
FS_REENTRANT (Re-Entrancy)	Disabled
FS_TIMEOUT (Timeout ticks)	1000
SYNC_t (O/S sync object)	osSemaphoreId
FS_LOCK (Number of files opened simultaneously)	2

5.6. USB_DEVICE

Class For FS IP: Communication Device Class (Virtual Port Com)

5.6.1. Parameter Settings:

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SUPPORT_USER_STRING (Enable user string descriptor)	Disabled
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message

Class Parameters:

USBD_CDC_INTERVAL (Number of micro-frames interval)	1000
---	------

5.6.2. Device Descriptor:

Device Descriptor:

VID (Vendor Identifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics
Device Descriptor FS:	
PID (Product Identifier)	22336
PRODUCT_STRING (Product Identifier)	STM32 Virtual ComPort
SERIALNUMBER_STRING (Serial number)	00000000001A
CONFIGURATION_STRING (Configuration Identifier)	CDC Config
INTERFACE_STRING (Interface Identifier)	CDC Interface

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PF0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	OSC_IN
SPI2	PF9	SPI2_SCK	Alternate Function Push Pull	No pull up pull down	High *	
	PB14	SPI2_MISO	Alternate Function Push Pull	No pull up pull down	High *	
	PB15	SPI2_MOSI	Alternate Function Push Pull	No pull up pull down	High *	
USB	PA11	USB_DM	Alternate Function Push Pull	No pull up pull down	High *	DM
	PA12	USB_DP	Alternate Function Push Pull	No pull up pull down	High *	DP
Single Mapped Signals	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	OSC32_IN
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	OSC32_OUT
	PF1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	OSC_OUT
	PA5	SPI1_SCK	Alternate Function Push Pull	No pull up pull down	*	SPI1_SCK [L3GD20_SCL/SPC]
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull up pull down	*	SPI1_MISO [L3GD20_SA0/SDO]
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull up pull down	*	SPI1_MISO [L3GD20_SDA/SDI/SDO]
	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	SWDIO
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	SWCLK
	PB3	SYS_JTDO-TRACESWO	n/a	n/a	n/a	SWO
	PB6	I2C1_SCL	Alternate Function Open Drain	Pull up	*	I2C1_SCL [LSM303DLHC_SCL]
	PB7	I2C1_SDA	Alternate Function Open Drain	Pull up	*	I2C1_SDA [LSM303DLHC_SDA]
GPIO	PE2	GPIO_EXTI2	External Event Mode with Rising edge trigger detection *	No pull up pull down	n/a	DRDY [LSM303DLHC_DRDY]
	PE3	GPIO_Output	Output Push Pull	No pull up pull down	*	CS_I2C/SPI [L3GD20_CS_I2C/SPI]
	PE4	GPIO_EXTI4	External Event Mode	No pull up pull down	n/a	MEMS_INT3 [LSM303DLHC_INT1]

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
			with Rising edge trigger detection *			
	PE5	GPIO_EXTI5	External Event Mode with Rising edge trigger detection *	No pull up pull down	n/a	MEMS_INT4 [LSM303DLHC_INT2]
	PA0	GPIO_Input	Input mode	No pull up pull down	n/a	B1 [Blue PushButton]
	PE8	GPIO_Output	Output Push Pull	No pull up pull down	*	LD4 [Blue Led]
	PE9	GPIO_Output	Output Push Pull	No pull up pull down	*	LD3 [Red Led]
	PE10	GPIO_Output	Output Push Pull	No pull up pull down	*	LD5 [Orange Led]
	PE11	GPIO_Output	Output Push Pull	No pull up pull down	*	LD7 [Green Led]
	PE12	GPIO_Output	Output Push Pull	No pull up pull down	*	LD9 [Blue Led]
	PE13	GPIO_Output	Output Push Pull	No pull up pull down	*	LD10 [Red Led]
	PE14	GPIO_Output	Output Push Pull	No pull up pull down	*	LD8 [Orange Led]
	PE15	GPIO_Output	Output Push Pull	No pull up pull down	*	LD6 [Green Led]
	PB8	GPIO_Output	Output Push Pull	No pull up pull down	Low	SD_CS
	PE0	GPIO_EXTI0	External Event Mode with Rising edge trigger detection *	No pull up pull down	n/a	MEMS_INT1 [L3GD20_INT1]
	PE1	GPIO_EXTI1	External Event Mode with Rising edge trigger detection *	No pull up pull down	n/a	MEMS_INT2 [L3GD20_DRDY/INT2]

6.2. DMA configuration

DMA request	Stream	Direction	Priority
SPI2_RX	DMA1_Channel4	Peripheral To Memory	Low
SPI2_TX	DMA1_Channel5	Memory To Peripheral	Low

SPI2_RX: DMA1_Channel4 DMA request Settings:

Mode: Normal
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: Byte
Memory Data Width: Byte

SPI2_TX: DMA1_Channel5 DMA request Settings:

Mode: Normal
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: Byte
Memory Data Width: Byte

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
Debug monitor	true	0	0
System tick timer	true	0	0
DMA1 channel4 global interrupt	true	0	0
DMA1 channel5 global interrupt	true	0	0
USB low priority or CAN_RX0 interrupts	true	0	0
PVD interrupt through EXTI line16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USB high priority or CAN_TX interrupts	unused		
SPI2 global interrupt	unused		
USB high priority interrupt remap	unused		
USB low priority interrupt remap	unused		

* User modified value

7. Power Plugin report

7.1. Microcontroller Selection

Series	STM32F3
Line	STM32F303
MCU	STM32F303VCTx
Datasheet	023353_Rev12

7.2. Parameter Selection

Temperature	25
Vdd	3.6

8. Software Project

8.1. Project Settings

Name	Value
Project Name	FatFS
Project Folder	/Users/geobrown/gpdsc/FatFS
Toolchain / IDE	Other Toolchains (GPDSC)
Firmware Package Name and Version	STM32Cube FW_F3 V1.4.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No