
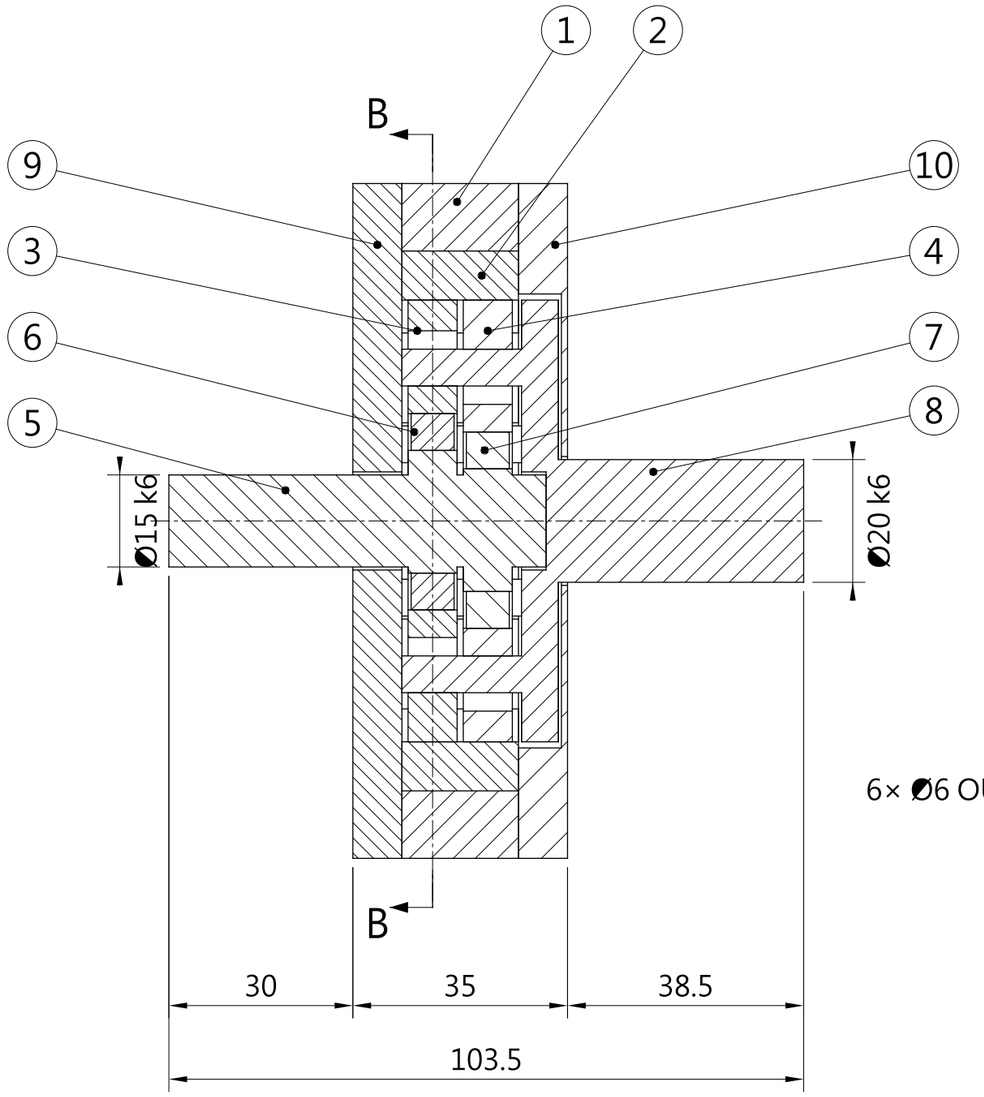


SECTION A-A

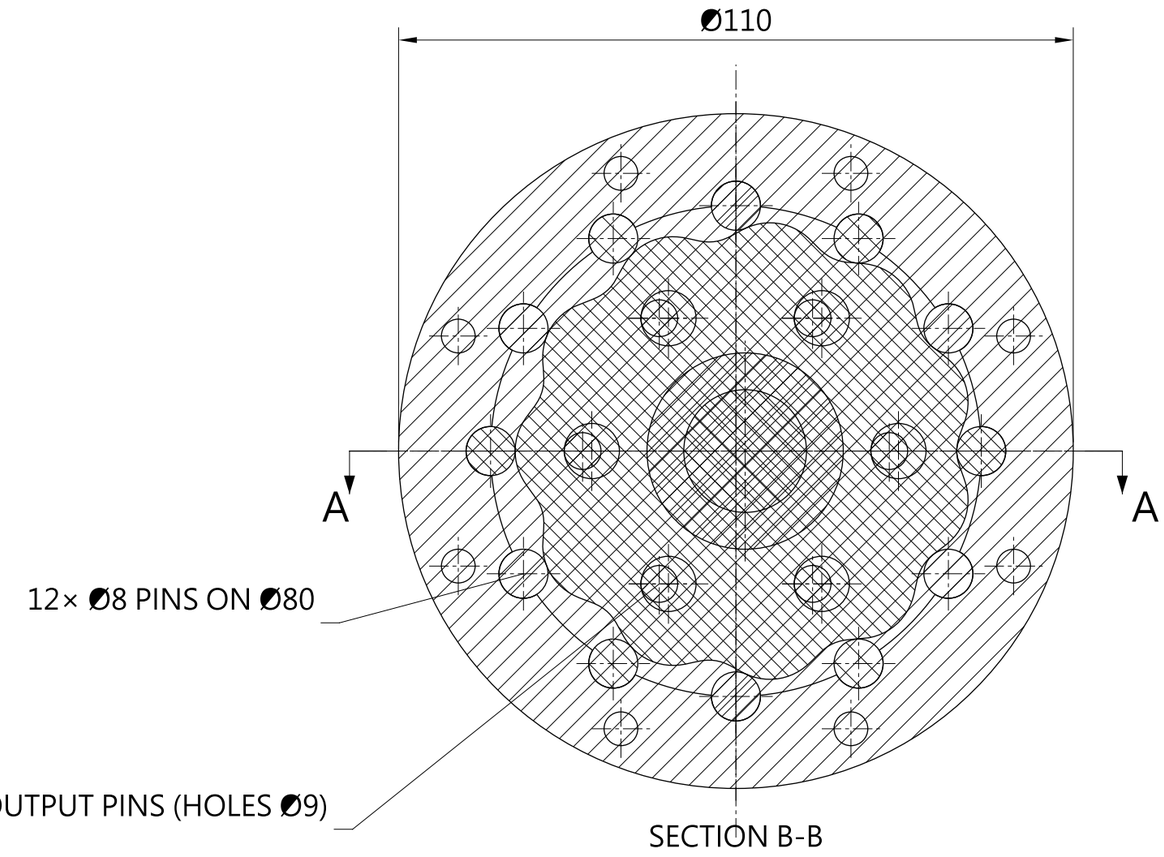

SECTION B-B

NOTES:
1. General tolerances: linear ±0.1, angular ±0.5° (ISO 2768-m).
2. Ratio 11:1, output turns opposite to input. Rated input 3000 rpm, 1.2 N·m → output 272.7 rpm, 11.88 N·m.
3. The two discs are 180° apart, each offset e = 1.5 from the input axis (shown at crank angle 0°).
4. Covers and pin housing clamped by 8× M5 through bolts (bolts not shown).

ITEM	PART	QTY	MATERIAL / SPEC
1	PIN HOUSING	1	S45C Q&T
2	RING PIN Ø8×19	12	SUJ2 HRC60
3	CYCLOID DISC A	1	AISI 52100 HRC58–62
4	CYCLOID DISC B	1	AISI 52100 HRC58–62
5	ECCENTRIC INPUT SHAFT	1	SCM440 Q&T
6	BALL BEARING 6804 (A)	1	20×32×7
7	BALL BEARING 6804 (B)	1	20×32×7
8	OUTPUT FLANGE + 6× Ø6 PINS	1	S45C Q&T; PINS SUJ2 HRC60
9	INPUT END COVER	1	A6061-T6
10	OUTPUT END COVER	1	A6061-T6

CD-11 CYCLOIDAL REDUCER 11:1 ASSEMBLY	SCALE 1:1 MM THIRD ANGLE
CD-11-000 · SEE PARTS LIST · CD-11	SHEET 1 OF 1 REV A assembly_drawing