

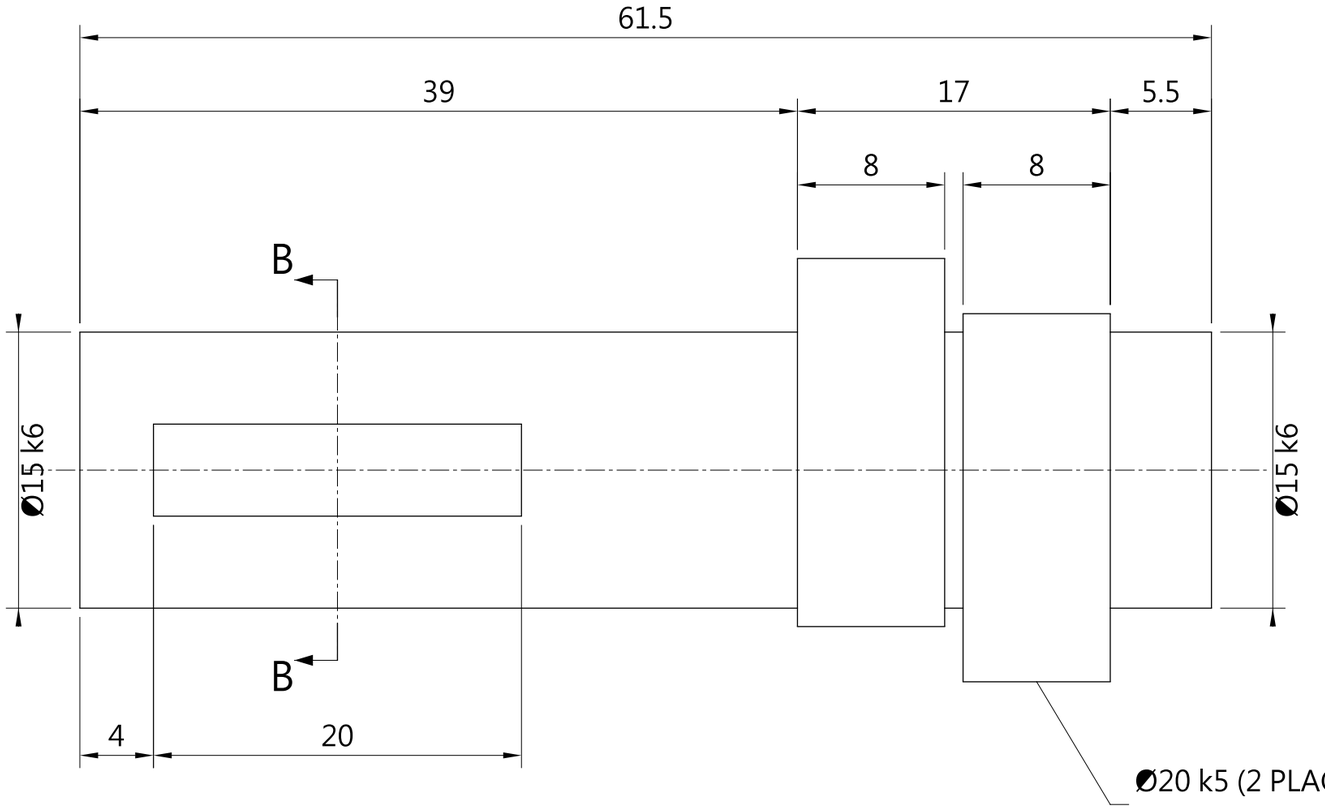


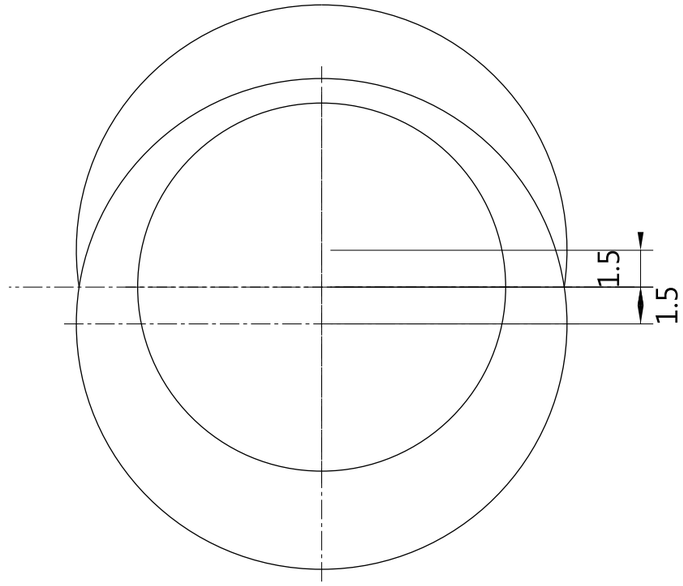

END VIEW (SCALE 4:1)

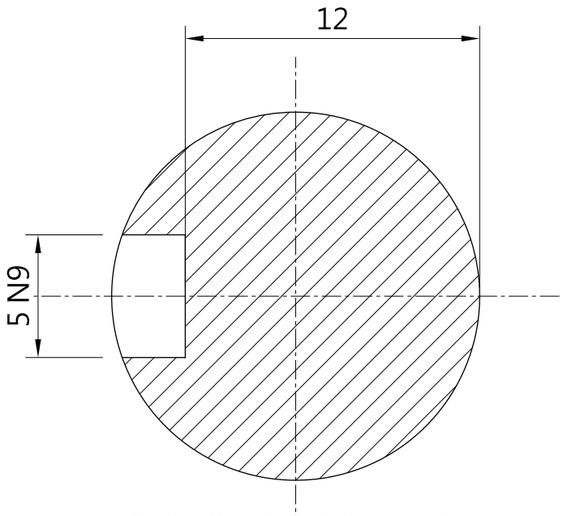

SECTION B-B (SCALE 4:1)

NOTES: 1. General tolerances: linear ±0.1, angular ±0.5° (ISO 2768-m).
2. Two eccentric cams Ø20 k5, each offset e = 1.5 ±0.005, 180° ±0.05° apart (see end view).
3. Cam OD induction hardened HRC 50 min, Ra 0.4. Unmarked chamfers C0.5.

ECCENTRIC INPUT SHAFT	SCALE 3:1 MM THIRD ANGLE
CD-11-005 · SCM440 Q&T HB 280–320 · CD-11	SHEET 1 OF 1 REV A shaft_drawing