
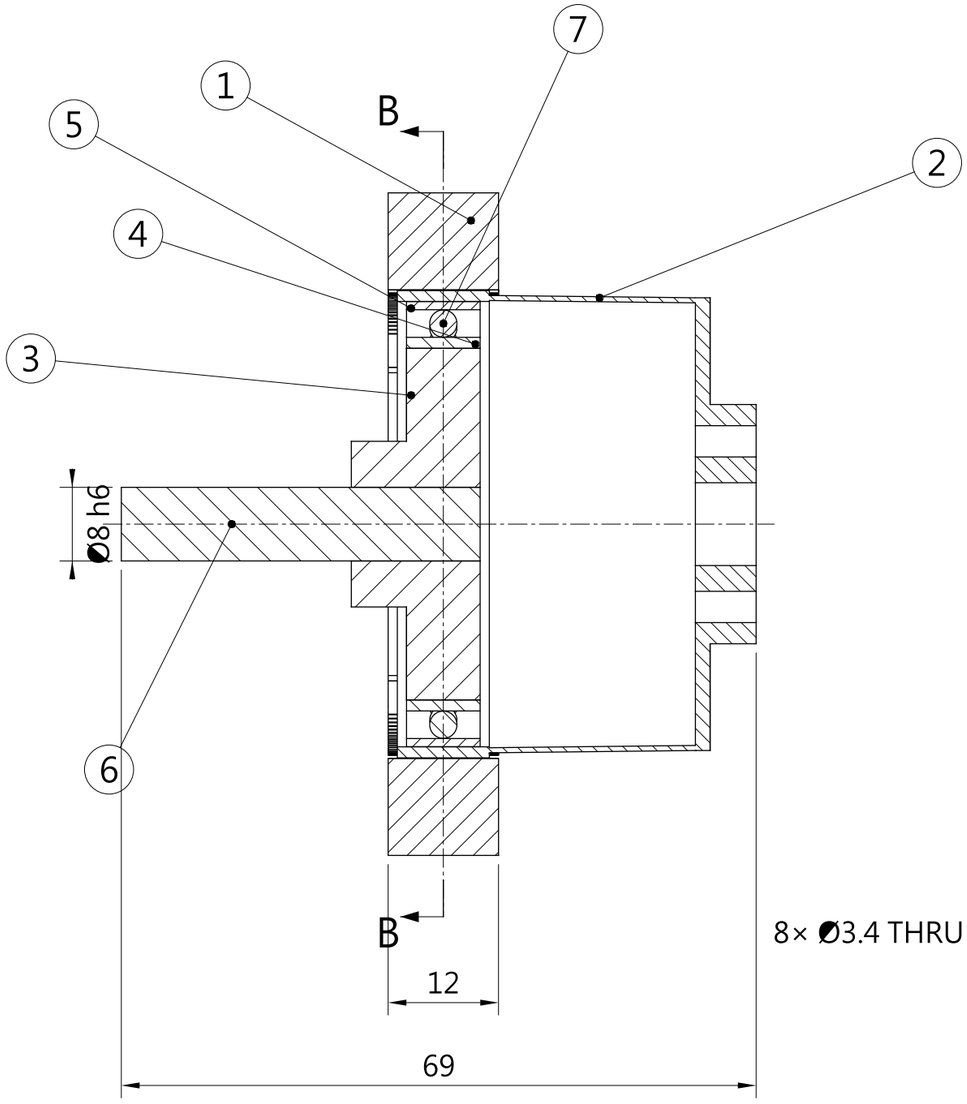


SECTION A-A

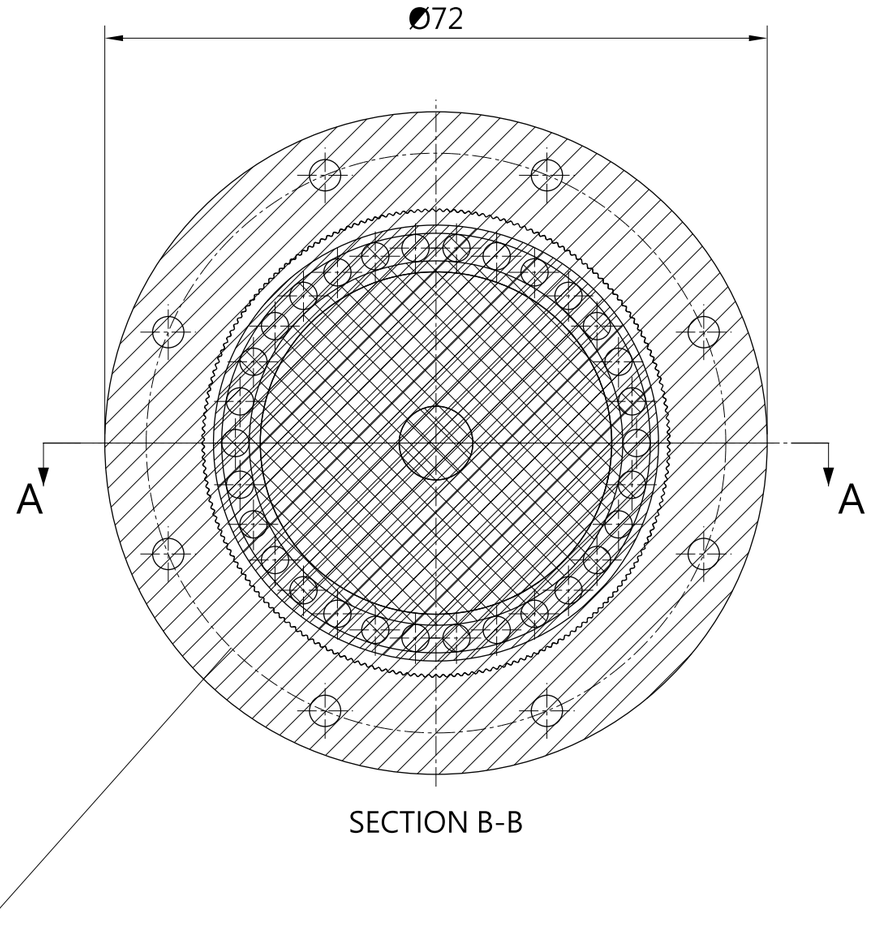

SECTION B-B

NOTES: 1. General tolerances: linear ±0.1, angular ±0.5° (ISO 2768-m).
2. Ratio 100:1, output (flexspline) turns opposite to input. 3000 rpm in → 30 rpm out; rated output 7 N·m.
3. Wave generator major axis lies in plane A-A; radial deflection w0 = 0.25 mm.
4. Flexspline drawn in the deformed (assembled) state; ball cage, seals and housing not shown.
5. Teeth fully engaged on the major axis (depth 0.24), clear on the minor axis; min tooth gap 0.015 over the full turn.

ITEM	PART	QTY	MATERIAL / SPEC
1	CIRCULAR SPLINE Z202 (FIXED)	1	42CrMo4 Q&T
2	FLEXSPLINE Z200 (OUTPUT)	1	AISI 4340 Q&T, SHOT-PEENED
3	WAVE GENERATOR CAM	1	SCM440 Q&T
4	FLEX BEARING INNER RACE	1	SUJ2 HRC60, t 1.2
5	FLEX BEARING OUTER RACE	1	SUJ2 HRC60, t 0.9
6	INPUT SHAFT Ø8	1	S45C
7	BALL Ø3	30	SUJ2 G10

SW-100 STRAIN WAVE GEAR 100:1 ASSEMBLY	SCALE 1.5:1 MM THIRD ANGLE
SW-100-000 · SEE PARTS LIST · SW-100	SHEET 1 OF 1 REV A assembly_drawing